




TITLE 20 dB 2 - 8 GHz DIRECTIONAL COUPLER

LTR. C

DRAWING:

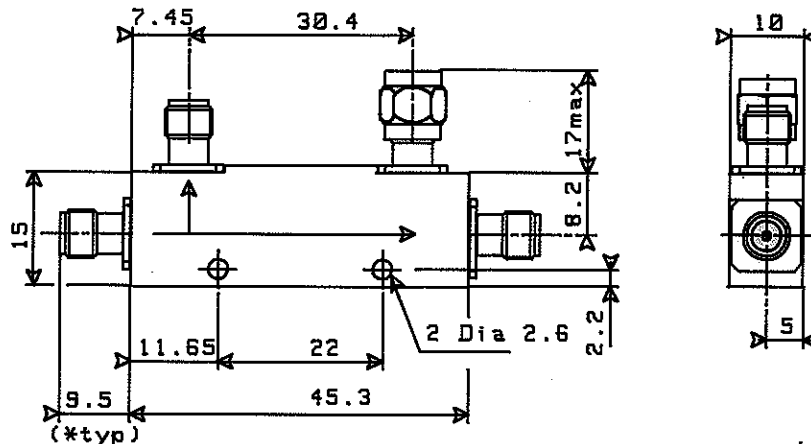

General tolerance: ± 0.5 mm

3 SMA/f connectors

ELECTRICAL CHARACTERISTICS:

FREQUENCY RANGE	: 2 - 8 GHz
IMPEDANCE	: 50 Ohms
COUPLING (*)	: 20 dB \pm 1 dB
FREQUENCY SENSITIVITY	: ± 0.4 dB
DIRECTIVITY	: 20 dB mini
INSERTION LOSS	: 0.4 dB max.
V.S.W.R.	: 1.25 max.
AVERAGE POWER	: 50 W CW at 25°C
PEAK POWER	: 3 kW (1 μ S, 1%.) at 25°C

MECHANICAL CHARACTERISTICS:

CONNECTORS	: SMA female per MIL C 39012
TERMINATION (on isolated port)	: 50 Ω 1 W
MAXIMUM WEIGHT	: 40 g

ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE	: - 40°C + 100°C
STORAGE TEMPERATURE RANGE	: - 40°C + 100°C

(*) Frequency sensitivity is included in coupling.

Tentative data subject to change without notice.

PEN	QUALITY D	MO			
		B			
PAGE	DATE	NAME	C	Nominal coupling -> coupling	12/10/90 K.I
			B	New format	06/07/90 K.I
1 1	16/01/90	K. LUCIEN	LTR	REVISIONS	DATE APP.