

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.




10 W 0.01 - 3 GHz SMA DC-BLOCK

issue
09. sep. 97

Page
1 / 1

DRAWING

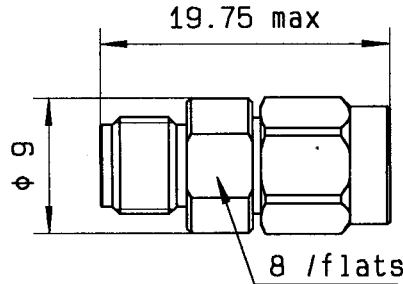

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : 0.01 - 3 GHz
 IMPEDANCE : 50 Ohms

FREQUENCY	0.01 - 3 GHz
V.S.W.R	<= 1.20
INSERTION LOSS	0.30 dB


MAIN LINE MAXIMUM DC VOLTAGE : 60 V
 TYPICAL CAPACITANCE : 4700 pF
 AVERAGE POWER at 25°C : 10 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

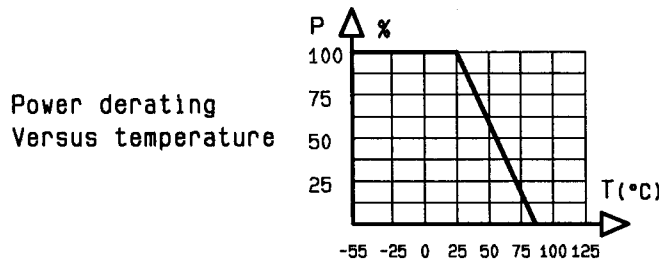

CREATION					
N° :					
PEN/EP:CAT					
Name: MG					
Date: 09. sep. 97					
APP.: AF <i>as</i>					
ISSUE		REVISIONS		NAME	APPR.

RADIALL®

101. rue P. Hoffmann - Z.I Ouest -
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33(1)49353535
 Fax : 33(1)48546363
 Tvx RADIA 235220F