


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.



10 W 0.01 - 3 GHz TNC DC-BLOCK

DRAWING

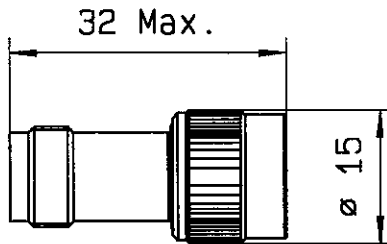

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : 0.01 - 3 GHz
 IMPEDANCE : 50 Ohms

FREQUENCY	0.01 - 3 GHz
V.S.W.R	<= 1.20
INSERTION LOSS	0.30 dB


MAIN LINE MAXIMUM DC VOLTAGE : 60 V
 TYPICAL CAPACITANCE : 4700 pF
 AVERAGE POWER at 25 °C : 10 W

MECHANICAL CHARACTERISTICS

CONNECTORS : TNC male/female per MIL-C 39012
 WEIGHT : < 17 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -40 , +85
 STORAGE TEMPERATURE RANGE (°C) : -40 , +85

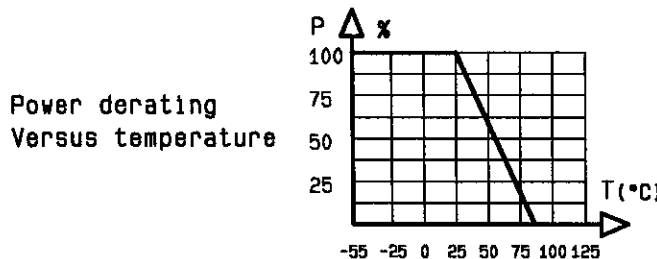

CREATION

N° :
 PEN/EP:CAT
 Name: MG
 Date: 09. sep. 97
 APP.: AF *af*

ISSUE

REVISIONS

NAME

APPR.

RADIALL®

101. rue P. Hoffmann - Z.I Ouest-
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone : 33(1)49353535
 Fax : 33(1)48546363
 Tvx RADIA 235220F