



RADIALL


® R 451030000

**TECHNICAL
DATA SHEET**

TITLE 1 - 18 GHZ HIGH SENSITIVITY COAXIAL DETECTOR

LTR. A

DRAWING

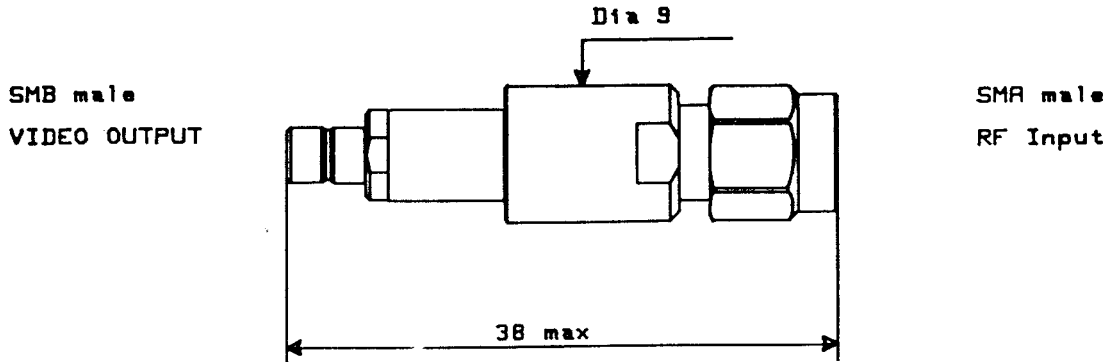

General tolerances: ± 0.5mm

ELECTRICAL CHARACTERISTICS :

- FREQUENCY RANGE : 1 - 18 GHz
- IMPEDANCE : 50 Ohms
- V.S.W.R (typical) : 4
- LOW LEVEL SENSITIVITY : 1500 mV/mW
- (Input Power <-20 dBm)
- FREQUENCY RESPONSE : ±2 dB
- AVERAGE POWER : 200 mW at 25°C
- PEAK POWER : 2 W (10 ns, 1 ms)
- OUTPUT POLARITY : Negative
- FILTERING CAPACITY (typical) : 20 pF
- TANGENTIAL SENSITIVITY (min) : -50 dBm
- DIODE : " Zero Bias" Schottky

MECHANICAL CHARACTERISTICS :

- CONNECTOR RF INPUT : SMA male per MIL C 39012
- CONNECTOR VIDEO OUTPUT : SMB male per MIL C 39012
- WEIGHT (max) : 10 grams

ENVIRONMENTAL CHARACTERISTICS :

- OPERATING TEMPERATURE RANGE (°C) : -25 , +70
- STORAGE TEMPERATURE RANGE (°C) : -40 , +85

Tentative data subject to change without notice.

PEN	QUALITY Dpt App.					
	MO B	19 NOV 1992				
CAT						
PAGE	DATE	NAME	LTR	REVISIONS	DATE	APP.
1 / 1	14/10/92	BOUVIER				

3294 - 9011