



RADIALL


R451953000

**TECHNICAL
DATA SHEET**

TITLE REMOVABLE CARTRIDGE

LTR. A

DRAWING:

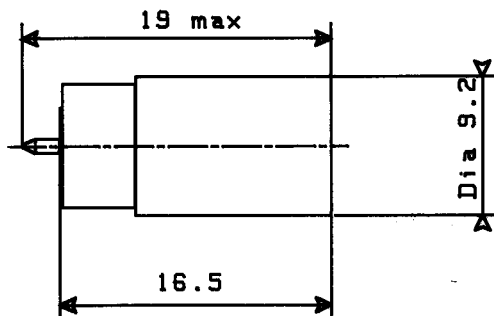

Mounted in a detector case type R 451576500.

General tolerances : ± 0.5 mm

ELECTRICAL CHARACTERISTICS:

FREQUENCY RANGE : .01 - 18 GHz
 IMPEDANCE : 50 Ohms
 POLARITY : Positive
 FREQUENCY RESPONSE:
 (0.01 - 8 GHz) : ± 0.2 dB/Octave
 (0.01 - 12.4 GHz) : ± 0.5 dB
 (0.01 - 18 GHz) : ± 1 dB
 V.S.W.R. :
 (0.01 - 8 GHz) : ≤ 1.35
 (8 - 18 GHz) : ≤ 1.50
 SENSITIVITY:
 LOW LEVEL (Input power ≤ -20 dbm): > 500 mV/mW
 HIGH LEVEL (Input power $= 0.35$ mW): > 100 mV
 TANGENTIAL SENSITIVITY : - 44 dB mini
 SQUARE LAW RESPONSE LIMIT : - 12 dBm
 VIDEO IMPEDANCE : 1 k Ω Typical
 VIDEO CAPACITY : 20 pF Typical
 AVERAGE POWER (CW) : 200 mW Maxi
 SCHOTTKY DIODE : $\langle\langle$ Zero bias $\rangle\rangle$

Tentative data subject to change without notice.

PEN CAT	QUALITY Dpt App.					
	MO B	13 MAY 1992				
PAGE 1/1	DATE 11/05/92	NAME K.LUCIEN	LTR	REVISIONS	DATE	APP.