


**STRAIGHT FEMALE MODULE 6 CRIMP TYPE  
INSERTS CABLE 2/50 S**

**R694.252.507**  
**SERIES MCC2**

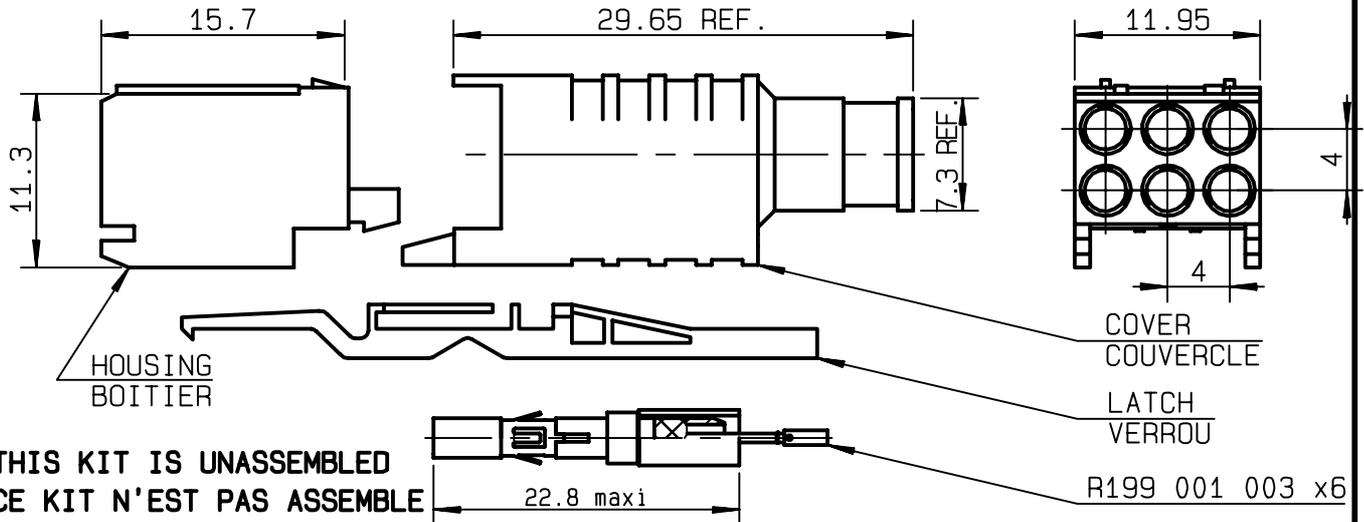

**THIS KIT IS UNASSEMBLED  
CE KIT N'EST PAS ASSEMBLE**

NOMINAL IMPEDANCE	<b>50</b> Ω
FREQUENCY RANGE	<b>0-6</b> GHz
TEMPERATURE RATING	<b>-25/+125</b> °C
V.S.W.R	<b>1.12</b> + <b>0</b> x F(GHz)Maxi
RF INSERTION LOSS	<b>0.2</b> √F(GHz) dB Maxi
VOLTAGE RATING	<b>500</b> Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	<b>750</b> Veff Mini
INSULATION RESISTANCE	<b>5000</b> MΩMini
HERMETIC SEAL	<b>NA</b> Atm.cm <sup>3</sup> /s
LEAKAGE (pressurized only)	<b>NA</b>
MECHANICAL DURABILITY	<b>500</b> Cycles
WEIGHT	<b>7.5</b> gr
SPECIFICATION	

CABLES : **KX 21**  
**RG 178**  
**RG 178 LC**  
**RG 196**

OTHERS CHARACTERISTICS

CABLE RETENTION	<b>32</b> N Mini
CENTER CONTACT RETENTION	
Axial force - mating end	<b>NA</b> N Mini
Axial force - opposite end	<b>NA</b> N Mini
Torque	<b>NA</b> cm.N Mini
RECOMMENDED TORQUES	
Mating	<b>NA</b> cm.N
Panel nut	<b>NA</b> cm.N
Clamp nut	<b>NA</b> cm.N

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT		
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
INSULATOR	PTFE	-
GASKET		-
OTHERS PIECES	LIQUID CRISTAL POLYMER	

(all values are given )  
in micrometers

BAFFERT

ISSUE	CREATION DATE	FILE PART-NUMBER
<b>0234E00</b>	<b>02/03/1995</b>	



**RADIALL**®


The information given here is subject to change without notice.  
Design changes may be in order to improve the product .

*Connect to the future*



**R694.252.507**

ISSUE 0234E00 SERIES MCC2

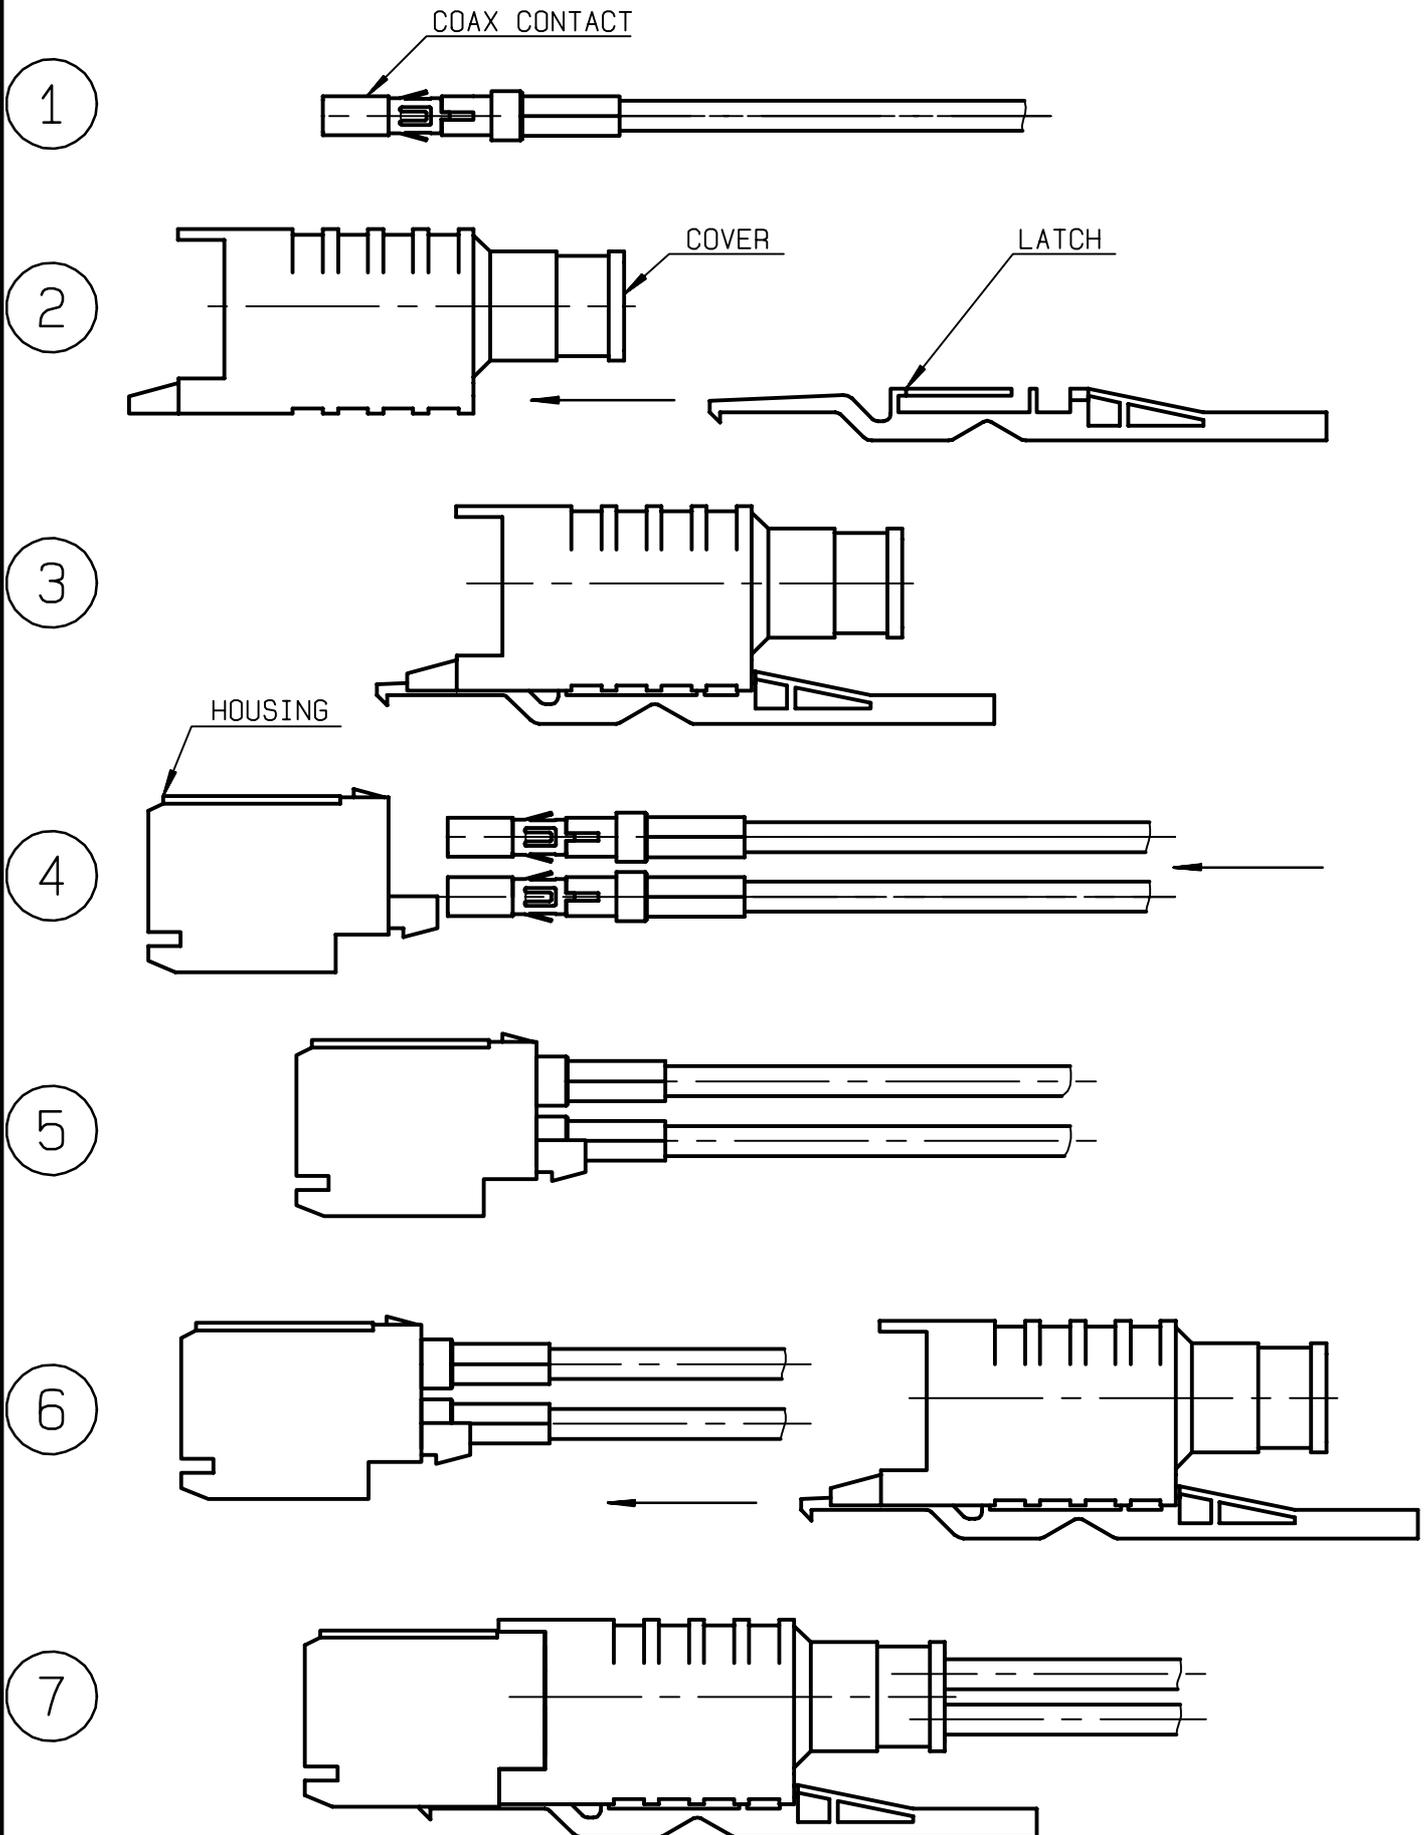

BAFFERT