


**RIGHT ANGLE MALE HOUSING
WITH PRESS PEG**

R694.261.036
SERIES MCC2

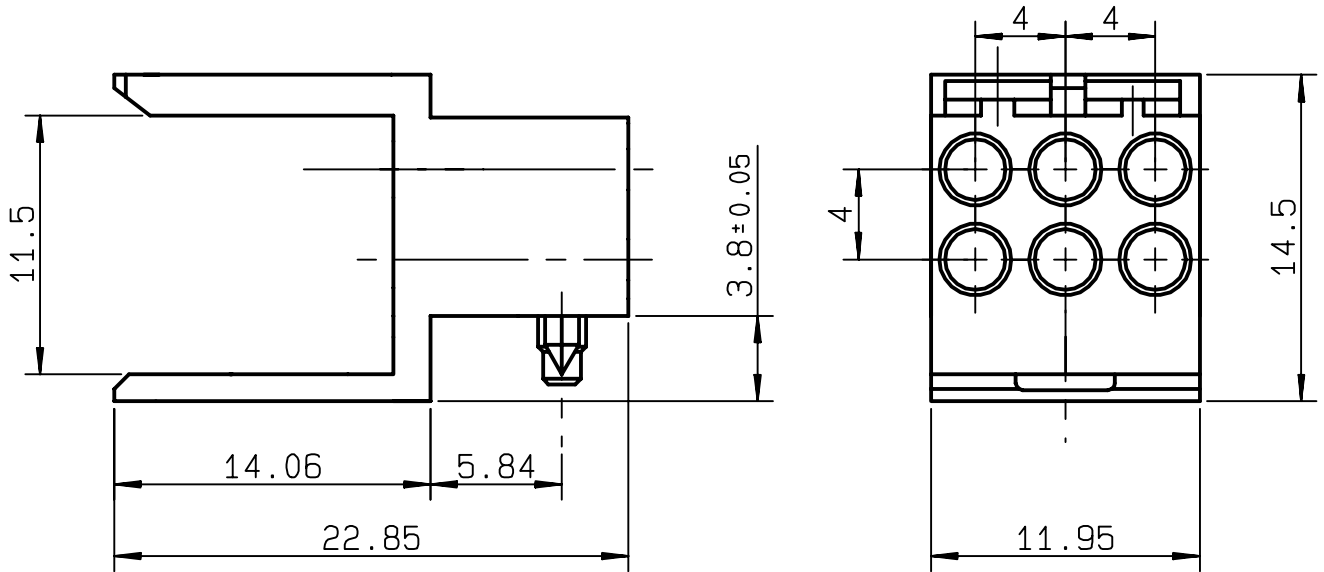

NOMINAL IMPEDANCE	Ω	CABLES :	
FREQUENCY RANGE	GHz		
TEMPERATURE RATING	$^{\circ}\text{C}$		
V.S.W.R	+ x F(GHz)Maxi		
RF INSERTION LOSS	\sqrt{F} (GHz) dB Maxi		
VOLTAGE RATING	Veff Maxi		
DIELECTRIC WITHSTANDING VOLTAGE	Veff Mini		
INSULATION RESISTANCE	M Ω Mini	OTHERS CHARACTERISTICS	
HERMETIC SEAL	Atm.cm ³ /s	CABLE RETENTION	N Mini
LEAKAGE (pressurized only)		CENTER CONTACT RETENTION	
MECHANICAL DURABILITY	Cycles	Axial force - mating end	N Mini
WEIGHT	gr	Axial force - opposite end	N Mini
SPECIFICATION		Torque	cm.N Mini
		RECOMMENDED TORQUES	
		Mating	cm.N
		Panel nut	cm.N
		Clamp nut	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY			
OUTER CONTACT			
CENTER CONTACT			
INSULATOR			
GASKET			
OTHERS PIECES	LIQUID CRISTAL POLYMER		

ISSUE	CREATION DATE	FILE PART-NUMBER
0234A00	19/03/1998	EPC 95-08



RADIALL[®]

BAFFERT

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future