
MODIFICATION BULLETIN NO. 1

PAGE 1 OF 4

ISSUED ON: July 31, '94

| Model Modified Article Reason for Modification | | | J3 Roll Feed | der Connector | Volt/Hz | Date of Modification | Serial Number | | | | | |
|---------------------------------------------------------|---------------------------------------------------------------------|--------------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------|------------------------------|---------------------------------|------|-----------------|------------------|------|
| | | | Right & Left | Right & Left Release Levers | | | | | | | | |
| | | | To ensure the front cover is locked | | | | | | | | | |
| Draw | Old Parts | | New Parts No. | Description | Rank | Q'ty Used Old→New | Inter- change- ability | Parts needed for replacement by | | ent by new part | Parts Catalog | |
| No. | No. | | | | | | | Part No. | Desc | ription | No. | Page |
| | A4532603 | | A4532604 | Left Release Lever | | $1 \rightarrow 1$ | X/X | | | | 4 | 3 |
| | A4532613 | | A4532614 | Right Release Lever | | $1 \rightarrow 1$ | X/X | | | | 15 | 3 |
| | 03130060B- | | | Philips Pan Head Screw - M3 x 6 | | $n \rightarrow n-2$ | | | | | 102 | 3 |
| | | | 09513006B | Philips Screw With Flat Washer - M3 x 6 | | $n \rightarrow n-4$ | | | | | 104 | 3 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| Interch (1) Wh rep (2) The | hangeability: hen old and ne lacement by n e mark to the l | ew pa new p left o | arts are not mu part" to install the slash indi | rediately. B : Replace with new p itually interchangeable, use addit he new part. icates whether the old part can b machine. $x = Not$ interchangeat | tional pa | arts or an ass in the new m | sembly par nachine, an | t as indicated | | ed for | | |

DETAILS OF MODIFICATION

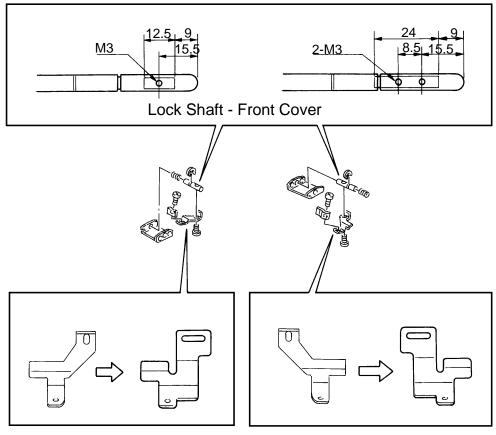

Left Release Lever

Right Release Lever

When the sheet feeder is pushed in roughly, the front cover may sometimes be released due to the tolerance of the length of the front cover lock shaft.

To correct this, the production machines have been modified so that the left and right release bracket position can be adjustable.

- 1. A screw hole has been added to the front cover lock shaft.
- 2. The configurations of the left and right release lever has been changed as shown.

DETAILS OF MODIFICATION

- 3. The number of fixing screws for the left and right release lever has been changed from 1 to 2. The screw has been changed to a flat washer type.
- **NOTE:** 1. When replacing the old left and/or right release lever, replace them together with a new left and/or right release lever and new front cover lock shaft.
 - 2. As the old cover lock shaft have not been shipped as a spare part from SPC and the new one can be installed on the old machine in the field the part number remains the same.

S. Hamano, Assistant General Manager Technical Support Department

ISSUED ON: July 31, '94

| | V/Hz | | JAPN PRODUCTION | | | |
|-----------------------------|-------------|-------------|-----------------|---------------|--|--|
| MODEL NAME | | DESTINATION | CODE | SERIAL NUMBER | | |
| R. F. CONNECTOR EF3000 | 220, 240/50 | EUROPE | A384 - 01 | 6781130001 | | |
| REGMA916 R/F CONNECTOR | 220, 240/50 | EUROPE | A384 - 02 | 28670056 | | |
| R.F. CONNECTOR TYPE830 | 220, 240/50 | EUROPE etc. | A384 - 03 | A3463060001 | | |
| K + E 7036 R/F CONNECTOR | 115/60 | USA, CANADA | A384 - 06 | 3733060001 | | |

MODIFICATION BULLETIN NO. 2

PAGE 1 OF 2

ISSUED ON: February 29, '96

| Model | J3 Roll Fee | eder Connector | | Vo | olt/Hz | Date of Modification | Serial Numbe |
|----------------------------|---------------------------|---------------------------------------------------------------------------------|------------------------------------------|--------------------|-----------|-------------------------|--------------|
| Iodified Article | Paper Feed | Paper Feed Roller | | | | | |
| Reason for Modification | To prevent material of | the paper feed roller from being swol the roller has been changed to silicor | llen as a result of the oi ne rubber. | il, the | | | |
| | | | | Inter- | | Parts Catalog | |
| Old P/N | New P/N | Description | Q'ty Used | change- ability | Index I | No. Pag | ge |
| AF020108 | AF020369 | Paper Feed Roller - Middle | $1 \rightarrow 1$ | X/O | 10 | 3 | i |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | sa, Manaç | | |

ISSUED ON: February 29, '96

-1

| | | | JAPN PRODUCTION | | | | |
|-----------------------------|-------------|-------------|-----------------|---------------|--|--|--|
| MODEL NAME | V/Hz | DESTINATION | CODE | SERIAL NUMBER | | | |
| R. F. CONNECTOR EF3000 | 220, 240/50 | EUROPE | A384 - 01 | 678026XXXX | | | |
| REGMA916 R/F CONNECTOR | 220, 240/50 | EUROPE | A384 - 02 | _ | | | |
| R. F. CONNECTOR TYPE830 | 220, 240/50 | EUROPE etc. | A384 - 03 | A3466010001 | | | |
| K + E 7036 R/F CONNECTOR | 115/60 | USA, CANADA | A384 - 06 | 373602XXXX | | | |
| R. F. CONNECTOR TYPE 830 | 115/60 | USA, CANADA | A384 - 07 | A346602XXXX | | | |