


Power Supply Unit IN115

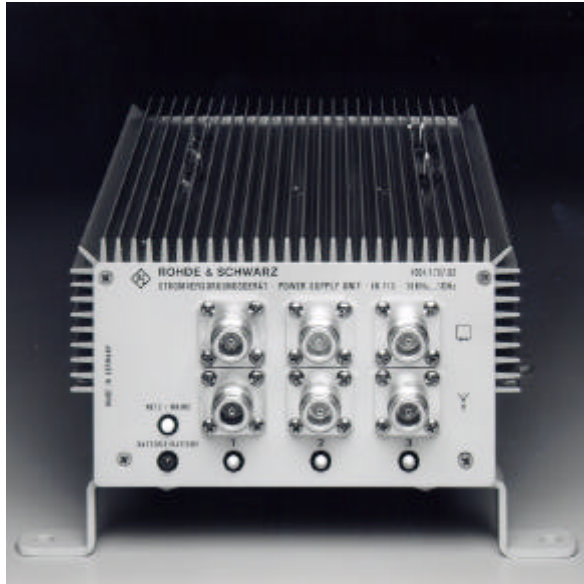

Brief description

The Power Supply Unit IN115 supplies the following active receiving antennas via coaxial cable:

HE010, HE015, HE202, HE302, HE309, HE314A1 and HE402.

- AC supply or battery operation
- Short-circuit proof
- Three DC-feed sections for up to three active antennas

Specifications

| | |
|---------------------------------------|-----------------------------|
| AC supply | 115/125/220/235 VAC ±10% |
| Power consumption | 50 VA max. |
| DC supply | 24V +35%/-20% |
| Switch-on monitor | pilot light |
| Output voltage | |
| with AC operation | 3 x 24 V ± 5% |
| with battery operation | 3 x 18 V ± 5% |
| Max. load current | 500 mA/output |
| Short-circuit current | 200 mA |
| RF frequency range for DC connections | 10 kHz to 1300 MHz |
| Connectors | N female |
| Operating temperature | -25 to +55 °C |
| Dimensions (W x H x D) | 170 x 125 x 350 mm |
| Weight | 5.5 kg |