

# **LCD TV 22**

LS22A13W

# **Owner's Instructions**

Before operating the unit, please read this manual thoroughly, and retain it for future reference.

ON-SCREEN MENUS TELETEXT PICTURE IN PICTURE

### For Better Display

- 1 Adjust computer resolution and screen injection rate (refresh rate) in control panel of computer as described below to enjoy the best quality of picture. You can have an uneven quality of picture in the screen if the best quality of picture is not provided in TFT-LCD.
  - Resolution : 1280 x 720
  - Vertical frequency (refresh rate) : 60 Hz
- 2 TFT LCD panel manufactured by using advanced semiconductor technology with precision of 99.999% above is used for this product. But the pixels of RED, GREEN, BLUE and WHITE color seem to be bright sometimes or some of black pixels could be seen. This is not from bad quality and you can use it without uneasiness.
  - The number of TFT-LCD pixels that is contained in this product are 2,764,800.
- **3** When you clean the monitor and the panel outside, please apply the recommended small amount of cleaner by using soft and dry cloth and polish it. Let LCD area not to be forced but to be scrubbed out softly. If excessive force is applied, you can have a stain on it.

#### Information in this document is subject to change without notice. © 2002 Samsung Electronics Co., Ltd. All rights reserved.


Reproduction in any manner whatsoever without the written permission of Samsung Electronics Co., Ltd. is strictly forbidden.

Samsung Electronics Co., Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.


The *Samsung logo* is the registered trademarks of Samsung Electronics Co., Ltd.; *VESA*, *DPMS* and *DDC* are registered trademarks of Video Electronics Standard Association; the *ENERGY STAR* name and logo are registered trademarks of the U.S. Environmental Protection Agency (EPA). As an ENERGY STAR Partner, Samsung Electronics Co., Ltd. has determined that this product meets the *ENERGY STAR* guidelines for energy efficiency. All other product names mentioned herein may be the trademarks or registered trademarks of their respective owners.

### **Safety Instructions**

### These illustrations represent precautions concerning your TV.




Do NOT expose the TV to extreme temperature conditions (below 5°C and above 35°C) or to extreme humidity conditions (less than 10% and more than 75%).



Do NOT expose the TV to direct sunlight.




Do NOT expose the TV to any liquids.



If the TV is broken, do not try to





repair it yourself. Contact qualified service personnel.


During a storm conditions (especially when there is lightning) unplug the TV from the mains socket and aerial.

If the remote control is not used for a long period of time, remove the batteries and store it in a cool, dry place.

Remove and discard vinyl bag from power adaptor before use. Possible fire hazard.

THIS DEVICE IS NOT FOR USE IN INDUSTRIAL ENVIRONMENTS

### Caution



The main voltage is indicated on the rear of the TV set and the frequency is 50 or 60Hz.

The lightning flash and arrow head within the triangle is a warning sign alerting you of "dangerous voltage" inside the product.

The exclamation point within the triangle is a warning sign alerting you of important instructions accompanying the product.

WARNING: TO PREVENT DAMAGE WHICH MAY RESULT IN FIRE OR SHOCK HAZARD. DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

Mode	System
CW/WS	PAL-B/G, D/K, I, SECAM-B/G,D/K, I, L/L', NTSC4.43
CS	PAL-B/G, D/K, I, SECAM-B/G,D/K, I, NTSC4.43/3.58



Thank you for buying a SAMSUNG TV.

Please take the time to read these instructions, as they will help you to operate your TV with ease.

# Contents

•	Fore	WORD Safety Instructions	_
		Caution	
٠		ECTING AND PREPARING YOUR TELEVISION	_
	•	Control Panels	
	-	Connection Panel	
	-	Infrared Remote Control	
	-	Connecting to an Aerial or Cable Television Network	
	-	Connecting a non-AV-Link VCR	
	-	Connecting a Satellite Receiver	
	-	Connecting a Decoder	
	-	Connecting to an Audio System and Sub-woofer	
	-	Inserting the Batteries in the Remote Control	
	-	Switching Your Television On and Off	
	-	Placing Your Television in Standby Mode	
	-	Becoming Familiar with the Remote Control	
	•	Plug and Play Feature	
	-	Choosing Your Language	15
	SETTI	NG THE CHANNELS	
•	52111	Automatic Storing of Channels	16
		Sorting the Stored Channels	
		Manual Storing of Channels	
		Assigning Names to Channels	
	-	Skipping Unwanted Channels	
		Fine Tuning Channels	
		Adjusting the Picture Standard	
		Adjusting the Picture Settings	
	-	Selecting the Picture Format	
	-	Freezing the Picture	
	-		- ·
٠	Setti	NG THE SOUND	
	-	Adjusting the Volume	25
	=	Switching the Sound Off Temporarily	
	=	Selecting the Sound Standard	
	-	Selecting the Sound Settings	26
	=	Selecting the Sound Mode	
	-	Selecting the Melody Sound	
	=	Virtual Dolby	28
	-	Adjusting the Volume Automatically	
	-	Connecting the Headphones	
	-	Adjusting Your Headphone Preferences	
		Selecting the Sound	

# Contents

<ul> <li>Setti</li> <li>I</li> </ul>	ING THE PICTURE Picture In Picture Feature Selecting the Blue Screen Mode	
<ul> <li>Setti</li> <li>I</li> <li>I</li> </ul>	TING THE TIME Setting the Sleep Timer Setting and Displaying the Current Time Switching the Television On and Off Automatically	33
<ul> <li>Setti</li> &lt;</ul>		36 36 37
	Displaying the Teletext Information Selecting a Specific Teletext Page	38 39 40
	Connecting to the RCA Input Connecting to the S-Video Input Viewing Pictures From External Sources	41 42 43 44 46 47 48 49 50








Symbols





Press

English-5

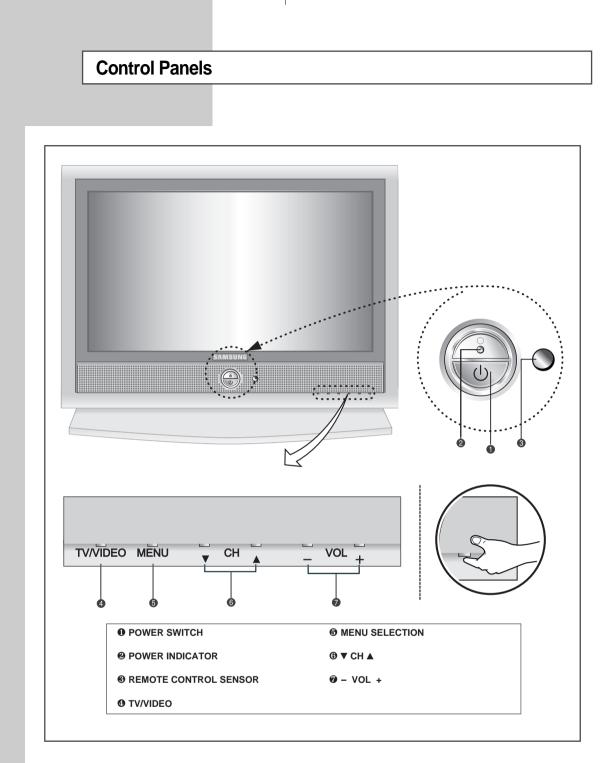


### Using the Buttons on the Panel


If the remote control no longer works or you have lost it, you can use controls on the panel of the TV to:

- Switch on the TV when it is in Standby mode and select channels (  $\forall$  CH  $\blacktriangle$ )
- Access the local menu ( **MENU** )
- ◆ Adjust the volume (- VOL +)
- Switch among Video input modes (**TV/VIDEO**)

### **Connection Panels**

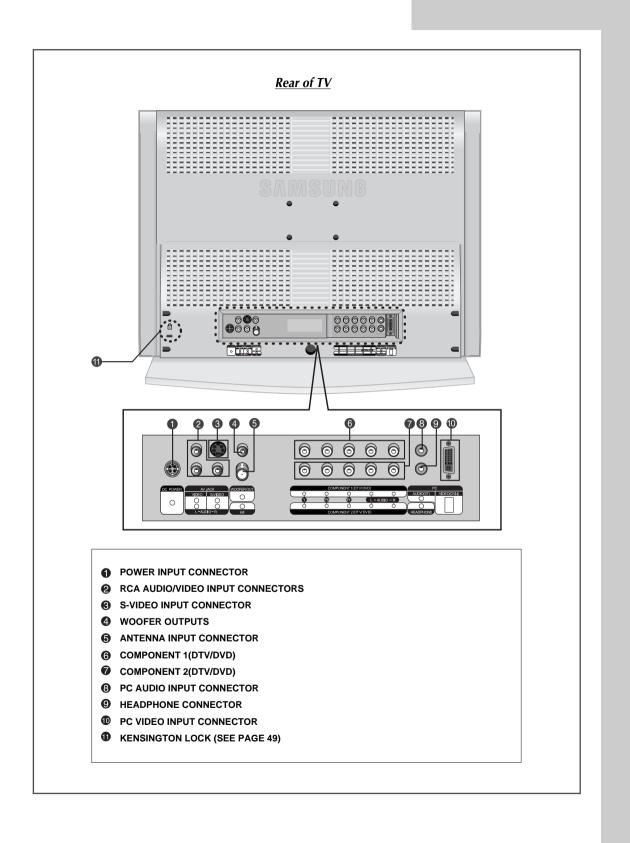

### Infrared Remote Control

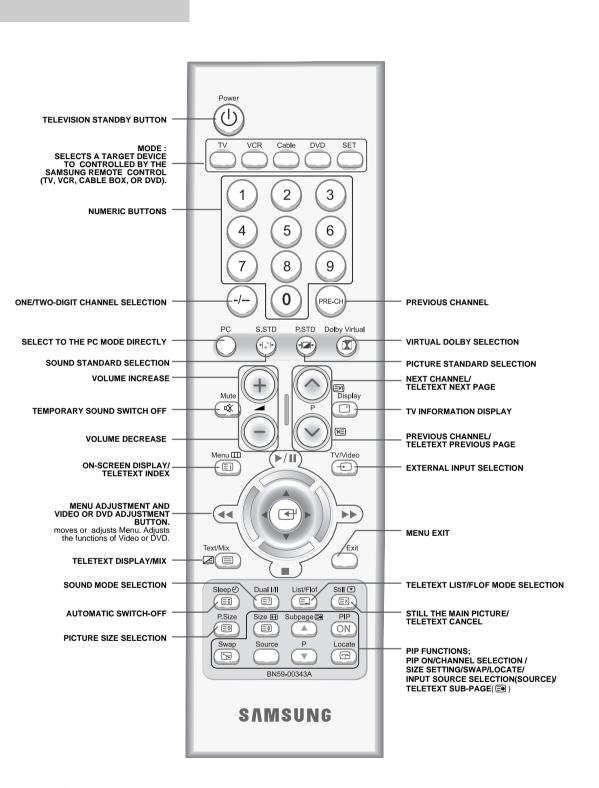

It is possible that the work of the transmitter is dull or not operated normally if the light of the Bulb is on around the TV set.

### **Connecting Connecting to an Aerial or Cable Television**

To view TV channels correctly, a signal must be received by the set from one of the following sources:

- An outdoor aerial
- A cable TV network
- A satellite network (see page 10 for further details)


1 In the first three cases, connect the aerial or network input cable to the  $75\Omega$  coaxial socket on the rear of the TV.

2 If you are using an indoor aerial, you may need to turn it when tuning your TV until you obtain a picture that is both sharp and clear.

For further details, refer to:

- "Automatic Storing of Channels" on page 16
- "Manual Storing of Channels" on page 18

If you wish to subscribe to a cable network, contact your local dealer.



### Connecting a non-AV-Link VCR


You can connect a VCR to the TV using a:

- Coaxial cable
- S-Video cable


1 Plug the aerial input cable into the appropriate socket on the VCR.

- 2 Connect a coaxial cable to the:
  - VCR aerial output socket
    - Television aerial input socket

**3** Follow the instructions supplied with your VCR to tune the VCR to your TV.

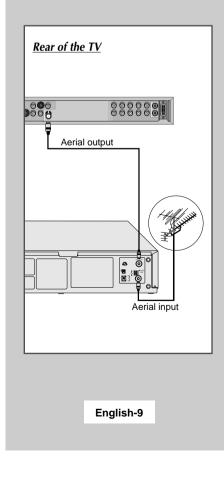

### **Connecting a Satellite Receiver**



# In order to watch TV programmes broadcast via a satellite network, you must connect a satellite receiver to the TV set.

If you wish to connect both a satellite receiver and a VCR, you should connect the:

- Receiver to the VCR
- ◆ VCR to the TV
  - (see pages 41~42 for further details)


Otherwise, connect the receiver directly to the TV.

### Using a coaxial cable

Connect a coaxial cable to the:

- Receiver output socket.
- Television aerial input socket.

### **Connecting a Decoder**



In order to descramble a coded transmission signal, you must connect a decoder to the TV set.

- If you wish to connect both a decoder and a VCR, you should connect the:
  - Decoder to the VCR
  - VCR to the TV (see pages 41~42 for further details)

Otherwise, connect the decoder directly to the TV.

### Using a coaxial cable

Connect a coaxial cable to the:

- Receiver output socket.
- Television aerial input socket.



### Connecting to an Audio System and Sub-woofer

Connect a set of audio cables between the AUX L, R jacks on the AUDIO SYSTEM and the AUDIO OUTPUT L, R jacks on the TV.

Connect an audio cable between the INPUT jack on an active(powered) Sub woofer and the WOOFER OUT jack on the TV.

• The audio system and subwoofer are sold separately.


### Inserting the Batteries in the Remote Control

You must insert or replace the batteries in the remote control when you:

• Purchase the TV

- Find that the remote control is no longer operating correctly
- 1 Remove the cover on the rear of the remote control by pressing the symbol downwards and then pulling firmly to remove it.
- 2 Insert two R03, UM4, "AA" 1.5V or equivalent batteries taking care to respect the polarities:
  - + on the battery against + on the remote control
  - on the battery against on the remote control
- **3** Replace the cover by aligning it with the base of the remote control and pressing it back into place.

Do not mix battery types, i.e. alkaline and monganese.



Sub Woofer

Audio Cable


 $\cap$ 

Audio Cable


(L)((•))

(R)





### Switching Your TV On and Off







#### The mains lead is attached to the rear of your TV.

1	Plug the m <u>Result</u> :	ains lead into an appropriate socket. A green Standby indicator appears on the front of your television.	
2	Press the <b>POWER</b> button ( $\bigcirc$ ).		
	Result:	The screen is turned on and a green Standby indicator disappears on the front of your television.	
		(When the timer operates and the power is turned off, LED turns red.)	
3	To switch your television off, press the <b>POWER</b> button ( $$ ) again.		

### Placing Your Television in Standby Mode





*Your television can be placed in Standby mode, in order to reduce the power consumption.* 

The Standby mode can be useful when you wish to interrupt viewing temporarily (during a meal, for example).

Press the **POWER** button (  $\bigcirc$  ).

<u>Result</u>: The screen is turned off and a green Standby indicator appears on the front of your television.

- 2 To switch your television back on, simply press the POWER button (  $\bigcirc$  ) button again.
- $\succ$

1

Do not leave your TV in Standby mode for long periods of time (when you are away on holiday, for example). Turn your television off by pressing the **POWER** button ( $\bigcirc$ ). It is best to unplug your television from the mains and aerial.


### **Becoming Familiar with the Remote Control**

The remote control is used mainly to:


- Change channels and adjust the volume
- Set up the TV using the on-screen menu system

The following table presents the most frequently used buttons and their functions.

Button	Viewing Function	Menu Function	
PA	Used to display the next stored channel.		
PV	Used to display the previous stored channel.		
	pushed immediately	nnels, the second digit must be after the first. Failure to do this digit channel being displayed.	
	Used to reduce the volume.		
+	Used to increase the volume.		
		<ul> <li>Used to:</li> <li>Display a submenu containing selections for the current menu option</li> <li>Search forwards/backwards manually for channels</li> <li>Increase/reduce a menu option value</li> </ul>	
MENU	Used to display the on-screen menu system.	Used to return to the previous menu or normal viewing.	
(1) to (9)	Used to display the corresponding channels.	Used to display the corresponding channel directly.	

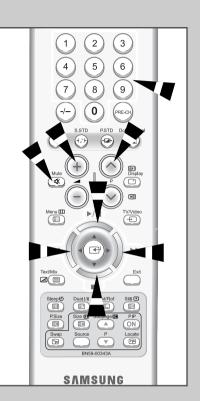

### **Plug and Play Feature**

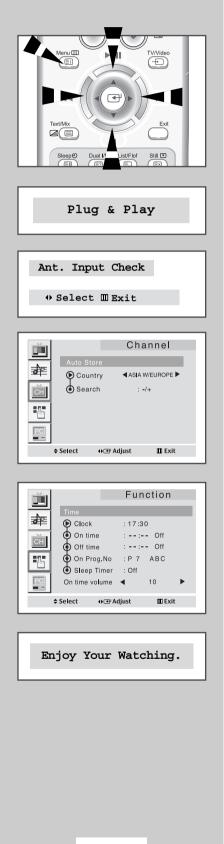

When the TV is initially powered ON, two basic customer settings proceed automatically and subsequently. The following settings are available.

- 1 If the TV is in Standby mode, press the **POWER** button ( 也) on the remote control.
  - Result: The message Plug & Play is displayed. It flickers for a little while, and then the Language menu is automatically displayed.
- 2 Select the appropriate language by pressing the UP/DOWN ▲▼ button. Press the MENU button to enter the language.
  - Result: The message Ant. Input : Check is displayed.
- 3 Make sure that the antenna is connected to the TV. Press the the LEFT/RIGHT ◄► button.
  - <u>Result</u>: The Auto store menu is displayed with Area is selected.
- Select your area by pressing the LEFT/RIGHT <> button.
   To search the channels, select search by pressing the UP/DOWN
   ▲▼ button, and then press the LEFT/RIGHT <> button.
   Press the MENU button to stop the search.
  - Result: The **Time** menu is displayed with **Clock** is selected. (Refer to "Automatic Storing of Channels" on page 16)
- 5 Press the the LEFT/RIGHT ◄► to move to the hour or minute. Set the hour minute by pressing the UP/DOWN ▲▼ button. (Refer to "Setting and Displaying the Current Time" on page 33)
- 6 When you have finished, press the **MENU** button.
  - Result: The message Enjoy Your Watching is displayed, and then the channel which has been stored will be activated.

### **Plug and Play Feature**

If you want to reset this feature ...


1	Press the <b>MENU</b> button.		
	Result: The main menu is displayed.		
2	Press the <b>UP/DOWN</b> ▲▼ button to select the Function. Press the <b>LEFT/RIGHT</b> ◀► button.		
	<u>Result</u> : The options available in the Function group are displayed.		
3	Press the UP/DOWN AV button to select the Plug & Play.		
4	Press the <b>LEFT/RIGHT</b> ◀► button.		
	Result: The message Plug & Play is displayed.		
5	For further details on how to set, refer to the opposite page14.		



# **Choosing Your Language**


When you start using your TV for the first time, you must select the language which will be used for displaying menus and indications.

1	Press the <b>MENU</b> button.		
	Result:	The main menu is displayed.	
2		<b>UP/DOWN</b> ▲▼ button to select the Function. <b>LEFT/RIGHT</b> ◀► button.	
	<u>Result</u> :	The options available in the Function group are displayed. The Language is selected.	
3	Press the	ELEFT/RIGHT ◄► button again.	
	Result:	The languages available are listed.	
4	Press the	• <b>UP/DOWN</b> ▲▼ button to select appropriate language.	
5		u are satisfied with your choice, press the <b>MENU</b> button to normal viewing.	




		Funct	tion
	Language Time PIP Pluge & F Blue scree	lay	<ul><li>Off</li></ul>
4	Select		III Exit

### **Automatic Storing of Channels**









P 1 C	227MHz
	35%
<b>Ⅲ ≑</b> Exit	

You can scan for the frequency ranges available to you, (availability depends on your country). Automatically allocated programme numbers may not correspond to actual or desired programme numbers. However you can sort numbers manually and clear any channels you do not wish to watch (see pages 17~19 for further details).

Press the <b>MENU</b> button.		
Result: The main menu is displayed.		
Press the <b>UP/DOWN</b> ▲▼ button to select the Channel. Press the <b>LEFT/RIGHT</b> ◀► button.		
Result: The options available in the Channel group are displayed.		
Press the <b>UP/DOWN</b> ▲▼ button to select the Auto store. Press the <b>LEFT/RIGHT</b> ◀► button.		
Result: The options available in the Auto store group are displayed.		
Press the <b>UP/DOWN</b> ▲▼ button to select the Country.		
Press the <b>LEFT/RIGHT ◄</b> to select your country. If you have selected the Others option but do not wish to scan the PAL frequency range, store the channels manually (see page 18).		
Press the UP/DOWN ▲▼ button to select the Search.         Press the LEFT/RIGHT ◀► button.         Result:       The search will end automatically. Channels are sorted and stored in an order which reflacts their position in the frequency range, (with lowest first an highest last). The programme originally selected is then displayed.	nd	
➤ To stop the search before it has finished, press the ME button and UP/DOWN ▲▼.	NU	
<ul> <li>When the channels have been stored, you can:</li> <li>Sort them in the order required (see page 17)</li> <li>Fine-tune channel reception if necessary (see page 22)</li> <li>Assign a name to the stored channels (see page 20)</li> </ul>		

### Sorting the Stored Channels


The Sort operation allows you to change the programme numbers of stored channels. This operation may be necessary after using ATM. You can delete those channels you do not want to keep.

1	Press the <b>MENU</b> button.		
	Result: The main menu is displayed.		
2	Press the <b>UP/DOWN</b> ▲▼ button to select the <b>Channel</b> . Press the <b>LEFT/RIGHT ◄</b> button.		
	Result: The options available in the Channel group are displayed.		
3	Press the <b>UP/DOWN</b> ▲▼ button to select the <b>Sort</b> . Press the <b>LEFT/RIGHT</b> ◀► button.		
	Result: The Sort menu is displayed.		
4	Press the <b>UP/DOWN</b> ▲▼ to select the <b>From</b> .		
5	Press the <b>LEFT/RIGHT ◄</b> ► to select the channel that you wish.		
6	Press the <b>UP/DOWN</b> ▲▼ button to select the <b>To</b> .		
7	Press the <b>LEFT/RIGHT I</b> to select the number of the programme to which the channel os to be moved.		
-			

- 8 Press the UP/DOWN ▲▼ button to select the Store.
- 9 Press the LEFT/RIGHT ◄ button to select the OK.

<u>Result</u>: The channel is moved to its new position.

**10** Repeat Steps **6** to **11** until you have moved all the channels to the required programme numbers.





Ĭ		Char	inel
में टॉग	Auto store Manual sto Name Add/Erase	ore	* *
	Fine tune Sort		
÷	Select 📢	🕀 Enter	🔟 Exit





### **Manual Storing of Channels**





		Channel
- afe	Manual store	m 🚽 Auto 🕨
ĊH	Sound syster	n ┥ BG 🕨
	Search     Channel	: 471MHz : C04
	Prog. No	:P1
PC	Store	: ?
	¢Select ↔ ↔	Adjust 🔟 Exit

C	Channel
Manual store Colour system Sound system Search Channel Prog. No	▲ Auto ► ■ BG ► : 471MHz : C04 : P 1
<ul> <li>Store</li> <li>Select ↔  Adjust</li> </ul>	:?

You can store up to 100 TV channels, including those received via cable networks.

When storing channels manually, you can choose:

- Whether or not to store each of the channels found ٠
- The programme number by which you wish to identify each stored channel
- 1 Press the MENU button. Result: The main menu is displayed. 2 Press the **UP/DOWN** ▲▼ button to select the Channel. Press the **LEFT/RIGHT** ◀ ▶ button. Result: The options available in the Channel group are displayed. 3 Press the UP/DOWN ▲▼ button to select the Manual store. Press the **LEFT/RIGHT ◄ ▶** button. Result: The Manual store menu is displayed. 4 If necessary, indicate the broadcasting standard required by Pressing the UP/DOWN AV to select the Color system, followed by Press the LEFT/RIGHT ◀► button. The color standards are displayed in the following order :  $\rightarrow$  Auto  $\rightarrow$  PAL  $\rightarrow$  SECAM  $\rightarrow$  NT4.43  $\rightarrow$  NT3.58  $^-$ 5 Select the sound system by pressing the UP/DOWN ▲▼ button, and followed by pressing the LEFT/RIGHT <> The sound standards are displayed in the following order. :  $\rightarrow$  BG  $\rightarrow$  DK  $\rightarrow$  I  $\rightarrow$  M 6 Press the UP/DOWN ▲▼ button to select the Store.
- 7


Press the LEFT/RIGHT ◀► button to select the ox.

# Manual Storing of Channels

8	lf you	Then press the
	Know the number of the the channel to be stored	
	Do not know the channe the numbers	<ul> <li>UP/DOWN ▲▼ button to select Search</li> <li>LEFT/RIGHT ◄► to start the search</li> </ul>
		cans the frequency range until the first the channel that you selected is received on
9	To assign a programme number to a channel, select the Prog.No. Press the LEFT/RIGHT ◀► button until you find the correct number.	
10	Press the <b>UP/DOWN</b> ▲▼ button to select the Store.	
11	Press the LEFT/RIGHT	► button to select the OK.
12	To store the channel and associated programme number, press the <b>MENU</b> button.	
	Repeat Steps 10 to 15 for each channel to be stored.	


Manual store Colour system Sound system Search Channel Prog. No Store Select	<ul> <li>■ BG ►</li> <li>: 471MHz</li> <li>: C04</li> <li>: P 1</li> <li>: ?</li> </ul>
	Channel
Manual store Colour system Sound system Search Channel Prog. No Store Store	<ul> <li>■ BG</li> <li>: 471MHz</li> <li>: C04</li> <li>: P 1</li> <li>: ?</li> </ul>
Manual store Colour system Sound system Search Channel Prog. No Store	Channel ▲ Auto ▶ ▲ BG ▶ : 471MHz : C04 : P 1 : ?
\$ Select ↔ ↔ Adju	st 🔟 Exit
Manual store	Channel ▲ Auto ▲ ▲ BG ▲ : 471MHz : CO4 : P1 : OK st Ш Exit
Manual store Colour system Sound system Search Channel Prog. No Store	▲ Auto ► ▲ BG ► : 471MHz : C04 : P 1 : OK

### **Assigning Names to Channels**









Channel names will be assigned automatically when channel information is broadcast. These names can be changed, allowing you to assign new names.


1	Press the <b>MENU</b> button.		
	Result:	The main menu is displ	ayed.
2	Press the <b>UP/DOWN</b> ▲▼ button to select the Channel. Press the <b>LEFT/RIGHT</b> ◀► button.		
	<u>Result</u> :	The options available in displayed.	the Channel group are
3	Press the UP/DOWN ▲▼ button to select the Name. Press the LEFT/RIGHT ◀► button.		
	<u>Result</u> :	The <b>Name</b> menu is displated automatically selected.	ayed with the current channel
4	If necessary, select the channel to be assigned a new name by Pressing the <b>UP/DOWN</b> ▲▼ button.		
5	Press the LEFT/RIGHT ◀► button.		
	Result:	Arrow indications are d	splayed around the name box.
6	То		Then press the
	Select a let	tter, number or symbol	UP/DOWN ▲▼ button
	Move on th	e next letter	<b>RIGHT</b> ► button
	Move back	the previous letter	LEFT ◀ button
	↓ ↓ ↓ ↓	characters available are: _etters of the alphabet (A Numbers (0 9) Special characters (_, -,	Z)
7	You can ha	ave each channel newlyn	amed.
8		have finished entering	the name, press the <b>MENU</b>

### **Skipping Unwanted Channels**

You can exclude the channels of your choice from the channel scan operation. When you scan through the stored channels, those you have chosen to skip are not displayed.


All channels that you do not specifically choose to skip are displayed during scanning.

- Press the MENU button. <u>Result</u>: The main menu is displayed.
   Press the UP/DOWN ▲▼ button to select the Channel. Press the LEFT/RIGHT ◀► button. <u>Result</u>: The options available in the Channel group are displayed. The Channel menu is displayed.
- 3 Press the UP/DOWN ▲▼ button to select the Add/Erase. Press the LEFT/RIGHT ◀► button.
  - Result: The Add/Erase menu is displayed.
- 4 Press the **UP/DOWN** ▲▼ button to select the required channel.
- 5 To add or erase the desired channel by pressing the LEFT/RIGHT ◀► button.
- **6** When you have finished adding and erasing channels, press the **MENU** button repeatedly to return to normal viewing.



		Ch	annel	
 ≇≊	Auto ste Manual Name Add/Era	store	> >	
	Fine tur Sort		<b>*</b>	
	Select	<b>⊕</b> ⊞ Enter	🏛 Exit	

	Cha	annel
<ul><li>P8</li><li>P9</li></ul>	se : Erased : Erased : Erased : Erased	
\$ Select	<b>⊕</b> Adjust	🕮 Exit



# **Fine Tuning Channels**

Auto store     Auto store     Auto store     Manual store     Name     Add/Erase     Fine tune     Sort     Sort     Sort     Sort     Exit
Channel Fine tune ♥ Tune : -/+ ♥ Store : ? ♥ Erase : ? ♥ Select ♥ ⊕ Adjust ■ Exit
Fine Tune
Channel Fine tune
Channel Fine tune Tune : -/+
Select ↔œAdjust ⅢExit

Use fine tuning to manually adjust a particular channel for optimal reception.

1	Press the	MENU button
	Result:	The main menu is displayed.
2		UP/DOWN ▲▼ button to select the Channel. LEFT/RIGHT ◀► button.
	<u>Result</u> :	The options avaliable in the Channel group are displayed.
3		UP/DOWN ▲▼ button to select the Fine Tune. LEFT/RIGHT ◀► .
4	Press the	<b>LEFT/RIGHT ◄</b> button to adjust the fine tuning.
5	Press the	<b>UP/DOWN</b> ▲▼ button to select the Store.
6	Press the	LEFT/RIGHT ◀► button to select the or.
7	Press the	he fine tuning. UP/DOWN ▲▼ button to select the Erase, then press /RIGHT ◀► to select the oĸ.

### **Changing the Picture Standard**

You can use your remote control to select the type of picture which best corresponds to your viewing requirements. The following picture effects are available:

• Custom, Dynamic, Standard, Movie.

To select the required picture effect, simply press the  $P.STD(\neg P + )$  button on the remote control.


You can also set these options via the Adjust option in the **Picture** group. If you change the **Contrast**, **Brightness**, **Sharpness**, **Colour**, **Tint** (NTSC only) or **Colour tone** settings on the **Picture** menu, the **Custom** option is selected automatically.



### **Adjusting the Picture Settings**

Your TV has several settings which allow you to control picture quality:

- Contrast, Brightness, Sharpness, Colour, Tint (NTSC only), Colour tone
- 1 Press the **MENU** button.
  - <u>Result</u>: The options available in the **Picture** group are displayed.
- 2 Press the LEFT/RIGHT ◀► button.
- 3 Press the UP/DOWN ▲▼ button to select the required item you want change.
  - > When select the Mode to Custom, the Adjust menu is displayed.
- 4 To adjust the...
   Contrast
   Brightness
   Sharpness
   Colour
   Tint (NTSC only)
   Colour tone
   LEFT/RIGHT ◄> button.
  - Result: You select the required option (Cool2, Cool1, Normal, Warm1,Warm2).
- **5** When you are satisfied with the settings, press the **MENU** button repeatedly to return to normal viewing.





# **Selecting the Picture Format**



You can select the picture format which best corresponds to your viewing requirements by simply pressing the P.SIZE button.

The following picture formats are available in the order given:

Auto wide  $\rightarrow$  Wide  $\rightarrow$  Panorama  $\rightarrow$  Zoom1  $\rightarrow$  Zoom2  $\rightarrow$  4:3

Picture format	Description	
Autowide	The screen size is automatically adjusted when entering a PAL Plus signal(WSS).	
Wide	Setting for the 16:9 screen format	
Panorama	Use this mode for the wide aspect ratio of a Panorama picture <u>Note:</u> Not available in 480p, 720p and 1080i mode.	
Zoom (1,2)	Expansion of a 16:9 picture to full screen format.	
4:3	Setting for normal 4:3 format.	

### **Freezing the Picture**



Press the STILL button to freeze a moving picture into a still one. Press the again to cancel.


Fn	alish	-24
	ynsi	1-24

### Adjusting the Volume

You can adjust the volume using your remote control.

То	hold down the	
Increase the volume	► button.	
	<u>Result</u> : A horizontal bar is displayed and the volume increases until you release the button. The cursor moves to the right to indicate the volume.	
Decrease the volume	◀ button.	
	<u>Result</u> : A horizontal bar is displayed and the volume decreases until you release the button. The cursor moves to the left to indicate the volume.	

Additional sound adjustments are available on your TV. For further details, refer to pages 25 to 30.



•

Switching the Sound Off Temporarily

You can switch the sound off temporarily.

**Example:** You wish to answer the telephone.

1	Press the	MUTE( 🕸 ) button.
	Result:	The sound is switched off and "Mute" is displayed.
2		wish to turn the sound back on, press the <b>MUTE</b> n again or either of the volume buttons.
	<u>Result</u> :	The sound comes back on at the same volume as before and the "Mute" indication disappears.



### Selecting the Sound Standard




You can use your remote control to select the type of special sound effect to be used when watching a given broadcast. The following sound effects are available:


• Custom, Standard, Music, Movie, Speech.

To select the required sound effect, simply press the S.STD(+) button on the remote control.

You can also set these options via the **Equalizer** in the **Sound** group.

### Adjusting the Sound Settings





The following settings can be adjusted to suit your personal preferences. The following settings are available:

1	Press the MENU button.			
	Result: The main me	enu is displayed.		
2	Press the UP/DOWN ▲ Press the LEFT/RIGHT	<ul><li>✓ button to select the sound.</li><li>▲ button.</li></ul>		
	Result: The options	available in the sound group are displayed		
3		♥ button to select the Equalizer. e to Custom, the Equalizer menu is		
4	Press the LEFT/RIGHT	< ► button.		
	Result: The Equali:	zer menu is displayed.		
	То	Press the		
	Change a setting	UP/DOWN ▲▼ button		
	Move to the next setting	<b>RIGHT</b> ► button		
	Move to the previous setting LEFT			
5	When you are satisfied	with the settings, press the MENU buttor		

If you make any changes to the **Equalizer** settings, the sound standard is automatically switched to **Custom**.

### **Selecting the Sound Mode**

You can set the Audio mode by using DUAL I/II. When you press this button, current sound mode is displayed on the upper right corner of the screen.

	Audio Type	DUAL I/II	Default
	Mono	Mono	Automatic
FM Stereo	Stereo	Stereo ↔ Mono	Change
	Dual	Dual1 ↔ Dual2	Dual1
	Mono	Mono	Automatic
NICAM	Stereo	Mono ↔ Stereo	Change
	Dual	$\begin{array}{c} Mono \rightarrow Dual1 \rightarrow Dual2 \\ \uparrow \\ \hline \end{array}$	Dual1


- ◆ If the receiving conditions deteriorate, listening will be easier if the mode is set to the "Mono" position using the DUAL I/II button.
- If the stereo signal is weak (or if intermittent Stereo-Mono) and automatic switching occurs, then switch to the "Mono" mode.
- When receiving mono sound in the AV mode, connect to the "L" input jack on the panels. If the mono sound comes out only from the left speaker, then press the DUAL I/II button.


### **Selecting the Melody Sound**

>

You can hear clear melody sound when the TV is powered ON or OFF. (No melody when the sound is set mute and power is turned off)

1	Press the	MENU button.
	Result:	The main menu is displayed.
2		UP/DOWN ▲▼ button to select Sound. LEFT/RIGHT ◀► button.
	<u>Result</u> :	The options available in the sound group are displayed.
3	Press the	UP/DOWN ▲▼ button to select the Melody.
4	Select th button.	e required option by pressing the LEFT/RIGHT <b>&lt;&gt;</b>
5	Press the	MENU button to return to normal viewing.








### Virtual Dolby

		S	Sound	
interest of the second	Mode Equalizer Virtual Dolby Auto volume Melody Headphone s Sound select	sound	Custom : Off : Off : Off Main	
\$	Select ♦ 🗨	<sup>#</sup> Adjust	III Exit	



This feature allows the TV's L/R speakers to provide a home Theater-like Dolby effect. The center and surround sounds are mixed into the L/R speakers.

- Press the MENU button.

   Result: The main menu is displayed.

   Press the UP/DOWN ▲▼ button to select the Sound.

   Press the LEFT/RIGHT ◄► button.
   Result: The options available in the Sound group are displayed.

   Press the UP/DOWN ▲▼ button to select the Virtual Dolby.
   Select the required option by pressing the LEFT/RIGHT ◀► button.
- 6 Press the **MENU** button to return to normal viewing.

### Adjusting the Volume Automatically

		Sou	nd
	Mode Equalizer Virtual Dolby Auto volume Melody Headphone s Sound select	<ul> <li>Cust</li> <li>ound</li> </ul>	rom ► ► : Off : Off : Off ►
PC			
	\$Select ↔ 🕀	Adjust	III Exit
		Sou	nd
	Mode	<ul> <li>Cust</li> </ul>	om 🕨
∎≇≞	Equalizer		•
- 24	Virtual Dolby		: Off
CH	Auto volumo		
СН	Auto volume Melody		: On : Off
		ound	
	Melody		: Off
	Melody Headphone s Sound select		: Off

Each broadcasting station has its own signal conditions, and so it is not easy for you to adjust the volume every time the channel is changed. Auto volume lets you automatically adjust the volume of the desired channel by lowering the sound output when the modulation signal is high or by raising the sound output when the modulation signal is low.

1	Press the I	MENU button.
	Result:	The main menu is displayed.
2		UP/DOWN ▲▼ button to select sound. LEFT/RIGHT ◀► button.
	Result:	The options available in the sound group are displayed.
3	Press the	UP/DOWN AV button to select the Auto volume.
4	Select the button.	e required option by pressing the LEFT/RIGHT <>
5	Press the I	MENU button to return to normal viewing.


### **Connecting Headphones**

# You can connect a set of headphones to your TV if you wish to watch a TV programme without disturbing the other people in the room.

Plug a set of headphones into the 3.5 mm mini-jack socket on the panel of the TV.

<u>Result</u>: The sound is heard through the headphones.

- For further details on how to set your headphone preferences, refer to the section below.
- Prolonged use of headphones at a high volume may damage your hearing.
- You will not receive sound from the speakers when you connect headphones to the system.




### **Adjusting Your Headphone Preferences**

You can adjust the headphone settings to suit your preferences. The following headphone settings are available:


• Volume, Balance, Bass, Treble.

1	Press the <b>MENU</b> button.		
	Result:	The main menu is	displayed.
2	Press the <b>UP/DOWN</b> ▲▼ button to select sound. Press the <b>LEFT/RIGHT</b> ◀► button.		
	Result:	The options availab	le in the sound group are displayed.
3	Press the <b>UP/DOWN</b> ▲▼ button to select the Headphone sound. Press the <b>LEFT/RIGHT</b> ◀► button.		
	Result:	The Headphone so	ound menu is displayed.
	То		Then
	Change th	ne option	Press the <b>UP/DOWN</b> ▲▼ button.
	Change a setting		Press the <b>LEFT/RIGHT ◀►</b> button.
	Confirm th	ne changes	Press the MENU button.



Headphone sound
Balance Bass Bass
Treble
⇒Select �⊡*Adjust ⅢExit

### Selecting the Sound



1 Press the **MENU** button.


<u>Result</u>: The main menu is displayed.

- 2 Press the UP/DOWN ▲▼ button to select sound. Press the LEFT/RIGHT ◀► button.
  - Result: The options available in the sound group are displayed.
- 3 Press the UP/DOWN ▲▼ button to select the Sound select.
- 4 Select the required option by pressing the LEFT/RIGHT ◀► button.
- 5 Press the **MENU** button to return to normal viewing.

The sound of subscreen can be selected only while the PIP functions is operating.

### **Picture in Picture Feature**

 $\sum$ 



		F	unctior	ı
	PIP TV/Video Swap	<ul> <li>▼</li> <li>▼</li> </ul>	ON VIDEO	•
СН	Size Prog.No	◀ ◀ P	Sma <b>ll</b> 15	<b>*</b>
	Select 4	🖅 Adjust	<b>00</b> E:	xit

You can display a "Picture-in-Picture screen" within the main picture of TV programme or Video input. In this way you can watch or monitor TV programme or the Video input from any connected equipment while watching TV or other Video input. For information about connection of other equipment, refer to pages 41 and 42.

1	Press the <b>MENU</b> button. <u>Result</u> : The main menu is displayed.
2	Press the <b>UP/DOWN</b> ▲▼ button to select Function. Press the LEFT/RIGHT ◀► button.
	Result: The options available in the Function group are displayed.
3	Press the <b>UP/DOWN</b> ▲▼ button to select PIP. Press the <b>LEFT/RIGHT</b> ◀► button.
	Result: The options available in the <b>PIP</b> group are displayed.
4	To activate the PIP feature, set the PIP to on by pressing the <b>LEFT/RIGHT</b> <> button.
5	Press the <b>UP/DOWN</b> $\blacktriangle$ button to select <b>TV/VIideo</b> . Then, select a source of the sub picture by pressing the <b>LEFT/RIGHT</b> $\blacktriangleleft$ button. The sources are displayed in the following order: $\mapsto$ <b>TV</b> $\rightarrow$ <b>VIDEO</b> $\rightarrow$ <b>S-VIDEO</b> $\rightarrow$ <b>COMP1</b> $\rightarrow$ <b>COMP2</b> $\neg$

6 To interchange the main picture and the sub picture, select the swap option and press the LEFT/RIGHT ◀► button.

- 7 Press the UP/DOWN ▲▼ button to select Size. Then, select a size of the sub to Double Screen1, Double Screen2 or Small by pressing the LEFT/RIGHT ◀► button.
- 8 Press the **UP/DOWN** ▲▼ button to select **Prog.No**. You can select the channel that you want to view through sub picture by pressing the **LEFT/RIGHT** ◀► button.
- 9 To return to normal viewing, press the **MENU** button.

### Remote-control functions while "PIP" is "On":

Features	Description	
PIP ON	Used to operate ON/OFF function of PIP directly.	
SWAP	Used to interchange the main picture and the sub picture.	
	When the main picture is in the Video mode and the sub picture is in the TV mode, you might not hear the sound of main picture when pressing the SWAP button after changing the sub picture channel. At this time, reselect the main picture channel.	
	> The swap function will not operate in PC Mode.	
LOCATE	Used to move the sub picture counterclockwise.	
P ▼/▲	Used to select the channel of sub picture.	
SIZE	Used to select the type of sub picture (Double Screen1, Double Screen2, Small).	
	The PC Mode can be setup in the main display only, and the size of the sub-display small size.	
SOURCE	Used to assign a source of sub picture (TV, VIDEO, S-VIDEO, COMP1, COMP2).	



### Setting the Blue Screen Mode

		Fι	Inction	
at the second se	Langua Time	age	*	
CH	PIP Pluge Blue se		► E	
-6	Dide St		. 01	
PC				
	Select		III Exit	

If no signal is being received or the signal is very weak, a blue screen automatically replaces the noisy picture background.

If you wish to continue viewing the poor picture, you must set the "Blue screen" mode to "Off".

1	Press the I	MENU button.
	Result:	The main menu is displayed.
2		UP/DOWN ▲▼ button to select the Function. LEFT/RIGHT ◀► button.
	<u>Result</u> :	The options available in the Function group are displayed
3	Press the	UP/DOWN ▲▼ button to select the Blue screen.
4	Select the button.	e required option by pressing the LEFT/RIGHT
5	Press the I	MENU button repeatedly to return to normal viewing.

### Setting the Sleep Timer



You can select a time period of between 30 and 180 minutes after which the television automatically switches to Standby mode by pressing the "SLEEP" button.

1 Press the **SLEEP** button on the remote control.

#### Result:

2

If the sle	ep timer is	The screen displays
Already	set	Time remaining before the television will be placed in standby mode.
Not yet s	set	Word "Off".
	e <b>SLEEP</b> button rvals (30, 60, 90,	repeatedly and cycle through the preset 120, 150, 180).
<u>Result:</u>	The TV automathe timer reached	atically switches to standby mode when es 0.

**3** To cancel the sleep timer function, press the **SLEEP** button repeatedly and select "Off".

Setting	and	Displaying	the	<b>Current Time</b>	
---------	-----	------------	-----	---------------------	--

You can set the TV's clock so that the current time is displayed when you press the "DISPLAY" button.

You must also set the time if you wish to use the automatic On/Off timers.



The clock setting will be re-activated when pressing the " $\bigcirc$ " (ON/OFF) button on the front panel.

1 Press the **MENU** button.

Result: The main menu is displayed.

2 Press the UP/DOWN ▲▼ button to select the Function. Press the LEFT/RIGHT ◀► button.

<u>Result</u>: The options available in the Function group are displayed

3 Press the UP/DOWN ▲▼ button to select the Time. Press the LEFT/RIGHT ◀► button.

<u>Result:</u> The "Time" menu is displayed with the 'Clock' selected.

4	То	Press the
	Move to the hour or minute	<b>LEFT/RIGHT</b> ◀► button.
	Set the hour or minute	<b>UP/DOWN</b> ▲▼ button.

5 When you have finished, press the MENU button or, press the MENU button repeatedly to return to normal viewing.

6	To display the	Press the "DISPLAY" button
	Channel information	Once.
	Current time	Twice.



When you set the timer on, your television will be turned off if you do not operate any controls during 3 hours after you turn on the TV. This 'Absent power off' function is available in only 'Timer on' situation. This function will prevent the leakage accident or dissipation caused by the occation that your TV will be left in turned on situation for a long time due to 'Timer on'. (when you are away on holiday for example)



		Function
a a a a a a a a a a a a a a a a a a a	Time	: 17:30
СН	On time	:: Off :: Off
- -	On Prog.No	:P7 ABC
PC	Sleep Timer On time volume	
	¢Select ↔⊡*A	ljust 🔟 Exit

### Switching the Television On and Off Automatically

Image: Select       Function         Image: Select       Function <t< th=""></t<>
Function         Time
Function           Ime              • Clock : 17:30             • On time : 06:30 On             • Off time : 11:30 On             • Off time : 11:30 On             • Off time : 11:30 On             • On Prog.No : P 7 ABC             • Sleep Timer : Off             On time volume ◀ 10 ▶
⇒ Select ↔ 🐨 Adjust 🔟 Exit
Image: Select       Function         Image: Select       Image: Select
Function         Ime
L

You can set the On/Off timers so that the TV will:

- Switch on automatically and tune to the channel of your choice at the time you select
- Switch off automatically at the time you select
- The first step is to set the TV's clock (refer to "Setting and Displaying the Current Time" on the previous page).
- 1 Press the **MENU** button.
  - Result: The main menu is displayed.
- 2 Press the UP/DOWN ▲▼ button to select the Function. Press the LEFT/RIGHT ◀► button.
  - Result: The options available in the Function group are displayed.
- 3 Press the UP/DOWN ▲▼ button to select the Time. Press the LEFT/RIGHT ◀► button.

<u>Result</u>: The **Time** menu is displayed.

- 4 Press the **UP/DOWN** ▲▼ button to select the **On** time.
- 5 Set the time at which you wish the TV to be switched On.
  - To...
     Press the...


     Move to the hour or minute
     LEFT/RIGHT ◄> button

     Adjust the hour or minute
     UP/DOWN ▲▼ button

     Move to the Off
     LEFT/RIGHT ◀> button

     Set the On or Off
     UP/DOWN ▲▼ button
- 6 In the same way, set the time at which you wish the TV to be switched Off.
- 7 If you want set the channel when the TV turns on, press the UP/DOWN ▲▼ button to select the On Prog.No. Press the LEFT/RIGHT ◀► button to select channel.
- 8 If you want set the volume level when the TV turns on, press the UP/DOWN ▲▼ button to select the On time volume. Press the LEFT/RIGHT ◀► button to adjust volume level.
- 9 When you have finished setting the On/Off time, On Prog. No or On time volume, press the MENU button repeatedly to return to normal viewing.

### Connecting to the PC Input

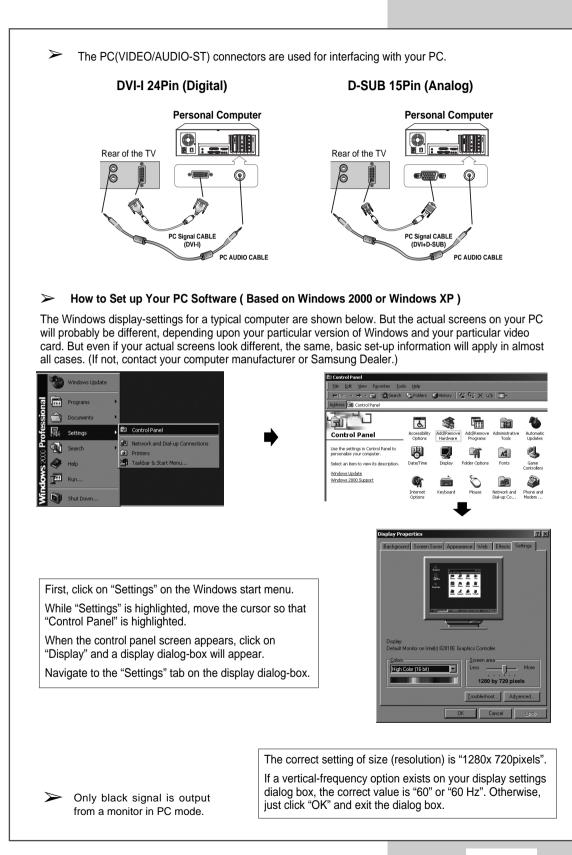

### Adjusting the Screen Quality

		Coarse Fine Position DVI Selec Coluor Ad Image Re Coluor Re 128	ljust ca <b>ll</b>	PC ► DVI-Ar ► : ? @60H	-
--	--	--	-----------------------	---------------------------------------	---

Coarse	► 1043	
Fine		

▲ Adjust

▶ 50

III Exit

The propose of picture quality adjustment is to remote or reduce picture noise. If the noise is not removed by fine tuning alone, then do the frequency adjustments to the utmost and fine tune again. After the noise has been reduced, re-adjust the picture so that it is aligned on the center of screen.

Preset to the PC mode by using the PC button.

- Press the MENU button.
   <u>Result</u>: The main menu is displayed.

   Press the UP/DOWN ▲▼ button to select the PC.
   Press the LEFT/RIGHT ◀► button.
   <u>Result</u>: The options available in the PC group are displayed.

   Press the UP/DOWN ▲▼ button to select the Coarse or Fine.
   Press the LEFT/RIGHT ◀► button to adjust the screen quality, vertical stripes appears or the picture may be blurry.
- **5** When you are satisfied with the settings, press the **MENU** button repeatedly to return to normal viewing.
- Coarse and Fine don't work in DVI-Digital Mode.

### **Changing the Screen Position**

PC       Coarse       Fine       DVI Select       Coluor Adjust       Image Recall       :?       Coluor Recall       :?       1280 X 720       • Geb Enter
PC Position OH-Position OV-Position Select +C#Adjust III Exit
H-Position •CP Adjust III Exit
V-Position → 50 ocp Adjust III Exit English-36

Pres	et to the PC mode by using the PC button.
1	Press the <b>MENU</b> button.
	Result: The main menu is displayed.
2	Press the <b>UP/DOWN</b> ▲▼ button to select <b>PC</b> . Press the <b>LEFT/RIGHT &lt;</b> ▶ button.
	Result: The options available in the PC group are displayed.
3	Press the <b>UP/DOWN I</b> button to select the <b>Position</b> and select the <b>H-Position</b> or <b>V-Position</b> .
4	Press the LEFT/RIGHT <> button to adjust the required position.
5	Press the <b>MENU</b> button repeatedly to return to nomal viewing.
To in	nitialize the image adjustment.
1	After steps 1~2 above are completed, press the UP/DOWN ▲▼ button to select the Image Recall.
n	Dropp the LEET/DICUT AN button to initialize the imag adjustment

2 Press the **LEFT/RIGHT ◄ ►** button to initialize the imag adjustment.

## **Changing the Screen Colour Standard**

#### Preset to the PC mode by using the PC button.

1	Press the	MENU button.	牽		Fine		Fine	Fine 🔳	Fine
	Result:	The main menu is displayed.	CH III	1	DVI Se Coluor	Position DVI Select Coluor Adjust	DVI Select Coluor Adjust	DVI Select Coluor Adjust	DVI Select d D' Coluor Adjust
2		UP/DOWN ▲▼ button to select PC. LEFT/RIGHT ◀► button.			Coluoi		Coluor Recall 1280 X 720	Coluor Recall 1280 X 720	Coluor Recall 1280 X 720 @
	Result:	The options available in the PC group are displayed.		• select					
3		• UP/DOWN ▲▼ button to select the Colour Adjust, s the LEFT/RIGHT ◀► button.	لت ۲۰		olour I R	olour Adjust P R			
	<u>Result</u> :	You can select "Custom", "Colour1", "Colour2" or "Colour3".			) G В				
4	Press the	MENU button repeatedly to return to normal viewing.	PC						


### Adjusting the Screen Colour Settings

Preset to the PC mode by using the PC button.

1	Press the <b>MENU</b> button.				
	<u>Result</u> : Th	e main menu is displayed.			
2	Press the UP/DOWN ▲▼ button to select PC. Press the LEFT/RIGHT ◀► button.				
	<u>Result</u> : The	e options available in the PC group are displayed.			
3	Press the <b>UP/DOWN</b> ▲▼ button to select the Colour Adjust, then press the LEFT/RIGHT ◀► button.				
4	Press the <b>UP/DOWN</b> ▲▼ button to select the required item you want adjust.				
5	To adjust the	Press the			
	<ul> <li>♦ R</li> <li>♦ G</li> <li>♦ B</li> </ul>	◆ LEFT/RIGHT ◀▶ button.			
6	Press the <b>MENU</b> button repeatedly to return to nomal viewing.				

#### To initialize the Colour adjustment.

- 1 After steps 1~2 above are completed, press the UP/DOWN ▲▼ button to select the Colour Recall.
- 2 Press the LEFT/RIGHT ◀ ► button to initialize the Colour adjustment.



PC

◀ DVI-Anolog ►


🏛 Exit

🏛 Exit

Select

			PC	
are l	Colour A	djust ┥	Custom	51
СН	∳ G			50
 ≣755	🕚 В			50
PC				
	\$ Select	♦ 🐨 Adjust	III Ex	it

#### **Teletext Decoder**




Most TV channels carry "teletext," pages of written information that provide information such as:

- Television programme times
- News bulletins
- Weather forecasts
- Sports results
- Subtitles for the hard of hearing

The teletext pages are organized according to six categories:

Part Contents		
A	Selected page number.	
B Broadcasting station identity.		
С	C Current page number or search status.	
D	Date and time.	
E Text.		
F Status information.		

#### **Displaying Teletext Information**



You can display teletext information at any time, but signal reception must be good. Otherwise:

- Information may be missing
- Some pages may not be displayed

To activate the teletext mode and display the contents page:

- 1 Using the  $P \land (\boxdot)$  or  $P \lor (\boxdot)$  button, select the channel providing the teletext service.
- **2** Press the **Text/Mix** ( $\Box$  /  $\Box$ ) button to activate the teletext mode.
  - Result:The contents page (page 100) is displayed.It can be redisplayed at any time by pressing<br/>the **Menu** (E) button.
- **3** To display the actual broadcast simultaneously with the teletext page, press the **Text/Mix** ( $\Box / \Box$ ) button.
- 4 To return to normal viewing press the **Still**(EX)button.
- **5** Press the **Text/Mix** (≡/2) button again to exit from the TTX display.

If any broken character appears while TTX is being viewed, make sure that the TTX language is identical with the language in the "Function" menu mode. If both languages are different, select the same language with the TTX language on the "Function" menu.

### Selecting a Specific Teletext Page


# *Press the number buttons on the remote control to enter the page number directly:*

1 Enter the three-digit page number listed in the contents by pressing the corresponding numeric buttons.

<u>Result</u>: The current page counter is incremented and the page is then displayed.

- 2 If the selected page is linked with several secondary pages, the secondary pages are displayed in sequence. To freeze the display on a given page, press the **Sleep** ( ∈ ). Press the **Sleep** again to resume.
- **3** Using the various display options:

To display	Press the		
<ul> <li>Both teletext information and the normal broadcast</li> </ul>	Text/Mix (≡ / 🖉 )		
<ul> <li>Hidden text (answers to quiz games, for example)</li> </ul>	Dual I∕∥(⊜)		
<ul> <li>The normal screen</li> </ul>	Dual I/II ( 🗊) again		
<ul> <li>A secondary page, by entering its 4-digit number</li> </ul>	Subpage ( 🗐 )		
The next page	<b>P</b> ∧ ( ))		
<ul> <li>The previous page</li> </ul>	<b>P∨</b> (1)		
<ul> <li>Double-size letters in the:</li> <li>Upper half of the screen</li> <li>Lower half of the screen</li> </ul>	Size ( ∰) ♦ Once ♦ Twice		
<ul> <li>Normal screen</li> </ul>	<ul> <li>Three times</li> </ul>		

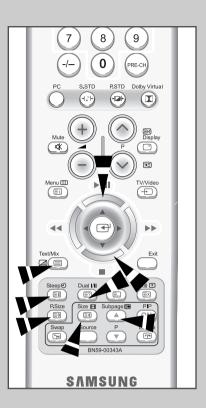

#### Using FLOF to Select a Teletext Page




The various topics included in the teletext pages are colour-coded, and can be selected by pressing the coloured buttons on the remote control.

- 1 Display the teletext contents page by pressing the Text/Mix ( / ☑) button.
- **2** Press the coloured button corresponding to the topic that you wish to select (The available topics are listed on the status information line).
  - Result: The page is displayed with additional colour-coded information that can be selected in the same way.

3	To display the:	Press the:
	Previous page	Red button.
	Next page	Green button.

## **Storing Teletext Pages**




#### Up to four teletext pages can be stored.


- Result: Four 3-digit numbers are displayed in different colours at the bottom of the screen.
- **2** Press the coloured button corresponding to the page that will be replaced.
- **3** Enter the new page number using the numeric buttons.
- 4 Repeat steps 2 and 3 for each page to be stored, using a different coloured button each time.
- 5 Press the **P.Size** ( ) button until the corresponding blocks blink.

The List/Flof( ) button is used to switch between:

- LIST mode
- FLOF mode


### Connecting to the Component Input/Outputs

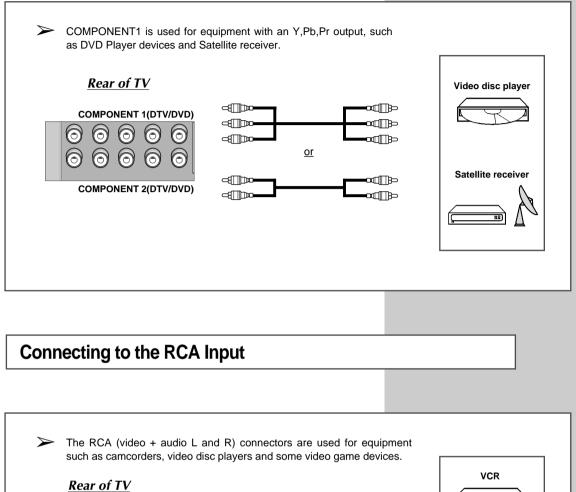

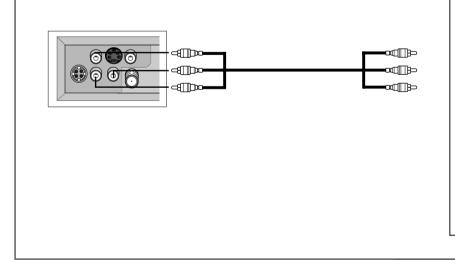




## **Connecting to the S-Video Input**



<u>Rear of the TV</u>

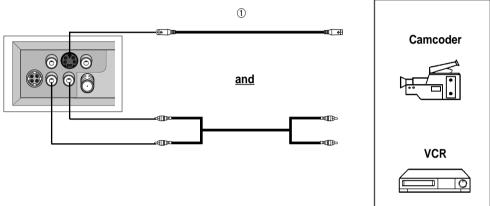

1 To play pictures and sound both the S-VIDEO and the RCA connections must be used.

### **Viewing Pictures From External Sources**

Once you have connected up your various audio and video systems, you can view the different sources by selecting the appropriate input.

- **1** Check that all the necessary connections have been made.
- 2 Switch the television on and if necessary, press the **TV/Video** (-€) button one or more times until the required input is displayed.
  - Depending on the source selected, the pictures may appear automatically.
  - To watch television programmes again, press the TV/Video(-①) button to select the "TV" and select the number of the channel required.



### **Troubleshooting: Before Contacting Service Personnel**

Before contacting Samsung after-sales service, perform the following simple checks.

If you cannot solve the problem using the instructions below, note the model and serial number of the television and contact your local dealer.

No sound or picture	<ul> <li>Check that the mains lead has been connected to a wall socket.</li> <li>Check that you have pressed the "①" (ON/OFF) button.</li> <li>Check the picture contrast and brightness settings.</li> <li>Check the volume.</li> </ul>		
Normal picture but no sound	<ul> <li>♦ Check the volume.</li> <li>♦ Check whether the MUTE ( \ (\ \ \ \ \ \ \ \ \ ) button has been pressed on the remote control.</li> </ul>		
No picture or black and white picture	<ul> <li>Adjust the colour settings.</li> <li>Check that the broadcast system selected is correct.</li> </ul>		
Sound and picture interference	<ul> <li>Try to identify the electrical appliance that is affecting the television and move it further away.</li> <li>Plug your television into a different mains socket.</li> </ul>		
Blurred or snowy picture, distorted sound	<ul> <li>Check the direction, location and connections of your aerial. This interference is often due to the use of an indoor aerial.</li> </ul>		
Remote control malfunctions	<ul> <li>Replace the remote control batteries.</li> <li>Clean the upper edge of the remote control (transmission window).</li> <li>Check the battery terminals.</li> </ul>		
"Check Signal Cable" message.	<ul> <li>Ensure that the signal cable is firmly connected to the PC sources.</li> <li>Ensure that the PC sources are turned on.</li> </ul>		
"Not Supported Mode!" message.	<ul> <li>Check the maximum resolution and the frequency of the video Adapter.</li> <li>Compare these values with the data in the Display Modes Timing Chart.</li> </ul>		
The image is too light or too dark.	<ul> <li>Adjust the Brightness and Contrast.</li> </ul>		
Horizontal bars appear to flicker, jitter or shimmer on the image.	<ul> <li>Adjust the Fine function.</li> <li>Adjust the Coarse function and then adjust the Fine function.</li> </ul>		
Vertical bars appear to flicker, jitter or shimmer on the image.	<ul> <li>The TV is using its power management system.</li> <li>Move the computer's mouse or press a key on the keyboard.</li> </ul>		
Screen is black and power indicator light is steady blinks 1 second.	<ul> <li>Check that your PC is normally operated, not in the power saving mode, or the signal cable is connected well.</li> </ul>		

Image is not stable and may appear to vibrate.	<ul> <li>If the setting is not correct, use your computer utility programme to change the display settings.</li> </ul>			
	NOTE: Your TV supports mult following frequency do	iiscan display functions within the main:		
	Horizontal frequency:	30 kHz ~ 61 kHz		
	<ul> <li>Vertical frequency:</li> </ul>	56 Hz ~ 75 Hz		
	<ul> <li>Maximum refresh rate:</li> </ul>	1280 x 720 @ 60 Hz		
Image is not centered on the screen.		ertical position.		

#### **Dot Defect**

TFT LCD panel manufactured by using advanced semiconductor technology with precision of 99.999% above is used for this product. But the pixels of RED, GREEN, BLUE and WHITE colour seem to be bright sometimes or some of black pixels could be seen.

This is not from bad quality and you can use it without uneasiness.

#### The number of TFT-LCD pixels : 2,764,800


### **Display Modes**

If the signal from the system equals to the standard signal mode, the screen is adjusted automatically. If the signal from the system doesn't equal to the standard signal mode, adjust the mode with refering to the Videocard user guide because the screen might not display or only the power LED might be on. For the display modes listed below, the screen image has been optimized during manufacture.

Mode	Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Pixel Clock Frequency (MHz)	Sync Polarity (H/V)
MAC	640×480	35.000	66.667	30.240	- / -
MAC	832×624	49.726	74.551	49.500	+/+
IBM	640×480	31.469	59.940	25.175	- / -
IDIVI	720×400	31.469	70.087	28.322	- / +
	640×480	37.861	72.809	31.500	- / -
	640×480	37.500	75.000	31.500	- / -
VESA	800×600	37.879	60.317	40.000	+/+
	800×600	48.077	72.188	50.000	+/+
	800×600	46.875	75.000	49.500	+/+
GTF	1280×720	44.769	60.000	74.841	- / +


#### Attaching a wall or Arm mounting Device

The TV supports VESA mounting standard for use with various VESA mounting devices. To install any VESA mounting device, please follow the instructions given.







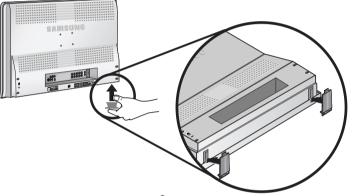

- < C >
- 1 Remove all cable connected on the TV.
- 2 Remove the four screws and then remove the Stand from the LCD TV. (refer to the picture A&B) Remove all cable connected on the TV.
- 3 Push the stand cap until it clicks, as shown in Figure C.
- 4 Connect all cable you removed at step 1.
- 5 Now you are ready to install Wall/Arm mounting device depending on your applications.

#### Maintenance of YOUR LCD TV


WARNING: To avoid risk of electric shock, do not disassemble the TV cabinet (except for gaining access to the cable connectors as described on page 5). Users cannot service the TV. User maintenance is restricted to cleaning as explained below:

Unplug the monitor from the power outlet before cleaning.

- To clean your flat panel display screen, lightly dampen a soft, clean cloth with water or mild ٠ detergent. If possible, use a special screen cleaning tissue or solution suitable for the antistatic coating.
- To clean the monitor cabinet, use a cloth lightly dampened with a mild detergent.
- Never use flammable cleaning material to clean your LCD TV or any other electrical apparatus.

#### Installing VESA Compliant mounting Device

Align the mounting interface pad with the holes in the rear cover mounting pad and secure it with the four screws that came with the arm-type base, wall mount hanger or other bases.

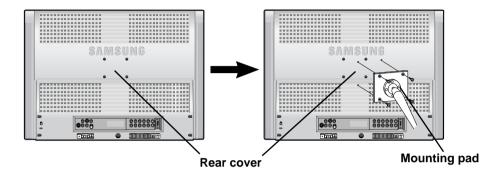


#### **Wall Mount Instructions**

The following instructions apply to a hollow sheet-rock wall only. Tools/Hardware needed - Philips screwdriver, four toggle bolts, 5/8in dia. Drill bit and drill. Contact Ergotron at (800) 888-8458 to purchase the triple pivot direct mount adapter and wall mount bracket kit.

 LTM225W (22") : No. 47 - 007 - 099 - 02 (Pivot direct mount adapter) No. 97 - 101 - 003 - 00 (Wall mount bracket kit)

Align the wall mount bracket on the wall at the desired height, making sure that the bracket will be mounted between the wall studs. Mark the four corner openings and drill four 5/8-dia. holes. Assemble the wall mount kit according to the instructions provided with it. Securely attach Ergotronís flat panel, triple pivot direct mount adapter to the back of the TV using the four 4mm, .7 pitch x 10mm screws provided with the arm. Secure the assembly to the wall using four 3/16 by 3-inch long toggle bolts.

#### **Kensington Slot**

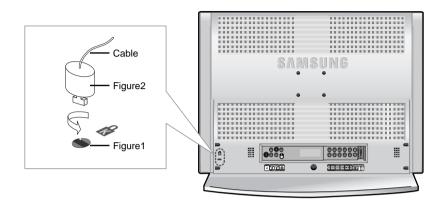

• This LCD TV has been designed to apply a burglarproof lock.

• See the fingure below for information about where the lock is located and how to use it.

The Kensington lock is a device used to physically fix the system when using it in a public place. The locking device has to be purchased separately. The appearance and locking method may differ from the illustration depending on the manufacturer. Please refer to the manual provided with the Kensington lock for proper use.

#### 1

Insert the locking device into the Kensington slot on the LCD TV(figure 1), and turn it in the locking direction(figure 2).

#### 2

Connect the Kensington lock cable.

### 3

Fix the Kensington lock to a desk or a heavy stationary object.

# Specification

Mode	l Name	LS22A13W
Panel	Size Display Size Type Pixel pitch Viewing Angle	22.0 inch Diagonal 487.68(H) × 274.32(V)mm a-si TFT active matrix 0.381(H) × 0.381(V)mm 85/85/85(k5 (L/R/U/D)
*Frequency	Horizontal Vertical Display Colour	30~48 kHz 56~75 Hz 16,777,216 colours
Display Resolution	Maximum Mode	1280 × 720 @ 60 Hz
Input Signal	Sync. Video signal	H/V Separate, TTL, P. or N. 0.7 Vp-p @ 75 ohm
TV	Colour system Sound system	PAL, SECAM, NTSC 4.43, NTSC 3.58 B/G, D/K, I, M
Video	Colour system Video system	PAL/NTSC/SECAM CVBS, S-VHS, RGB
Component	DTV DVD Video Audio	YPbPr Composite sync 480p, 720p, 1080i, 576p(50Hz), 1080i(50Hz) YPbPr Composite sync 480i Input 1.0Vp-p @ 75ohm Input 500mVrms
Power Supply	Input Output	AC 100 ~ 240 V(50Hz / 60Hz), 2A DC 14V / 8A

Œ

\* Referring to Display Modes, page 46.

# Specification

Model Name		LS22A13W
Power Maximum Consumption Power Saving		120W < 5 W
body (60 With stand 23.		23.62 x 2.63 x 17.46 inch/15.65 lbs (600 x 66.8 x 443.5mm/7.1 kg) 23.62 x7.28 x 18.43 inch/19.4 lbs (600 x 185 x 468mm/8.8 kg)
Environmental Considerations	Operating Temperature Operating Humidity Storage Temperature Storage Humidity	50 °F to 104 °F (10 °C to 40 °C) 10% to 80% -13 °F to 113 °F (-25 °C to 45 °C) 5% to 95%
Audio Characteristics	Audio Input 1 Audio Input 2 Headphone out Frequency Response Audio out	RCA Jack Red(R) White(L), 0.5Vrms (-9dB) 3.5ø Stereo Jack, 0.5Vrms (-9dB) Max. 10mW Output (3.5ø Stereo Jack 32) RF: 80Hz ~ 15kHz (at- 3dB) A/V: 80Hz ~ 20kHz (at - 3dB) 7W X 2 (Option : Active Woofer 500mV RMS at 20 - 150Hz)

£

## **Pin Assignments**

#### **Pin DVI Connection**

Pin	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Separate H/V	Rx 2-	Rx 2+	GND	No Connection	No Connection	DDC Clock (SCL)	DDC Data (SDA)	Analog Vertical Sync	Rx 1-	Rx 1+	GND	No Connection		DDC Input Power (+5V)	Se <b>l</b> f Laster
Pin	16	17	18	19	20	21	22	23	24	25(C3)	26(C5)	27(C4)	28(C2)	29(C5)	30(C1)
Separate H/V	Output Signal Connection	Rx 0-	Rx 0+	GND	No Connection	No Connection	GND	Rx C-	Rx C+	Analog (Blue)	Analog GND	Analog Horizontal Sync	Ana <b>l</b> og (Green)	Ana <b>l</b> og GND	Analog (Red)

$\square$			_				
	2	3	4	5	6	7	8 1 2
9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	
							• • • •

#### THIS APPLIANCE IS DISTRIBUTED BY:



