



K-8-650

-50C~650C
flexible thermocouple K type
Sensor : $\phi 1 \times 300\text{mm}$
Length 1.4m


K-8-800

-50C~800C
Sheath shape thermocouple K type
Sensor : $\phi 3.1 \times 150\text{mm}$
Length 1.2m

To use K-8 series,
K-AD adaptor is required.

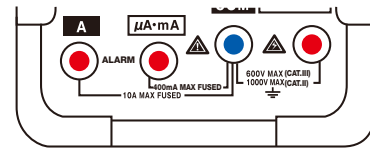

K-AD (optional)

K type temperature probe
with international
miniature connector**K-AD**

Thermocouple K type adaptor for connecting to
K-8-250-K-8-800
Length 50mm

Notice :

RD700 / 701 and CD772 can only measure
-20°C~300°C (max) regardless of the
specification of temperature probe.
Accuracy of K-8-XXX
-40°C~330°C : $\pm 2.5^\circ\text{C}$
330°C~1200°C : $\pm 0.75\%$ of measured
temperature

Carrying case**C-01**

160x 54x 180mm

C-08S

144x 160x 54mm

C-77

195x 130x 75mm
Soft case

C-CP

130x 120x 30mm

C-DA

160x 125x 45mm

C-DCM2000

123x 250x 57mm

C-M53

130x 190x 70mm

C-NH7

130x 162x 55mm

C-PC10/S

240x 155x 65mm

C-77H

186x 140x 72mm

C-SP

165x 140x 50mm
Soft case

C-CA

180x 150x 50mm

C-STH

348x 100x 37mm

C-YS

160x 140x 40mm

Holster**H-70****C-CD**

190x 145x 70mm

C-CDS

175x 110x 45mm

C-CL

190x 90x 45mm
Soft case

H-50