


ILLUMINANCE METER

POCKET-SIZE

LX2

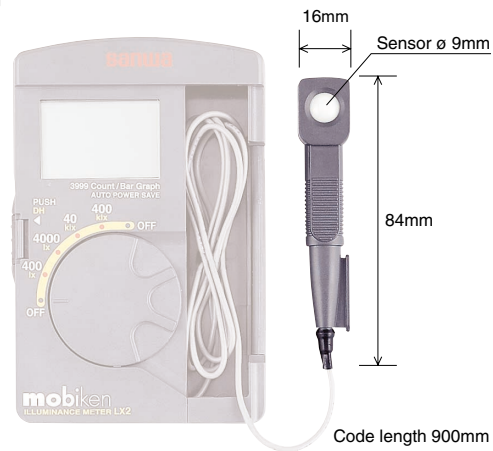


Receptor element	Si photodiode (ø 9mm)
Display	3999 count with bar graph
Sampling rate	Numeric: Approx. 2 times / sec. Bar graph: Approx. 20 times / sec.
Measuring Range	400.0 lx 4000 lx 40.00k lx 400.0k lx
Accuracy	±(7%rdg. + 1dgt.) Below 3000 lx ±(10.5%rdg. + 1dgt.) 3000 lx or higher Compatible JIS standard A class 23°C±2°C
Temperature characteristics	±5% at 23°C
Character of relative spectral responsivity	Approximation of spectral luminous efficiency of the standard photometric observer
Function	DATA hold
Battery	Auto Power Save
Power consumption	SR-44 or LR-44 x 2 pcs.
Operating Temperature	Approx. 10mW
Storage temperature	0°C ~ 40°C max. 80%RH without condensation
Dimensions, mass	- 10°C ~ 50°C max. 80%RH without condensation
Dimensions, mass	117(H) x 76(W) x 18(D) mm, Approx. 120g.
Sensor probe	84(H) x 16(W) x 10(D) mm
Accessory	Manual

LASER POWER METER

POCKET-SIZE

LP1

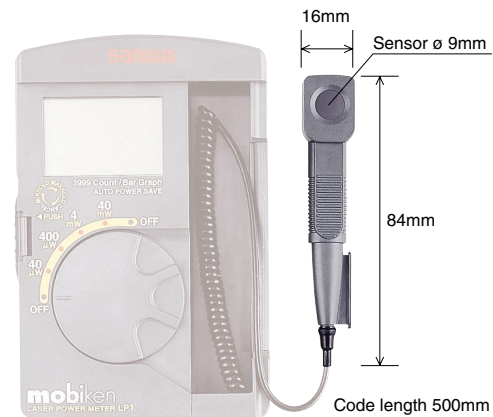

Receptor element	Si photodiode (ø 9mm)
Wavelength range	400nm ~ 1100nm
Wavelength	633nm (He-Ne raser) reference wavelength
Display	Convert by a table of spectral sensitivity characteristic (representing value)
Sampling rate	3999 count with bar graph
Measuring Range	Numeric: Approx. 2 times / sec. Bar graph: Approx. 20 times / sec.
Accuracy	40.00µW 400.0µW 4.000mW 40.00mW
Function	±5% (1mW at 4mW range, 633nm)
Battery	23°C±2°C
Power consumption	MAX hold, MIN hold
Operating Temperature	Auto Power Save
Storage temperature	SR-44 or LR-44 x 2 pcs.
Dimensions, mass	Approx. 6mW
Dimensions, mass	0°C ~ 40°C max. 80%RH without condensation
Sensor probe	- 10°C ~ 50°C max. 80%RH without condensation
Accessory	117(H) x 76(W) x 18(D) mm, Approx. 120g.
Accessory	84(H) x 16(W) x 10(D) mm
Accessory	Manual

THERMO METER

POCKET-SIZE

TH3



Measuring Range	- 50.0°C ~ 200.0°C
Resolution	0.1°C
Accuracy	±(0.5%rdg + 0.5)°C
Sampling rate	Approx. 2 times / sec.
Display	3999
Sensor	Platinum foil thermometric resistor (100Ω at 0°C)
Response	Sheath type Pt100Ω ø 2 x 64 JIS B class
Character of relative spectral responsivity	Approx. 7 sec. interval
Function	Approximation of spectral luminous efficiency of the standard photometric observer
Function	MAX hold, MIN hold
Battery	DATA hold
Power consumption	Relative Zero
Operating Temperature	Auto Power Save
Storage temperature	SR-44 or LR-44 x 2 pcs.
Dimensions, mass	Approx. 18mW
Dimensions, mass	23°C±7°C max. 80%RH without condensation
Sensor probe	5°C ~ 40°C max. 80%RH without condensation
Accessory	0°C ~ 50°C max. 80%RH without condensation
Accessory	117(H) x 76(W) x 18(D) mm, Approx. 120g.
Accessory	84(H) x 16(W) x 10(D) mm
Accessory	Manual

The specifications and other information in this catalogue are subject to change without prior notice.

mobiken Series

ILLUMINANCE METER LX2



SIZE:177(H) x 76(W) x 18(D)mm Approx. 120g

sanwa

SANWA ELECTRIC INSTRUMENT CO., LTD.

Dempa Bldg., 4-4 Sotokanda 2-Chome, Chiyoda-ku, Tokyo 101-0021, Japan
Tel. 81-3-3251-0941, Fax. 81-3-3256-9740
http://www.sanwa-meter.co.jp
e-mail: exp_sales@sanwa-meter.co.jp



In 2002, our factory SANWA MI TECHNOS CO., LTD. obtained ISO 9001:2000.
The certification is given by Japan Quality Assurance Organization (JQA).
Nov., 2002

sanwa




ILLUMINANCE METER

POCKET-SIZE

LX2

Compact Illuminance meter ! Easy to use in narrow space by small probe.

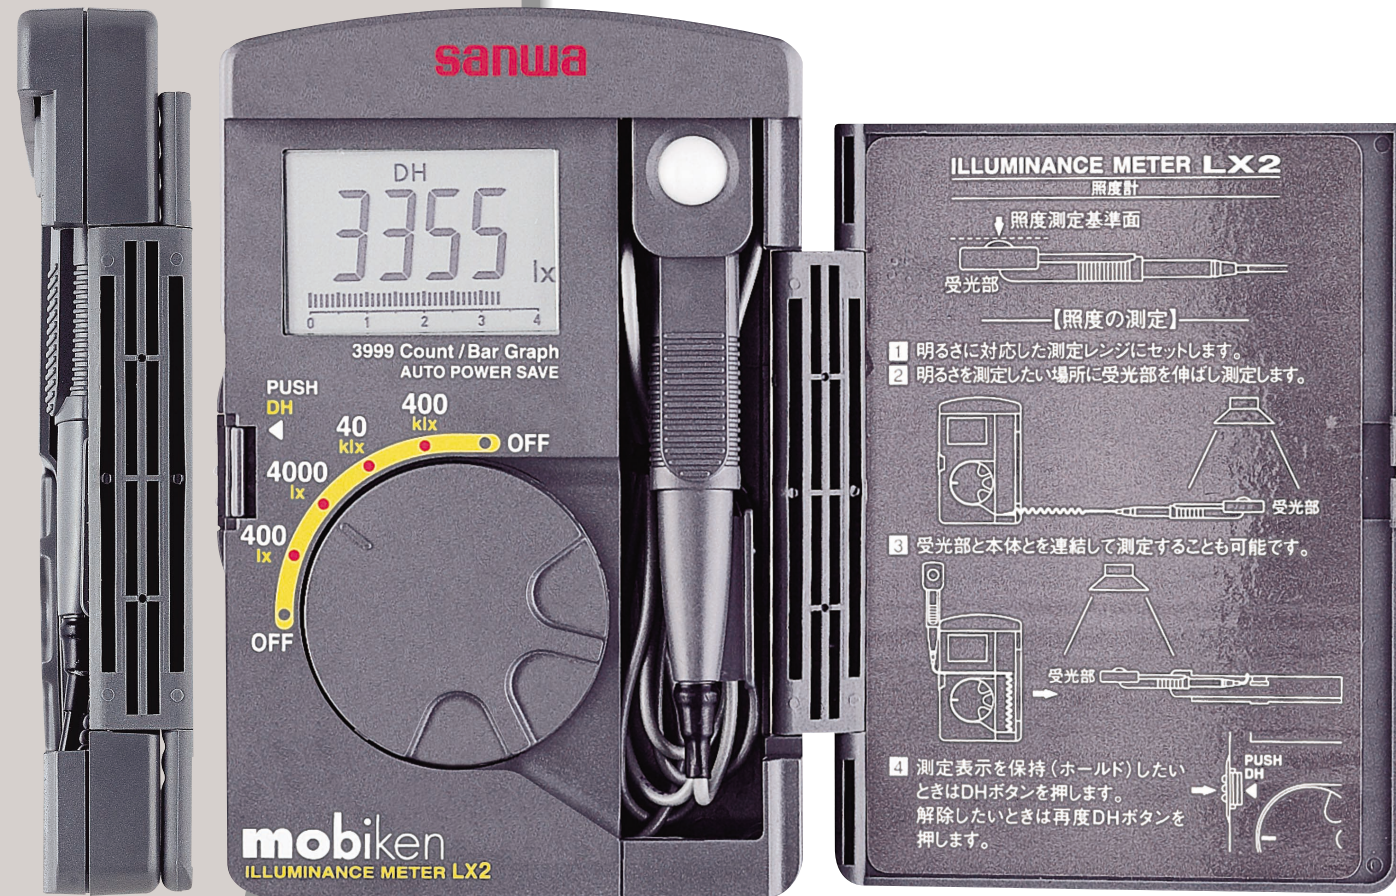

Actual size

LX2 is the Illuminance Meter, which can be broadly, easily used by the simple operation from the check of brightness in any environment of everyday life to illumination management or maintenance of office, factory, or even agricultural forestry, etc.

- Small sensor (ø 9mm) and thin stick probe can be put at narrow space easily.
- 3999 count with bar graph
- Measurement from 0.1lx to 399.9lx (399900lx)
- Data hold function and Auto Power Save function



A skid was attached in sensor holder for safety measurement.

Sensor probe can be fitted over the fixed position of the upper left part when measuring.

mobiken Series

Compact pocket size, but realized high precision and wide range measurement. Sensor probe can be put in the body after use. Smart and convenient measuring instrument: MOBIKEN series.

18mm Slim, box-shaped & fine-drawn body.



LASER POWER METER

POCKET-SIZE

LP1

Optical power max 40mW can be measured. Pocket-size Laser Power Meter. Best for check and maintenance of laser devices. LP1 (standard type) can carry out direct reading measurement (633nm of He-Ne laser reference wavelength) of the optical power of visible laser, such as a laser pointer and a light pick up of DVD player. And using a conversion table of spectral sensitivity characteristic (representing value), the meter can measure wavelengths from 400nm to 1100nm as rough readings.

- Reference wavelength: 633nm
- Wide optical power measurement range: 0.01μW ~ 39.99mW
- Si photodiode (ø 9mm) used for direct input sensor
- Sensor probe can be stored in a main unit
- MAX hold / MIN hold function
- Auto Power Save function



THERMO METER

POCKET-SIZE

TH3

TH3 is suitable for temperature measurement of SPOT temperature measurement, such as gas, a liquid, soil, and a soft food stuff. It is the optimal thermometer for temperature measurement management of broad fields, such as air-conditioning machine, interior of a room, foods, agriculture, and horticulture.

- High resolution 0.1°C
- Data hold, MAX hold, MIN hold and Relative functions
- A skid was attached in sensor holder for safety measurement
- Measurement from - 50.0°C ~ 200.0°C
- Auto Power save function