



**SHARP®**

## WITH INCREASED PRODUCTIVITY AND VERSATILITY, THE SHARP AR-235 IMAGER™ TRULY DELIVERS

The Sharp AR-235 Imager offers the advanced digital technology you need to meet the challenges of today's fast pace of business. Designed for busy workgroups and offices, this productive performer delivers innovative modular options that can grow with your business. Easily transform the AR-235 Imager into a networkable document management system with powerful network printing, scanning, scan to e-mail, fax, and finishing capabilities. With incredible versatility, advanced productivity, and Sharp's world famous reliability, the AR-235 Imager will meet your business needs today, while providing flexible, modular features for your business tomorrow.



*Many office workgroups would choose the Sharp AR-235 Imager for its copier performance alone. When you consider that it can also handle all the network printing, network scanning and finishing needs of a busy workgroup at the same time, the Sharp AR-235 Imager is the clear choice.*

### HIGHLIGHTS:

- 23 ppm Copy/Print Speed
- 2,100 Sheets Total Online Paper Capacity
- Standard Duplexing
- True 1200 dpi Resolution
- Standard 16 MB Copier Memory (Expandable to 272 MB)
- Optional Scanning, Faxing and Network Printing
- Optional Finisher/Sorter with Offset Stacking and Stapler
- Optional Job Separator Tray
- Optional Bar Code Font Kit
- Scan Once, Print Many Technology

### FEATURES:

- Two Standard 500-Sheet Paper Cassettes
- 100-Sheet Bypass Tray
- 30-Sheet Optional RSPF (or SPF)
- 25-400% Zoom Range (1% increments)
- Maximum Monthly Volume: 50,000 Copies/Prints
- Continuous Copy: 999 Maximum
- 20 Account Numbers
- Easy-to-Use LCD Control Panel
- 256 Level Grayscale

### OPTIONAL CONTROLLER FEATURES:

- 32 MB Printer Memory, Expandable to 288 MB
- PCL5e/PCL6 PDL Support (Standard)
- PostScript Level 3 Emulation (Optional) Supports Macintosh® 8.51 or Later
- Standard Windows® 95/98/ME, Windows® 2000, Windows® NT, Unix® Client Support

### OPTIONAL FAX FEATURES:

- Less than 3 Second Transmission Time\*
- 33.6 Modem Speed
- JBIG Compression
- 50 Rapid and 300 Speed Dial Keys
- Duplex Scanning for Easy Faxing of Two-Sided Documents (R-SPF Required)
- 2 MB Fax Memory Standard (Upgradable to 10 MB with Options)

### OPTIONAL SCAN FEATURES:

- 600 dpi Network Scanning
- Scan to E-mail Technology (Via Sharpdesk™ Utility)

# AR-235 IMAGER SCANNING OVERVIEW



## Scan to Desktop PC

Send a file directly to your desktop PC (TIFF/PDF)

- OCR
- Launch application
- Save in specified directory



## Scan to E-mail

Send scanned images directly to any e-mail address


- TIFF or PDF
- Easy to use
- Cost effective vs. overnight mail



## Scan to FTP File Server

For specialized applications

- Simply enter IP address of the FTP site, i.e. passing files to a EDMS located directly on a server

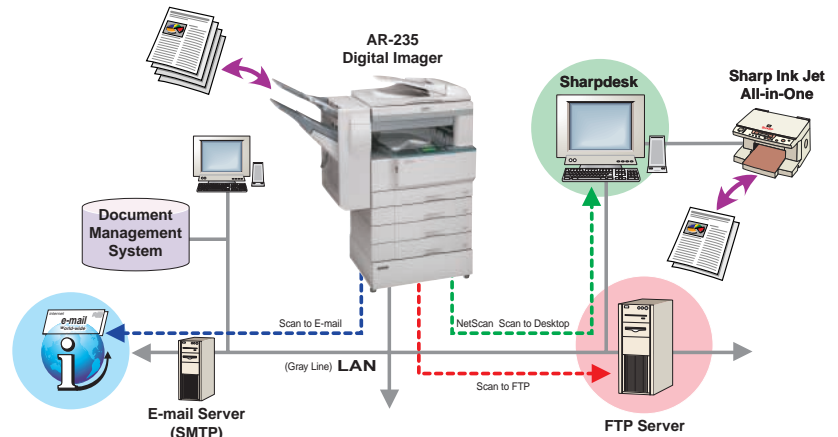

Simply connect the Sharp AR-235 Imager to your LAN and let Sharpdesk, the user-friendly desktop document management software, guide users through scanning to desktop PC, email, or an FTP server.

# AR-235 IMAGER SPECIFICATIONS

## GENERAL SPECIFICATIONS

Type:	Console
Copy System:	4-Beam Laser Electronic
Originals	Sheets, Bound Document, Photographs
Original Size:	Max. 11" x 17"
Copy Sizes:	Max. 11" x 17"; Min. 5.5" x 8.5"
Copying Speed:	23 ppm (8.5" x 11" at 100% ratio at 600 x 1200 dpi) 13.5 ppm (8.5" x 11" at 100% ratio at 1200 x 1200 dpi)
Continuous Copy:	Max. 999
Copy Ratio:	25%-400% in 1% increments Fixed Presets: 25%, 50%, 64%, 77%, 95%, 100%, 121%, 129%, 141%, 200%, 400%, 800%
Printing Resolution:	1200 x 1200 dpi (Super Photo Mode)
Gradation:	256 levels
Duplexing:	Standard (Trayless)
First Copy Time:	Approx. 4.8 Seconds
Warm-Up Time:	Approx. 40 Seconds
Memory Size:	32 MB Expandable to 288 MB
Original Feed System:	Optional 30-sheet Reversing Single Pass Feeder (R-SPF) Optional Single Pass Feeder (SP4)
Memory Capacity:	1530 Letter-size Pages (Maximum)
Compression Method:	JBIG
Copy Paper Feed:	Two 500-sheet Adjustable Paper Cassettes (Standard) 100-sheet Bypass Tray (Standard) Optional 30-sheet RSPF (or SPF) Two 500-sheet Paper Cassettes (Optional)

Optional Output:	Finisher/Sorter (AR-FN5)
Fusing System:	Heat Rollers
Developer System:	Magnetic Brush Development
Exposure System:	Moving Optical Source, Slit Exposure (Stationary Platen) with Automatic Exposure Function
Light Source:	Xenon Lamp
Required Power Supply:	120 Volts, 60Hz
Power Consumption:	Maximum 1.5 kw
Dimensions:	24.5" x 23" x 25.5" (w x d x h)
Weight:	Approx. 92.2 lbs.

## OPTIONAL EMBEDDED CONTROLLER SPECIFICATIONS

PDL Support:	PCL5e/PCL6 (Standard) Emulated PostScript 3 (Optional)
Memory:	32 MB Standard; 288 MB Max.
CPU:	200 MHz
Client Operating System Support:	Windows® 95/98/2000/ME, Windows® NT 4.0, Netware®, Macintosh® OS 8.51 or Later (with Optional PS3 Kit)
Protocol Support:	TCP/IP, IPX/SPX, EtherTalk, NetBEUI, Peer-to-Peer
I/O Interface:	Parallel, 10/100 BaseTX

Design and specifications are subject to change without notice. Sharp is a registered trademark of Sharp Corporation. All trademarks and registered trademarks are of their respective holders.

\*with ITU-T No.1 chart standard resolution, SUPER G3 mode, 33,600 bps, JBIG compression

**SHARP**  
FROM SHARP MINDS  
COME SHARP PRODUCTS™

SHARP ELECTRONICS CORPORATION  
NETWORK OFFICE SYSTEMS GROUP  
SHARP PLAZA  
MAHWAH, NJ 07430-2135  
1-800-BE-SHARP  
WWW.SHARP-USA.COM



As an ENERGY STAR® Partner, SHARP has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.