PRICOM™ 3100
Mini Print Server

SHARP®

Advanced Network Printing Solution for Small Workgroup Digital Imagers™

Introducing the PRICOM 3100—a highly reliable, high quality, network print server.

THE IDEAL COMPANION FOR SMALL WORKGROUP IMAGERS

Now you can add network-printing capability to your Sharp Digital Imager with a simple plug-in device. With its built in RJ45 Ethernet connection, the PRICOM 3100 print server plugs directly into the parallel port of your Imager, allowing any PC user on your network to print to it.* The PRICOM 3100 combines advanced network capability with a compact, easy-to-use interface. With features that include bi-directional communication, web-based management, IP filtering, and intelligent device monitoring, the PRICOM 3100 is the ideal companion for Sharp's small workgroup Imagers.

Compatibility and Performance You Expect

With the PRICOM 3100, compatibility is never an issue. With built in protocol support that includes TCP/IP, NetBEUI (Windows), and IPX/SPX (Netware), the PRICOM 3100 can easily adapt to any environment supported by Sharp's small workgroup Digital Imagers. And, because the PRICOM 3100 has been extensively tested in Sharp's quality assurance lab, you can rest assured that it will perform beyond your expectations.

Quick Setup and Easy to Manage

The PRICOM 3100 Print Server has an intuitive on-screen setup wizard that walks users through a simple point-and-click installation process – setting up a print server has never been so easy! For administrators and advanced users, a more comprehensive Admin Utility is also available, which can be used to manage multiple devices over the network. The PRICOM 3100 also monitors the device and can alert the administrator to a variety of print related conditions.**

** Alert information is based on each Imager's monitoring capabilities

* AR-153E/157E requires optional MFP kit
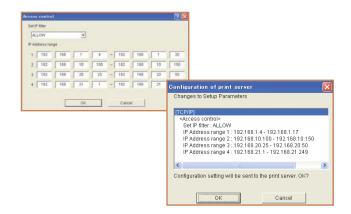
Secure Device Access with IP Filtering

The PRICOM 3100 also offers IP filtering – an enhanced network security feature that allows administrators to restrict access to the Imager by specifying authorized IP addresses. And, with the easy-to-use configuration screen, setting or changing the IP address accessibility is quick and easy.

Web-based Management

With web-based management capability, administrators and advanced users can configure the Pricom 3100 through a web browser such as Internet Explorer. This allows remote management from any PC that is on the same network.

Specifications

Digital Imager Compatibility	AR-153E/AR-157E (optional AR-PG2 MFP Expansion Kit required)
	AR-M160/AR-M205 (optional AR-EB7 Function Upgrade Kit recommended)
	AR-M208/AR-M208N (with standard JBIG printing system)
	AR-M237/AR-M277 (with standard JBIG printing system)
Network Interface	RJ-45 Ethernet
Type	10/100 BaseT
Network Operating Systems	Windows® 95/98/ME/XP/NT4.0/2000/, Novell® Netware® 3.x/4.x/5.x/6
Network Protocols	TCP/IP: Raw (port 9100), LPD, FTP, IPP, HTTP, TELNET, DHCP, BOOTP, SNMP, POP3, SMTP, DNS, DDNS, WINS, TCP, UDP, ARP, RARP, IP, ICMP, NetBIOS over TCP/IP
	NetBEUI: SMB, NetBIOS
	Netware: IPX/SPX, SNMP, NDS
Device Security	IP filtering
Device Interface	IEEE 1284 Parallel
Power	5v 500mA (Includes AC Adapter)
Software Included	Quick Setup Utility and Admin Manager Utility
CPU	32 bit RISC CPU
Memory	2 MB RAM/1 MB Flash
Dimensions	2.4 x 3.3 x 0.9 in.
Weight	2.8 oz.
Sharp Item Number	AR-PS3100

silex technology

Sharp Electronics Corporation
Sharp Plaza, Mahwah, NJ 07430-2135
For more information call: 1-800-BE-SHARP
www.sharpusa.com

SHARP®