
AR-156_sell_sheet 1/8/01 10:49 AM Page 1



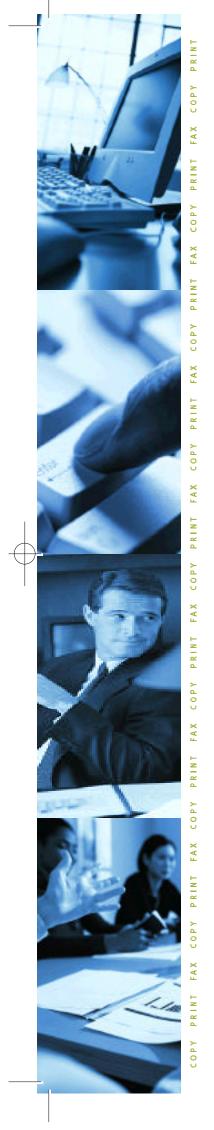

Digital Copier

SHARP

COMPACT CONVENIENCE, DUPLEXING EFFICIENCY, AND ADVANCED DIGITAL TECHNOLOGY

Packed with the high-tech advantages of a digital copier with duplex capabilities, the sleek, easy-to-use AR-156 Digital IMAGER will immediately enhance your office productivity. Designed with dedication to our awardwinning reliability, the Sharp AR-156 IMAGER will deliver true value day in and day out through feature-filled performance,




quality imaging and innovative efficiency. With trayless duplexing, two sided docume quick and effortless. For more functionality, add the laser printing capabilities.

The Sharp AR-156 IMAGER demonstrates Sharp's commitment to improving people: technology and innovation. It's time to take your business to a better place...and wit Digital IMAGER series, that better place is here now.

• 15 ppm engine speed

- Standard Trayless Duplexing
- Standard Reversing Single Pass Feeder (R-SPF) for automatic document feeding
- High resolution 600 dpi output
- Scan Once Print Many (1-page memory buffer) 6MB
- 250-sheet paper tray
- Expandable paper supply
- - -
 - 50-sheet bypass
 - 50-200% Zoom (1% Increments)
 - 9.6 second first copy time
- Photo Mode
- Economical cost of operation
- Dual printer kit options



AR-156_sell_sheet 1/8/01 10:49 AM Page 2





AR-156 COPIER SPECIFICATIONS

ТҮРЕ	Digital copying machine, desk-top type
COPY SYSTEM	Dry, electrostatic
ORIGINALS	Sheets, bound documents
FEEDER	Standard reversing single pass feeder (RSPF)
ORIGINAL SIZE	Max. 10" x 14"
COPY SIZES	3 1/2" x 5 1/2" to 8 1/2" x 14"
COPYING SPEED	15 copies per minute
CONTINUOUS COPY	Max. 99; subtractive counter
COPY RATIO	Variable: 50-200% in 1% increments (total 151 steps) fixed presets: 50%, 64%, 78%, 100%, 129%, 200%
FIRST COPY TIME	Approx. 9.6 sec. (normal copying mode)
COPY PAPER FEED	One 250-sheet paper tray with automatic feed; one bypass tray with 50-sheet automatic feed capability
FUSING SYSTEM	Heat rollers
DEVELOPER SYSTEM	Magnetic brush development
EXPOSURE SYSTEMS	Moving optical source, slit exposure (stationary platen) with automatic exposure
LIGHT SOURCE	Xenon lamp
RESOLUTION	Output: 600 dpi
GRADATION	Scan: 256 levels; Output: 2 levels
MEMORY	6 MB (1-page memory buffer)
POWER SUPPLY	AC (120 V ± 10%), 60 HZ (±2%)
POWER CONSUMPTION	Max 1.3kW
WEIGHT	approx. 50.7 lbs.; (23 kg); including supplies
COPIER DIMENSIONS	20.4" (W) x 19" (D) x 15" (H)
OPERATING CONDITIONS	Temperature: 50° F to 86° F (10° C to 30° C); Humidity 20-85%
OPTIONAL EQUIPMENT	250-sheet Paper Tray (AR-DE9) Host-based Print Kit (AR-PG1) PCL Print Kit (AR-PB9)

Design and specifications are subject to change without notice.

As an ENERGY STAR® Partner, Sharp® has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

AR-PG1 PRINT KIT

PRINT SPEED	8 ppm
PDL	Host-based
RESOLUTION	600dpi /300dpi
STANDARD INTERFACE	IEEE P1284 Bi-directional Parallel Port (1), USB Port (1)
PLUG AND PLAY	Yes
PRINT DRIVER	Microsoft Windows 3.1x/Windows95/ Windows98/Windows NT 4.0

AR-PB9 PRINTER EXPANSION KIT

PRINTING SPEED	15 ppm
PAGE DESCRIPTION LANG	PCL6 (PCL XL)/PCL5e emulation
RESOLUTION	600dpi/300dpi
STANDARD INTERFACE	IEEE P1284 Bi-directional Parallel Port (1), USB Port (1)
PLUG AND PLAY	Yes
PRINT DRIVER	Microsoft Windows 3.1x (PCL5e only) Windows95/Windows98/Windows NT 4.0
RESIDENT SCREEN FONTS	45 outline fonts compatible to PCL6
MEMORY	8 MB Standard (1 DIMM expansion slot-64, 32, 16 MB)/72 MB Max

Sharp is a registered trademark of Sharp Corporation. All trademarks and registered trademarks are the property of their respective holders.



SHARP ELECTRONICS CORPORATION Document and Network Systems of America Sharp Plaza, Mahwah, NJ 07430-2135 201-529-9600 www.sharp-usa.com





WWW.SHARP-USA.COM

