



DS340 Synthesized Function and Arbitrary Waveform Generator

- **15.1 MHz frequency range**
- **1 μ Hz frequency resolution**
- **Arbitrary waveforms (up to 40 Msamples/s)**
- **Sine, square, ramp and triangle waveforms**
- **Linear and log sweeps**
- **FSK up to 1 MHz**
- **Optional RS-232 and IEEE-488 interfaces with Arbitrary Waveform Composer software**

Introducing the DS340 Synthesized Function and Arbitrary Waveform Generator from Stanford Research Systems.

Using Direct Digital Synthesis (DDS), the DS340 includes a wide range of features at a fraction of the cost of other function generators. It has all the performance you've come to expect from SRS, such as microhertz frequency resolution, phase continuous frequency shifting and arbitrary waveforms.

The sine and square wave functions have an extended frequency range of 15.1 MHz, while ramp and triangle waveforms are generated to 100 kHz. These standard functions along with a 10 MHz broadband (white) noise source are easily selected from the front panel.


Another advantage of the DS340 is its ability to generate arbitrary waveforms at rates up to 40 Msamples/s. Arbitrary patterns with as many as 16,300 points are easily generated with the Arbitrary Waveform Composer software package, which downloads waveforms

directly via the IEEE-488 or RS-232 interfaces.

Phase continuous linear and logarithmic frequency sweeps are available over the entire frequency range of the DS340. Sweeps may be triggered internally or from the front panel. Frequency shift keying (FSK) is also possible with the DS340. An internal rate generator allows switching at rates up to 50 kHz, while external switching can be clocked at rates up to 1 MHz.

Optional GPIB and RS-232 interfaces provide fast, easy communication with computers. The DS340 is fully programmable and ideally suited for automated systems and computer control.

The DS340 from Stanford Research Systems – higher performance, more features, outstanding value. For more information, or to place an order, call SRS at (408)744-9040.

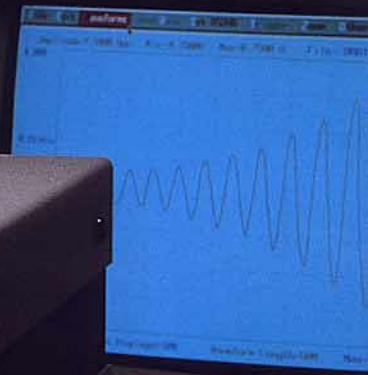

Specifications

FREQUENCY RANGE

Waveforms	
Sine	1 μ Hz to 15.1 MHz
Square	1 μ Hz to 15.1 MHz
Ramp	1 μ Hz to 100 kHz
Triangle	1 μ Hz to 100 kHz
White noise	DC to 10 MHz
Frequency resolution	1 μ Hz

FUNCTION OUTPUT

Impedance	50 Ω
Range	50 mV _{pp} to 10 V _{pp} into 50 Ω . 100 mV _{pp} to 20 V _{pp} into High Z.
Accuracy	0.1 dB (sine output)
Resolution	12 bit (3 digits)
DC Offset	\pm 5 VDC (50 Ω)
Offset resolution	10 mV (50 Ω) 20 mV (High Z)
Isolation	40 V

SINE SPECTRAL PURITY

Spurious response	< - 65 dBc to 1 MHz (+ 6 dB/oct > 1 MHz)
Harmonic distortion	
DC to 20 kHz	< - 70 dBc
20 kHz to 100 kHz	< - 60 dBc
100 kHz to 1 MHz	< - 50 dBc
1 MHz to 15.1 MHz	< - 40 dBc
Phase noise (30 kHz band centered on carrier)	< - 55 dBc

SQUARE WAVE

Rise/Fall time (10% to 90%)	15 ns \pm 5 ns
Asymmetry	< (3 ns + 1%)
Overshoot (full scale output)	< 2%

RAMPS AND TRIANGLES

Rise/Fall time (10% to 90%)	45 ns \pm 10 ns
Linearity	\pm 0.1% of full scale
Settling time	200 ns (0.5% of final value)

ARBITRARY WAVEFORMS

Sample rate	40 MHz/N
Waveform length	8 to 16,300 points
Vertical resolution	12 bits
Rise/Fall time (10% to 90%)	45 ns \pm 10 ns
Programmability	GPIB or RS-232

FSK AND SWEEPS

FSK rate	Internal - 50 kHz External - 1 MHz
FSK rate resolution	2 Digits
Sweeps	Linear and logarithmic
Sweep spans	Linear - 1 μ Hz to 15.1 MHz Log - six decades
Sweep rate	0.01 Hz to 1 kHz

TIMEBASE

Accuracy	\pm 5 ppm (20 - 30°C)
Aging	5 ppm/year
Optional Timebase	TXCO: 2ppm stability Aging: 2 ppm/year (20 -50°C)

GENERAL

Front panel outputs	Function output Sync (TTL levels into 50 Ω) Trigger/FSK
Rear panel input	Sweep/FSK and Trigger
Rear panel outputs	GPIB and RS-232 inter- faces. All instrument functions are controllable over the interfaces.
Interface option	8 digit LED display 9 instrument settings 35 Watts, 50/60 Hz. 100/120/220/240 VAC.
Display	8.5"x3.5"x13" (WxHxL)
Non-volatile memory	8.5 lbs.
Power	One year parts and labor on materials and workmanship.
Dimensions	
Weight	
Warranty	

Ordering Information (All prices U.S. list)

DS340

Synthesized Function Generator	\$1295
-----------------------------------	--------

OPTIONS

-01	RS-232 and IEEE-488 interfaces with Arbitrary Waveform Composer software	\$495
-02	TCXO Timebase	\$350
-0345RMS	Single Rack Mount Kit	\$85
-0345RMD	Double Rack Mount Kit	\$85



STANFORD RESEARCH SYSTEMS

1290 D Reamwood Avenue • Sunnyvale, CA 94089

Telephone (408)744-9040 • FAX: (408)744-9049 • Email: info@thinkSRS.com • Web: www.thinkSRS.com