

DIGITAL CLOCK DISTRIBUTOR
500 SERIES
TL1 USER'S GUIDE
(USED WITH MIS CARD 090-45018-23)

CONTENTS	PAGE	COMMANDS (Contd)	PAGE
1. GENERAL	1	Card Information and Date Commands	
2. USING THIS PRACTICE	2	RTRV-ATTR-T1	62
3. DESCRIPTION	2	RTRV-COND-{EQPT T1}	65
A. Conventions	2	RTRV-EQPT	71
B. Application Message Types	2	RTRV-HDR	73
C. Command Definition	2	RTRV-PRMTR-T1	75
D. Response Definitions	3	RTRV-PM-T1	77
E. Parameter Definitions and Values ...	4	RTRV-TH-T1	82
F. Task/Command Cross-reference ...	4	Figures	
4. COMMANDS	8	1. Command Format	3
Security Commands		2. MIS Card Switch	9
ACTIVATE USER (ACT-USER)	10	Tables	
CANCEL USER (CANC-USER)	12	A. Parameter Definitions	4
EDIT SECURITY PASSWORD		B. Task/Command Cross-reference	7
(ED-SECU-PID)	14	C. Operational Considerations	8
Configuration Commands		1. GENERAL	
ED-EQPT	16	1.01 This practice provides information on the input messages (commands), response messages, and automatic messages used with the Telecom Solutions Digital Clock Distributor 500 series of products. The language used in this practice is Transaction Language 1 (TL1). A Maintenance Interface, System (MIS) card (part number 090-45018-23) must be installed in the DCD-500 series system to use the tools and information presented here. This practice assumes that MRC-T and PSM-T cards are installed as required.	
ED-PRMTR-T1	19	1.02 This practice has been reissued to modify the INIT-SYS command. A change bar indicates the changed area.	
INIT-REG-T1	21		
INIT-SYS	24		
OPR-ACO-ALL	26		
RMV-T1	28		
RST-T1	30		
SET-ATTR-LOG	32		
SET-ATTR-T1	34		
SET-DAT	37		
SET-SID	39		
SET-TH-T1	41		
SW-DX-EQPT	43		
Retrieve Alarms (Manual and Automatic) Commands			
RTRV-ALM-{ALL EQPT T1}	45		
REPT-ALM {EQPT T1}	52		
REPT-EVT	56		
RTRV-LOG	59		

2. USING THIS PRACTICE

2.01 Part 3, Description, describes how to use the commands and read the responses, including: explanations of the typestyle conventions and syntax, finding a command to perform a desired task, definitions of the parameters, and other useful information.

2.02 Part 4, Commands, describes the commands, each one starting at the top of a page. Each command has a description, a format, examples, values for the parameters, and responses to the command.

3. DESCRIPTION

A. Conventions

3.01 The syntax and language structure used with the 500 series systems comply with specifications in Bellcore's TR-TSY-000831, Section 12.1 of OTGR Issue 2, Feb. 1988. As a subset of the ITU's MML (Man-Machine Language), the language specifies Applications Messages which allow communication between an OS (Operations System) and an NE (Network Element) such as one of the 500 series systems.

3.02 The following conventions are used in this manual to define the syntax of input and response messages:

- < > enclose parameters which must be used
- [] enclose optional parameter(s)
- { } enclose a series of parameters, at least one of which must be used

- | separates a list of parameters within the { } symbols, of which one and only one parameter may be selected
- " " enclose a report of an alarm or event
- :
- ... indicates one or more parameters are repeated an appropriate number of times, and hence are omitted
- ,
- ;


B. Application Message Types

3.03 Two TL1 standard types of messages are used:

- a. *Input/Response*, in which a command with valid parameters is input to the 500 series system and a response message is returned.
- b. *Automatic*, in which a message is generated by the 500 series system, stored in the Event Log, and sent to the Communications Port.

C. Command Definition

3.04 A command consists of a Command Code followed by a colon, parameter blocks separated by colons, and a terminating semicolon (Figure 1). A command can only be entered at the semicolon prompt (;).

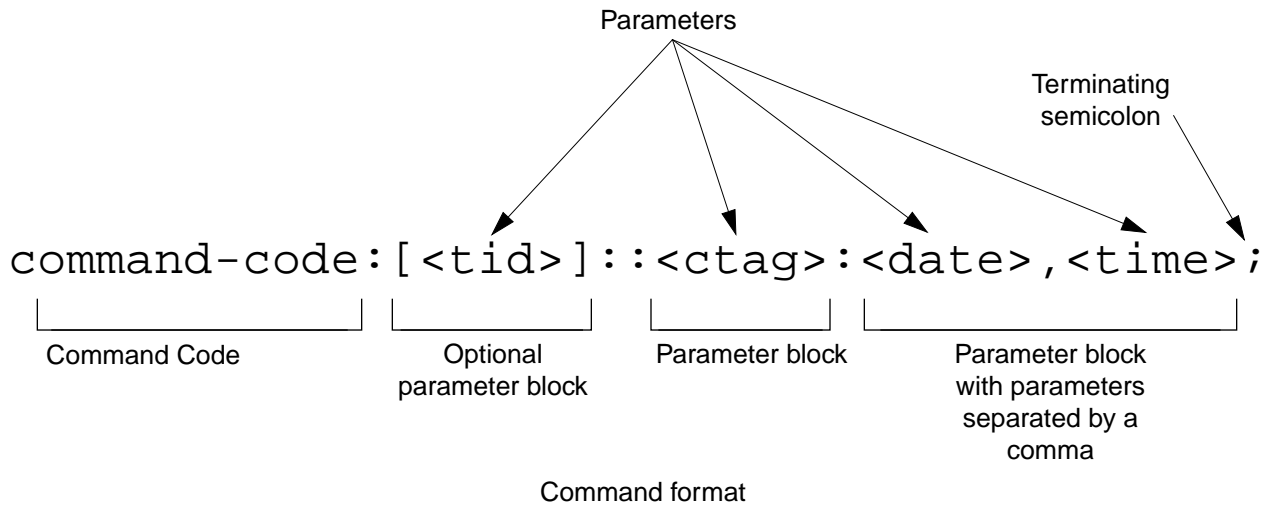

Null parameter block

SET-DAT : : 111 : 931208 , 153500 ;

Example of a command generated using the above format

Figure 1. Command Format

3.05 Parameter blocks may be null (contain no parameters), or contain one or more parameters. Two colons occur next to each other if a parameter block is null. (Some parameters in the complete TL1 language set are not used. These unused parameters are left null in this command set.) Colons after the last active parameter and before the semicolon need not be entered.

3.06 Multiple parameters in a parameter block are separated by commas. Two commas occur next to each other if a parameter is null. Commas after the last active parameter and before a colon or semicolon need not be entered.

3.07 Entering a semicolon at the end of the command causes the command to execute.

3.08 If any mistakes are made while entering a command, send the bad command and reenter a good command. The system does not recognize edited commands.

3.09 In this practice, uppercase letters in a command are parameter values to be entered as shown. Lowercase letters in a command indicate a choice of values is available for that parameter. The values specific to that command are listed with the command.

Note: Upon start-up or after removing and reseating a card, send no commands and ignore any alarms for approximately five minutes.

D. Response Definitions

3.10 A response or a message is returned by the 500 series system when it receives a command. A response to a command may be a Completed or an Error response. Both kinds of responses include the source identifier (the sender of the response), the date and time, and the correlation tag of the given command. The Retry Later message is a single line that contains the characters “;RL”, with no quotes.

- a. *Completed*: The command has been completed or information requested is returned. This response carries the COMPLD message.
- b. *Error*: The command was denied, and the response carries the DENY message. The Error Code parameter (errcde) shows the reason.
- c. *Retry Later*: The command was not carried out because the system was busy; retry the command later.

E. Parameter Definitions and Values

3.11 The TL1 commands use parameters that direct and constrain their operation. The general def-

initions of the parameters, and the type of message in which they appear, are listed in Table A. The values of the parameters are listed with the command.

F. Task/Command Cross-reference

3.12 Consult Table B to find the command appropriate for a task. This table also lists whether or not a command is password protected. Protected commands can only be accessed if the user logged on with a password. Unprotected commands can be accessed with or without a password. Refer to Table B for a list of protected and unprotected commands.

Table A. Parameter Definitions

PARAMETER	USED IN MESSAGE TYPE	DEFINITION
aid	Command, response	This parameter is the access identifier. When used in a command, the aid is the equipment that the command affects. When seen in a response, the aid is the equipment reporting the condition.
almcde	Response	This parameter is the alarm code. It identifies the severity of the alarm. If multiple alarms are reported, the value for almcde is the highest severity of those reported.
atag	Response	This parameter is the automatic message tag, a decimal number with a maximum of 3 characters (1 through 999). It is assigned by the system to sequence and correlate automatic messages.
condeff	Automatic message	This parameter is the condition effectivity. It reports that a standing condition is raised (SC), or that it is cleared (CL). This parameter is the only difference between a response that raises a standing condition, and a response that clears the same standing condition. If a standing condition is raised, it can be retrieved using the RTRV-COND-ALL or RTRV-COND-EQPT commands.
conddescr	Response	This parameter is the condition description. It is a text description of the alarm or condition reported by the system, enclosed within escaped quotes (\"). The system returns one conddescr per response message.
condtype	Command, response, automatic message	This parameter is the condition type. When used in a command, it indicates the type of alarm condition requested. When seen in a response, it indicates the type of alarm condition being reported, which is further explained in the conddescr parameter. When seen in an automatic message, it indicates the type of alarm condition reported as either raised or cleared, which is also further explained in the conddescr parameter.
crcmode	Command	This parameter specifies whether the selected Multi-Reference Controller (MRC) reference uses CRC validation.

Table A. Parameter Definitions (Contd)

PARAMETER	USED IN MESSAGE TYPE	DEFINITION
ctag	Command, response	<p>This parameter is the correlation tag. The operator must enter a ctag for each command. This is the method the system uses to communicate the results of the command. For example, if "111" was entered as a ctag in a command, the response contains "111 COMPLD" or "111 DENY".</p> <p>If two commands were entered with the same ctag and one command was completed but the other was in error, both responses would have the same identification number. The operator may not be able to identify the command to re-enter.</p> <p>The ctag has a maximum of 6 characters beginning with either a letter or a numeral. It is assigned by the operator and must be included in a command.</p>
date	Command, response	This parameter is the current date in the 6-digit form yy-mm-dd (year, month, day). For example, 93-12-08 is December 8, 1993. To enter the date in a command, do not use the hyphens. For example, 931208 is December 8, 1993.
errcde	Response	This parameter is the error code returned by the system. It is a four-character mnemonic that identifies the reason the command was denied.
fmode	Command	This parameter specifies the framing format for the selected MRC reference.
mondatt	Command, response	This parameter is the date of the beginning of the requested performance-monitoring period specified by the tmper parameter.
montm	Command, response	This parameter is the beginning time of day of the requested performance-monitoring period specified by the tmper parameter.
montype	Command, response	This parameter is the type of performance-monitoring register in the memory storage.
monval	Command, response	This parameter is the value in the specified performance-monitoring register.
ntfcncde	Command, response	This parameter is the notification code, indicating the severity of the alarm or event. When used in a command, it requests only those alarms or events of that severity level. When seen in a response, it indicates the severity of the alarm or event.
pid	Command	This parameter specifies the password identification; a pid is limited to a maximum of 10 (upper, lower, or mixed case) characters.
priority	Command	This parameter specifies the priority of the references available at the MRC. The reference with priority 1 is used first, then the priority 2 reference, and so on.

Table A. Parameter Definitions (Contd)

PARAMETER	USED IN MESSAGE TYPE	DEFINITION
sid	Response	<p>This parameter is the source identifier. It identifies the system sending the response or automatic message. The sid in a response message matches the tid in the input command, if a tid was used.</p> <p>The sid must be a valid TL1 identifier of no more than 20 characters, limited to letters, numerals and hyphens, beginning with a letter. The sid is recommended to be the target's office name, if available. All systems are manufactured with the sid TELECOMSOLUTIONS as the default. Assign unique sids in a multi-system installation with the SET-SID command.</p> <p>Note: The sids on the expansion shelves are automatically assigned.</p>
srveff	Command, response	This parameter identifies how the alarm condition affects service.
state	Command	This parameter contains the primary maintenance state (in-service or out-of-service) into which the unit is moved, and may contain a secondary maintenance state indication that identifies a reason for the move to that maintenance state.
tid	Command	<p>This parameter is the target identifier. Use this parameter in a command if there are multiple systems and you want to address a system other than the current one. If this parameter is not used, the command goes to the current system.</p> <p>The tid must be a valid sid, the name assigned to the target system with the SET-SID command. The sid in the response message is the same value as the tid.</p>
time	Command, response	This parameter is the current time in the 6-digit form hh:mm:ss (hours, minutes, seconds). For example, 15:46:06 is 3:46:06 pm. To enter the date in a command, do not use the colons. For example, 154606 is 3:46:06 pm.
tmper	Command, response	This parameter is the accumulation time period for the specified performance-monitoring information.
type	Command	This parameter specifies the type of reference (GPS, LORAN, etc.) the selected MRC reference uses.
typereq	Command	This parameter is the type of condition or state to be retrieved.

Table B. Task/Command Cross-reference

TASK	COMMAND / MESSAGE	PAGE	CAN BE PROTECTED
SECURITY			
Logon	ACT-USER	10	Yes
Logoff	CANC-USER	12	Yes
Modify password	ED-SECU-PID	14	No
CONFIGURATION AND CONTROL			
Modify communication ports	ED-EQPT	16	Yes
Modify reference parameters	ED-PRMTR-T1	19	Yes
Set or clear performance-monitoring registers	INIT-REG-T1	21	Yes
Initialize (clear) the system	INIT-SYS	24	Yes
Silence audible alarms	OPR-ACO-ALL	26	Yes
Take equipment out of service	RMV-T1	28	No
Put equipment in service	RST-T1	30	No
Clear 64-event system log	SET-ATTR-LOG	32	Yes
Set notification code associated with a specific event	SET-ATTR-T1	34	Yes
Set system date and time	SET-DAT	37	Yes
Set system identification code (source identifier)	SET-SID	39	Yes
Set threshold for equipment parameters	SET-TH-T1	41	Yes
Switch to duplicate equipment	SW-DX-EQPT	43	Yes
RETRIEVE ALARMS (MANUAL AND AUTOMATIC)			
Display alarms for all or specific equipment	RTRV-ALM- {ALL EQPT T1}	45	No
Displays the occurrence of alarmed events	REPT-ALM- {EQPT T1}	52	No
Displays the occurrence of nonalarmed events	REPT-EVT	56	No
Display alarms and events in 64-event system log	RTRV-LOG	59	No
CARD INFORMATION AND DATE			
Display notification code and condition type associated with a specific event	RTRV-ATTR-T1	62	No
Display condition of all or specific equipment equipment that is not in alarm	RTRV-COND- {EQPT T1}	65	No
Display sid, date, and time (to verify equip. data path)	RTRV-HDR	73	No
Display performance-parameter data	RTRV-PM-T1	75	No
Display performance-monitoring data	RTRV-PM-T1	77	Yes
Display threshold for equipment parameter	RTRV-TH-T1	82	Yes

4. COMMANDS

4.01 The commands used with the 500 series systems are listed in this section. Each command starts on a separate page with the command code, message category, and type. The first paragraph describes what the command is and what it does. The command paragraph shows the format and syntax of the command, shows an example of the command and what the example accomplishes, and provides the values for the parameters. The completed and error response formats are shown, with examples and possible messages that may be displayed for the parameters. Parameter definitions are listed in Table A. For a list of the available commands, refer to Table B. Operational considerations are listed in Table C.

4.02 The command types include:

- Security
- Configuration and control
- Retrieve manual and/or automatic alarms
- Card information and date

4.03 Security for the MIS -03 card is controlled by two items: a password entered by command and a switch setting on the card (section 4 of SW1; see Figure 2). From the factory, no password is entered and the switch is set for no protection (section 4 is in the ON position). While in this configuration, all commands can be accessed without logging onto the system.

Note: Located on the MIS card daughter-board is a PROM with a label showing the SW1 switch designations (Figure 2); disregard this label.

4.04 To activate protection, section 4 of SW1 must be set to OFF and a password must be entered. A password is entered by using the ED-SECU-PID command. Once a valid password is entered, the protected commands (listed in Table B) can be accessed only by logging onto the system using the ACT-USER command with the correct password. Those commands which cannot be protected (listed in Table B) can always be accessed without logging on.

4.05 Protection can be removed by either setting section 4 of SW1 to OFF or removing the password. The ED-SECU-PID command is used to remove the password (or change the password). Refer to the ED-SECU-PID command description in this user's guide for details on removing or changing a password.

4.06 If the ACT-USER command is used to log onto the system, the CANC-USER command is used to log off. However, the user will be automatically logged off if no activity is detected for 5 minutes.


4.07 Configuration and control commands are used to configure card and system parameters.

4.08 Retrieve manual and/or automatic alarms commands are used to obtain alarm information.

4.09 Card information and date commands are used to obtain MRC and/or PSM card information.

Table C. Operational Considerations

NUMBER	CONSIDERATION
1	All systems are shipped with the factory-set sid TELECOMSOLUTIONS. In multi-system installations, use the SET-SID command to set a unique sid for each system before entering other commands.
2	Upon initial installation of the MIS card, it is recommended that the time and date be set using the SET-DAT command to allow for proper event correlation.
3	In a shelf, clock cards and clock input cards are labeled A and B. In the commands and responses, these cards are designated 1 and 2. For example, input 4 of clock input card MRC A is designated MRC-1-4 in the commands and responses.
4	All clock input cards are designated MRC, whether they are CI cards, ACI cards, or MRC cards.
5	If multiple autonomous alarms appear that include a major (MJ) alarm and a card failure (CARD FAIL), ignore the MJ CARD FAIL message.

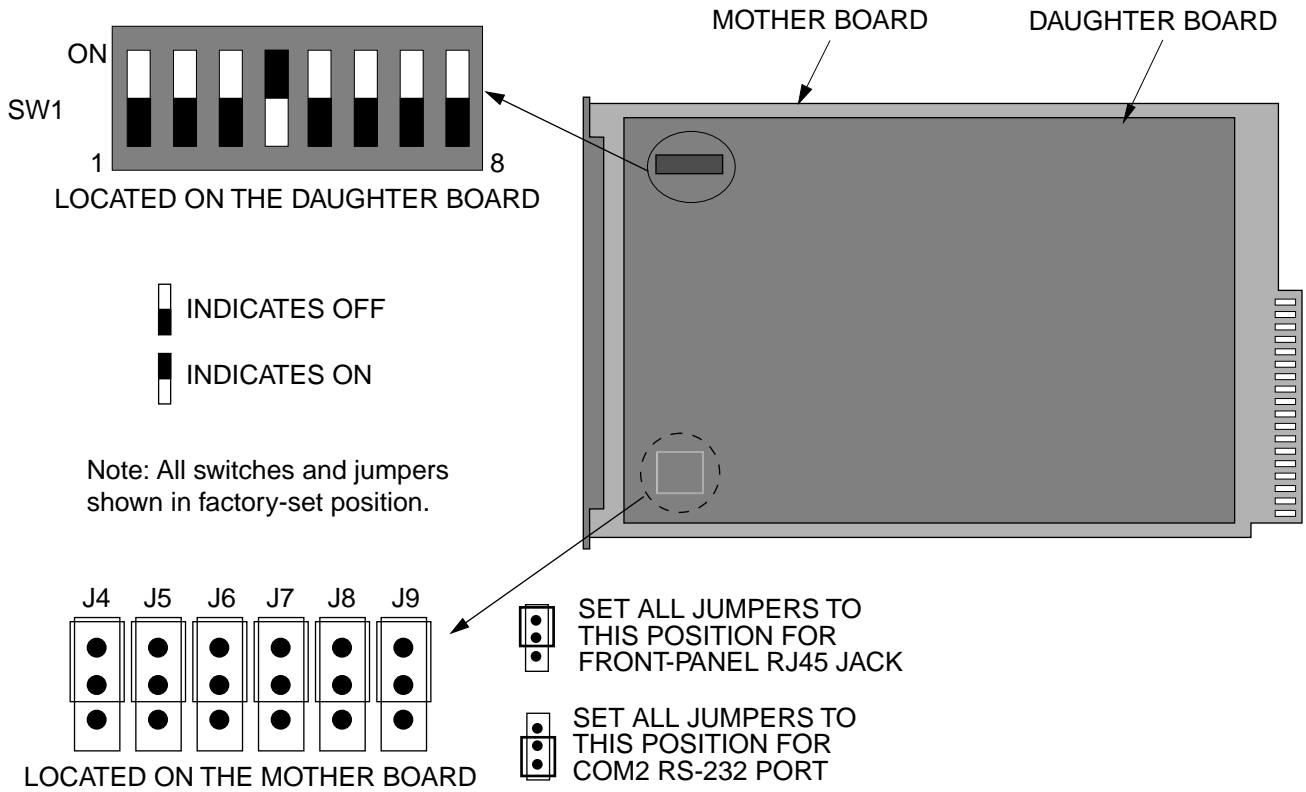

SW1 Switch Settings

SW1 Section	Position	Description	Factory Setting
1 (See Note)	On	1200 baud	
	Off	9600 baud	X
2 and 3	2=on, 3=any	Odd parity	
	2=off, 3=on	Even parity	
	2=off, 3=off	No parity	X
4	On	Password protection disabled	X
	Off	Password protection enabled	
7	On	Expansion shelf	
	Off	Master shelf	X
8	On	Remote system	
	Off	Not a remote system	X

Note: Section 1 sets COM2 and front-panel RJ45 jack only (active port selected by jumpers)

Figure 2. MIS Card Switch

COMMAND CODE: ACT-USER

MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE

PURPOSE

ACTIVATE USER

This command allows the user to log on and begin a session.

Note: During a session, if no activity is detected for five minutes, the system will initiate a CANCEL USER and log the user off.

INPUT FORMAT

```
ACT-USER:[<tid>]:SUPER:<ctag>::<pid>;
```

pid: password identification; pid is limited to a maximum of 10 (upper, lower, or mixed case) characters

Example:

```
ACT-USER::SUPER:155::CASSIOPEIA;
```

This example, tagged as command 155, logs onto the designated <tid> with the password CASSIOPEIA and begins a session.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:04:13  
M 155 COMPLD  
;
```

COMMAND-CODE: ACT-USER (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```
<sid> <date> <time>  
M <ctag> DENY  
  <errcde>  
;
```

```
errcde:  ENEQ = not equipped  
         IIAC = invalid aid  
         ICNV = command not valid  
         IICT = invalid ctag  
         IDNV = data not valid  
         IISP = invalid syntax or punctuation  
         IITA = invalid tid  
         INUP = unimplemented non-null parameter  
         SARB = system resources are busy  
         SCSN = invalid sequence  
         SDNA = duplex unit not available  
         SROF = requested operation failed  
         SNVS = not in valid state
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:12:47  
M 155 DENY  
  IISP  
;
```

COMMAND CODE: CANC-USER**MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE****PURPOSE****CANCEL USER**

This command logs the user out and ends the session. There is also a timeout feature; if no activity is detected for a five minute period, the system will initiate a CANCEL USER command.

INPUT FORMAT

```
CANC-USER:[<tid>]:SUPER:<ctag>;
```

Example:

```
CANC-USER::SUPER:155;
```

This example, tagged as command 155, logs out and ends a session.

RESPONSE FORMAT**NORMAL RESPONSE**

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:04:13  
M 155 COMPLD  
;
```

COMMAND-CODE: CANC-USER (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```
<sid> <date> <time>  
M <ctag> DENY  
  <errcde>  
;
```

```
errcde:  ENEQ = not equipped  
         IIAC = invalid aid  
         ICNV = command not valid  
         IICT = invalid ctag  
         IDNV = data not valid  
         IISP = invalid syntax or punctuation  
         IITA = invalid tid  
         INUP = unimplemented non-null parameter  
         SARB = system resources are busy  
         SCSN = invalid sequence  
         SDNA = duplex unit not available  
         SROF = requested operation failed  
         SNVS = not in valid state
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:12:47  
M 155 DENY  
  IISP  
;
```

COMMAND CODE: ED-SECU-PID

MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE

PURPOSE

EDIT SECURITY PASSWORD

This command allows the user to change passwords.

Note:

1. For password protection to be enabled, DIP switch SW1, section 4, of the MIS card must be set to the OFF position.
2. To password protect all commands which can be protected (see Table B), a password must be entered. The factory-setting is no password. As long as there is no password, no protection is performed.
3. To remove the password and assign a new password (for example, if the password is forgotten), perform the following:
 - a. Remove the MIS card and set DIP switch SW1, section 4, to ON.
 - b. Replace the MIS card and let it go through the power up sequence.
 - c. Rename the password using the ED-SECU-PID command.
 - d. Remove the MIS card and set DIP switch SW1, section 4, to OFF.
 - e. Replace the MIS card and let it go through the power up sequence.

INPUT FORMAT

```
ED-SECU-PID:[<tid>]:SUPER:<ctag>::<pid>,<newpid>;
```

pid:	password identification
new pid:	maximum of 10 (upper, lower, or mixed case) characters

Note: The factory-set pid is no password. If no password is detected, the system is placed in the non-secure (not protected) mode.

Example:

```
ED-SECU-PID::SUPER:150::,ORION;
```

This example, tagged as command 150, changes the null password to ORION.

Example:

```
ED-SECU-PID::SUPER:155::ORION,CASSIOPEIA;
```

This example, tagged as command 155, changes the old password (ORION) to CASSIOPEIA.

COMMAND-CODE: ED-SECU-PID (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
;

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:04:13
M 155 COMPLD
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:12:47
M 155 DENY
    IISP
;

```

COMMAND CODE: ED-EQPT

MESSAGE CATEGORY: PROVISIONING
TYPE: INPUT/RESPONSE

PURPOSE

EDIT EQUIPMENT

This command modifies the communication ports.

INPUT FORMAT

```
ED-EQPT:[<tid>]:<aid>:<ctag>::<baud rate>,<monitor mode>
,<keep alive>,,<terminator>,<echo>;
```

- aid:** Communication port as follows:
- COM-1 = communication port 1
 - COM-2 = communication port 2
 - COM-3 = communication port 3
 - COM-ALL = all communication ports
- baud rate:** The baud rate of COM2 can only be changed by a switch on the MIS card (factory setting is 9600); port 3 cannot be changed if it is set as a remote port via switches on the MIS card:
- 1200 = 1200 baud
 - 9600 = 9600 baud (factory setting for COM1 and COM3 ports)
 - <null> = no change to baud rate
- monitor mode:** In the monitor mode, the port echoes all valid commands and responses from all ports; the communication port number is added to all echoed commands:
- ALW = monitor mode enabled (factory setting for COM1 port)
 - INH = monitor mode disabled (factory setting for COM2 and COM3 ports)
 - <null> = no change to monitor-mode status
- keep alive:** The keep-alive message is sent every 15 to 20 minutes and consists of the response to the RTRV-HDR command (with the ctag used with this ED-EQPT command):
- ALW = keep-alive enabled (factory setting for COM1 port)
 - INH = keep-alive disabled (factory setting for COM2 and COM3 ports)
 - <null> = no change to keep-alive status
- terminator:** This special-character end-of-text terminator does not replace the TL1-specified end-of-text terminator (;). This special-character follows the TL1 semicolon. The end-of-text terminator can be configured as follows:
- 00 = no special-character end-of-text terminator
 - 00-FF = hex-formatted number for a special ASCII character to be the end-of-text terminator (factory setting is 19)
 - <null> = no change to special-character end-of-text terminator

COMMAND-CODE: ED-EQPT (Contd)

INPUT FORMAT (Contd)

echo: If enabled, echo causes each character to be echoed back to the terminal when entered. The echo can be changed as follows:

ALW	= echo enabled
INH	= echo disabled (factory setting for all ports)
<null>	= no change to echo status

Example:

```
ED-EQPT::COM-3:111::,ALW,ALW,,19,;
```

This example for communications port 3, tagged as command 111, does not change the baud rate, enables the monitor mode, enables the keep-alive, resets the terminator to the factory setting of 19, and does not change the echo setting.

COMMAND-CODE: ED-EQPT (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
;

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:04:13
M 111 COMPLD
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:      ENEQ = not equipped
              IIAC = invalid aid
              ICNV = command not valid
              IICT = invalid ctag
              IDNV = data not valid
              IISP = invalid syntax or punctuation
              IITA = invalid tid
              INUP = unimplemented non-null parameter
              SARB = system resources are busy
              SCSN = invalid sequence
              SDNA = duplex unit not available
              SROF = requested operation failed

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:12:47
M 154 DENY
    IISP
;

```

REFERENCE

AT&T request, June 1995

COMMAND CODE: ED-PRMTR-T1

MESSAGE CATEGORY: PROVISIONING
TYPE: INPUT/RESPONSE

PURPOSE

EDIT PARAMETER T1

This command modifies the facility parameter values for priority, reference type, framing, and CRC that are stored in the system database. If the priority of the reference is reassigned, the other references rearrange their priorities automatically, for example, if MRC-1-2 (MRC A of span 2) is assigned a priority 4, the priority for MRC-1-3 becomes second, MRC-1-4 becomes third, and so on.

INPUT FORMAT

```
ED-PRMTR-T1:[<tid>]:<aid>:<ctag>:<priority>,<type>,,[<fmode>],
[<crcmode>];
```

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)
priority:	<u>MRC only (null for PSM):</u>	
	1 thru 4	= priority of the reference, 1 is highest priority
type:	<u>MRC only (null for PSM):</u>	
	GPS	= global positioning system reference
	LORAN	= LORAN reference
	CESIUM	= cesium reference
	NETWORK	= network reference
fmode:	<u>MRC and PSM only:</u>	
	CAS	= CAS framing
	CCS	= CCS framing
crcmode:	<u>MRC and PSM only:</u>	
	NONCRC4	= do not use CRC4
	CRC4	= use CRC4
	<null>	= current crcmode does not change

Example:

```
ED-PRMTR-T1::MRC-2-2:154:1,GPS,,CAS,NONCRC4;
```

This example, tagged as command 154, commands MRC B of span 2 to be the first priority reference, specifies it is using a GPS reference, CAS framing, and no CRC4.

COMMAND-CODE: ED-PRMTR-T1 (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
;

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:04:13
M 154 COMPLD
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:12:47
M 154 DENY
    IISP
;

```

REFERENCE

AT&T 365-340-202, August, 1992

COMMAND CODE: INIT-REG-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

INITIALIZE REGISTER T1

This command initializes the specified performance-monitoring storage registers on the specified equipment, and sets the register to the specified value. These registers contain PM information accumulated in previous intervals. The SET-ATTR-LOG command clears the 64-event system log. The INIT-SYS command performs a “cold restart”, clearing all system registers.

Note: This command may be issued only once every 60 seconds.

INPUT FORMAT

```
INIT-REG-T1:[<tid>]:<aid>:<ctag>::[<montype>],[<monval>]
[, , , [<tmper>], [<mondatt>][ , <montm> ]];
```

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

montype:	AIS	= alarm indication signal
	BPV	= bipolar violations
	CRC	= cyclic redundancy check errors
	OOF	= out of frame errors
	LOS	= loss of signal
	<null>	= all montypes

For PSM only:

MTIE1	= maximum time interval error at 1 second
MTIE4	= maximum time interval error at 4 seconds
MTIE16	= maximum time interval error at 16 seconds
MTIE64	= maximum time interval error at 64 seconds
MTIE128	= maximum time interval error at 128 seconds
MTIE512	= maximum time interval error at 512 seconds
MTIE900	= maximum time interval error at 900 seconds
TVAR1	= time variance error at 1 second
TVAR4	= time variance error at 4 seconds
TVAR16	= time variance error at 16 seconds
TVAR64	= time variance error at 64 seconds
TVAR128	= time variance error at 128 seconds
<null>	= all of the above montypes

monval:	x	= value in the performance-monitoring register
	<null>	= zero

COMMAND-CODE: INIT-REG-T1 (Contd)

INPUT FORMAT (Contd)

tmper: For PSM only:
 15-MIN = time period of the register to be initialized (always 15-MIN)

mondatt: For PSM only:
 mm-dd = date of the first initialization register

montm: For PSM only:
 hh-mm = start of the first register to be initialized (e.g., 14-00, 14-15, 14-30, 14-45) (registers are initialized from this point to the current register)

Examples:

```
INIT-REG-T1::MRC-1-4:143::BPV,5;
```

The example above, tagged as command 143, sets the current BPV performance-monitoring register to 5 at MRC A, span 4.

```
INIT-REG-T1::PSM-1-ALL:144::,,,,,15-MIN,06-22,14-30;
```

The current date and time in this example are June 23 (06-23) and 2:17 pm (14-17). The example above, tagged as command 144, sets all 24 hours of PSM performance-monitoring registers to zero, losing all stored maintenance data.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:41:32
M 143 COMPLD
;
```

COMMAND-CODE: INIT-REG-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:42:21
M 143 DENY
    IISP
;

```

REFERENCE

TR-NWT-00833, Issue 5, Revision 1, April 1993

COMMAND CODE: INIT-SYS

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

INITIALIZE SYSTEM

The MIS option restarts the processor by executing the same routine that is performed on power-up. The restart initializes the system processor registers, which are on the MIS card, to the highest initialization level (9). All information except the sid, tid, date, and time are cleared. (The SET-ATTR-LOG command clears only the 64-event system log, and the INIT-REG-T1 command clears specific registers.) Use INIT-SYS command with care.

The COM-x option causes the data terminal ready (DTR) signal to drop for 5 seconds. The x can be any of the three communication ports (1, 2, or 3). However, the shelf must receive the command with the COM option on the same port as specified in the command.

Note: The "9" in the command indicates the high severity level (either the MIS processor will be restarted or a port will temporarily lose communications).

INPUT FORMAT

```
INIT-SYS:[<tid>]:<aid>:<ctag>::9;
```

aid:	MIS	= restarts the MIS card
	COM-1	= drops DTR for 5 seconds on the COM 1 port (the command must be input on the COM 1 port)
	COM-2	= drops DTR for 5 seconds on the COM 2 port (the command must be input on the COM 2 port)
	COM-3	= drops DTR for 5 seconds on the COM 3 port (the command must be input on the COM 3 port)

Example:

```
INIT-SYS::MIS:110::9;
```

This example, tagged as command 110, erases all system information (which is stored on the MIS card) except the sid, tid, date, and time.

COMMAND-CODE: INIT-SYS (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
;

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:41:32
M 110 COMPLD
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:42:21
M 111 DENY
    IISP
;

```

REFERENCE

TR-NWT-000833, Issue 4, December 1990

COMMAND CODE: OPR-ACO-ALL

MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE

PURPOSE

OPERATE ALARM CUTOFF

This command silences all current audible alarm signals and lights the green ACO lamp on the MIS card.

INPUT FORMAT

```
OPR-ACO-ALL:[<tid>]:ALL:<ctag>;
```

Example:

```
OPR-ACO-ALL::ALL:111;
```

This example, tagged as command 111, silences all alarms in the current system.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:44:27  
M 111 COMPLD  
;
```

COMMAND-CODE: OPR-ACO-ALL (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:46:06
M 111 DENY
  IISP
;

```

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: RMV-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

REMOVE T1

This command removes an equipment unit or facility from service, and places it into a maintenance state. When the equipment or facility is in a maintenance state, service-affecting diagnostic routines may be performed or the unit may be replaced. No alarms are generated at the near end office as a result of this command.

INPUT FORMAT

```
RMV-T1:[<tid>]:<aid>:<ctag>;
```

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

Example:

```
RMV-T1::PSM-1-3:133;
```

This example, tagged as command 133, removes PSM-1, span 3 from service.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-01-11 15:48:14  
M 133 COMPLD  
;
```

COMMAND-CODE: RMV-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:52:25
M 113 DENY
  IISP
;

```

REFERENCE

TR-NWT-000833, Issue 5, December 1992

COMMAND CODE: RST-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

RESTORE T1

This command restores an equipment unit or facility into service from a maintenance state.

INPUT FORMAT

RST-T1:[<tid>]:<aid>:<ctag>;

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

Example:

RST-T1::PSM-1-3:134;

This example, tagged as command 134, restores PSM-1, span 3 to service.

RESPONSE FORMAT

NORMAL RESPONSE

<sid> <date> <time>
M <ctag> COMPLD
;

Example:

TELECOMSOLUTIONS 94-01-11 15:53:12
M 134 COMPLD
;

COMMAND-CODE: RST-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 94-12-05 15:53:25
M 134 DENY
    IISP
;

```

REFERENCE

TR-NWT-000833, Issue 5, December 1992

COMMAND CODE: SET-ATTR-LOG**MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE****PURPOSE****SET ATTRIBUTE LOG**

This command clears the 64-event system message log (which is in the MIS). It is useful after retrieving the messages with the RTRV-LOG command. (The INIT-SYS command performs a "cold restart" and clears all the system registers, and the INIT-REG-T1 command clears specific registers.)

INPUT FORMAT

```
SET-ATTR-LOG:[ <tid> ]::<ctag>::ALARMS,CLR;
```

Example:

```
SET-ATTR-LOG:::117::ALARMS,CLR;
```

This example, tagged as command 117, erases all information stored in the system message log.

RESPONSE FORMAT**NORMAL RESPONSE**

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 16:31:46  
M 117 COMPLD  
;
```


COMMAND-CODE: SET-ATTR-LOG (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 16:31:51
M 117 DENY
    IISP
;

```

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: SET-ATTR-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

SET ATTRIBUTE T1

This command sets the notification code associated with the specified event. This attribute governs whether the event is reported automatically. Alarmed events are reported automatically by the REPORT ALARM message.

INPUT FORMAT

SET-ATTR-T1:[<tid>]:<aid>:<ctag>:: [<ntfcncde>] , [<condtype>] ;

aid: MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
 MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
 PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

ntfcncde: CR = critical alarm
 MJ = major alarm
 MN = minor alarm
 NA = not alarmed
 <null> = not alarmed

condtype: AIS = alarm indication signal
 BPV = bipolar violations
 CRC = cyclic redundancy check errors
 OOF = out of frame errors
 LOS = loss of signal

For PSM only:

MTIE1 = maximum time interval error at 1 second
MTIE4 = maximum time interval error at 4 seconds
MTIE16 = maximum time interval error at 16 seconds
MTIE64 = maximum time interval error at 64 seconds
MTIE128 = maximum time interval error at 128 seconds
MTIE512 = maximum time interval error at 512 seconds
MTIE900 = maximum time interval error at 900 seconds
TVAR1 = time variance error at 1 second
TVAR4 = time variance error at 4 seconds
TVAR16 = time variance error at 16 seconds
TVAR64 = time variance error at 64 seconds
TVAR128 = time variance error at 128 seconds
<null> = all condtypes

COMMAND-CODE: SET-ATTR-T1 (Contd)

INPUT FORMAT (Contd)

Example:

```
SET-ATTR-T1::MRC-1-4:137::MJ,AIS;
```

This example, tagged as command 137, sets the alarm indication signal to a major alarm on MRC A, span 4.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 94-01-10 14:22:18  
M 137 COMPLD  
;
```

COMMAND-CODE: SET-ATTR-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 94-01-10 14:23:24
M 137 DENY
  IISP
;

```

REFERENCE

TR-NWT-00833, Issue 5, Revision 1, April 1993

COMMAND CODE: SET-DAT

MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE

PURPOSE

SET DATE

This command sets the system (real-time) date and time clock to the given values.

INPUT FORMAT

```
SET-DAT:[ <tid> ]::<ctag>:<date>,<time>;  
    date: 6-digit form yymmdd (year, month, day)  
    time: 6-digit form hhmmss (hours, minutes, seconds)
```

Example:

```
SET-DAT:::118:931208,163500;
```

This example, tagged as command 118, sets the date and time.

RESPONSE FORMAT

NORMAL RESPONSE

```
    <sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 16:35:00  
M 118 COMPLD  
;
```

COMMAND-CODE: SET-DAT (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 16:35:02
M 118 DENY
  IISP
;

```

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: SET-SID

MESSAGE CATEGORY: ADMINISTRATION
TYPE: INPUT/RESPONSE

PURPOSE

SET SOURCE IDENTIFIER

This command sets the system identification, or source identifier. The sid is included in every message sent by the system. The target identifier (tid) in a command is the sid of the system where the command is targeted. (The MIS card retains the sid for six to eight hours after the card is removed from the shelf.)

Note: The sids on the expansion shelves are automatically assigned. The expansion shelf sids are as follows:

- <tid>E1 = Expansion shelf #1
- <tid>E2 = Expansion shelf #2
- <tid>E3 = Expansion shelf #3

INPUT FORMAT

```
SET-SID:[<tid>]::<ctag>:<sid>;
```

Example:

```
SET-SID:::119:TELECOMSOLUTIONS2;
```

This example, tagged as command 119, sets the sid as TELECOMSOLUTIONS2.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

Example:

```
TELECOMSOLUTIONS2 93-12-08 16:37:08
M 119 COMPLD
;
```

COMMAND-CODE: SET-SID (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 16:37:12
M 119 DENY
  IISP
;

```

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: SET-TH-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

SET THRESHOLD T1

This command sets the threshold level for a monitored parameter. When the parameter exceeds the threshold value, an automatic message is sent. The threshold may apply to one or more units. One command is required for each threshold setting.

INPUT FORMAT

```
SET-TH-T1:[<tid>]:<aid>:<ctag>::<montype>,<thlev>;
```

aid: MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
 MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
 PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

montype: BPV = bipolar violations
 CRC = cyclic redundancy check errors
 OOF = out of frame errors
 AIS = alarm indication signal

For PSM only:

MTIE1 = maximum time interval error at 1 second
MTIE4 = maximum time interval error at 4 seconds
MTIE16 = maximum time interval error at 16 seconds
MTIE64 = maximum time interval error at 64 seconds
MTIE128 = maximum time interval error at 128 seconds
MTIE512 = maximum time interval error at 512 seconds
MTIE900 = maximum time interval error at 900 seconds
TVAR1 = time variance error at 1 second
TVAR4 = time variance error at 4 seconds
TVAR16 = time variance error at 16 seconds
TVAR64 = time variance error at 64 seconds
TVAR128 = time variance error at 128 seconds

thlev: decimal numeral for threshold level

Example:

```
SET-TH-T1::PSM-1-3:135::MTIE1,200;
```

This example, tagged as command 135, sets the 1-second MTIE threshold on PSM-1, span 3, to a phase shift of 200 nanoseconds.

COMMAND-CODE: SET-TH-T1 (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
;

```

Example:

```

    TELECOMSOLUTIONS2 94-01-10 14:26:44
M 135 COMPLD
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 16:37:12
M 135 DENY
    IISP
;

```

REFERENCE

TR-NWT-000833 Issue 5, Revision 1, April 1993

COMMAND CODE: SW-DX-EQPT

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

SWITCH DUPLEX EQUIPMENT

This command switches an equipment unit or facility with its mate.

INPUT FORMAT

```
SW-DX-EQPT:[<tid>]:<aid>:<ctag>;
aid:      MRC  = active Multi-Reference Controller
```

Example:

```
SW-DX-EQPT::MRC:140;
This example, tagged as command 140, switches the active MRC with its mate unit.
```

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

Example:

```
TELECOMSOLUTIONS2 94-01-10 14:44:36
M 140 COMPLD
;
```

ERROR RESPONSE

```
<sid> <date> <time>
M <ctag> DENY
<errcde>
;
```

Example:

```
TELECOMSOLUTIONS 94-01-10 14:44:37
M 140 DENY
IISP
;
```

COMMAND-CODE: SW-DX-EQPT (Contd)

REFERENCE

TR-NWT-000833 Issue 5, December 1992

COMMAND CODE: RTRV-ALM-{ALL|EQPT|T1}

MESSAGE CATEGORY: SYSTEM MAINTENANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE ALARMS

This command lists all the alarms in any equipment or facility in a system (RTRV-ALM-ALL), specific equipment alarms (RTRV-ALM-EQPT), or specific facilities (RTRV-ALM-T1). The optional parameters specify alarms by severity, type, or whether they affect service. If a piece of equipment is not in alarm, use the RTRV-COND command to retrieve its condition. Equipment that does not respond to either command is not installed.

INPUT FORMAT

RTRV-ALM-{ALL|EQPT|T1}:[<tid>]:[<aid>]:<ctag>[:[:<ntfncde>],
[<condtype>],[<srveff>]][, , ,];

aid: For RTRV-ALM-ALL:
ALL = all DCD-500 equipment types or states

For RTRV-ALM-EQPT:
EXPANS = expansion shelf
FUSE-1 = fuse A
FUSE-2 = fuse B
MASTER = master shelf
MRC-1 = Multi-Reference Controller A
MRC-2 = Multi-Reference Controller B
PSM-x = Precision Sync Monitor card (x = 1 to 9)
MIS = Maintenance Interface, System
CLK-1 = Stratum clock unit A
CLK-2 = Stratum clock unit B
SYSTEM = all clocks
ALL = all equipment

For RTRV-ALM-T1:
MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4
 or ALL)

ntfncde: CR = critical alarm
 MJ = major alarm
 MN = minor alarm
 <null> = all ntfncdes

For RTRV-ALM-ALL:
<null> = all DCD-500 equipment types or states

COMMAND-CODE: RTRV-ALM-{ALL|EQPT|T1} (Contd)

INPUT FORMAT (Contd)

condtype:	FA	= fuse alarm
	SYNCCLK	= output port failed
	HLDOVRSYNC	= clock in the holdover mode
	SYNC	= input reference failed
	FRNGSYNC	= clock in the freerunning mode
	SLTMSIG	= input references unlocked
	INT	= card failed
	FSTSYNC	= clock in the fast-converge mode
	BPV	= bipolar violations
	CRC	= cyclic redundancy check errors
	OOF	= out of frame errors
	LOS	= loss of signal
	AIS	= alarm indication signal
	<null>	= all of the above condtypes
	<u>For PSM only:</u>	
	MTIE1	= maximum time interval error at 1 second
	MTIE4	= maximum time interval error at 4 seconds
	MTIE16	= maximum time interval error at 16 seconds
	MTIE64	= maximum time interval error at 64 seconds
	MTIE128	= maximum time interval error at 128 seconds
	MTIE512	= maximum time interval error at 512 seconds
	MTIE900	= maximum time interval error at 900 seconds
	TVAR1	= time variance error at 1 second
	TVAR4	= time variance error at 4 seconds
	TVAR16	= time variance error at 16 seconds
	TVAR64	= time variance error at 64 seconds
	TVAR128	= time variance error at 128 seconds
	<null>	= all of the above condtypes
	<u>For RTRV-ALM-ALL:</u>	
	<null>	= all condtypes
srveff:	SA	= service-affecting condition
	NSA	= nonservice-affecting condition
	<null>	= service-affecting or nonservice-affecting conditions
	<u>For RTRV-ALM-ALL:</u>	
	<null>	= service-affecting or nonservice-affecting conditions

Example:

```
RTRV-ALM-T1::MRC-1-4:143::MJ, ,NSA;
```

This example, tagged as command 143, retrieves major alarms (if any) from MRC A, span 4.

COMMAND-CODE: RTRV-ALM-{ALL | EQPT | T1} (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

If there are no alarms, the format is:

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:48:14
M 143 COMPLD
;
```

If there is at least one alarm to report, the format is:

```
<sid> <date> <time>
M <ctag> COMPLD
[ "<aid>[,<aiddet>]:<ntfcncde>,<condtype>,<srveff>:
[<conddescr>]" ]...
"[<aid>]:<ntfcncde>,<condtype>,<srveff>:
[<conddescr>]"
;
```

aid: For RTRV-ALM-EQPT:
EXPANS = expansion shelf
FUUSE-1 = fuse A
FUUSE-2 = fuse B
MASTER = master shelf
MRC-1 = Multi-Reference Controller A
MRC-2 = Multi-Reference Controller B
PSM-x = Precision Sync Monitor card (x = 1 to 9)
MIS = Maintenance Interface, System
CLK-1 = Stratum clock unit A
CLK-2 = Stratum clock unit B
SYSTEM = all clocks have failed

For RTRV-ALM-T1:

MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4
 or ALL)

ntfcncde: CR = critical alarm
 MJ = major alarm
 MN = minor alarm

COMMAND-CODE: RTRV-ALM-{ALL|EQPT|T1} (Contd)

RESPONSE FORMAT (Contd)

condtype:	AIS	= alarm indication signal	
	FA	= fuse alarm	
	FRNGSYNC	= clock is in the freerunning mode	
	FSTSYNC	= clock is in the fast-converge mode	
	HLDOVRSYNC	= clock is in the holdover mode	
	INT	= card has failed	
	LOS	= loss of signal	
	SFI	= loss of stratum input to MRC	
	SLTMSIG	= input references are unlocked	
	SYNC	= input reference has failed	
	SYNCCLK	= output port has failed	
	SYNCPRI	= loss of all primary timing references	
	SYNCSEC	= loss of all secondary timing references	
	T-BPV	= threshold for BPVs is exceeded	
	T-CRC	= threshold for CRCs is exceeded	
	T-OOF	= threshold for OOFs is exceeded	
	<u>For PSM only:</u>		
		MTIE1	= maximum time interval error at 1 second
		MTIE4	= maximum time interval error at 4 seconds
		MTIE16	= maximum time interval error at 16 seconds
	MTIE64	= maximum time interval error at 64 seconds	
	MTIE128	= maximum time interval error at 128 seconds	
	MTIE512	= maximum time interval error at 512 seconds	
	MTIE900	= maximum time interval error at 900 seconds	
	TVAR1	= time variance error at 1 second	
	TVAR4	= time variance error at 4 seconds	
	TVAR16	= time variance error at 16 seconds	
	TVAR64	= time variance error at 64 seconds	
	TVAR128	= time variance error at 128 seconds	
srveff:	SA	= service-affecting condition	
	NSA	= nonservice-affecting condition	

COMMAND-CODE: RTRV-ALM-{ALL | EQPT | T1} (Contd)

RESPONSE FORMAT (Contd)

conddescr:	ALARM INDICATION	
	RECEIVED	= received alarm indication
	CARD FAIL	= card has failed
	CLOCK ACTIVE	= clock is active
	CLOCK FREERUNNING	= clock is in the freerunning mode
	CLOCK IN HOLDOVER	= clock is in the holdover mode
	CLOCK NOT CONVERGED	= clock is not locked to the input signal
	DISCIPLINING REFERENCE	= timing input has switched to another
	SWITCHED	reference
	EXPANSION MAJOR	= expansion shelf has a major alarm
	EXPANSION MINOR	= expansion shelf has a minor alarm
	FRAMER FAILURE	= framing
	FUSE OR POWER FAIL	= fuse or power at DCD system has failed
	INPUT OUT OF TOLERANCE	= input signal is out of the clock unit's pull-
		in range
	INPUT ACTIVE	= input signal is active
	LOSS OF SIGNAL	= signal is lost
	LOSS OF ALL PRIMARY	= all primary timing input references have
	TIMING INPUT	been lost
	REFERENCES	
	LOSS OF STRATUM A INPUT	= input from clock in ST A slot has been
		lost
	LOSS OF STRATUM B INPUT	= input from clock in ST B slot has been
		lost
	OUTPUT SYNC PORT FAIL	= output port on an output card has failed
	ST SYNTH SIGNAL FREQ	= the synthesized signal from the clock
	DRIFT	card is showing frequency drift
	SYNC INPUTS UNLOCKED	= synchronization inputs are unlocked
	SYNC INPUT FAILED	= input reference signal input has failed
	SYNC SYSTEM FAIL	= entire system has failed
	THRESHOLD VIOLATION	= bipolar violation threshold has been
	FOR BPV	exceeded
	THRESHOLD VIOLATION	= cyclic redundancy check threshold has
	FOR CRC	been exceeded
	THRESHOLD VIOLATION	= fractional frequency threshold has been
	FOR FFREQ	exceeded
	THRESHOLD VIOLATION	= an MTIE threshold has been exceeded
	FOR MTIE OBSERVATION	
	THRESHOLD VIOLATION FOR	= threshold for MTIE 1-second
	MTIE1 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 4-second
	FOR MTIE4 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 16-second
	FOR MTIE16 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 64-second
	FOR MTIE64 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 128-second
	FOR MTIE128 OBSERVATION	observation is exceeded

COMMAND-CODE: RTRV-ALM-{ALL|EQPT|T1} (Contd)

RESPONSE FORMAT (Contd)

THRESHOLD VIOLATION FOR MTIE512 OBSERVATION	= threshold for MTIE 512-second observation is exceeded
THRESHOLD VIOLATION FOR MTIE900 OBSERVATION	= threshold for MTIE 900-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR1 OBSERVATION	= time variance for TVAR 1-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR4 OBSERVATION	= time variance for TVAR 4-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR16 OBSERVATION	= time variance for TVAR 16-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR64 OBSERVATION	= time variance for TVAR 64-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR128 OBSERVATION	= time variance for TVAR 128-second observation is exceeded
THRESHOLD VIOLATION FOR OOF	= out-of-frame threshold has been exceeded
<null>	= no descriptive information exists

Example:

```

TELECOMSOLUTIONS 93-12-08 15:50:23
M 143 COMPLD
  "MRC-1-4:MJ,LOS,NSA"
  "MRC-1-4:MJ,MTIE1,NSA"
;

```

This example, in response to command 143, shows that MRC A, span 4, has two major alarms: loss of signal, and MTIE 1-second alarms.

COMMAND-CODE: RTRV-ALM-{ALL | EQPT | T1} (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
    <errcde>
;

```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 15:52:25
M 112 DENY
    IISP
;

```

REFERENCE

TR-NWT-000833, Issue 5, Revision 1, April 1993

COMMAND CODE: REPT-ALM {EQPT|T1}

MESSAGE CATEGORY: SURVEILLANCE
TYPE: AUTOMATIC

PURPOSE

REPORT ALARM

This message reports the occurrence of alarmed events, including the access identifier, the severity of the alarm, the type of condition, whether it affects service, and a short description of the alarm.

MESSAGE FORMAT

```
<sid> <date> <time>
<almcde> <atag> REPT ALM {EQPT|T1}
      "<aid>:<ntfcncde>,<condtype>,<srveff>:<conddescr>"
;
```

almcde:	*C	= critical alarm
	**	= major alarm
	*	= minor alarm
	A	= automatic message (only if a following ntfncde is CL or NA)
aid:	ALL	= all DCD-500 object entities
	CLK-1	= Stratum clock unit A
	CLK-2	= Stratum clock unit B
	EXPANS	= expansion shelf
	FUSE-1	= fuse A
	FUSE-2	= fuse B
	MASTER	= master shelf
	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4)
MIS	= Maintenance Interface, System	
SYSTEM	= all clocks have failed	
ntfcncde:	CR	= critical alarm
	MJ	= major alarm
	MN	= minor alarm
	CL	= cleared alarm
	NA	= not alarmed

COMMAND-CODE: REPT-ALM {EQPT|T1} (Contd)

MESSAGE FORMAT (Contd)

condtype:	AIS	= alarm indication signal
	FA	= fuse alarm
	FRNGSYNC	= clock is in the freerunning mode
	FSTSYNC	= clock is in the fast-converge mode
	HLDOVRSYNC	= clock is in the holdover mode
	INT	= card has failed
	LOS	= loss of signal
	SFI	= loss of stratum input to MRC
	SLTMSIG	= input references are unlocked
	SYNC	= input reference has failed
	SYNCCLK	= output port has failed
	SYNCPRI	= loss of all primary timing references
	SYNCSEC	= loss of all secondary timing references
	T-BPV	= threshold violation for BPVs
	T-CRC	= threshold violation for CRC errors
	T-FFREQ	= threshold violation for fractional frequency
	T-MTIE1	= threshold for MTIE 1 second is exceeded
	T-MTIE4	= threshold for MTIE 4 seconds is exceeded
	T-MTIE16	= threshold for MTIE 16 seconds is exceeded
	T-MTIE64	= threshold for MTIE 64 seconds is exceeded
	T-MTIE128	= threshold for MTIE 128 seconds is exceeded
	T-MTIE512	= threshold for MTIE 512 seconds is exceeded
	T-MTIE900	= threshold for MTIE 900 seconds is exceeded
T-OOF	= threshold for OOFs is exceeded	
T-TVAR1	= threshold for TVAR 1 second is exceeded	
T-TVAR4	= threshold for TVAR 4 seconds is exceeded	
T-TVAR16	= threshold for TVAR 16 seconds is exceeded	
T-TVAR64	= threshold for TVAR 64 seconds is exceeded	
T-TVAR128	= threshold for TVAR 128 seconds is exceeded	
srveff:	SA	= service-affecting condition
	NSA	= nonservice-affecting condition

COMMAND-CODE: REPT-ALM {EQPT|T1} (Contd)

MESSAGE FORMAT (Contd)

conddescr:	ALARM INDICATION	= received alarm indication
	SIGNAL RECEIVED	
	CARD FAIL	= card has failed
	CLOCK ACTIVE	= clock is active
	CLOCK FREERUNNING	= clock is in the freerunning mode
	CLOCK IN HOLDOVER	= clock is in the holdover mode
	CLOCK NOT CONVERGED	= clock is not locked to the input signal
	DISCIPLINING REFERENCE	= timing input has switched to another
	SWITCHED	reference
	EXPANSION MAJOR	= expansion shelf has a major alarm
	EXPANSION MINOR	= expansion shelf has a minor alarm
	FRAMER FAILURE	= framing
	FUSE OR POWER FAIL	= fuse or power at DCD system has failed
	INPUT OUT OF TOLERANCE	= input signal is out of the clock unit's
		pull-in range
	INPUT ACTIVE	= input signal is active
	LOSS OF SIGNAL	= signal is lost
	LOSS OF ALL PRIMARY	= all primary timing input references have
	TIMING INPUT	been lost
	REFERENCES	
	OUTPUT SYNC PORT FAIL	= output port on an output card has failed
	SYNC INPUTS UNLOCKED	= synchronization inputs are unlocked
	SYNC INPUT FAILED	= input reference signal input has failed
	SYNC SYSTEM FAIL	= entire system has failed
	THRESHOLD VIOLATION	= bipolar violation threshold has been
	FOR BPV	exceeded
	THRESHOLD VIOLATION	= cyclic redundancy check threshold has
	FOR CRC	been exceeded
	THRESHOLD VIOLATION	= fractional frequency threshold has been
	FOR FFREQ	exceeded
	THRESHOLD VIOLATION	= an MTIE threshold has been exceeded
	FOR MTIE OBSERVATION	
	THRESHOLD VIOLATION FOR	= threshold for MTIE 1-second
	MTIE1 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 4-second
	FOR MTIE4 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 16-second
	FOR MTIE16 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 64-second
	FOR MTIE64 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 128-second
	FOR MTIE128 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 512-second
	FOR MTIE512 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= threshold for MTIE 900-second
	FOR MTIE900 OBSERVATION	observation is exceeded
	THRESHOLD VIOLATION	= out-of-frame threshold has been exceeded
	FOR OOF	

COMMAND-CODE: REPT-ALM {EQPT|T1} (Contd)

MESSAGE FORMAT (Contd)

THRESHOLD VIOLATION FOR TVAR1 OBSERVATION	= time variance for TVAR 1-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR4 OBSERVATION	= time variance for TVAR 4-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR16 OBSERVATION	= time variance for TVAR 16-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR64 OBSERVATION	= time variance for TVAR 64-second observation is exceeded
THRESHOLD VIOLATION FOR TVAR128 OBSERVATION	= time variance for TVAR 128-second observation is exceeded
<null>	= no descriptive information exists

Example:

```

TELECOMSOLUTIONS 93-12-08 15:41:32
* 14 REPT ALM EQPT
  "CLK-1:MN,HLDOVRSYNC,NSA:\ "CLOCK IN HOLDOVER\ " "
;

```

This example, tagged as automatic message 14, shows that clock 1 has a minor alarm, the clock is in holdover, and service is not affected.

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: REPT-EVT

MESSAGE CATEGORY: SURVEILLANCE
TYPE: AUTOMATIC

PURPOSE

REPORT EVENT

This message reports the occurrence of nonalarmed events, including the access identifier, the severity of the alarm, the type of condition, whether it affects service, and a short description of the alarm.

MESSAGE FORMAT

```

<sid> <date> <time>
<atag> REPT EVT {EQPT|T1}
      "<aid>:<condtype>,<condeff>:<conddescr>"
;

```

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)
	CLK-1	= clock card A
	CLK-2	= clock card B
condtype:	AIS	= alarm indication signal
	FFREQ	= fractional frequency exceeded for ST A or ST B
	LOS	= loss of signal
	SFI	= loss of stratum input
	T-BPV	= threshold violation for BPVs
	T-CRC	= threshold violation for CRC errors
	T-FFREQ	= threshold for fractional frequency is exceeded
	T-MTIE	= an MTIE threshold has been exceeded
	T-MTIE1	= threshold for MTIE 1 second is exceeded
	T-MTIE4	= threshold for MTIE 4 seconds is exceeded
	T-MTIE16	= threshold for MTIE 16 seconds is exceeded
	T-MTIE64	= threshold for MTIE 64 seconds is exceeded
	T-MTIE128	= threshold for MTIE 128 seconds is exceeded
	T-MTIE512	= threshold for MTIE 512 seconds is exceeded
	T-MTIE900	= threshold for MTIE 900 seconds is exceeded
	T-OOF	= threshold for OOFs is exceeded
	T-TVAR1	= time variance for TVAR 1 second is exceeded
	T-TVAR4	= time variance for TVAR 4 seconds is exceeded
	T-TVAR16	= time variance for TVAR 16 seconds is exceeded
	T-TVAR64	= time variance for TVAR 64 seconds is exceeded
	T-TVAR128	= time variance for TVAR 128 seconds is exceeded
	WKSWPR-x	= working facility switched back to working status (x = equipment number)
condeff:	CL	= standing condition cleared
	SC	= standing condition raised

COMMAND-CODE: REPT-EVT (Contd)

MESSAGE FORMAT (Contd)

conddescr:	DISCIPLINING REFERENCE SWITCHED	= working facility switched back to working status
	LOSS OF STRATUM A INPUT	= input from clock in ST A slot has been lost
	LOSS OF STRATUM B INPUT	= input from clock in ST B slot has been lost
	THRESHOLD VIOLATION FOR BPV	= BPV errors exceed the BPV threshold
	THRESHOLD VIOLATION FOR OOF	= OOF errors exceed the OOF threshold
	THRESHOLD VIOLATION FOR CRC	= AIS errors exceed the AIS threshold
	ALARM INDICATION SIGNAL RECEIVED	= an alarm indication signal has been received
	ST SYNTH SIGNAL FREQ VIOLATION	= the synthesized signal from the clock card is showing frequency drift
	THRESHOLD VIOLATION FOR MTIE OBSERVATION	= an MTIE threshold has been exceeded
	THRESHOLD VIOLATION FOR MTIE1 OBSERVATION	= threshold for MTIE 1-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE4 OBSERVATION	= threshold for MTIE 4-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE16 OBSERVATION	= threshold for MTIE 16-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE64 OBSERVATION	= threshold for MTIE 64-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE128 OBSERVATION	= threshold for MTIE 128-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE512 OBSERVATION	= threshold for MTIE 512-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE900 OBSERVATION	= threshold for MTIE 900-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR1 OBSERVATION	= time variance for TVAR 1-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR4 OBSERVATION	= time variance for TVAR 4-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR16 OBSERVATION	= time variance for TVAR 16-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR64 OBSERVATION	= time variance for TVAR 64-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR128 OBSERVATION	= time variance for TVAR 128-second observation is exceeded

COMMAND-CODE: REPT-EVT (Contd)

MESSAGE FORMAT (Contd)

Example:

```
TELECOMSOLUTIONS 93-12-08 15:41:32
2 REPT EVT T1
  "MRC-1-4:SFI,SC:\ "LOSS OF STRATUM A INPUT\ " "
;
```

This example, tagged as automatic message 2, shows that a standing condition has been raised because of a loss of input from the stratum A clock at MRC A, span 4.

REFERENCE

TA-TSY-000309, Issue 1, December 1990

COMMAND CODE: RTRV-LOG

MESSAGE CATEGORY: SYSTEM MAINTENANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE LOG

This command displays all alarm and non-alarm events in the 64-event system message log. RTRV-LOG does not erase the messages. (See SET-ATTR-LOG to erase the system message log, which is located on the MIS card.)

INPUT FORMAT

```
RTRV-LOG:[<tid>]::<ctag>::ALARMS;
```

Example:

```
RTRV-LOG:::115::ALARMS;
```

This example, tagged as command 115, displays all event information stored in the event log in the MIS card.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>
M <ctag> COMPLD
  ALARMS
  /* <contents of message log> */
;
```

If the sequence /* or */ occurs within the contents of a message log, it is represented by the sequence \/* or */ respectively.

COMMAND-CODE: RTRV-LOG (Contd)

RESPONSE FORMAT (Contd)

Example:

```

TELECOMSOLUTIONS 93-12-08 16:11:28
M 115 COMPLD
ALARMS
/*
"93-12-08 16:06:42 SET-ATTR-LOG:::1::ALARMS,CLR;"
"93-12-08 16:06:42 AMRC-2:NORMAL,CL:\\"INPUT ACTIVE\\" "
"93-12-08 16:07:27 *MASTER:MN,SYNC,NSA:\\"SYNC INPUT FAILED\\" "
"93-12-08 16:07:27 *CLK-1:MN,HLDVRSYNC,NSA:\\"CLOCK IN
HOLDOVER\\" "
"93-12-08 16:07:27 ACLK-1:FSTSYNC,SC:\\"CLOCK NOT CONVERGED\\" "
"93-12-08 16:07:27 ACLK-2:FSTSYNC,SC:\\"CLOCK NOT CONVERGED\\" "
"93-12-08 16:07:27 *CLK-2:MN,HLDVRSYNC,NSA:\\"CLOCK IN
HOLDOVER\\" "
"93-12-08 16:07:27 AMRC-1:NORMAL,CL:\\"INPUT ACTIVE\\" "
*/
;
```

ERROR RESPONSE

```

<sid> <date> <time>
M <ctag> DENY
<errcde>
;
```

```

errcde:    ENEQ = not equipped
           IIAC = invalid aid
           ICNV = command not valid
           IICT = invalid ctag
           IDNV = data not valid
           IISP = invalid syntax or punctuation
           IITA = invalid tid
           INUP = unimplemented non-null parameter
           SARB = system resources are busy
           SCSN = invalid sequence
           SDNA = duplex unit not available
           SROF = requested operation failed
           SNVS = not in valid state
```

COMMAND-CODE: RTRV-LOG (Contd)

RESPONSE FORMAT (Contd)

Example:

```
TELECOMSOLUTIONS 93-12-08 16:12:31
M 115 DENY
  IISP
;
```

REFERENCE

TA-NWT-000200, Issue 5, December 1990

COMMAND CODE: RTRV-ATTR-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE ATTRIBUTE T1

This command retrieves and displays the notification code associated with the specified event. Alarmed events are reported automatically by the REPORT ALARM message. Use the <aid>, <ntfcncde>, and <condtype> parameters together or separately to display the notification code, or the type of events.

INPUT FORMAT

RTRV-ATTR-T1:[<tid>]:<aid>:<ctag>::[<ntfcncde>],[<condtype>];

aid	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

ntfcncde:	CR	= critical alarm
	MJ	= major alarm
	MN	= minor alarm
	NA	= not alarmed
	<null>	= not alarmed

condtype:	AIS	= alarm indication signal
	BPV	= bipolar violations
	CRC	= cyclic redundancy check errors
	LOS	= loss of signal
	OOF	= out of frame errors
	<null>	= all the above condtypes

For MRC only:

FFREQ	= fractional frequency exceeded
-------	---------------------------------

For PSM only:

MTIE1	= maximum time interval error at 1 second
MTIE4	= maximum time interval error at 4 seconds
MTIE16	= maximum time interval error at 16 seconds
MTIE64	= maximum time interval error at 64 seconds
MTIE128	= maximum time interval error at 128 seconds
MTIE512	= maximum time interval error at 512 seconds
MTIE900	= maximum time interval error at 900 seconds
TVAR1	= time variance error at 1 second
TVAR4	= time variance error at 4 seconds
TVAR16	= time variance error at 16 seconds
TVAR64	= time variance error at 64 seconds
TVAR128	= time variance error at 128 seconds
<null>	= all condtypes

COMMAND-CODE: RTRV-ATTR-T1 (Contd)

INPUT FORMAT (Contd)

Example:

```
RTRV-ATTR-T1::MRC-1-4:143::MJ;
```

This example, tagged as command 143, retrieves and displays the major alarm notification codes associated with all performance-monitoring events for MRC A, span 4.

RESPONSE FORMAT

NORMAL RESPONSE

If there are no attributes for the items specified in the command, the response format is:

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

If attributes for the items specified in the command exist, the response format is:

```
<sid> <date> <time>
M <ctag> COMPLD
["<aid>:<ntfcncde>,<condtype>,, " ]...
"<aid>:<ntfcncde>,<condtype>,, "
;
```

Example:

```
TELECOMSOLUTIONS 94-01-10 14:34:01
M 143 COMPLD
"MRC-1-4:MJ,LOS,, "
"MRC-1-4:MJ,BPV,, "
;
```

COMMAND-CODE: RTRV-ATTR-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:      ENEQ = not equipped
              IIAC = invalid aid
              ICNV = command not valid
              IICT = invalid ctag
              IDNV = data not valid
              IISP = invalid syntax or punctuation
              IITA = invalid tid
              INUP = unimplemented non-null parameter
              SARB = system resources are busy
              SCSN = invalid sequence
              SDNA = duplex unit not available
              SROF = requested operation failed
              SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 94-01-10 14:36:33
M 138 DENY
  IISP
;

```

REFERENCE

TR-NWT-00833, Issue 5, Revision 1, April 1993

COMMAND CODE: RTRV-COND-{EQPT|T1}

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE CONDITIONS

This command instructs the system to return the current standing condition and/or state associated with one or more specified equipment units or facilities.

INPUT FORMAT

RTRV-COND- {EQPT|T1} : [<tid>] : <aid> : <ctag> [: : <typereq>] ;

aid: For RTRV-COND-EQPT:

CLK-1 = Stratum clock unit A
 CLK-2 = Stratum clock unit B
 FUSE-1 = fuse A
 FUSE-2 = fuse B
 MIS = Maintenance Interface, System
 ALL = all above equipment (does not include MRC or PSM)

MRC-1 = Multi-Reference Controller A
 MRC-2 = Multi-Reference Controller B
 PSM-x = Precision Sync Monitor card (x = 1 to 9)

For RTRV-COND-T1:

MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
 MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
 PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

typereq: For RTRV-COND-T1:

AIS = alarm indication signal
 ALLCOND = all condtypes
 ALLSTAT = all maintenance states
 BPV = bipolar violations
 CRC = cyclic redundancy check errors
 IS-NR = in service, normal
 IS-NR,ACT = in service: active
 IS-NR,EQ = in service: equipped
 LOS = loss of signal
 OOF = out of frame errors
 OOS-MT = out of service and in maintenance
 OOS-MT,MAN = out of service: manually removed
 OOS-MT,FLT = out of service: fault
 OOS-MT,OOT = out of service: out of tolerance
 <null> = all maintenance states

COMMAND-CODE: RTRV-COND-{EQPT | T1} (Contd)

INPUT FORMAT (Contd)

For PSM only:

MTIE1	= maximum time interval error at 1 second
MTIE4	= maximum time interval error at 4 seconds
MTIE16	= maximum time interval error at 16 seconds
MTIE64	= maximum time interval error at 64 seconds
MTIE128	= maximum time interval error at 128 seconds
MTIE512	= maximum time interval error at 512 seconds
MTIE900	= maximum time interval error at 900 seconds
TVAR1	= time variance error at 1 second
TVAR4	= time variance error at 4 seconds
TVAR16	= time variance error at 16 seconds
TVAR64	= time variance error at 64 seconds
TVAR128	= time variance error at 128 seconds

For RTRV-COND-EQPT:

ALLSTAT	= all maintenance states
<null>	= all maintenance states

Example:

```
RTRV-COND-T1::MRC-1-ALL:113::BPV;
```

This example, tagged as command 113, retrieves the non-alarmed bipolar violation status of all spans on MRC-1.

RESPONSE FORMAT

NORMAL RESPONSE

If there are no conditions (that is, if all of the equipment is in alarm or not installed), the format is:

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

If there is at least one line of information to report, the format is:

```
<sid> <date> <time>
M <ctag> COMPLD
["<aid>[, <aidtype>]:[<ntfncd>], {<condtype> | <state>}, [<serveff>]
[, , , , , <conddescr>"] ]...
"<aid>[, <aidtype>]:[<ntfncd>], {<condtype> | <state>}, [<serveff>]
[, , , , , <conddescr>"]
;
```

COMMAND-CODE: RTRV-COND-{EQPT | T1} (Contd)

RESPONSE FORMAT (Contd)

aid:	<u>For RTRV-COND-ALL and RTRV-COND-EQPT:</u>
	CLK-1 = Stratum clock unit A
	CLK-2 = Stratum clock unit B
	FUSE-1 = fuse A
	FUSE-2 = fuse B
	MIS = Maintenance Interface, System
	MRC-1 = Multi-Reference Controller A
	MRC-2 = Multi-Reference Controller B
	MRC-ALL = all Multi-Reference Controllers
	PSM-x = Precision Sync Monitor card (x = 1 to 9 or ALL)
	<u>For RTRV-COND-T1:</u>
	MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)
aidtype:	T1 = RTRV-COND-T1 command was sent
ntfncde:	<u>For condtype:</u>
	CR = critical alarm
	MJ = major alarm
	MN = minor alarm
	NA = not alarmed
	NR = not reported
	<u>For state:</u>
	<null> = ntfncde has no meaning
condtype:	AIS=alarm indication signal
FA	= fuse alarm
FRNGSYNC	= clock in the freerunning mode
FSTSYNC	= clock in the fast-converge mode
HLDOVRSYNC	= clock in the holdover mode
INT	= card failed
LOS	= loss of signal
NORMAL	= input reference or clock is active
SFI	= loss of stratum input to MRC
SLTMSIG	= input references unlocked
SYNC	= input reference failed
SYNCCLK	= output port failed
SYNCPRI	= loss of all primary timing references
SYNCSEC	= loss of all secondary timing references
T-BPV	= threshold for BPVs is exceeded
T-CRC	= threshold for CRCs is exceeded
T-FFREQ	= threshold for fractional frequency is exceeded
T-MTIE1	= threshold for MTIE 1 second is exceeded

COMMAND-CODE: RTRV-COND-{EQPT | T1} (Contd)

RESPONSE FORMAT (Contd)

condtype:	T-MTIE4	= threshold for MTIE 4 seconds is exceeded
(Contd)	T-MTIE16	= threshold for MTIE 16 seconds is exceeded
	T-MTIE64	= threshold for MTIE 64 seconds is exceeded
	T-MTIE128	= threshold for MTIE 128 seconds is exceeded
	T-MTIE512	= threshold for MTIE 512 seconds is exceeded
	T-MTIE900	= threshold for MTIE 900 seconds is exceeded
	T-OOF	= threshold for OOFs is exceeded
	T-TVAR1	= threshold for TVAR 1 second is exceeded
	T-TVAR4	= threshold for TVAR 4 seconds is exceeded
	T-TVAR16	= threshold for TVAR 16 seconds is exceeded
	T-TVAR64	= threshold for TVAR 64 seconds is exceeded
	T-TVAR128	= threshold for TVAR 128 seconds is exceeded
state:	IS-NR	= in service, normal
	IS-NR,ACT	= in service: active
	IS-NR,EQ	= in service:, equipped
	OOS-MT	= out of service and in maintenance
	OOS-MT,MAN	= out of service: manually removed
	OOS-MT,FLT	= out of service: fault
	OOS-MT,OOT	= out of service: out of tolerance
conddescr:	ALARM INDICATION	
	SIGNAL RECEIVED	= received alarm indication
	CARD FAIL	= card has failed
	CLOCK ACTIVE	= clock is active
	CLOCK FREERUNNING	= clock is in the freerunning mode
	CLOCK IN HOLDOVER	= clock is in the holdover mode
	CLOCK NOT CONVERGED	= clock is not locked to the input signal
	DISCIPLINING REFERENCE	= timing input has switched to another
	SWITCHED	reference
	EXPANSION MAJOR	= expansion shelf has a major alarm
	EXPANSION MINOR	= expansion shelf has a minor alarm
	FRAMER FAILURE	= framing
	FUSE OR POWER FAIL	= fuse or power at DCD system has failed
	INPUT OUT OF TOLERANCE	= input signal is out of the clock unit's
		pull-in range
	INPUT ACTIVE	= input signal is active
	LOSS OF SIGNAL	= signal is lost
	LOSS OF ALL PRIMARY	= all primary timing input references have
	TIMING INPUT	been lost
	REFERENCES	
	LOSS OF STRATUM A INPUT	= input from clock in ST A slot has been
		lost
	LOSS OF STRATUM B INPUT	= input from clock in ST B slot has been
		lost
	OUTPUT SYNC PORT FAIL	= output port on an output card has failed

COMMAND-CODE: RTRV-COND-{EQPT | T1} (Contd)

RESPONSE FORMAT (Contd)

conddescr: (Contd)	ST SYNTH SIGNAL FREQ VIOLATION	= the synthesized signal from the clock card is showing frequency drift
	SYNC INPUTS UNLOCKED	= synchronization inputs are unlocked
	SYNC INPUT FAILED	= input reference signal input has failed
	SYNC SYSTEM FAIL	= entire system has failed
	THRESHOLD VIOLATION FOR BPV	= bipolar violation threshold has been exceeded
	THRESHOLD VIOLATION FOR CRC	= cyclic redundancy check threshold has been exceeded
	THRESHOLD VIOLATION FOR FFREQ	= fractional frequency threshold has been exceeded
	THRESHOLD VIOLATION FOR MTIE OBSERVATION	= an MTIE threshold has been exceeded
	THRESHOLD VIOLATION FOR MTIE1 OBSERVATION	= threshold for MTIE 1-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE4 OBSERVATION	= threshold for MTIE 4-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE16 OBSERVATION	= threshold for MTIE 16-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE64 OBSERVATION	= threshold for MTIE 64-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE128 OBSERVATION	= threshold for MTIE 128-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE512 OBSERVATION	= threshold for MTIE 512-second observation is exceeded
	THRESHOLD VIOLATION FOR MTIE900 OBSERVATION	= threshold for MTIE 900-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR1 OBSERVATION	= time variance for TVAR 1-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR4 OBSERVATION	= time variance for TVAR 4-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR16 OBSERVATION	= time variance for TVAR 16-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR64 OBSERVATION	= time variance for TVAR 64-second observation is exceeded
	THRESHOLD VIOLATION FOR TVAR128 OBSERVATION	= time variance for TVAR 128-second observation is exceeded
	THRESHOLD VIOLATION FOR OOF	= out-of-frame threshold has been exceeded
	<null>=	= no descriptive information exists

COMMAND-CODE: RTRV-COND-{EQPT|T1} (Contd)

RESPONSE FORMAT (Contd)

Example:

```
TELECOMSOLUTIONS 93-12-08 15:57:22
M 113 COMPLD
  "MRC-1-2,T1:NA,T-BPV,,,,,,,,,"
;
```

This example, tagged as a response to command 113, reports that MRC A, span 2 has a nonalarmed condition—the BPV threshold is exceeded. No descriptive information exists.

ERROR RESPONSE

```
<sid> <date> <time>
M <ctag> DENY
  <errcde>
;
```

```
errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state
```

Example:

```
TELECOMSOLUTIONS 93-12-08 15:52:25
M 113 DENY
  IISP
;
```

REFERENCE

TR-NWT-000833, Issue 4, December 1990

COMMAND CODE: RTRV-EQPT

MESSAGE CATEGORY: SYSTEM MAINTENANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE EQUIPMENT

This command returns the configuration of the specified communication port(s).

INPUT FORMAT

```
RTRV-EQPT:[<tid>]:<aid>:<ctag>::;
```

aid: Communication port in the form COM-x where x is one of the following:

1	=	communication port 1
2	=	communication port 2
3	=	communication port 3
ALL	=	all communication ports

Example:

```
RTRV-EQPT::COM-1:114;
```

This example, tagged as command 114, requests the configuration of communications port 1.

RESPONSE FORMAT

NORMAL RESPONSE

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 16:01:04  
M 114 COMPLD  
;
```

COMMAND-CODE: RTRV-EQPT (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:      ENEQ = not equipped
              IIAC = invalid aid
              ICNV = command not valid
              IICT = invalid ctag
              IDNV = data not valid
              IISP = invalid syntax or punctuation
              IITA = invalid tid
              INUP = unimplemented non-null parameter
              SARB = system resources are busy
              SCSN = invalid sequence
              SDNA = duplex unit not available
              SROF = requested operation failed
              SNVS = not in valid state

```

Example:

```

      TELECOMSOLUTIONS 93-12-08 16:01:21
M 114 DENY
  IISP
;

```

REFERENCE

AT&T request, June 1995

COMMAND CODE: RTRV-HDR**MESSAGE CATEGORY: SYSTEM MAINTENANCE
TYPE: INPUT/RESPONSE****PURPOSE****RETRIEVE HEADER**

This command returns a normal response indicating COMPLD (completed). This command can be used to verify that parts of the system are good. If the response is returned, the cable, MIS, and communications link are viable; and the sid, date, and time can be verified. The response to this command will be issued as a keep-alive message if keep-alive is enabled by the ED-EQPT command (the ctag in the keep-alive message is the same ctag used when enabled by the ED-EQPT command).

INPUT FORMAT

```
RTRV-HDR:[<tid>]::<ctag>;
```

Example:

```
RTRV-HDR:::114;
```

This example, tagged as command 114, requests the header from the current system, including the sid, date, and time.

RESPONSE FORMAT**NORMAL RESPONSE**

```
<sid> <date> <time>  
M <ctag> COMPLD  
;
```

Example:

```
TELECOMSOLUTIONS 93-12-08 16:01:04  
M 114 COMPLD  
;
```

COMMAND-CODE: RTRV-HDR (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:      ENEQ = not equipped
              IIAC = invalid aid
              ICNV = command not valid
              IICT = invalid ctag
              IDNV = data not valid
              IISP = invalid syntax or punctuation
              IITA = invalid tid
              INUP = unimplemented non-null parameter
              SARB = system resources are busy
              SCSN = invalid sequence
              SDNA = duplex unit not available
              SROF = requested operation failed
              SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 93-12-08 16:01:21
M 114 DENY
  IISP
;

```

REFERENCE

TA-NWT-000200, Issue 5, December 1990

COMMAND CODE: RTRV-PRMTR-T1

MESSAGE CATEGORY: PROVISIONING
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE PARAMETER T1

This command retrieves and displays the facility parameter values for priority, reference type, framing, and CRC that are stored in the system database.

INPUT FORMAT

```
RTRV-PRMTR-T1:[<tid>]:<aid>:<ctag>;
```

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

Example:

```
RTRV-PRMTR-T1::MRC-1-2:154;
```

This example, tagged as command 154, displays the facility parameters for span 2 of MRC-A.

RESPONSE FORMAT

NORMAL RESPONSE

If no facilities are assigned or equipped, the response is:

```
<sid> <date> <time>
M <ctag> COMPLD
;
```

If one or more facilities are assigned or equipped, the response is:

```
<sid> <date> <time>
M <ctag> COMPLD
[ "<aid>:,,,,,<priority>,<type>,<fmode>,<crcmode>" ] ...
"<aid>:,,,,,<priority>,<type>,<fmode>,<crcmode>" ...
;
```

priority:	1 thru 4	= priority of the reference, 1 is the highest priority
	<null>	= PSM

type:	GPS	= global positioning system reference
	LORAN	= LORAN reference
	CESIUM	= cesium reference
	NETWORK	= network reference
	<null>	= PSM

COMMAND-CODE: RTRV-PRMTR-T1 (Contd)

RESPONSE FORMAT (Contd)

crcmode: MRC only:
 NONCRC4 = does not use CRC4
 CRC4 = uses CRC4

fmode: MRC only:
 CAS = CAS framing
 CCS = CCS framing

Example:

```

TELECOMSOLUTIONS 93-12-08 15:04:13
M 154 COMPLD
"MRC-1-2,,,,,,,,,1,GPS,NONCRC4,,CCS"
;
```

ERROR RESPONSE

```

<sid> <date> <time>
M <ctag> DENY
<errcde>
;
```

errcde: ENEQ = not equipped
 IIAC = invalid aid
 ICNV = command not valid
 IICT = invalid ctag
 IDNV = data not valid
 IISP = invalid syntax or punctuation
 IITA = invalid tid
 INUP = unimplemented non-null parameter
 SARB = system resources are busy
 SCSN = invalid sequence
 SDNA = duplex unit not available
 SROF = requested operation failed
 SNVS = not in valid state

Example:

```

TELECOMSOLUTIONS 93-12-08 15:12:47
M 154 DENY
IISP
;
```

REFERENCE

AT&T 365-340-202, August, 1992

COMMAND CODE: RTRV-PM-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE PERFORMANCE MONITORING T1

This command retrieves and displays the current set of PM data for one or more equipment units or facilities. The PM data may be used to load or verify a database, to examine events that are not reported by automatic messages, or to evaluate the system after maintenance operations. Parameters are provided to display past PM data if the MIS card is configured to store such data. PM data is retrieved from the specified time period to the current time period.

INPUT FORMAT

RTRV-PM-T1:[<tid>]:<aid>:<ctag>::[<montype>],,,[tmper],
[mondatt],[montm];

aid:	MRC-1-x	= Multi-Reference Controller A (x = span 1 to 4 or ALL)
	MRC-2-x	= Multi-Reference Controller B (x = span 1 to 4 or ALL)
	PSM-x-y	= Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4)
montype:	<u>For PSM only:</u>	
	BPV	= bipolar violations
	CRC	= cyclic redundancy check errors
	OOF	= out of frame errors
	LOS	= loss of signal
	AIS	= alarm indication signal
	MTIE	= maximum time interval error has occurred
	MTIE1	= maximum time interval error at 1 second
	MTIE4	= maximum time interval error at 4 seconds
	MTIE16	= maximum time interval error at 16 seconds
	MTIE64	= maximum time interval error at 64 seconds
	MTIE128	= maximum time interval error at 128 seconds
	MTIE512	= maximum time interval error at 512 seconds
	MTIE900	= maximum time interval error at 900 seconds
	TVAR1	= time variance error at 1 second
	TVAR4	= time variance error at 4 seconds
	TVAR16	= time variance error at 16 seconds
	TVAR64	= time variance error at 64 seconds
	TVAR128	= time variance error at 128 seconds
	PHASE	= 1 minute average raw phase value as computed by the PSM
	SLIPS	= number of slips in a given time period
	TOTALSLIP	= number of slips in a specified 24-hour time period

COMMAND-CODE: RTRV-PM-T1 (Contd)

INPUT FORMAT (Contd)

For MRC only:

BPV = bipolar violations
 CRC = cyclic redundancy check errors
 OOF = out of frame errors
 LOS = loss of signal
 AIS = alarm indication signal
 FREQ = pair-wise frequency error threshold being exceeded
 ALL = all performance monitoring data

mondatt:

For PSM only:

mm-dd = where mm = month, dd = day (current or previous day only)

For MRC only:

<null> = current time period of the current day

montm:

For PSM only:

hh-0 = where hh = 0, 1, ..., 23 (hour of the day)
 hh-15 = 15 minutes past the hour (hh)
 hh-30 = 30 minutes past the hour (hh)
 hh-45 = 45 minutes past the hour (hh)

For MRC only:

<null> = current time period of current day

For PSM only:

1-DAY = past 24 hour period; applies to TOTALSLIP only
 15-min = specified 15 minute period beginning at the time specified in the montm field

For MRC only:

15-min = current 15-minute time period of the current day
 <null> = current time period of the current day

Note: Counts for each 15-minute time period from the specified period to the current are retrieved. If the date is not specified, the time period is assumed to be in the last 24 hours. If the previous day is specified, only starting times between midnight (00:00) and 24 hours ago are accepted. If the current day is specified, only starting times between midnight (00:00) and the current time are accepted. In all accepted cases, all data to the current time are retrieved.

COMMAND-CODE: RTRV-PM-T1 (Contd)

INPUT FORMAT (Contd)

Examples:

Note: For all the following examples, assume the current date and time are 06-23 and 19:37, or June 23 and 7:37 pm. The current time period is 19:30, the time period between 7:30 pm and 7:45 pm.

```
RTRV-PM-T1::MRC-1-4:141::OOF,,,,,18-45;
```

The above example, tagged as command 141, retrieves and displays the out-of-frame performance monitoring data for span 4 on MRC-A. Data is displayed for each 15-minute count since 6:45 pm today.

```
RTRV-PM-T1::MRC-1-4:173::OOF,,,,,06-22,18-45;
```

The above example, tagged as command 173, is invalid. The time is more than 24 hours ago.

```
RTRV-PM-T1::MRC-1-4:174::OOF,,,,,21-45;
```

The above example, tagged as command 174, retrieves and displays the out-of-frame performance monitoring data for span 4 on MRC-A. Data is displayed for each 15-minute count since 9:45 pm yesterday, which is the only 21-45 in the last 24-hour period. The result is the same if yesterday's date is specified.

```
RTRV-PM-T1::MRC-1-4:175::OOF,,,,,06-23,21-45;
```

The above example, tagged as command 175, is invalid. 9:45 pm today has not arrived yet.

```
RTRV-PM-T1::PSM-1-4:176::TOTALSLIP,,,,,1-DAY::;
```

The above example, tagged as command 176, retrieves and displays the total number of slips for span 4 on PSM-A for the past 24-hour period.

COMMAND-CODE: RTRV-PM-T1 (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
[ "<aid>:<montype>,<monval>,<valdty>,,,,15-MIN,<montm>," ] ...
  "<aid>:<montype>,<monval>,<valdty>,,,,15-MIN,<montm>,"
;

```

```

    valdty:      COMPLD  = data was accumulated over the entire 15-minute time period
                  PRTL   = data was accumulated over part of the 15-minute time period
                  NA     = data not available

```

Example:

```

TELECOMSOLUTIONS2 94-06-23 19:37:58
M 141 COMPLD
"MRC-1-4:OOF,1,COMPLD,,,,15-MIN,18-45"
"MRC-1-4:OOF,3,COMPLD,,,,15-MIN,19-00"
"MRC-1-4:OOF,0,COMPLD,,,,15-MIN,19-15"
"MRC-1-4:OOF,1,PRTL,,,,15-MIN,19-30"
;

```

This example, the response to command 141, shows that MRC A, span 4, had 1 out-of-frame (OOF) error in the 15-minute period ending at 6:45 pm, 3 OOFs in the period ending 7 pm, none in the next time period, and 1 in the current 15-minute time period. The current time period is not complete, and is labeled "partial".

COMMAND-CODE: RTRV-PM-T1 (Contd)

RESPONSE FORMAT (Contd)

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

```

errcde:  ENEQ = not equipped
         IIAC = invalid aid
         ICNV = command not valid
         IICT = invalid ctag
         IDNV = data not valid
         IISP = invalid syntax or punctuation
         IITA = invalid tid
         INUP = unimplemented non-null parameter
         SARB = system resources are busy
         SCSN = invalid sequence
         SDNA = duplex unit not available
         SROF = requested operation failed
         SNVS = not in valid state

```

Example:

```

    TELECOMSOLUTIONS 94-01-10 15:12:13
M 141 DENY
  IISP
;

```

REFERENCE

TR-NWT-000833 Issue 5, Revision 1, April 1993

COMMAND CODE: RTRV-TH-T1

MESSAGE CATEGORY: SURVEILLANCE
TYPE: INPUT/RESPONSE

PURPOSE

RETRIEVE THRESHOLD T1

This command retrieves and displays the threshold level for a monitored parameter. When the parameter exceeds the threshold value, an automatic message is sent. The threshold may apply to one or more units.

INPUT FORMAT

```
RTRV-TH-T1:[<tid>]:<aid>:<ctag>[::<montype>];
```

aid: MRC-1-x = Multi-Reference Controller A (x = span 1 to 4 or ALL)
 MRC-2-x = Multi-Reference Controller B (x = span 1 to 4 or ALL)
 PSM-x-y = Precision Sync Monitor card (x = 1 to 9, y = span 1 to 4 or ALL)

montype: AIS = alarm indication signal
 BPV = bipolar violations
 CRC = cyclic redundancy check errors
 OOF = out of frame errors
 LOS = loss of signal

For PSM only:

MTIE1 = maximum time interval error at 1 second
MTIE4 = maximum time interval error at 4 seconds
MTIE16 = maximum time interval error at 16 seconds
MTIE64 = maximum time interval error at 64 seconds
MTIE128 = maximum time interval error at 128 seconds
MTIE512 = maximum time interval error at 512 seconds
MTIE900 = maximum time interval error at 900 seconds
TVAR1 = time variance error at 1 second
TVAR4 = time variance error at 4 seconds
TVAR16 = time variance error at 16 seconds
TVAR64 = time variance error at 64 seconds
TVAR128 = time variance error at 128 seconds
<null> = all the above montypes

Example:

```
RTRV-TH-T1::PSM-1-1:136::MTIE1;
```

This example, tagged as command 136, retrieves and displays the MTIE errors at the 1-second threshold for span 1 on PSM-1.

COMMAND-CODE: RTRV-TH-T1 (Contd)

RESPONSE FORMAT

NORMAL RESPONSE

```

    <sid> <date> <time>
M <ctag> COMPLD
[ "<aid>:<montype>,,,<thlev>" ] ...
  "<aid>:<montype>,,,<thlev>"
;

```

thlev: threshold level in decimal numerals

Example:

```

TELECOMSOLUTIONS2 94-01-10 14:44:38
M 136 COMPLD
  "MRC-1-1:CRC,,,16"
  "MRC-1-2:CRC,,,16"
  "MRC-1-3:CRC,,,16"
  "MRC-1-4:CRC,,,16"
;

```

ERROR RESPONSE

```

    <sid> <date> <time>
M <ctag> DENY
  <errcde>
;

```

errcde: ENEQ = not equipped
 IIAC = invalid aid
 ICNV = command not valid
 ICT = invalid ctag
 IDNV = data not valid
 IISP = invalid syntax or punctuation
 IITA = invalid tid
 INUP = unimplemented non-null parameter
 SARB = system resources are busy
 SCSN = invalid sequence
 SDNA = duplex unit not available
 SROF = requested operation failed
 SNVS = not in valid state

COMMAND-CODE: RETRIEVE THRESHOLD T1 (Contd)

RESPONSE FORMAT (Contd)

Example:

```
TELECOMSOLUTIONS 93-12-08 16:45:03
M 136 DENY
IISP
;
```

REFERENCE

TR-NWT-000833 Issue 5, Revision 1, April 1993