



GPS In-Line Lightning Arrestor

KEY FEATURES

- Industry's best RF Performance
- Low throughput energy
- Multi-strike capability


Lightning damages communications sites all over the world every day. Lightning does not have to strike the antenna to significantly damage the antenna or the GPS receiver. GPS antenna damage is usually due to the effects of a lightning strike on a nearby structure, not the result of a direct lightning strike. Since lightning strikes may induce damaging voltages in the antenna system when striking nearby objects, attempt to locate the antenna at least 15 meters away from lightning rods, towers, or structures that attract lightning. Also, locate the GPS antenna lower than any structures that will attract a strike.

Lightning arrestors will protect your systems from lightning damage. In-line lightning arrestors are mounted on a low impedance ground between the antenna and the point where the cable enters the building. This is a

commonly used configuration since there is often a good earth ground nearby to connect to. The lightning arrestors require no additional power or wiring except the ground lead.

If the cable between this lightning arrestor and the GPS receiver is longer than four meters, consider placing a second lightning arrestor within four meters of the GPS receiver. The second arrestor reduces any lightning-induced voltages in the cable to the receiver.

These units use separate RF (DC-Blocked) and dc paths through the protector. This design results in low throughput voltage and energy.

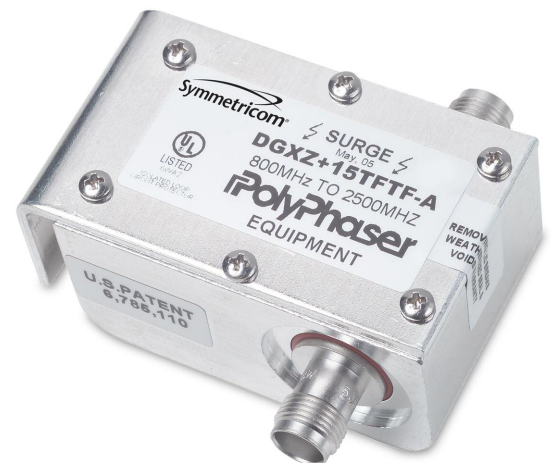

GPS In-line Lightning Arrestor

GPS In-line Lightning Arrestor Specifications

DATA AND RF SPECIFICATIONS

- Frequency range: 800 to 2500MHz
- Insertion loss: ≥ 0.1 dB over frequency range
- Voltage standing wave ratio: 1.1 : 1

ELECTRICAL SPECIFICATIONS

- Current: 4Adc
- Power: 2.25 Watts RMS average
- Turn on: +16.5V dc
- Turn on time: 4ns for 2 kV / ns
- Operating voltage: +15V
- Usage current: ≥ 4.0 mA continuous
- Unit impedance: 50 Ω
- Polarity: +

INTERFACE SPECIFICATIONS

- Mounting: Bulkhead or flange
- Protected side connector: TNC Female 50 Ω
- Surge side connector: TNC Female 50 Ω

PRODUCT INCLUDES

- Lightning arrester, 25' or 50' Belden 9104 cable with TNC terminations



Lightning Arrester Kit (shown with 25' cable)

ENVIRONMENTAL SPECIFICATIONS


- Relative humidity: to 95%
- Temperature range: -50°C to +85°C storage/operating
- Weatherization: Meets 60529 IPC67
Meets Bellcore #TA-NWT-000487
Procedure 4.11, wind driven (120 mph)
rain intrusion test
- Maximum surge: 20kA IEC 61000-4-5
8 / 20 microsecond waveform
- Throughput energy: $\geq 500\mu\text{J}$ @ 8/20 μs Waveform

OPTIONS

- GPS Lightning arrester kit w/25 ft. (7.5 m) cable
- GPS Lightning arrester kit w/50 ft. (15 m) cable

Part No.

150-709
150-710

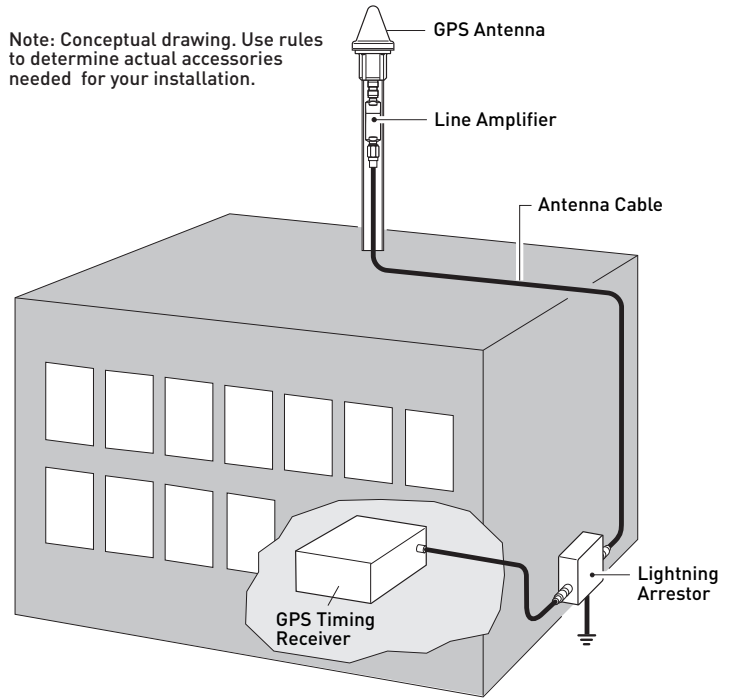

Common GPS Antenna Equipment Placement



SYMMETRICOM, INC.
2300 Orchard Parkway
San Jose, California
95131-1017
tel: 408.433.0910
fax: 408.428.7896
info@symmetricom.com
www.symmetricom.com