

# RTD Probes

DIGITAL THERMOMETERS AND PROBES

**General Purpose/Immersion Probe:** For measuring gases, liquids, soft materials or small-area surfaces, 316 SS sheath. TPR coil cord 1½ ft (ext. 5 ft).


Range: -200 °C to +600 °C

Time constant: 10 second

Accuracy: ± (0.3 °C + 0.5 %)

## ORDERING INFORMATION

MODEL 8693\*

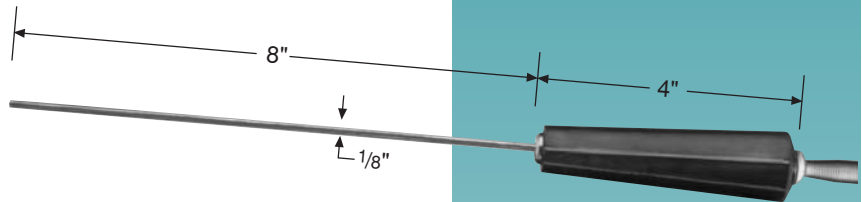

**Surface Probe:** For measurements on hot or cold flat surfaces. 304 SS sheath. TPR coil cord 1½ ft (ext. 5 ft)


Range: -50 °C to +260 °C

Time constant: 3 second

Accuracy: (± 0.3 °C + 0.5 %)

## ORDERING INFORMATION

MODEL 8695\*

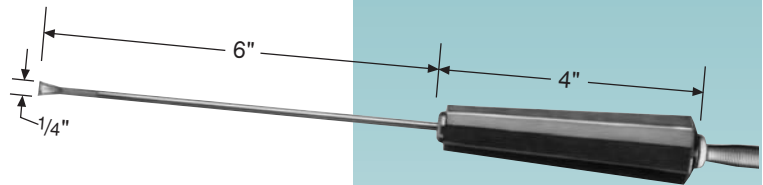

**Air/Gas Probe:** For measuring air and other gaseous atmospheres. 304 sheath. TPR coil cord 1½ ft. (ext. 5 ft)


Range: -50 °C to +260 °C

Time constant: 5 second

Accuracy: (± 0.3 °C + 0.5 %)

## ORDERING INFORMATION

MODEL 8696\*

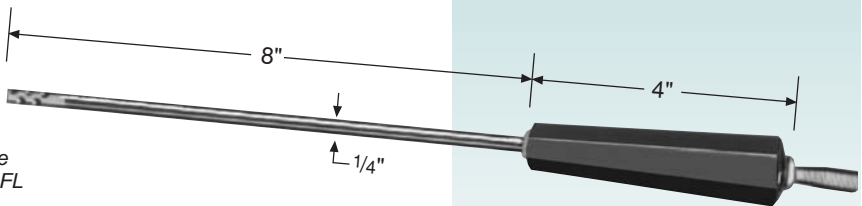

NOTE: All TEGAM 100 Ω Platinum RTD probes have 4-wire RTDs and are supplied with a Switchcraft TA4FL (or equivalent) compatible connector.

\* Pin 2 - sense (868/9)

Prices and specifications subject to change without notice.

**TEGAM**®

YOUR GLOBAL SOURCE FOR TEST  
AND MEASUREMENT SOLUTIONS