

Model SR1030

RESISTANCE STANDARDS & INSTRUMENTS

- Part-per-million transfers from 100 m Ω to 1 M Ω
- Thermally isolated by oil for maximum short-term thermal stability
- Excellent long-term stability; ± 20 ppm for 6 months
- Accuracy calibrated to ± 10 ppm
- Seven decades of resistance transfer- 1, 10, 100, 1 k, 10 k and 100 k Ω /step
- 100:1 resistance transfers using series, parallel, series/parallel connection
- Calibration readings traceable to the NIST are provided

Extremely Accurate and Stable

The Model SR1030 provides the part-per-million (ppm) resistance transfer accuracies and the long-term stabilities you need in today's modern metrology and calibration laboratories.

The SR1030 Resistance Transfer Standards are extremely accurate, stable resistance standards that are used on the bench and are light enough to carry with you to remote calibration, repair, production or R&D sites. The SR1030 consists of six transfer standards in decades from 1 Ω to 100 k Ω per step. Each decade standard consists of 12 nominally equal resistors matched initially to within 10 ppm. In addition, each decade standard produces three decade values – 10 resistors in series (10R), 10 resistors in parallel (R/10), and nine of the 10 resistors in series/parallel (R). By making a 1:1 comparison with the tenth resistor, you can resolve a series-parallel value to better than 1 ppm.

Resistance Transfer Standard System

Oil Immersion Provides Thermal Isolation


All standards, except the 100 k Ω /step standard, are immersed in a mineral oil bath. Oil immersion provides thermal isolation to minimize the effects of ambient temperature variations. This means maximum short-term thermal stability for the standards. The SR1030 also exhibits superior long-term stability (± 20 ppm of nominal for six months; ± 35 ppm for two years; ± 50 ppm typical for five years). This gives you longer mean time between calibrations, increasing your calibration throughput.

As an added benefit, the oil speeds the dissipation of heat created in the resistors

during calibration. This heat dissipation further contributes to the stability of the standards.

Gaskets seal the SR1030 to keep the work surface and measuring contacts clean. The gaskets also minimize oil aging and contamination to lengthen the time between oil changes.

Since the 100 k Ω standard can be measured at much lower bridge power than the lower value standards, it is not necessary to immerse the standard in oil. However, this standard still benefits from the thermal lagging effects because it is sealed in a chamber using insulating materials that provide approximately the same temperature lagging effects as oil.

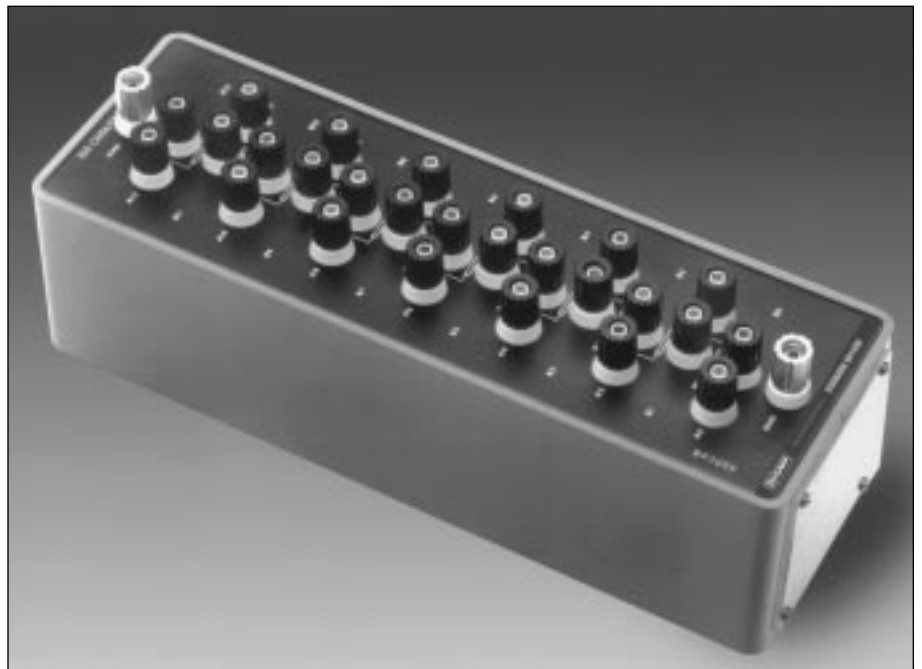

TEGAM

THE GLOBAL SOURCE FOR PROVEN TEST
AND MEASUREMENT TECHNOLOGY.

Model SR1030

RESISTANCE TRANSFER STANDARD

Refining Resistance Technology

TEGAM's experience in design and manufacture of resistance standards has made TEGAM's standards highly respected throughout government and industry. The SR1030 incorporates all the features of the SR1010 Resistance Transfer Standards with the many benefits of a sealed oil bath.

Ideal as a Multi-Value Standard Resistor or Reference Voltage Divider

The high accuracy and precision of the individual resistors make the SR1030 ideal for use as a multi-value standard resistor or reference voltage divider. The superior stability of the SR1030 makes it particularly suitable for calibrating 6-1/2, 7-1/2 and 8-1/2 digit digital multimeters.

Certified Traceable to the NIST

The SR1030 Resistance Transfer Standard System is certified traceable to the National Institute of Standards and Technology. You can use the SR1030 to transfer this traceability to your resistance standards and measuring equipment. Certified calibration data is supplied with every standard.

Specifications

Nominal Values (per step)

1, 10, 100, 1 k, 10 k and 100 k Ω

Transfer Accuracy

100:1 $\pm(1 \text{ ppm} + 0.1 \mu\Omega)$ at parallel value, using SB103, PC101, and SPC102 as necessary

10:1 $\pm(1 \text{ ppm} + 0.1 \mu\Omega)$ at series or parallel value, using SB103, PC101, and SPC102 as necessary

Initial Adjustment

± 20 ppm, matched within 10 ppm

Initial Calibration Certificate

± 10 ppm, NIST traceable

Calibration Conditions

$23 \pm 1^\circ\text{C}$, low-power, four-terminal measurement, initial calibration readings are provided

Long-Term Resistance Stability

± 20 ppm of nominal for 6 months
 ± 35 ppm for 2 years
 ± 50 ppm for 5 years, typical

Temperature Coefficient

1 Ω ± 15 ppm/ $^\circ\text{C}$, matched within 5 ppm/ $^\circ\text{C}$

10 Ω ± 1 ppm/ $^\circ\text{C}$

100 Ω to 100 k Ω ± 5 ppm/ $^\circ\text{C}$, matched within 3 ppm/ $^\circ\text{C}$

Power Coefficient (typical)

1 Ω ± 0.3 ppm/mW/resistor

10 Ω ± 0.02 ppm/mW/resistor

100 Ω to 100 k Ω ± 0.1 ppm/mW/resistor

Maximum Power Rating

Single Step 1W/step
 10 resistors 5W/distributed

Leakage Resistance

1 Ω to 10 k Ω $>10^{12} \Omega$ terminal to case
 100 k Ω $>10^{13} \Omega$ terminal to case

Breakdown Voltage

1500 volts peak to case

Oil Bath

Type Mineral oil, USP Light Penco, Sontex 85, white

Insulation

Resistance Typically $10^{14} \Omega$ cm
 Quantity Approximately 0.5 gallons

Dimensions (with oil)


Height 120 mm (4.7 in.)
 Width 117 mm (4.6 in.)
 Depth 335 mm (13.2 in.)
 Mass 6.35 kg (Weight 10 lb.)

Operating Environment

Temperature $22.8 \pm 3.3^\circ\text{C}$ ($73 \pm 6^\circ\text{F}$)
 Humidity 20 to 50% relative humidity

Safe Operating Environment

Temperature 0 to 50°C (32 to 126°F)
 Humidity 15 to 80% relative humidity

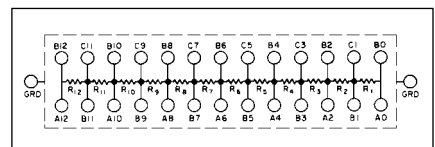

Maximum Current and Voltage Capabilities

SR1030 Resistance Value Per Step	One Resistor Alone	10 Resistors in Parallel (R/10)	10 Resistors in Series (R10)
	Maximum I, V	Maximum I, V	Maximum I, V
1 Ω	1.0 A, 1.0 V	7.07 A, 707 mV	707 mA, 7.07 V
10 Ω	316 mA, 3.16 V	2.23 A, 2.23 V	223 mA, 22.3 V
100 Ω	100 mA, 10 V	707 mA, 7.07 V	70.7 mA, 70.7 V
1 k Ω	31.6 mA, 31.6 V	223 mA, 22.3 V	22.3 mA, 233 V
10 k Ω	10 mA, 100 V	70.7 mA, 70.7 V	7.07 mA, 707 V
100 k Ω	3.16 mA, 316 V	22.3 mA, 223 V	1.5 mA, 1500 V*

* Based on the breakdown voltage of 1500 volts peak to case

OPTIONS AND ACCESSORIES

Model SB103 Shorting Bars

The Model SB103 Shorting Bars are used to connect any number of Model SR1030 Resistors in parallel or nine resistors in series/parallel arrangement. They may be used by themselves or in conjunction with the Model PC101 or SPC102 networks. The resistance that must be added to the value calculated from the individual resistor values is given in the accompanying table for two- and four-terminal measurements. See Combined Functional Specifications on page 4.

Resistance

End to end: approximately 100μΩ/bar

Maximum Current

10 A/bar

Dimensions (Each Bar)

Height	36 mm (1.4 in.)
Width	241 mm (9.5 in.)
Depth	20 mm (0.8 in.)
Mass	0.23 kg (Weight 8 oz.)

Model PC101 Parallel Compensation Network

The Model PC101 Parallel Compensation Network is used in addition to the Model SB103 Shorting Bars for the four-terminal parallel connection of 10 low-value resistors in the Model SR1030 Resistance Transfer Standard System.

Effective Resistance and Accuracy

Effect of connection resistances on four-terminal parallel value less than ±0.1 μΩ. See Combined Option Functional Specifications on page 4.

Resistor Matching

Matched to 0.05%

Maximum Current

2.0 A

Breakdown Voltage

1500 volts peak-to-case

Dimensions

Height	25 mm (1 in.)
Width	305 mm (12 in.)
Depth	81 mm (3.2 in.)
Mass	0.45 kg (Weight 1 lb.)

Model SPC102 Series/Parallel Compensation Network

The Model SPC102 Series/Parallel Compensation Network is used in addition to the Model SB103 Shorting Bars for the four-terminal series/parallel connection of nine low-value resistors in the Model SR1030 Resistance Transfer Standard System.

Effective Resistance and Accuracy

Effect of connection resistances on four-terminal series/parallel values less than ±0.1 μΩ. See Combined Option Functional Specifications on page 4.

Resistor Matching

Matched to 0.05%

Maximum Current




2.0 A

Breakdown Voltage

1500 volts peak-to-case

Dimensions

Height	25 mm (1 in.)
Width	305 mm (12 in.)
Depth	81 mm (3.2 in.)
Mass	0.45 kg (Weight 1 lb.)

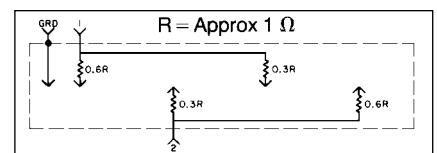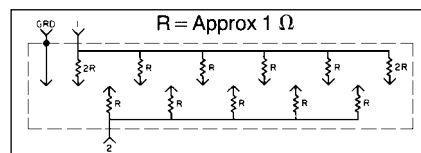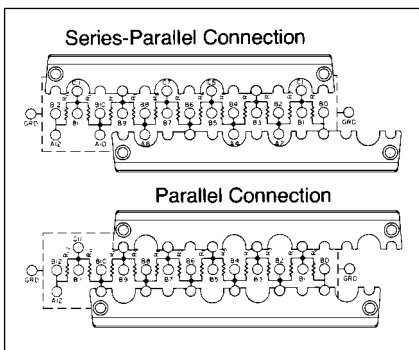

Model SR1030

RESISTANCE TRANSFER STANDARD

OPTIONS AND ACCESSORIES CONTINUED

Combined Option Functional Specifications

Resistor Grouping	Ten Resistors in Parallel	Nine Resistors in Series/Parallel	Ten Resistors in Series
Nominal Value (Relative to Individual Resistor Value R)	0.1R	R	10R
Four-Terminal Measurement	Resistance Added to Value Calculated from Individual Resistor Values (Value and Tolerance in Microhms)		
With SB103 and PC101 or SPC102	0 ±0.1 μΩ	0 ±1 μΩ	–
With SB103 Alone	50 ±10 μΩ	200 ±40 μΩ	–
With No Accessories	–	–	0 ±10 μΩ
Two-Terminal Measurement			
With SB103	150 ±30 μΩ	300 ±60 μΩ	–
With No Accessories	–	–	300 ±60 μΩ

Order Information

SR1030 Resistance Transfer Standard System: **Part No.**

1 Ω Resistance Transfer Standard	31030
10 Ω Resistance Transfer Standard	31031
100 Ω Resistance Transfer Standard	31032
1 kΩ Resistance Transfer Standard	31033
10 kΩ Resistance Transfer Standard	31034
100 kΩ Resistance Transfer Standard	31035

Options:

SB103 Shorting Bars	30103
PC101 Parallel Compensation Network	08540
SPC102 Series/Parallel Compensation Network	08560

Calibration & Technical Services

For warranty and remedial repair, calibration services and spare parts, or for additional information on TEGAM sales and service offices around the world, contact us at **440-466-6100 (ph)** or **440-466-6110 (fx)**.



THE GLOBAL SOURCE FOR PROVEN TEST AND MEASUREMENT TECHNOLOGY.

TEN TEGAM WAY • GENEVA, OHIO 44041
440-466-6100 • FAX 440-466-6110
www.tegam.com • e-mail: sales@tegam.com