

HCTEK4321 Transit Case Instructions



071-2135-02

Tektronix

Copyright © Tektronix. All rights reserved. Licensed software products are owned by Tektronix or its subsidiaries or suppliers, and are protected by national copyright laws and international treaty provisions.

Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specifications and price change privileges reserved.

TEKTRONIX and TEK are registered trademarks of Tektronix, Inc.

Contacting Tektronix

Tektronix, Inc.
14200 SW Karl Braun Drive
P.O. Box 500
Beaverton, OR 97077
USA

For product information, sales, service, and technical support:

- In North America, call 1-800-833-9200.
- Worldwide, visit www.tektronix.com to find contacts in your area.

Warranty

Tektronix warrants that the product will be free from defects in materials and workmanship for a period of three (3) months from the date of original purchase from an authorized Tektronix distributor. If the product proves defective during this warranty period, Tektronix, at its option, either will repair the defective product without charge for parts and labor, or will provide a replacement in exchange for the defective product. Batteries are excluded from this warranty. Parts, modules and replacement products used by Tektronix for warranty work may be new or reconditioned to like new performance. All replaced parts, modules and products become the property of Tektronix.

In order to obtain service under this warranty, Customer must notify Tektronix of the defect before the expiration of the warranty period and make suitable arrangements for the performance of service. Customer shall be responsible for packaging and shipping the defective product to the service center designated by Tektronix, shipping charges prepaid, and with a copy of customer proof of purchase. Tektronix shall pay for the return of the product to Customer if the shipment is to a location within the country in which the Tektronix service center is located. Customer shall be responsible for paying all shipping charges, duties, taxes, and any other charges for products returned to any other locations.

This warranty shall not apply to any defect, failure or damage caused by improper use or improper or inadequate maintenance and care. Tektronix shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than Tektronix representatives to install, repair or service the product; b) to repair damage resulting from improper use or connection to incompatible equipment; c) to repair any damage or malfunction caused by the use of non-Tektronix supplies; or d) to service a product that has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty of servicing the product.

THIS WARRANTY IS GIVEN BY TEKTRONIX WITH RESPECT TO THE PRODUCT IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. TEKTRONIX AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. TEKTRONIX' RESPONSIBILITY TO REPAIR OR REPLACE DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THIS WARRANTY. TEKTRONIX AND ITS VENDORS WILL NOT BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES IRRESPECTIVE OF WHETHER TEKTRONIX OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

[W14 – 15AUG04]

HCTEK4321 Transit Case

The HCTEK4321 is a ruggedized transit case specifically designed to provide travel and storage protection for many products. The case protects instruments from shock, vibration, and moisture, and provides room for associated accessories, such as probes, adapters, and manuals. The case accommodates the following product series:

- TDS200
- TDS1000, TDS1000B
- DPO2000, MSO2000, TDS2000, TDS2000B, TPS2000
- DPO3000, TDS3000, TDS3000B, TDS3000C
- DPO4000, MSO4000

Other features include an air pressure equalization control valve for use during air transport and security rings for use with locks (locks not included).

The HCTEK4321 consists of a heavy duty outer shell and an inner layer of foam. This inner layer has three removable rings of foam. The inner ring also includes two removable side foam pieces.

To use the HCTEK4321, refer to the relevant figures and do the following:

1. Open the case by unsnapping the four latches.
2. Remove the relevant foam inserts from the case, as described in the next table.
3. Place the oscilloscope in the appropriate soft case, as described in the next table. The soft case is a required component of this system, and must be purchased separately.

Soft case	Oscilloscope	Installation procedure
AC220	TDS200	Do not remove any foam insert. See Figure 1 (B).
AC2100	TDS1000, TDS1000B, TDS2000, TDS2000B	Remove the side foam inserts from the inner foam ring. See Figure 2 (A).
	TPS2000	Remove the inner ring of foam inserts. See Figure 2 (B).
ACD2000	DPO2000, MSO2000	Remove the two inner foam inserts. See Figure 2 (C).
AC3000	TDS3000, TDS3000B, TDS3000C	Remove the two inner foam inserts. See Figure 1 (C).
ACD4000	DPO3000	Leave the foam inserts in the soft case and remove all foam inserts from the transit case. See Figure 3 (B).
	DPO4000, MSO4000	Remove all foam inserts. See Figure 3 (A).

4. Place the relevant soft case and oscilloscope in the HCTEK4321 transit case.
5. Close the case and snap the four latches closed. See Figure 1 (A).
6. To secure the case, fasten a lock through the security rings.
7. If the instrument is to be transported via aircraft, open the air pressure control valve to allow for pressure equalization.

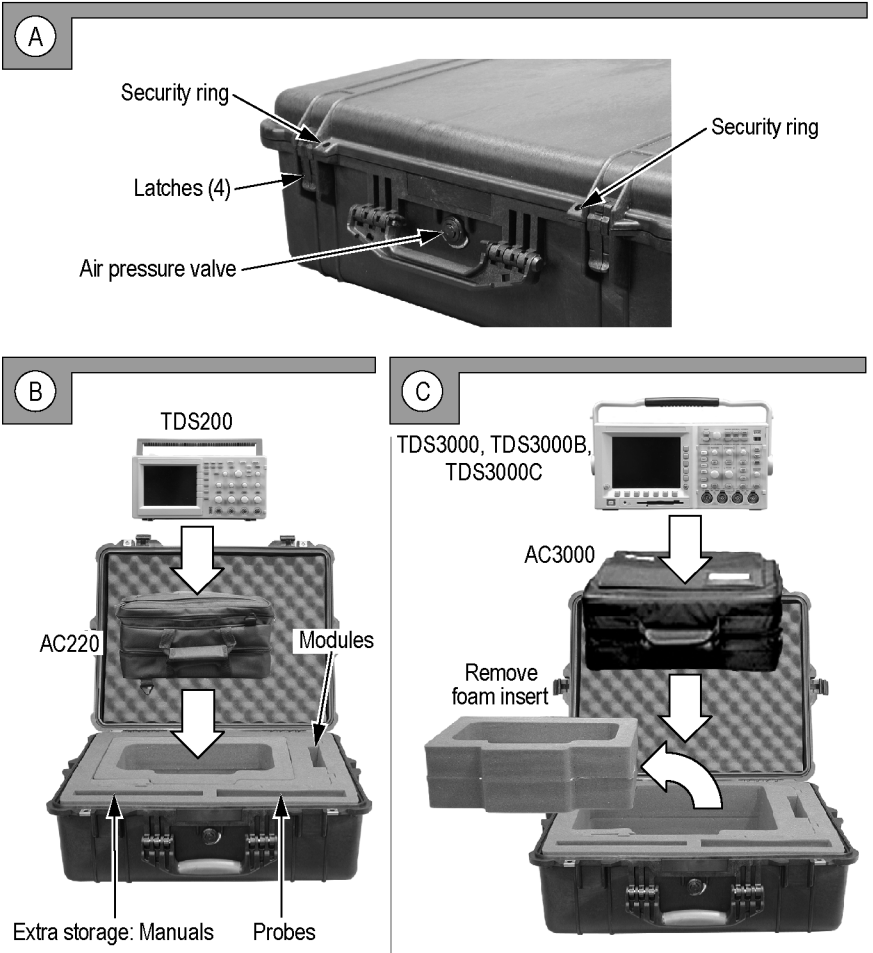


Figure 1: Transit case description; TDS200, TDS3000, TDS3000B, and TDS3000C

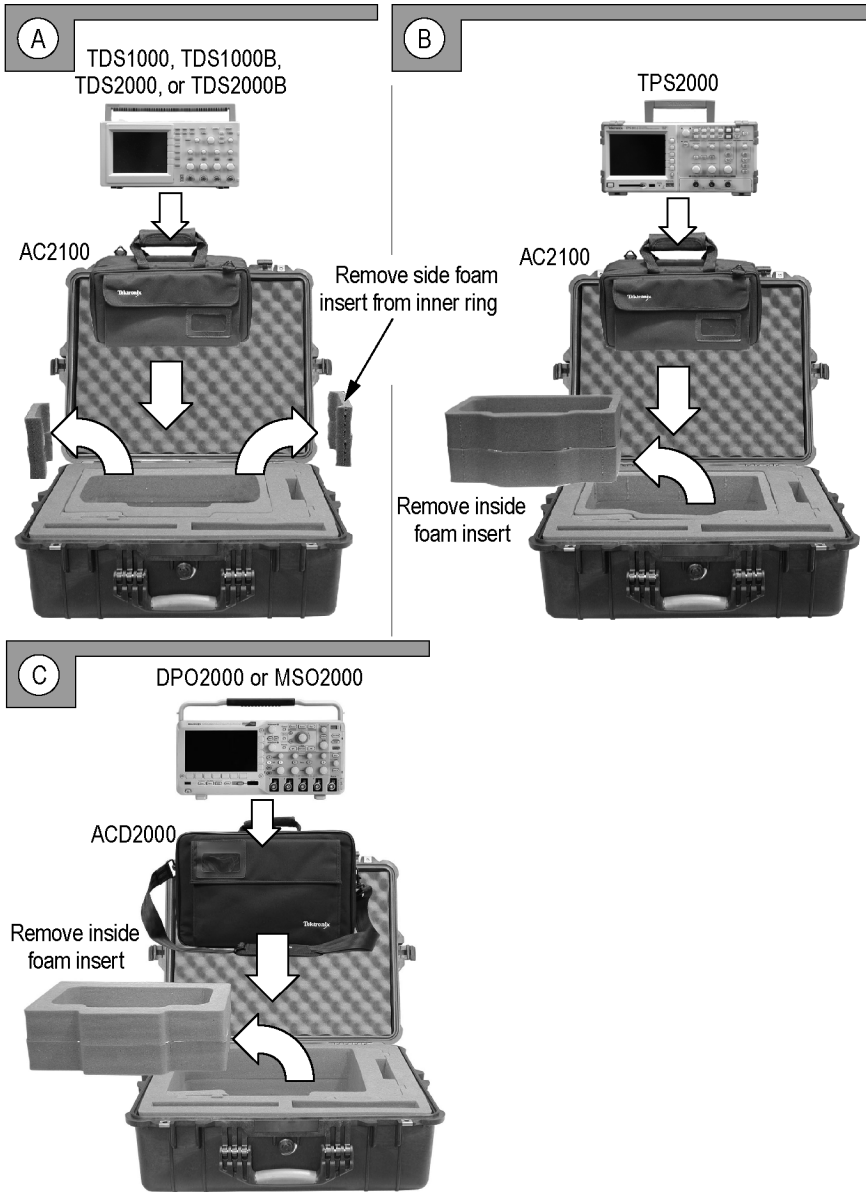


Figure 2: Transit case description; TDS1000, TDS1000B, TDS2000, TDS2000B, TPS2000, DPO2000, and MSO2000

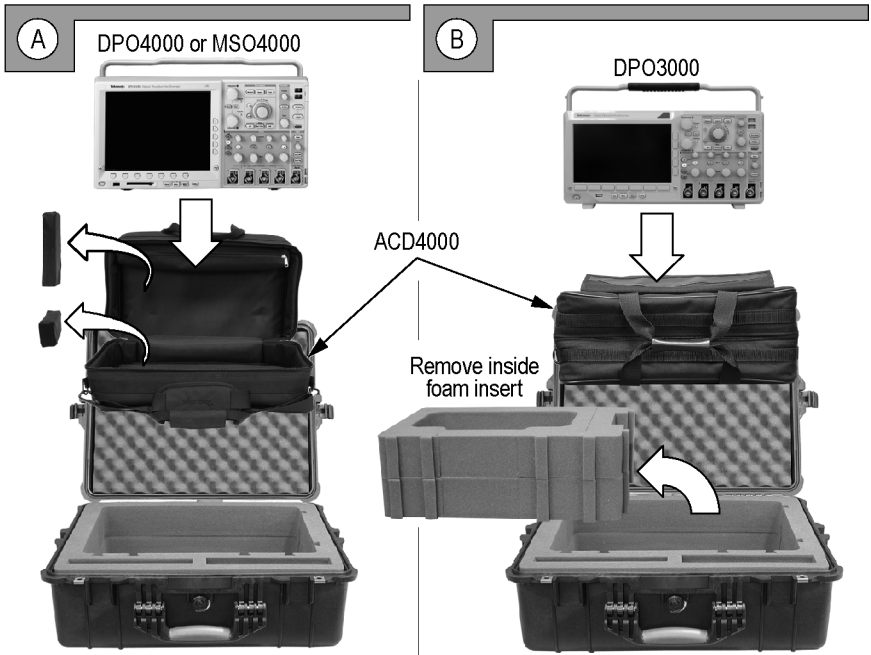


Figure 3: Transit case description; DPO3000, DPO4000, and MSO4000

Specifications

Material/Color: Ultra-High Impact Polypropylene/Black, Polyurethane foam lining

Shipping Weight 17.0 lbs. (7.71 kg)

Dimensions	Length	Width	Height
Outside	23.25 inches (59.06 cm)	20.75 inches (52.71 cm)	9.0 inches (22.86 cm)
Inside	22.0 inches (55.88 cm)	17.0 inches (43.18 cm)	8.0 inches (20.32 cm)