


Overview

The EA014 Torque Calibration Adapter connects to the transducer using a 9-way Female D-Type connector (top connector).

The 3000 Series connects to the adapter box using a 9-way Male D-Type connector (side connector).

Simply connect these devices together using the supplied serial connection leads.

Connection Diagram

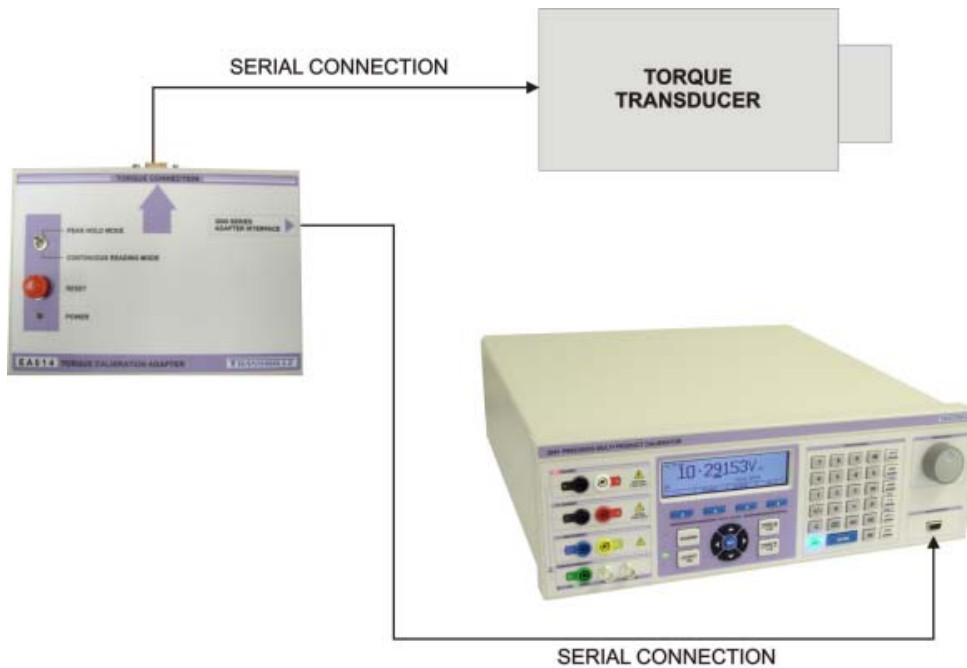

Adapter Controls


TORQUE TRANSDUCER CONNECTION

PEAK HOLD / CONTINUOUS READING MODE SELECTION

PEAK HOLD RESET

POWER INDICATOR

3000 SERIES ADAPTER INTERFACE CONNECTION

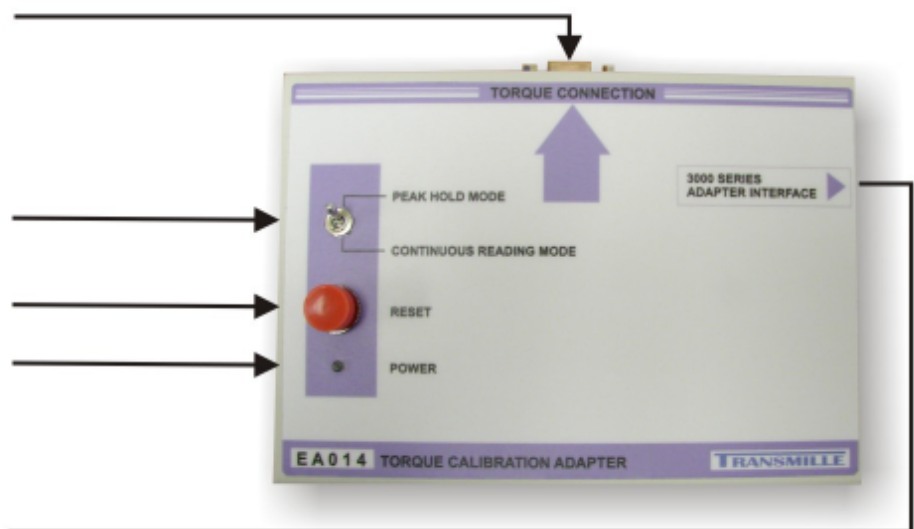

Once connected, the power LED on the EA014 adapter will illuminate.

This adapter is now ready for use using the ProCal calibration software (operation detailed separately)