


PM100 and PM300 Printer and RS232 Interface

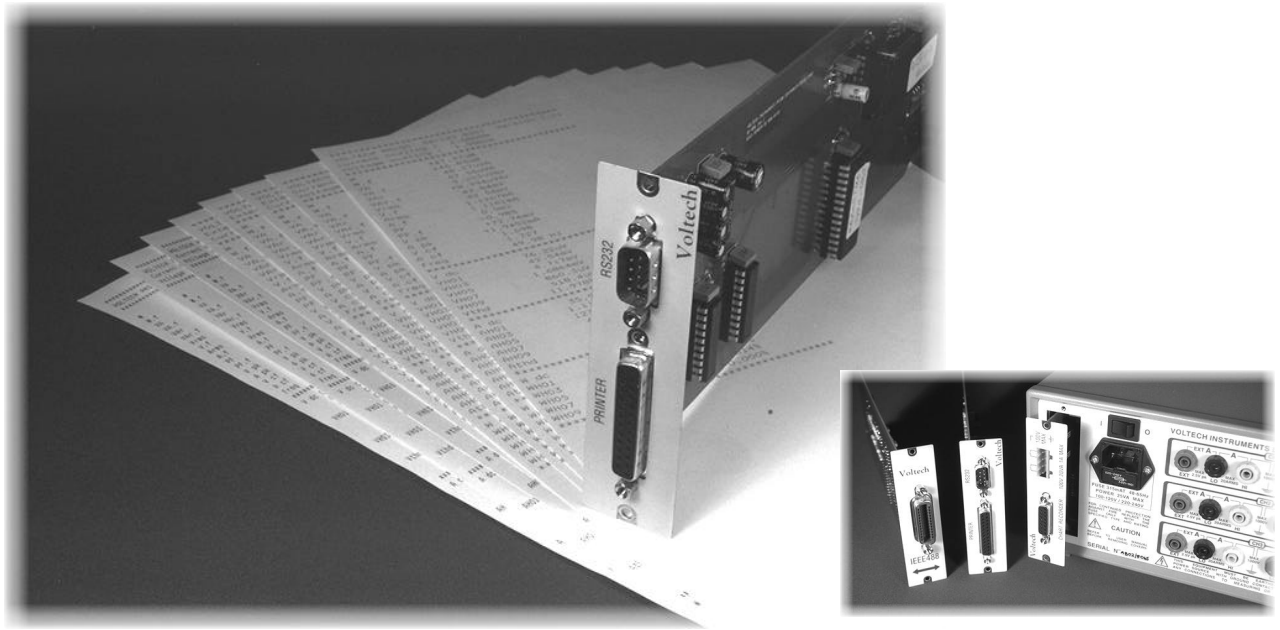

RS232

- ◆ Full remote control of the analyzer using the IEEE488.2 protocol.
- ◆ Connections on a male 9-way 'D' - type connector.
- ◆ Configurable as a printer output for serial printers.
- ◆ Baud rates selectable via the front panel, stored during power off.
1200, 2400, 4800, 9600, and 19200.

Parallel Printer

- ◆ Output of ASCII data to most printers with a centronics type (parallel) interface.
- ◆ Standard computer type 25-way 'D' type connector.
- ◆ Prints user selected numeric information in an 80 column format.