# THE Venom Viper


PLEASE READ THE WEBLEY RAIDER OWNER'S MANUAL, SUPPLIED WITH THIS LEAFLET BEFORE USING YOUR NEW AIR GUN.

WEBLEY VENOM



### CUSTOM SHOP

Frankiey Industrial Park, Tay Road, Rubery, Rednal, Birmingham, B45 0PA, England. TELEPHONE: 0121 453 1864. FAX: 0121 457 7846.

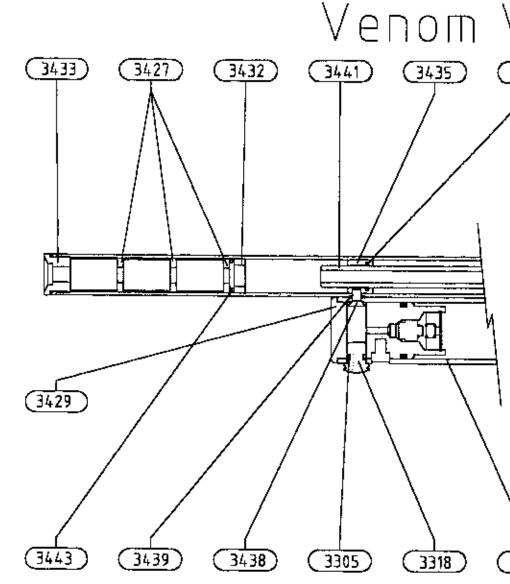

			Ę		
342 342	3439	3438		3305	3318
PART NO	DESCRIPTION  OUT OF PRINCIPALIS	<u>.</u> .	OTY	PART NO	DESCRIPTION
3305	FILLER PLUG O RING		+ 1	3435	BARREL STEADY
3427	FILLER PLUG BLACK BAFFLE		1	3436	BARREL SHROUD
3429	ENO PLUG FRONT		1	3438 3439	SILENCER FIXING SCREW SILENCER SEATING WASHER
3430	VALVE CAP		+ ;-	3440	BARREL SLEEVE 2 SHOT
3/3				2775	PARIACE SELETE 2 SHOT

3441

3442

3443

1

1

BARREL .22

BARREL O RING

BARREL STEADY O RING

3431


3432

3433

**VALVE HOUSING** 

BAFFLE SPACER

SILENCER END CAP

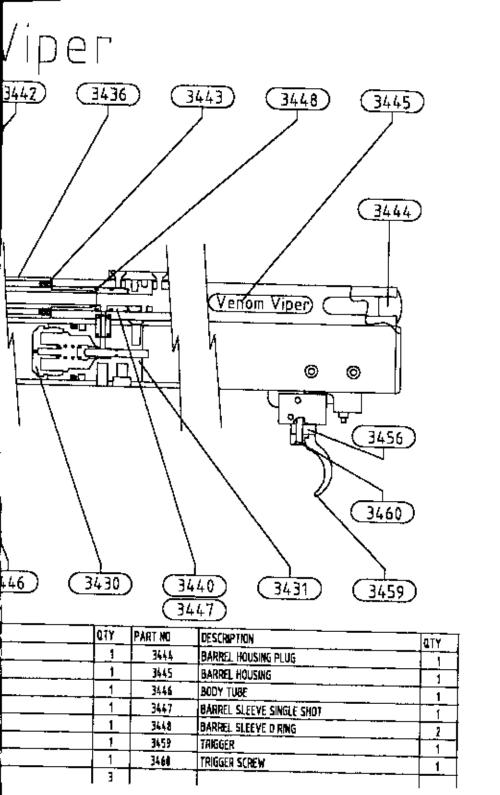

## <u>THE VENOM VIPER AIR</u> RIFLE

Based on the Webley Raider precharged air rifle, the Venom Viper is a fully customised sporter developed specifically for the hunter.

The Viper's specification includes:

- Lothar Walther choked barrel.
- Built in silencer/barrel shroud.
- 3 2 stage adjustable custom trigger.
- 4. Single shot and 2 shot magazine versions available.
- .22 calibre.
- Ambidextrous walnut and beech stocks available.
- A quick-fill charging system is fitted as standard.
- 8. Approx. 80 shots from 1 charge.
- 9. Can be charged using a Webley Pump.
- 10. 12 month Guarantee.

WEIGHT(no sight fitted): 6.2 lbs (2.8kgs)

BARREL LENGTH: 14 ins. (35.5cm)

OVERALL LENGTH: 37.5ins. (95.2cm)

MAX. SAFE WORKING PRESSURE 200 BAR.

### ! WARNING!

THE VENOM VIPER CONTAINS PRESSURISED AIR, DO NOT ATTEMPT TO DISMANTLE THE RIFLE WHILST IT IS PARTIALLY OR FULLY CHARGED, SERIOUS INJURY AND/OR DAMAGE MAY RESULT IF THIS INSTRUCTION IS IGNORED.

OUR POLICY IS ONE OF CONTINUAL IMPROVEMENT. WE RESERVE THE RIGHT TO MODIFY THE SPECIFICATION OF THIS PRODUCT WITHOUT PRIOR NOTICE

# This owner's manual was provided as a service to you by:



# www.airgunsofarizona.com

airguns\_az@yahoo.com

Phone: (480)461-1113

Fax: (480)461-3928