



# N4525 Printer Re-Pack Kit Instruction

1. Arrange (6) packaging parts onto the Bottom Tray as shown.


Note: Foam Blocks are identified as shown.

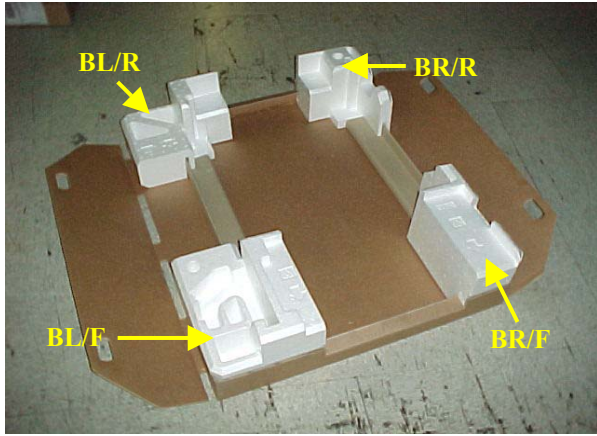


2. Remove MBF Assembly from Printer by pulling Up and Outward.

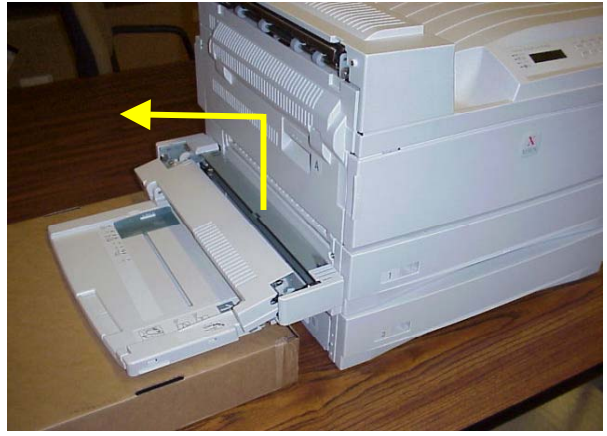

3. Remove Print Cartridge from Printer.  
(Note: Open Door "A" and Front Cover and follow the Instructions inside the Front Cover.)

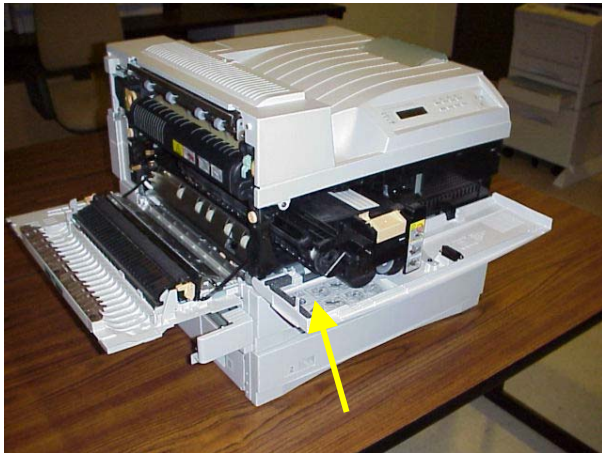

4. Locate the Upper and Lower Exit Rollers as shown below.

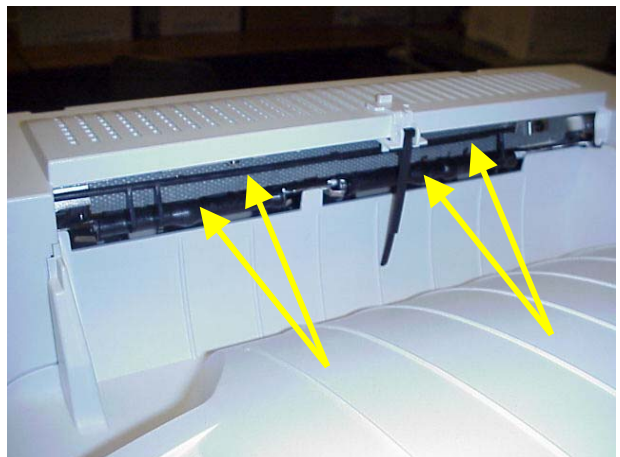

5. Insert the Cardboard Support between the Upper and Lower Exit Rollers and tape in place.



6. Tape shipping pad to Printer as shown.



# N4525 Printer Re-Pack Kit Instruction

7. Lift the Printer onto the foam blocks as shown. **CAUTION:** Two individuals are required to lift printer and position on the foam blocks.
8. Place the plastic bag over the Printer.




9. Box the Print Cartridge and place box onto the foam blocks.



10. Bag the MBF Assembly that was removed in Step #2 and place it into molded cavity as shown.



11. Place the (4) Top Corner Blocks as shown. **Note:** Foam Blocks have stamped identification.

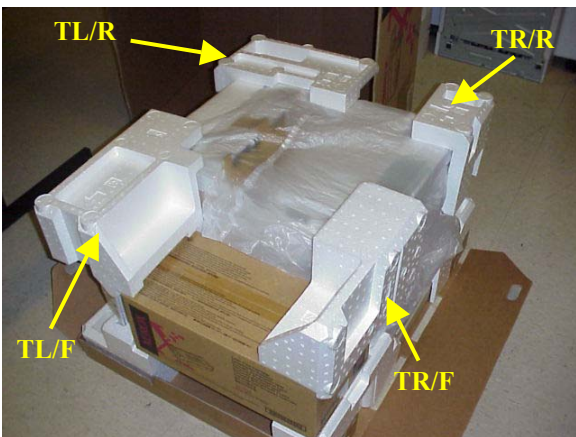

12. Place the Overpack Box over the packaged items and install the (4) plastic locking clips.

