

# General Specifications

## VJHF Isolator (Super Speed Response Type) (Isolated Single-output and Isolated Dual-output Types)



GS 77J01H11-01E


### General

The VJHF is a compact, plug-in, super speed isolator that converts DC voltage or DC current signals into isolated DC voltage or DC current signals.

The VJHF transmitter features:

- Ultra-fast 50 μs signal conversion for a 63% response;
- a wide choice of input and output signal ranges;
- four isolated ports (input, output-1, output-2, power supply and grounding) on a dual-output model;
- a withstanding voltage of 2000 V AC;
- a wide supply voltage range - supporting both 100 V and 200 V power lines of AC or DC; and
- close side-by-side mounting.

### Model and Suffix Codes

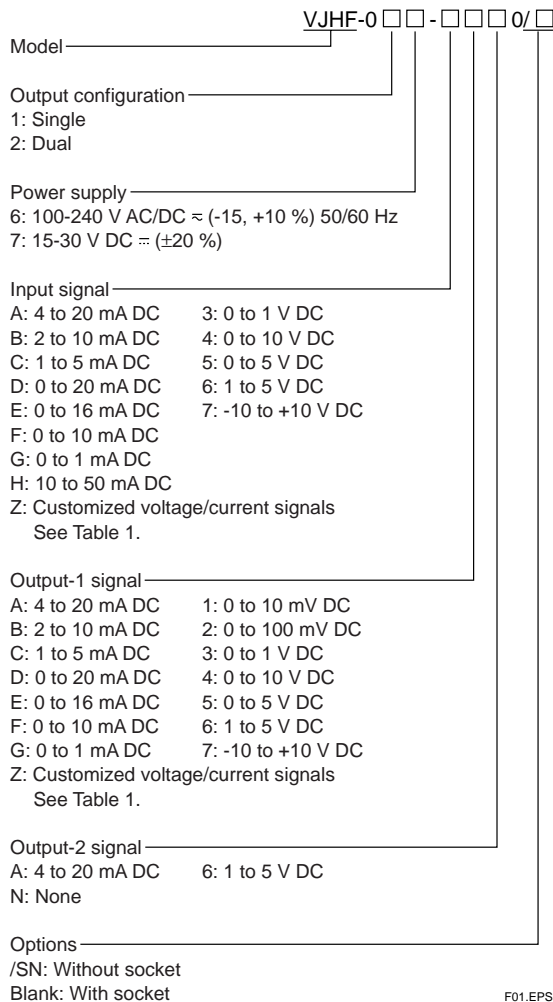

### Input/Output Specifications

Type of input: DC voltage or DC current signal

Input resistance:

- Voltage input: approx. 1 MΩ (or 100 kΩ when turned off)
- Current input: 250 Ω for 4 to 20 mA range  
500 Ω for 2 to 10 mA range  
1 kΩ for 1 to 5 mA range  
250 Ω for 0 to 20 mA range  
250 Ω for 0 to 16 mA range  
500 Ω for 0 to 10 mA range  
1 kΩ for 0 to 1 mA range  
100 Ω for 10 to 50 mA range

Allowable input level:

- Voltage input: Within ±30 V DC
- Current input: Any level that satisfies the following condition,  
 $(\text{Input current})^2 \times \text{Input resistance} \leq 0.5 \text{ W}$

Output signal: DC voltage or DC current

Allowable load resistance:

- Output 1
 

Output Range	Output Range
4 to 20 mA DC: 750 Ω maximum	0 to 10 mV DC: 250 kΩ minimum
2 to 10 mA DC: 1500 Ω maximum	0 to 100 mV DC: 250 kΩ minimum
1 to 5 mA DC: 3000 Ω maximum	0 to 1 V DC: 2 kΩ minimum
0 to 20 mA DC: 750 Ω maximum	0 to 10 V DC: 10 kΩ minimum
0 to 16 mA DC: 900 Ω maximum	0 to 5 V DC: 2 kΩ minimum
0 to 10 mA DC: 1500 Ω maximum	1 to 5 V DC: 2 kΩ minimum
0 to 1 mA DC: 15 kΩ maximum	-10 to +10 V DC: 10 kΩ minimum
- Output 2
 

Output Range	Output Range
4 to 20 mA DC: 350 Ω maximum	1 to 5 V DC: 2 kΩ minimum

Zero and span adjustment: Within ±5% of span for both zero and span adjustment

### Items to be specified when ordering

- Model and Suffix Code: e.g. VJHF-026-AAA0

## ■ Standard Performance

- Accuracy rating:  $\pm 0.1\%$  of span (aside from the  $\pm 0.1\%$  accuracy of the external resistor on current-input models)
- Response: 50  $\mu$  s for a 63% response (10 to 90% change of range)
- Insulation resistance: 100 M $\Omega$  minimum at 500 V DC input, output-1, output-2, power supply and grounding terminals mutually
- Withstanding voltage: 2000 V AC for one minute between input, (output-1, output-2), power supply and grounding terminals mutually except input (output-1, output-2);  
1500 V AC for one minute between input (output-1, output-2) terminals;  
1000 V AC for one minute between output-1 and output-2 terminals
- Operating temperature range: 0 to 50°C
- Operating humidity range: 5 to 90% RH (no condensation)
- Supply voltage range: 100-240 V AC/DC  $\approx$  (-15, +10%)  
50/60 Hz or 15-30 V DC  $\approx$  ( $\pm 20\%$ )
- Effects of power line regulation: Up to  $\pm 0.1\%$  of span for a supply voltage range of 85 to 264 V AC (47 to 63 Hz), 85 to 264 V DC or 12 to 36 V DC
- Effects of ambient temperature variations: Up to  $\pm 0.2\%$  of span per 10°C
- Current consumption: 156 mA at 24 V DC
- Power consumption: 6.6 VA at 100 V AC; 8.7 VA at 200 V AC

## ■ Mounting and Appearance

- Material: ABS resin (casing)
- Mounting: Wall mounting, DIN rail mounting, or mounting on a side-by-side multiple mounting base
- Connection: Terminals with M3 size screws
- External dimensions: 76 (H)  $\times$  29.5 (W)  $\times$  124.5 (D) mm
- Weight: Main unit = approx. 124 g; socket = approx. 51 g

## ■ Accessories


- Tag number label: One
- Resistor module: One (for current input models)

## Customized Signal Specifications


Table 1 Manufacturable Ranges

	Current Signal	Voltage Signal
Input range	0 to 70 mA DC	-300 to +300 V DC
Span	1 to 70 mA DC	1 to 600 V DC
Zero elevation	0 to 25%	-125% to +25%
Output range	0 to 24 mA DC	-10 to +10 V DC
Span	1 to 24 mA DC	10 mV to 20 V DC
Zero elevation	0 to 200%	-100% to +200%

T01.EPS

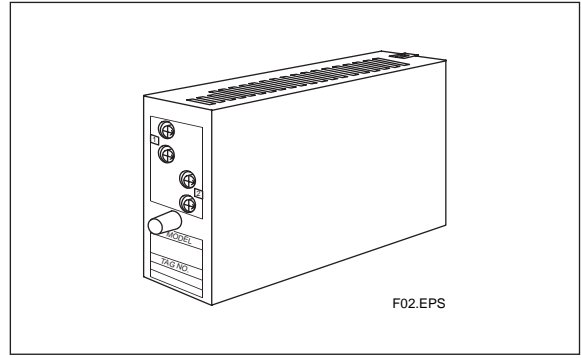

## Terminal Assignments

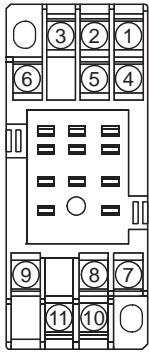


1	INPUT	(+)
2	OUTPUT 2	(+)
3	INPUT	(-)
4	N.C.	
5	OUTPUT 2	(-)
6	N.C.	
7	OUTPUT 1	(+)
8	GND	
9	OUTPUT 1	(-)
10	SUPPLY	(L+)
11	SUPPLY	(N-)

Note: For single-output models, OUTPUT2 is N.C.

F03.EPS


## Block Diagram

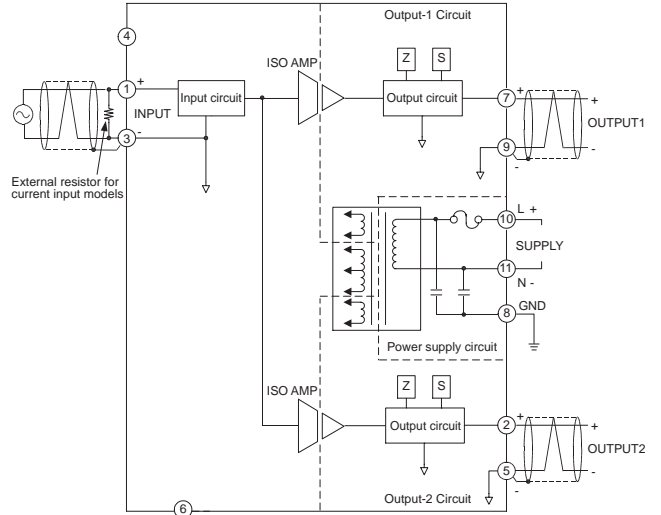

Note: Single-output models do not contain the output-2 circuit.

F04.EPS

## External Dimensions

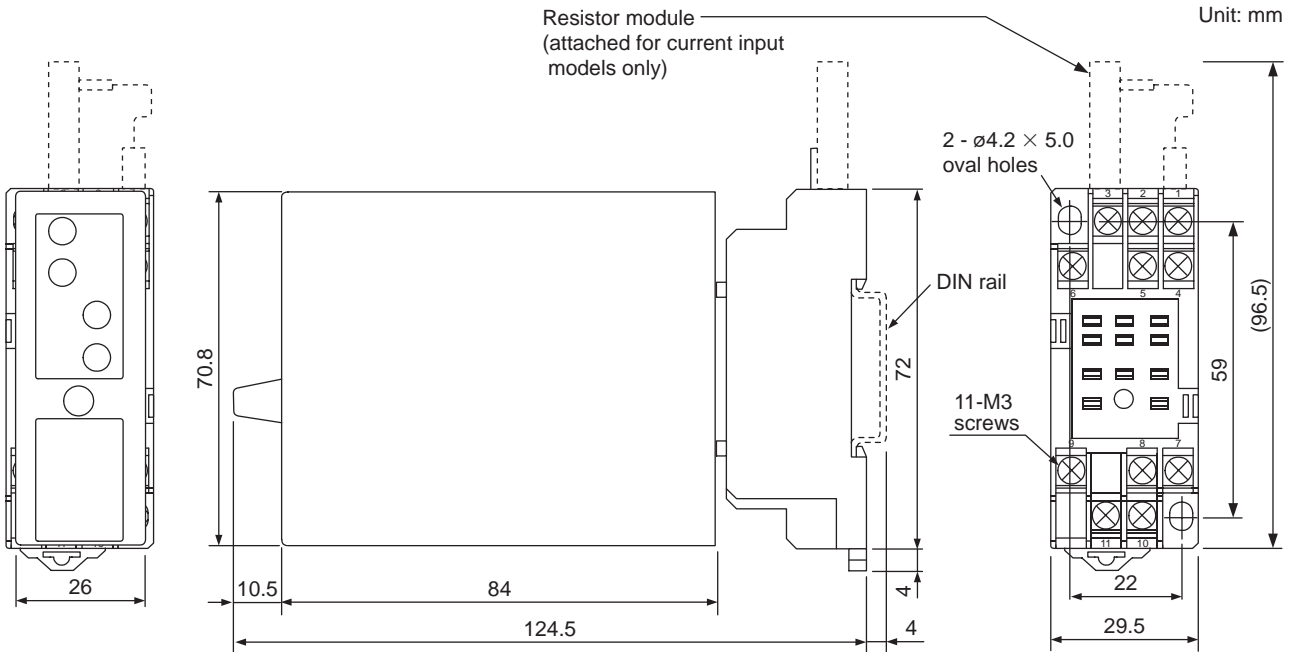

F05.EPS

- The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.