



## Standard Performance

Accuracy rating:  $\pm 0.1\%$  of span; see the following exceptions:

- $\pm 0.1\%$  of span or  $\pm 1^\circ\text{C}$ , whichever is greater when  
Type K, T and E  $< -200^\circ\text{C}$ ,  
 $400^\circ\text{C} \leq$  Type B  $< 600^\circ\text{C}$ ,  
Type E and J  $> 750^\circ\text{C}$ , or  
Type N  $> 1200^\circ\text{C}$ .
- $\pm 0.1\%$  of span or  $\pm 2^\circ\text{C}$ , whichever is greater when  
Type N  $< -200^\circ\text{C}$ .
- Accuracy is not guaranteed when Type B is below  $-400^\circ\text{C}$ , or for output levels less than 0.5% of the span of a 0 to X mA output range type.
- The accuracy derived from the following expression is applied when the measuring span is below 10 mV in thermoelectromotive force.  
 $10/\text{measuring span (mV)} \times \text{accuracy}^*$

\* Any of  $\pm 0.1\%$ ,  $\pm 1^\circ\text{C}$  or  $\pm 2^\circ\text{C}$ .

Accuracy of reference junction compensation:

- $\pm 1^\circ\text{C}$  ( $25^\circ\text{C} \pm 15^\circ\text{C}$ ) for Type K, T, E, J, B and N thermocouples;
- $\pm 2^\circ\text{C}$  ( $25^\circ\text{C} \pm 15^\circ\text{C}$ ) for Type R and S thermocouples

Response speed: 150 ms, 63% response (10 to 90%)

Burnout function: One of the three options is selected - Up, Down or Off; the maximum burnout time is specified as 60 seconds.

Effects of power line regulation: Up to  $\pm 0.1\%$  of span for the regulation within allowable range of each supply voltage range

Effects of ambient temperature variations: Up to  $\pm 0.15\%$  of span per  $10^\circ\text{C}$

Effects of leadwire resistance variations: Up to  $\pm 15 \mu\text{V}$  per  $100 \Omega$

## Conformance to EMC Standards

Applicable EMC standard: EN61326

CE-certified models mean those which are CE certified on condition that they be operated over a supply voltage range of 15-30 V DC  $\dots$  ( $\pm 20\%$ ) only.

## Power Supply and Isolation

Supply rated voltage range: 100-240 V AC/DC  $\approx$  50/60 Hz or 15-30 V DC  $\dots$

Supply input voltage range: 100-240 V AC/DC  $\approx$  ( $-15, +10\%$ ) 50/60 Hz or 15-30 V DC  $\dots$  ( $\pm 20\%$ )

Power consumption: 2.2 W at 24 V DC ; 2.2 W at 110 V DC; 5.5 VA at 100 V AC; 7.4 VA at 200 V AC

Insulation resistance: 100 M $\Omega$  minimum at 500 V DC between input, output-1, output-2, power supply and grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute between input, (output-1 and output-2), power supply and grounding terminals mutually;  
1000 V AC for one minute between output-1 and output-2 terminals

## Environmental Conditions

Operating temperature range: 0 to  $50^\circ\text{C}$

Operating humidity range: 5 to 90% RH (no condensation)

Operating conditions: Avoid installation in such environments as corrosive gas like sulfide hydrogen, dust, sea breeze and direct sunlight.

Installation altitude: 2000 m or less above sea level.

## Mounting and Appearance

Material: Modified polyphenylene oxide (casing)

Mounting method: Wall, DIN rail or dedicated VJ mounting base (VJCE) mounting

Connection method: M3 screw terminals

External dimensions: 76 (H) $\times$ 29.5 (W) $\times$ 124.5 (D) mm (including a socket)

Weight: Approx. 120 g (main unit), approx. 51 g (socket)

## Accessories

Tag number label: One

RJC (reference junction compensation) sensor (Part number: A1167HT): One

## Customized Signal Specifications

<Input range>


Special thermocouple with temperature table. The measuring range is between -100 and +100 mV in thermoelectromotive force.

Table 1 Manufacturable Ranges

	Current Signal	Voltage Signal
Output range (DC)	0 to 24 mA	-10 to +10 V
Span (DC)	1 to 24 mA	10 mV to 20 V
Zero elevation	0 to 200%	-100 to +200%

T01.EPS

### Terminal Assignments




1	INPUT	(+)
2	OUTPUT-2	(+)
3	INPUT	(-)•RJC
4	INPUT	RJC reverse side
5	OUTPUT-2	(-)
6	N.C.	
7	OUTPUT-1	(+)
8	GND	
9	OUTPUT-1	(-)
10	SUPPLY	(L+)
11	SUPPLY	(N-)

F03.EPS


Note: For single-output type, OUTPUT-2 is N.C.

### Block Diagram

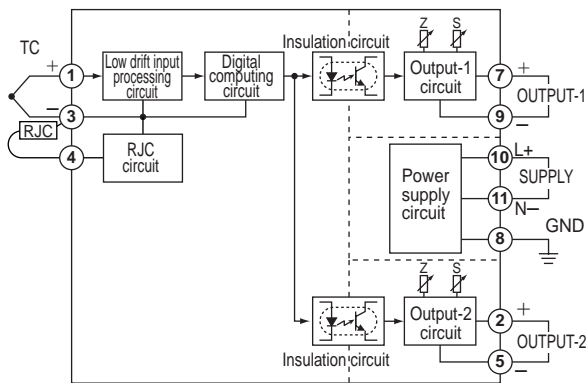

F04.EPS

### External Dimensions

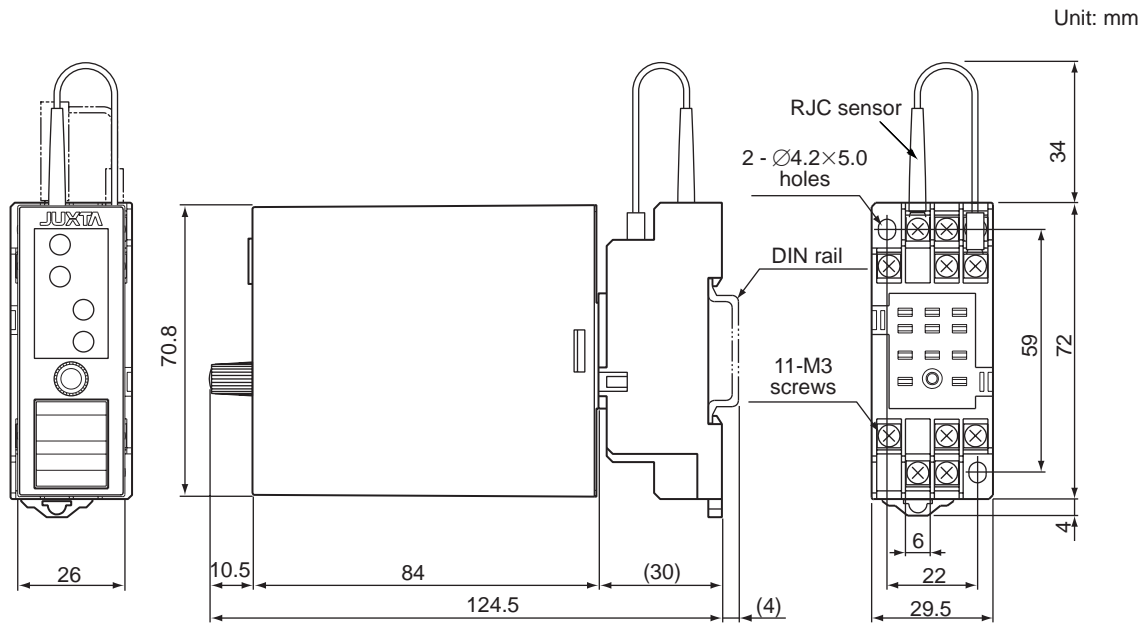

F05.EPS

• The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.