

JUTXA F Series

General Specifications

Model : FG1A/V

JUTXA

PT Transmitter (R.M.S.)

1. GENERAL

- This instrument converts AC voltage signals from PT output, etc. to current or voltage signals.
- AC/DC conversion is made by root mean square.

2. SPECIFICATIONS

IO Specifications	
Input signal	0~110V AC or 0~150V AC
Input loss	0.5VA max
Input frequency	40Hz~10kHz
Permissible over-input	120% (continuous), 200% (1 minute)
Output signal	DC current or voltage signal
Zero point adjustment range	±5% of span
Span adjustment range	±5% of span
Standard performance	
Precision rating	±0.2% of span
Response speed	150ms 63% response (10~90%)
Insulation resistance	100MΩ min (at 500V DC) between input~output, input~power supply and output~power supply
Voltage withstand	2600V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (no condensation)
Power supply voltage	24V DC ±10% (ripple : 10% P-P max)
Effect of power supply voltage fluctuation	±0.1% max of span per 24V DC ±10% fluctuation
Effect of change in ambient temperature	±0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 90mA (FG1A), 60mA (FG1V)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 24 x 127 mm (h x w x d)
Weight	130g
Accessories	
Tag number label : x1	
Mounting blocks: x2	M4 mounting screws: x2

FG1□-□□*B

TYPE NO.

OUTPUT SPECIFICATION

A: Current

V: Voltage

Input signals

1: 0~110V AC

2: 0~150V AC

0: Custom AC voltage signal

(100% input voltage of 30~300V AC)

OUTPUT SIGNAL

FG1A FG1V

A: 4~20mA DC 1: 0~10mV DC

B: 2~10mA DC 2: 0~100mV DC

C: 1~5mA DC 3: 0~1V DC

D: 0~20mA DC 4: 0~10V DC

E: 0~16mA DC 5: 0~5V DC

F: 0~10mA DC 6: 1~5V DC

G: 0~1mA DC 7: -10~+10V DC

Z: (custom) current signal 0: (custom) voltage signal
(24mA max) (±10V max)

POWER SUPPLY

24V DC±10%

OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


FG1A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC	5MΩ min	0~750Ω
2~10mA DC		0~1500Ω
1~5mA DC		0~3000Ω
0~20mA DC		0~750Ω
0~16mA DC		0~900Ω
0~10mA DC		0~1500Ω
0~1 mA DC		0~15kΩ
Others where I ₁₀₀ =24mA max		(15/I ₁₀₀)Ω max

I₁₀₀ : 100% output current


FG1V (DC Voltage Output)		
Output Signal	Output Resistance	Permissible Load Resistance
0~10mV DC	100Ω max	250kΩ min
0~100mV DC		2kΩ min
0~1V DC		10kΩ min
0~10V DC		2kΩ min
0~5V DC		2kΩ min
1~5V DC		10kΩ min
-10~+10V DC		250kΩ min
Others where V ₁₀₀ ≤100mV		10kΩ min

V₁₀₀ : 100% output voltage

WIRING DIAGRAM

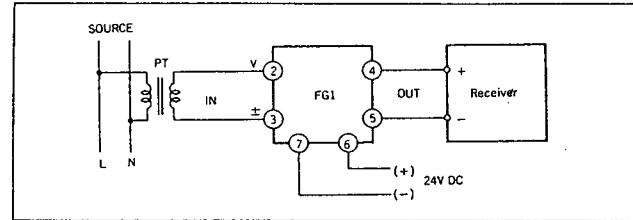

EXTERNAL DIMENSION

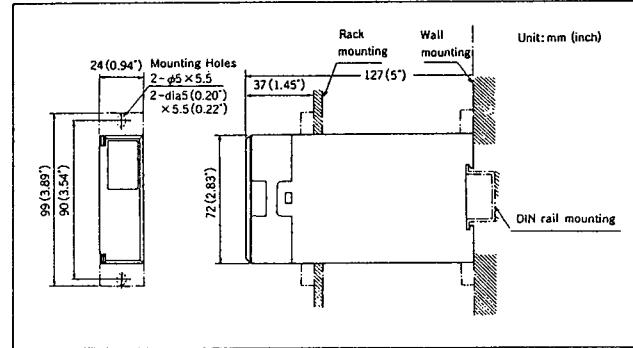

Subject to change without notice for grade up quality and performance