

JUXTA W Series

Model : WM1A/V

General Specifications

mV Transmitter

JUXTA

1. GENERAL

This signal conditioner converts millivoltage signals to current or voltage signals.

- Incorporation of one-chip microcomputer provides high efficiency and superior performance.
- Use of Handy Terminal allows easy on-site range change, zero and span adjustments, burnout selection, and I/O monitoring.

2. SPECIFICATIONS

IO Specifications	
Input signal	DC mV
Measuring range	-100~+150mV DC
Input resistance	1M Ω (3k Ω when power off)
Zero elevation	300% max of span
Permissible applied voltage	-0.5V~+4.0V
Span	3~100mV DC (standard span: 10mV min)
Signal source resistance	1k Ω max
Output signal	DC current or voltage signal
Zero point adjustment range	\pm 10% of span
Span adjustment range	\pm 10% of span
Standard performance	
Precision rating	\pm 0.1% of span
Response speed	200ms 63% response (10~90%)
Burnout	Specify UP, DOWN, or OFF. Burnout time is 60 secs max.
Insulation resistance	100M Ω min (at 500V DC) between input~output~power supply (DC drive) input~output~power supply~ground (AC drive)
Voltage withstand	1500V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply (DC drive) 1500V AC/minute between input~output~power supply~ground (AC drive)
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (No condensation)
Power supply voltage	85~264V AC 47~63Hz, 24V DC \pm 10%
Effect of power supply voltage fluctuation	\pm 0.1% max of span per 85~264V AC or 24V DC \pm 10% fluctuation
Effect of change in ambient temperature	\pm 0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 85mA (WM1A-1), 50mA (WM1V-1)
Power dissipation	100V AC 7VA (WM1A-2), 5.5VA (WM1V-2)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 48 x 127 mm (h x w x d)
Weight	DC drive: approx. 150g, AC drive : approx. 300g
Accessories	
Tag number labels: 1	Range labels: 1
Mounting blocks: 2	M4 mounting screws: 4

WM1 -1 - * B/B

TYPE NO.

OUTPUT SPECIFICATION

A: Current

V: Voltage

INPUT SIGNAL

1: DC potential differential signals

Input signal range:

-100~+150mV DC (where span=3mV min)

OUTPUT SIGNAL

WM1A

A: 4~20mA DC

B: 2~10mA DC

C: 1~5mA DC

D: 0~20mA DC

E: 0~16mA DC

F: 0~10mA DC

G: 0~1mA DC

Z: (custom) current signal

(24mA max)

WM1V

1: 0~10mV DC

2: 0~100mV DC

3: 0~1V DC

4: 0~10V DC

5: 0~5V DC

6: 1~5V DC

7: -10~+10V DC

0: (custom) voltage signal

(±10V max)

POWER SUPPLY

1: 24V DC±10% 2: 85~264V AC

BURNOUT

U: UP

D: DOWN

N: OFF

High Voltage Withstand Specifications

The JUXTA W Series is also available in 2000V AC voltage withstand specifications. Contact your dealer for details.

DUAL OUTPUT SPECIFICATIONS

Model	1st Output (selectable)	2nd Output
WM1A	4~20mA DC 2~10mA DC 1~5mA DC 0~20mA DC 0~16mA DC 0~10mA DC 0~1mA DC	1~5V DC
WM1V	0~10mV DC 0~100mV DC 0~1V DC 0~10V DC 0~5V DC 1~5V DC -10~+10V DC	1~5V DC

The JUXTA W Series allows dual output. Enter/DO after the model code when ordering.

OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


WM1A (DC Current Output)			
Output Signal	Output Resistance	Permissible Load Resistance	
4~20mA DC	5MΩ min	0~750Ω	
2~10mA DC		0~1500Ω	
1~5mA DC		0~3000Ω	
0~20mA DC		0~750Ω	
0~16mA DC		0~900Ω	
0~10mA DC		0~1500Ω	
0~1mA DC		0~15kΩ	
Others where I ₁₀₀ =24mA max			(15/I ₁₀₀)Ω max

I₁₀₀ : 100% output current


WM1V (DC Voltage Output)		
Output Signal	Output Resistance	Permissible Load Resistance
0~10mV DC	100Ω max	250kΩ min
0~100mV DC		2kΩ min
0~1V DC	1Ω max	10kΩ min
0~10V DC		2kΩ min
0~5V DC		2kΩ min
1~5V DC		2kΩ min
-10~+10V DC		10kΩ min
Others where V ₁₀₀ ≤100mV	100Ω max	250kΩ min
V ₁₀₀ >100mV	1Ω max	10kΩ min

V₁₀₀ : 100% output voltage

WIRING DIAGRAM

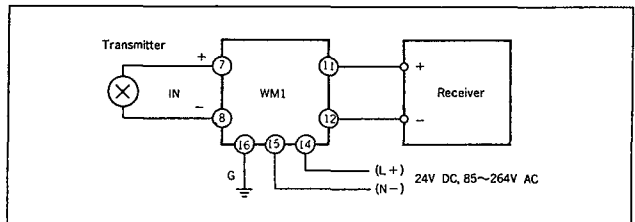

EXTERNAL DIMENSION

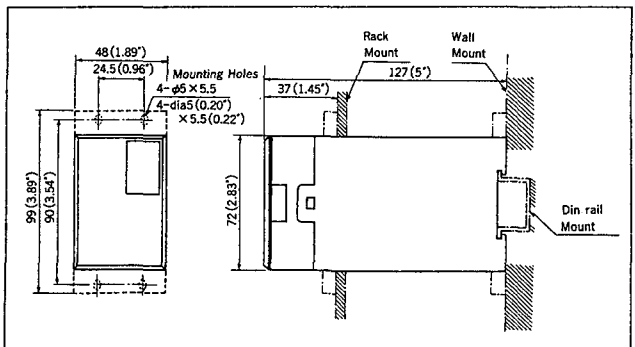

Subject to change without notice for grade up quality and performance