

Fig. 3 Effect of centerbody on separation angle of attack.

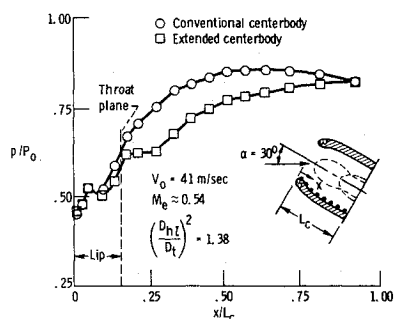


Fig. 4 Effect of centerbody on lip and diffuser axial static pressure distribution with attached flow.

terbody, and then with an extended centerbody (bottom of Fig. 1). Reynolds number of the internal flow, based on throat diameter, D_t , was approximately 5×10^6 .

Inlet flow separation resulting from high angle of attack is readily identified by the traces of total pressure distortion shown in Fig. 2. With both the conventional and extended spinners, an abrupt increase in distortion indicates the onset of inlet flow separation. The traces indicate that the design of the centerbody has a surprisingly large effect on the separation angle, α_{sep} .

The effect of the centerbody on the separation angle is shown in Fig. 3 as a function of lip contraction ratio and inlet flow. This figure shows that a large improvement in the separation angle was obtained with the extended centerbody for all contraction ratios. Note that with the extended centerbody, an increase in the separation angle was obtained with increasing lip thickness. However, with the conventional centerbody an "optimum" contraction ratio appears to exist. (A contraction ratio of 1.34 is better than both 1.30 and 1.38 at most values of M_e .) A possible explanation for this behavior may be deduced by examining the axial distribution of surface static pressure measured within the inlet from the highlight to the diffuser exit.

Figure 4 shows the axial static pressure distribution measured at 30° angle of attack with both the conventional and extended centerbodies. The inlet lip contraction ratio is 1.38 with both inlets, and both have attached flow. As indicated by Fig. 3, the inlet with the conventional centerbody is on the verge of flow separation at a 30° angle with $M_e = .54$. However, with the extended centerbody separation did not occur until the angle of attack was more than doubled to approximately 65° . Figure 4 indicates that the presence of the extended centerbody greatly reduced the diffusion rate just downstream of the throat. However, the pressure distribution on the lip was only slightly affected. The conclusion is that with the conventional centerbody, the critical element in determining tolerance to angle of attack may have been the

diffuser. An "optimum" lip may result because large values of contraction ratio can result in a thicker initial boundary layer at the diffuser entrance thereby increasing the likelihood of diffuser separation. Alternatively, the high surface velocity encountered with a thin lip may lead to weak shocks which interact with the boundary layer to cause premature separation on either the lip or within the diffuser.

The reduced adverse pressure gradient obtained in the diffuser with the extended centerbody caused the inlet lip to become the critical element, thereby resulting in the observed increase in separation angle.

Conclusions

Model test results indicate that an extended centerbody may be very effective in improving inlet tolerance to angle of attack. The improved performance was obtained by reducing the adverse pressure gradient just downstream of the throat. The benefit of this effect could possibly be obtained with a short conventional centerbody by recontouring the diffuser or by using an extended throat to reduce the adverse pressure gradient.

Results suggest that with a given diffuser and conventional centerbody, increasing contraction ratio will improve angle-of-attack performance to the point where the diffuser becomes the critical element. A further increase in contraction ratio may then actually result in poorer inlet performance.

References

- Albers, J.A., "Predicted Upwash Angles at Engine Inlets for STOL Aircraft," NASA TM X-2593, July 1972.
- Albers, J.A. and Miller, B.A., "Effect of Subsonic Inlet Lip Geometry on Predicted Surface and Flow Mach Number Distributions," NASA TN D-7446, Dec. 1973.
- Albers, J.A., Stockman, N.O., and Hirn, J.J., "Aerodynamic Analysis of Several High Throat Mach Number Inlets for the Quiet Clean Short-Hall Experimental Engine," NASA TM X-3183, Jan. 1975.
- Jakubowski, A.K. and Luidens, R.W., "Internal Cowl-Separation at High Incidence Angles," AIAA Paper 75-64, Washington, D.C. 1975.
- Miller, B.A., Dastoli, B.J., and Wesoky, H.L., "Effect of Entry-Lip Design on Aerodynamics and Acoustics of High Throat-Mach-Number Inlets for the Quiet, Clean, Short-Hall Experimental Engine," NASA TM X-3222, May 1975.
- Hickcox, T.E., et al., "Low Speed and Angle of Attack Effects on Sonic and Near-Sonic Inlets," Boeing Commercial Airplane Co., Seattle, Wash. D6-42392, March. 1975.

Errata

Influence of Rainfall Intensity on Erosion of Materials at Supersonic Velocities

George F. Schmitt Jr.

Air Force Materials Laboratory,
Wright-Patterson Air Force Base, Ohio
[J. Aircraft 12, 761-762 (1975)]

ON page 761, column 2, paragraph 3, the last sentence should read: The mass encountered is calculated from the water concentration and the swept volume a particular specimen encompasses as it travels down the track.

Received Feb. 9, 1976

Index categories: Materials, Properties of; Hypervelocity Impact; Research Facilities and Instrumentation.