

modified by the addition of strakes running the length of the span. Figure 3 compares the measured C_D with the "equivalent" circular section methods for different values of the ratio of strake height s to cylinder radius r . In the figure, C_{D0} corresponds to the drag of a cylinder without strakes and both C_D and C_{D0} are based on the same (equivalent) area. The Newtonian impact theory appears to agree more closely with the test data in the transonic speed range.

Conclusions

Based on a wind-tunnel experiment conducted to measure the drag coefficients of circular cylinders at transonic Mach numbers, several conclusions can be made. The C_D is influenced by Reynolds number at most by only a few percent over a range including the low-speed "critical" region. The influence of a change in relative surface roughness of an order of magnitude also amounts to only a few percent difference. A reduction in the drag coefficient as Mach number increases through 0.7 to 0.8 is caused by the formation and location of shock waves and not by Reynolds number effects, as speculated in previous investigations. Finally, for the s/r ratios tested, the increase in drag due to the wingspan of a wing-body combination appears to be estimated adequately by current theoretical treatments.

Acknowledgment

This research was supported in part by the NASA Ames Research Center under Grant NSG-2123.

References

- 1 Jorgensen, L. H., "Prediction of Static Aerodynamic Characteristics for Space-Shuttle-Like and Other Bodies at Angles of Attack from 0 Degrees to 180 Degrees," NASA TN D-6996, Jan. 1973.
- 2 Knowler, A. E. and Pruden, F. W., "On the Drag of Circular Cylinders at High Speeds," British Aeronautics Research Council, R&M No. 1933, 1944.
- 3 Matt, H., "Measurement of Drag of Round Rods of Various Diameters at High Subsonic Airspeed," Deutsche Luftfahrtforschung, Forschungsberichte (Report) No. 1825, 1943; results also reported by Naumann, A. and Pfeifer, H., "Über Die Grenzschichtströmung am Zylinder bei hohen Geschwindigkeiten," *Advances in Aeronautical Sciences*, Vol. 3, edited by Th. von Kármán, Pergamon Press, New York, 1962, pp. 185-206.
- 4 Welsh, C. J., "The Drag of Finite Length Cylinders Determined from Flight Tests at High Reynolds Numbers for a Mach Numbers Range from 0.5 to 1.3," NACA TN 2491, June 1973.
- 5 Macha, J. M., "A Wind-Tunnel Investigation of Circular and Straked Cylinders in Transonic Cross Flow," Texas A&M Research Foundation, College Station, Texas, Rept. 3318-76-01, Nov. 1976.
- 6 Gowen, F. E. and Perkins, E. W., "Drag of Circular Cylinders for a Wide Range of Reynolds Numbers and Mach Numbers," NACA TN 2960, June 1953.
- 7 Jorgensen, L. H., "A Method for Estimating Static Aerodynamic Characteristics for Slender Bodies of Circular and Noncircular Cross Section Alone and with Lifting Surfaces at Angles of Attack from 0 Degrees to 90 Degrees," NASA TN D-7228, April 1973.

Technical Comments

Comment on "LTA Aerodynamic Data Revisited"

F. R. Goldschmied*

Westinghouse Electric Corporation, Pittsburgh, Pa.

AN excellent review has been given by Curtiss, Hazen, and Putman¹ on the subject of LTA aerodynamics. The classical aerodynamic goal for LTA is the minimization of propulsion power for a given hull volume and a given flight speed. The boundary layer must be assumed completely turbulent because of high Reynolds numbers ($> 10^8$) and hull surface conditions. Recently, a methodology has been presented by Parsons, Goodson, and Goldschmied² for the automatic synthesis of minimum-drag hull shapes for incompressible axisymmetric bodies of specified volume at given speed. The significant results of these studies is the fact that, for turbulent boundary layers, the volume drag coefficient varies but little for wide variations of the five geometric profile parameters. The "Akron"³ still yields one of the lowest aerodynamic drag coefficients, at par with the best U. S. Navy Series 58 Model 4176.⁴ Parametric studies against fineness ratio, from Hess⁵ to Young,⁶ substantiate the above.

It can be concluded that means other than body shaping alone are needed to reduce propulsion power. Mention is made by Curtiss, Hazen, and Putman¹ of modern interest in BLC airships, which can reduce friction drag at constant volume with much lower fineness ratios, without allowing

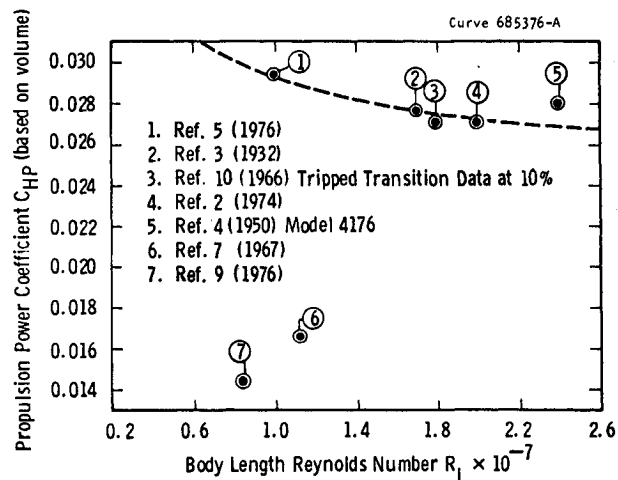


Fig. 1 Propulsion power assessment for all-turbulent vehicles.

concomitant flow separation and high pressure drag. It should be pointed out that a significant attempt to integrate hull design, boundary-layer control, and stern jet propulsion was presented by Goldschmied,⁷ on the basis of wind-tunnel tests reported by Cerreta.⁸ Further wind-tunnel work was carried out in recent years, with a substantial reduction of the minimum suction flow requirements; these results have been presented by Goldschmied.⁹

A general assessment of the situation can easily be made, as shown in Fig. 1, by plotting the power coefficient C_{HP} (based on volume) against the Reynolds number (based on length). The guidelines are as follows: 1) laminar/turbulent transition is always triggered or assumed at 5% or 10% length from the nose; 2) an additional drag $\Delta C_D = 0.003$ is imposed on all bodies to account for the empennage resistance; c) stern wake-propeller efficiency of 85% is assumed for bodies 1 through 5;

Received Dec. 8, 1976; revision received Feb. 7, 1977.

Index categories: Aerodynamics; Testing, Flight and Ground.

*Advisory Scientist, Research Laboratories, Associate Fellow AIAA.

and 4) an impeller efficiency of 90% is assumed for bodies 6 and 7.

It is seen that propulsion power is reduced in half by the Goldschmied vehicles; considerably better results may be obtained yet from a system optimization study which would produce the best possible match between the hull profile, the single suction-slot, the impeller stage, and the stern propulsive jet.

Mathematical models for the several components are available and can be combined into a system. For instance, five parameters may be allocated to the hull profile, two parameters to the suction-slot, two parameters to the impeller stage, and one parameter to the propulsive jet; the ten parameters then may be simultaneously optimized by the methods of Ref. 2. A suitable experimental verification could be carried out in the NASA Ames 40 × 80-ft wind tunnel, with a 300 ft³ model of 6-ft diam and 18-ft length. The length Reynolds number would be 3.75×10^7 and the estimated power to the impeller would be 52 hp at 230 mph, with transition triggered at 5%.

References

- ¹Curtiss, H. C. Jr., Hazen, D. C., and Putman, W. F., "LTA Aerodynamic Data Revisited," *Journal of Aircraft*, Vol. 13, Nov. 1976, pp. 835-844.
- ²Parsons, J. S., Goodson, R. E., and Goldschmied, F. R., "Shaping of Axisymmetric Bodies for Minimum Drag in Incompressible Flow," *Journal of Hydronautics*, Vol. 8, July 1974, pp. 100-107.
- ³Freeman, H. B., "Measurements of Flow in the Boundary-Layer of a 1/40 Scale Model of the U. S. Airship Akron," NACA Report 430, 1932.
- ⁴Gertler, M., "Resistance Experiments on a Systematic Series of Streamlined Bodies of Revolution for Application to the Design of High-Speed Submarines," U.S. Navy DTMB Report C-297, April 1950.
- ⁵Hess, J. L., "On the Problem of Shaping an Axisymmetric Body to Obtain Low Drag at Large Reynolds Numbers," *SNAME Journal of Ship Research*, Vol. 20, March 1976, pp. 51-60.
- ⁶Young, A. D., "The Calculation of the Total and Skin-Friction Drags of Bodies of Revolution at Zero Incidence," British ARC R&D 1874, April 27, 1939.
- ⁷Goldschmied, F. R., "Integrated Hull Design, Boundary-Layer Control, and Propulsion of Submerged Bodies," *Journal of Hydronautics*, Vol. 1, July 1967, pp. 2-11.
- ⁸Cerreta, P. A., "Wind-Tunnel Investigation of the Drag of a Proposed Boundary-Layer Controlled Airship," U.S. Navy DTMB Aero Rept. 914, March 1957.
- ⁹Goldschmied, F. R., "Axisymmetric Vehicle System Design for Total Propulsion Power Optimization," *Proceedings of the Low-Speed Boundary-Layer Transition Workshop: II*, The RAND Corporation, Santa Monica, Calif., Sept. 13-15, 1976.
- ¹⁰Carmichael, B. H., "Underwater Vehicle Drag Reduction through Choice of Shape," AIAA Paper 66-657, Colorado Springs, Colo., June 13, 1966.