

Aerodynamic Shape Design and Optimization: Status and Trends

George S. Dulikravich*

Pennsylvania State University, University Park, Pennsylvania 16802

A limited number of aerodynamic shape design concepts have been surveyed and an attempt has been made to classify them. Characteristics, both positive and negative, of the more prominent methods were outlined. Future research is expected to concentrate on the use of Navier-Stokes equations and applications to three-dimensional configurations. Interdisciplinary constrained optimization is expected to play a more prominent role in the immediate future. Adjoint operator/control theory and its variations are the most promising concepts for interdisciplinary aerodynamic shape design which involves a large number of variables. This theory is expected to constitute the major development area in future research.

Introduction

IN the general field of aerodynamics, as with any field theory, we are faced with two problems, analysis and design. In the case of analysis (direct problem) we are asked to predict the details of a flowfield if the geometry of the object is specified. In the case of a design (inverse or indirect) problem we are asked to predict the geometry of the object, which must be compatible with the desired features of the flowfield. Although the words "design" and "inverse" have the same meaning in the present context, it has become customary to use the expression "inverse design" instead. Thus, aerodynamic shape design involves the ability to determine the geometry of an aerodynamic object that will satisfy the governing equations for the flowfield and the desired boundary conditions. For example, it is possible to determine the coordinates of an airfoil if a surface pressure distribution is specified. The resulting designs can be subject to certain specified constraints. Examples that include such constraints, may entail finding aerodynamic configurations that are compatible with entirely shock-free transonic flowfields, or obtaining shapes of objects that produce flowfields with minimum entropy generation, minimum noise generation, desired surface heat flux distribution, etc.

Depending on the prescribed features of the flowfield, design (inverse) methodologies can be grouped into two general categories, 1) surface flow design, and 2) flowfield design. Surface flow design involves specifying certain flow parameters (pressure, Mach number, etc.) on the surface of the flying object, then finding the shape that will generate these surface conditions without regard for the rest of the flowfield. Flowfield design approach, on the other hand, enforces certain global flowfield features (shock-free flow, minimal entropy generation, etc.) at every point of the flowfield by determining the shape that will satisfy these constraints locally. A large number of methods for performing surface flow design have been developed, whereas only a few methods for flowfield design are known to exist.

Although numerous methods¹⁻⁵ for performing inverse design and optimization of aerodynamic configurations have been devised, these methods are not routinely used by the engi-

neering community. Since there are no comprehensive textbooks covering this field (except for a few publications in the form of survey articles), these methods have not been taught in engineering programs. Consequently, present and future engineers are inadequately trained in this rapidly growing field. In other words, future aerodynamicists are not taught how to achieve the mathematically optimal aerodynamic configurations most economically by means of inverse design and optimization. Instead, cut-and-try design based on repetitive analysis and intuition, is still widely practiced in the aerospace industry. Needless to say, this classical inefficient approach cannot survive the rigors of the competitive global world market. This fact has been recognized by a few leading companies where these methods are being developed and implemented by a few highly specialized individuals. These efforts, although resulting in actual hardware, have been mostly covered by a veil of undue secrecy. This concise survey article is an attempt to classify and briefly evaluate the most prominent aerodynamic design methods available in the open literature.

One of the reasons for the slow acceptance of inverse design and optimization methodologies in the field of aerodynamics has been the notion that these methods are hard to comprehend and difficult to mathematically formulate. The fact is that most of the design methods are as complex analytically and numerically as their direct (analysis) counterparts. A typical inverse design computer code needs a single run to generate a new shape that duplicates the desired surface flow parameters. An advanced constrained optimization code might require computer time that is equivalent to a few dozen analysis runs in order to arrive at a mathematically optimal configuration, rather than just an improved shape that the cut-and-try approach would be able to provide.

Most of the methods that will be mentioned in this article have been available for quite some time. It was the author's deliberate decision to write this survey article by quoting only the methods that have either found their acceptance in industry or that could be further perfected. Details of each methodology could be found by reading the original papers quoted in the concise list of references. The author would like to apologize for not being able to quote all the publications available because of the page limitations.

Mathematical models used in aerodynamic shape design are based on partial differential equations, integral equations, and algebraic equations. Detailed reviews have been presented at specialists meetings¹⁻⁵ in the form of survey articles.⁶⁻¹³ For example, Zhukovskii conformal mapping is actually a technique for designing a class of airfoil shapes with a specified pressure distribution at the surface that corresponds to a flow around a rotating circular cylinder. Here we are dealing with a simple algebraic expression, but that expression is based on

Presented as Paper 91-0476 at the AIAA Aerospace Sciences Meeting, Reno, NV, Jan. 7-10, 1991; received May 24, 1991; revision received Oct. 1, 1991; accepted for publication Oct. 14, 1991. Copyright © 1992 by George S. Dulikravich. Published by the American Institute of Aeronautics and Astronautics, Inc. with permission.

*Associate Professor, Department of Aerospace Engineering. Associate Fellow AIAA.

a general solution of an integral equation formulation (a point-dipole and a point vortex) or a Laplace operator (a partial differential equation) governing the flowfield. Thus, many global conformal mappings can be viewed as very special methods for designing certain simple shapes in a steady, planar, irrotational, inviscid flowfield. Moreover, global conformal mapping is the only example that comes to mind as a method that combines the surface flow design concept and the flowfield design concept. It guarantees that the resulting airfoil shapes have the specified surface distribution of the flow parameters while maintaining the irrotationality of the flowfield.

In a more general situation, the arbitrary distribution of the surface flow parameters, or an arbitrary field distribution of the flow parameters, could result in shapes that are not physically meaningful and cannot be manufactured. For example, the lower surface and the upper surface of an airfoil could either cross over (fish tail shapes) or never meet (open trailing edge shapes), although these solutions are mathematically acceptable. Obviously, the problem rests in choosing an appropriate surface distribution of the flow parameters that satisfies certain global flow field constraints.¹⁴ Certain constraints on the geometry are needed since the final aerodynamic design is often incompatible with heat transfer, structural dynamics, acoustics, or manufacturing requirements.

The main objection raised by designers when discussing inverse (design) methodologies is that these methods create strictly point-designs rather than range-designs. In other words, an aerodynamic shape designed by using a surface flow design method will have the desired characteristics only at the design conditions.¹⁵ If the operating conditions (angle of attack, free stream Mach number, etc.) vary from the design conditions, then the configuration will have to be changed (Fig. 1) in order to main the desired surface-flow parameters. For example, when designing transonic shock-free shapes with any of the surface-flow design methods, the resulting configuration could have a mildly concave surface, locally covered by the supersonic flow. As a result, a "hanging shock" or a "loose-foot" shock¹⁴ will form even at the design conditions. At off-design, the hanging shock reattaches itself to the airfoil surface causing a rapid increase in drag due to boundary-layer separation. Consequently, it is more appropriate to design an almost shock-free shape, even at the design conditions. Such

shapes could have a weak family of shocks¹⁶ that do not increase appreciably in strength at off-design conditions.

Surface Data Specification

Prevention of uncontrolled flow separation over a wider range of angles-of-attack, Mach numbers, and Reynolds numbers, is the most important goal of an aerodynamic design. We must now face the question, what is the best surface pressure distribution? It might not be an appropriate question in light of the fact that the surface pressure distribution alone is not indicative of potentially hazardous flowfield features, such as an unexpected hanging shock. A number of researchers¹⁷⁻¹⁹ have entertained this issue using an approach based on boundary-layer information. A different (although somewhat speculative) fast method, for detection of flow separation²⁰ from a given surface pressure distribution, utilizes a concept of minimal kinetic energy rate from fracture mechanics. All these methods leave the designer with an important feeling that he is still in command, although realizing that all of his experience is inadequate when compared to a true mathematically constrained optimization.

Among the large number of publications using various surface flow designs, applications to single airfoils,²¹⁻²⁸ multicomponent airfoil,²⁹ cascades of airfoils,³⁰⁻³⁷ ducts,³⁸ rotors,³⁹⁻⁴⁸ isolated wings,^{49,50} wing-body combinations,^{51,52} complete airplanes,⁵³ nozzles,⁵⁴⁻⁵⁷ inlets,^{58,59} and axisymmetric bodies⁶⁰ can be found. Some of these methods have received wider acceptance than others. The general conclusion is that methods that are more economical, versatile, robust, and easier to comprehend and implement are more widely used. There are even instances in which three-dimensional aircraft configuration⁵³ have been aerodynamically optimized on personal computers.

Inverse Design Using Analysis Codes

This general approach to aerodynamic shape design is becoming quite popular since it requires only a simple master code that can call any available flowfield analysis code as a subroutine. Thus, as more sophisticated analysis codes become available, they can be directly substituted in the master code that computes corrections to the input geometry. The surface motion is often modeled as an elastic membrane that moves according to an instantaneous difference between the specified and the computed local surface pressures.^{22,24} This is quite effective in enforcing a relatively smooth convergence of the surface geometry (Fig. 2). A more thorough study on the stability of the surface motion model is necessary, since the choice of coefficients in the model²⁴ can affect the con-

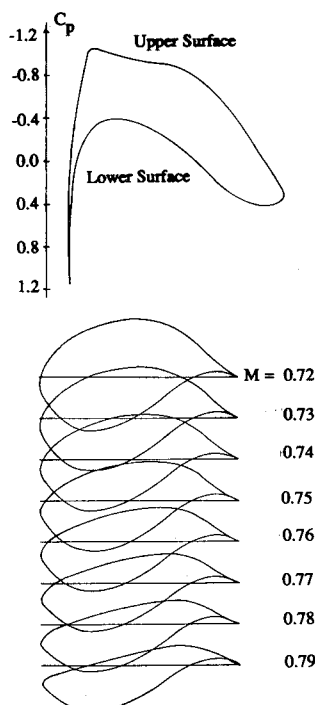


Fig. 1 Airfoil shapes¹⁵ (y-axis magnified five times) having identical surface pressure distributions at different freestream Mach numbers.

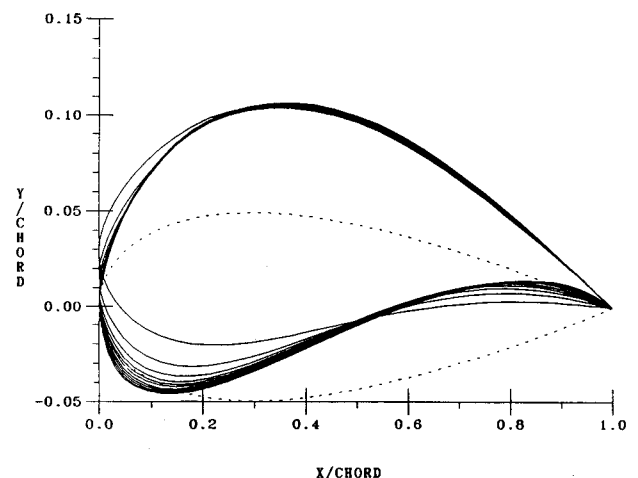


Fig. 2 Example of the convergence history using a master code method²⁴ and a surface panel analysis code; initial shape was a NACA0010 airfoil; and target pressure distribution was for a 15%-thick cambered Zhukovskii airfoil.

vergence rate and the stability of the iterative design process. An even more efficient method³⁰ is based on an equivalent surface transpiration concept.

Stream Function-Based Methods

A very interesting concept, termed stream-function-as-a-coordinate (SFC), is based on a transformed stream function formulation where the vertical coordinate of each streamline is treated as the unknown. Thus, the SFC formulation^{36,61,62} directly solves the unknown geometric coordinates that are the coordinates of the streamlines (Fig. 3). A three-dimensional version of the SFC formulation remains to be developed. A similar concept derived from the boundary element integral method²³ gives a fully converged solution for an airfoil design on a personal computer in 10–20 iterations. Another method that is based on the interplay of two stream functions, and the potential function in irrotational subsonic inviscid flows,^{37,38} is capable of generating fascinating configurations of channels and three-dimensional ducts subject to a specified surface pressure along the duct walls (Fig. 4).

Taylor Series Expansion Method

An extremely fast and simple (although approximate) method of preliminary design can reportedly be used on a pocket programmable calculator. The method is based on prescribing, e.g., a Mach number distribution along the midpassage streamline, and then deducing values of the Mach number on the top and bottom of the passage by expanding the prescribed data in the vertical direction, using the Taylor series. With more terms in the Taylor series, a larger gap-to-chord cascade can be designed. Errors in this method rapidly increase to-

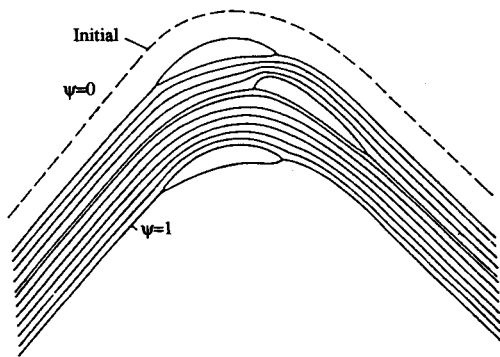


Fig. 3 SFC method³⁶ generates streamline shapes directly as its solution; example of a turbomachinery cascade designed simultaneously with a splitter blade in a single computer run.

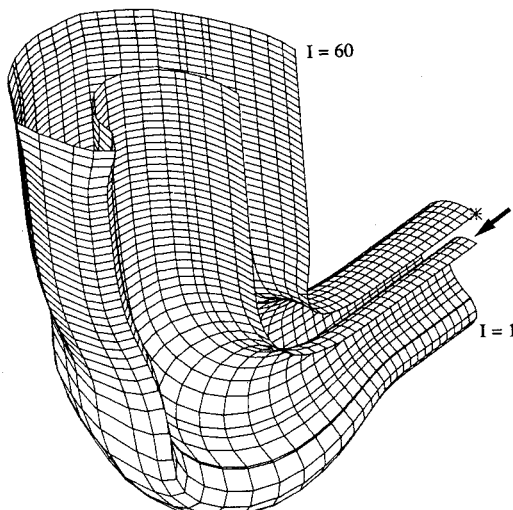


Fig. 4 Stream function—potential function inverse design method,³⁸ can generate complex realistic three-dimensional configurations.

wards the stagnation points, particularly if they are blunt. The method is equally applicable to a preliminary design of axial and radial turbomachinery.⁴³

Three-Dimensional Formulations

Highly sophisticated computer codes have been developed and successfully applied in the design of three-dimensional coaxial nozzles⁵⁴ and turbomachinery blading.⁴⁴ The model includes a complete set of the three-dimensional Euler equations of gas dynamics. Although complex, the method converges quickly, since the geometry corrections are calculated using information that propagates along the characteristic lines. Several new methods^{45–48} for quasi-three-dimensional and fully three-dimensional turbomachinery design, using inviscid flow-field formulations, are analytically novel and interesting. The main drawback of these approaches is that the basic model does not take into account either viscosity or turbulence.

The general concept of using a small master code to call any available flowfield analysis code, as a subroutine in the process of surface flow design, can be made to converge relatively quickly if a suitable formulation is used to evaluate and distribute the local geometry (Fig. 5). Recently, inverse designs of isolated shock-free transonic wings have been reported by using a full potential analysis code and a geometry correction redistribution algorithm based on an integro-differential formulation.⁴⁹ A typical design process would require less than 10 flowfield analysis runs. Inverse designs of wing-body combinations were successfully performed using the surface transpiration concept and a small perturbation transonic potential flow equation,⁵⁰ full potential transonic equation,⁵¹ and higher-order surface panel methods,^{52,53} together with a gradient search optimization code.

Transonic Shock-Free Design

Probably the best known method for flowfield design is a hodograph-based method^{63–65} for designing transonic, shock-free shapes. Actually, the method is a combination of both

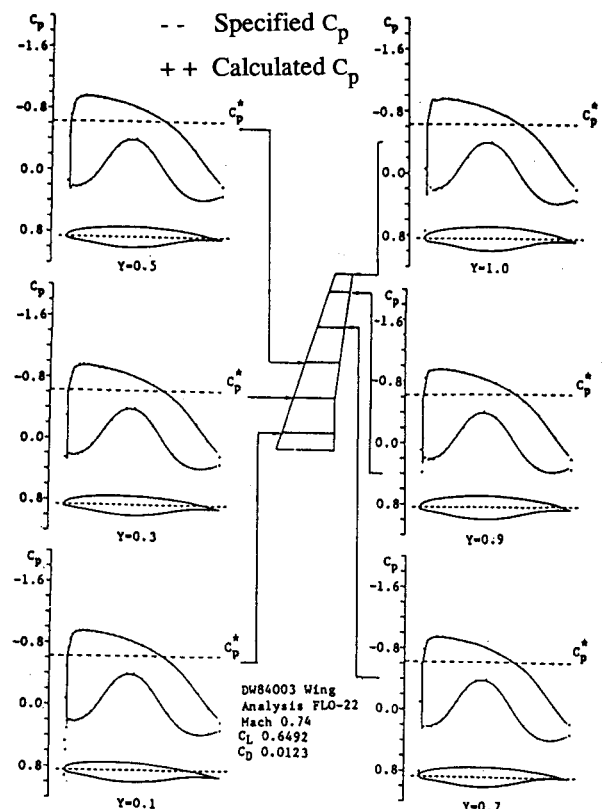


Fig. 5 Inverse design of an entirely shock-free transonic transport wing using a master code based on an integral method⁴⁹ requires only 10 flowfield analysis runs.

surface flow design (the surface Mach number can be specified on a point-by-point basis) and flowfield design formulations (it can be guaranteed that no shocks occur in the flowfield). Consequently, the method suffers from the problems previously mentioned (open trailing edges and fish-tail shapes) that are associated with both general approaches to design. The method was well publicized in the seventies and the resulting software⁶⁴ found its way into industry. Nevertheless, methods based on the hodograph transformation are not applicable to general three-dimensional configurations. Since the hodograph method is based on an elliptic continuation approach,⁶⁵⁻⁶⁷ it requires two real and two imaginary characteristics. Needless to say, it is a highly complicated method and the resulting software is not easy to modify.

An alternative design method is known as the fictitious gas^{66,67} method. This concept is based on the fact that shocks can form only in supersonic flow, i.e., if the governing partial differential equation is locally hyperbolic. Consequently, if the conditions for possible shock formations are to be eliminated, the governing partial differential equations should never be allowed to become hyperbolic. This can be ensured by switching from an isentropic expression for density and local speed of sound, to an appropriate analytical fictitious density relation at every point in the field, and on the boundary where the flow is likely to become supersonic. Computational results are acceptable in the subsonic regions (where the isentropic relations are used), but are not acceptable in the supersonic regions (where the fictitious gas relations are used). The resulting sonic line that separates the two regions, is compatible with both the isentropic and fictitious gas relations. Hence, the sonic line values of the stream function and the potential function, can be used as initial data for integration of the purely supersonic domain underneath the sonic line. We can now use the isentropic relations in this region so that the governing equations will be locally strictly hyperbolic. Moreover, the system becomes linear if transformed to a rheograph plane⁶⁶ characterized by the Prandtl-Meyer function and the local velocity vector angle. The new shape coordinates will be determined from the condition that the stream function should maintain a constant value at every point of the airfoil surface. This method is fairly simple to comprehend and implement in existing full potential codes. Nevertheless, the fictitious gas method does not allow us the freedom to specify surface values of flow parameters. It only guarantees that if our choice for the fictitious gas density—Mach number relation is not too restrictive, the supersonic bubble will become shallow and stretched along the surface, that results in an entirely shock-free flowfield. The method is suitable for redesigning existing airfoils,^{66,67} cascades of airfoils,⁶⁸⁻⁷⁰ quasi three-dimensional rotors,⁷¹ and transonic wings^{72,73} without having to worry about surface crossover, fish-tail shapes and hanging shocks.

Optimization Attempts

Due to the fact that aerodynamic shape design represents only a part of the overall design of a flying vehicle, the need for interdisciplinary optimization arises. Simultaneously, optimization algorithms are rapidly finding applicability in pure aerodynamic design.^{52,53,57,73-91} Presently, optimization algorithms are often used to minimize the difference between the specified and the computed surface flow data. It should be pointed out that such use of an optimizer has nothing to do with optimizing the aerodynamic shape. Noteworthy exceptions involve maximizing lift-to-drag ratio for isolated helicopter blade airfoils⁷⁶ and multicomponent airfoils,⁷⁸ minimizing the total pressure loss across the shock waves in supersonic inlets⁸² and around nonaxisymmetric hypersonic vehicles,⁸³ minimizing the total pressure loss in an incompressible viscous flow inside an S-shaped duct,⁸⁴ optimizing airfoils over a range of operating conditions,⁸⁵ and minimizing induced drag^{52,53,86} of an entire three-dimensional airplane (Fig. 6). Recent publications⁸⁷⁻⁸⁹ expose interesting and po-

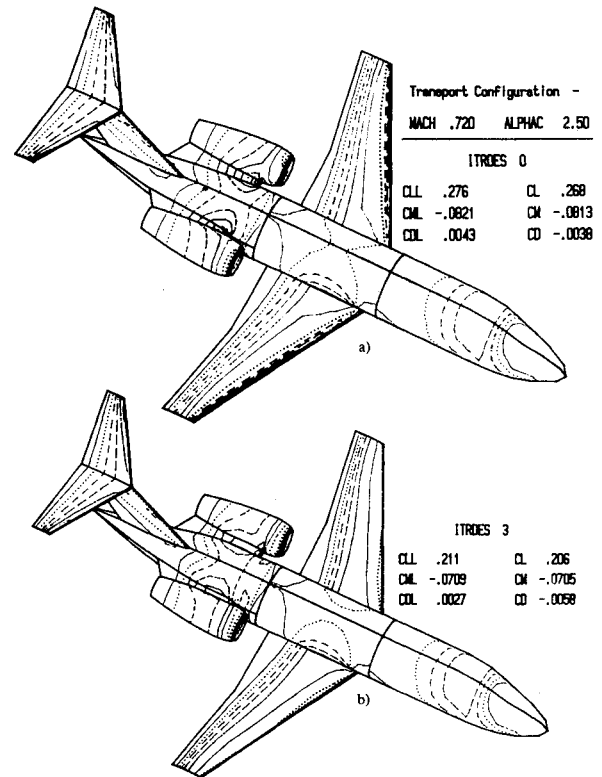


Fig. 6 Entire business jet configuration can be optimized⁵³ on a personal computer using surface transpiration concept and a panel method a) before and b) after three optimization cycles. Notice improvements in aerodynamic coefficients.

tentially promising sensitivity analysis formulations for evaluation and optimization at off-design conditions. Nevertheless, sensitivity analysis is a very costly process requiring a large number of analysis runs. Single cycle optimization⁹⁰ is therefore, welcome, since it allows for a stable iterative algorithm where an optimizer is used on each updated configuration even before the flowfield has fully converged to the new geometry. As a consequence, a typical airfoil design involves an equivalent of 5–10 fully converged flowfield solutions. A very readable and thorough comparative analysis of optimization-based approaches⁹¹ confirms that more economical approaches are possible with the gradient-based algorithms. Besides a wide variety of the gradient-based optimization algorithms, it should be pointed out that truly remarkable results were obtained using an evolution type algorithm⁷⁹ that seems to be less sensitive to local minimums. Initial applications of neural networks to aerodynamic design are also encouraging.⁵⁷

Adjoint Operator/Control Theory

Control theory has recently been applied to systems of partial differential equations governing fluid flow.⁹²⁻⁹⁹ In this context, control theory can be thought of as a minimization process performed in a continuous function space, that is beneficial when optimizing a large number of variables. This approach requires derivation of adjoint systems of partial differential equations and their appropriate boundary conditions. The adjoint operators must be separately derived for each new system of flow governing equations. The methodology is explained in the articles mentioned in the list of references which appear to be the most complete^{95,96} and readable^{98,99} texts on this subject to date. They also provide convincing results (Figs. 7 and 8) for the design of nozzles and ducts with maximum pressure rise and minimum total pressure drop. These preliminary results dispel earlier reservations that these formulations might not be computationally efficient since they involve the solution of an additional

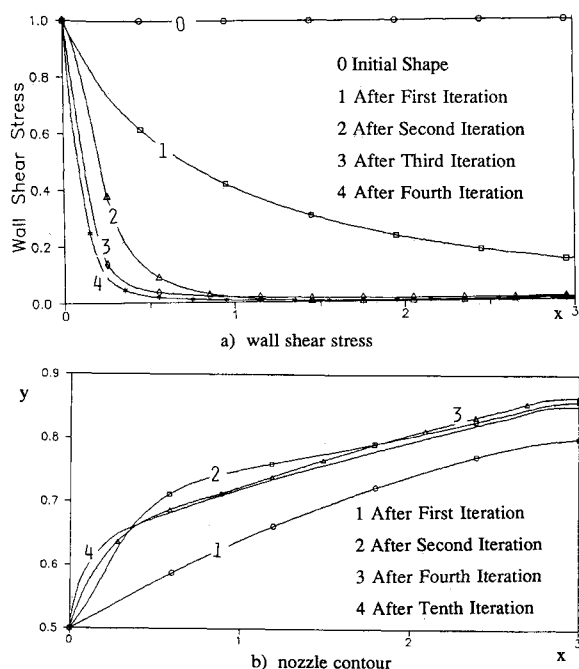


Fig. 7 Two-dimensional nozzle designed using laminar incompressible Navier-Stokes equations and adjoint operator/control theory⁹⁷⁻⁹⁹; iteration histories for a) the surface shear stress and b) the nozzle geometry. Inlet-to-exit pressure rise was maximized while minimizing total pressure loss.

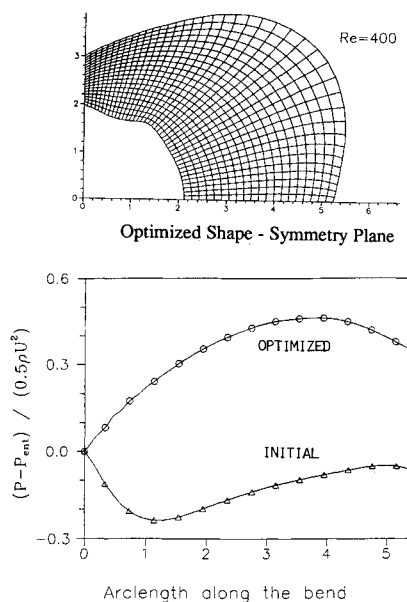


Fig. 8 Three-dimensional curved duct designed using Navier-Stokes equations and adjoint operator/control theory⁹⁸; initial duct had constant radius; and inlet-to-exit pressure rise was maximized while minimizing total pressure loss.

set of adjoint equations and several more interface equations. Typically, the adjoint operator approach requires 5–15 analysis runs.

Conclusions

Realistic, aerodynamic shapes, can be designed using methodologies from computational fluid dynamics and optimization. Two basic categories of the inverse (design) formulation are 1) surface flow design, and 2) flowfield design. A number of methods, in both categories, including novel methods based on flow control theory, have been discussed and critically evaluated. Many issues remain unresolved. They include: specification of a more appropriate set of design constraints,

acceleration of iterative algorithms, minimization of artificial dissipation, increased versatility and robustness of the design methods, and direct use of existing and future flowfield analysis software.

Acknowledgment

The author expresses his deep appreciation to Helmut Sobieczky of DLR-Goettingen, whose pioneering research on transonic shock-free flowfield design, sparked the author's interest in the general field of aerodynamic shape design.

References

- ¹Dulikravin, G. S. (ed.), *Proceedings of the 1st International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-I)*, Dept. of Aerospace Engineering and Engineering Mechanics, Univ. of Texas, Austin, TX, Oct. 17–18, 1984.
- ²*Proceedings of the 2nd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-II)*, edited by G. S. Dulikravin, Department of Aerospace Engineering, Penn State Univ., University Park, PA, Oct. 26–28, 1987.
- ³*Proceedings of AGARD Specialist's Meeting on Computational Methods for Aerodynamic Design (Inverse) and Optimization*, edited by J. W. Slooff, AGARD CP-463, Loen, Norway, May 24–25, 1989.
- ⁴*Proceedings of a Special Course on Inverse Methods for Airfoil Design for Aeronautical and Turbomachinery Applications*, edited by R. Van Dem Braembusche, AGARD Rept. 780, Rhode-St-Genese, Belgium, May 14–18, 1990.
- ⁵*Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991.
- ⁶Slooff, J. W., "Computational Methods for Subsonic and Transonic Aerodynamic Design," *Proceedings of the 1st International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-I)*, edited by G. S. Dulikravin, Dept. of Aerospace Engineering and Engineering Mechanics, Univ. of Texas, Austin, TX, Oct. 17–18, 1984, pp. 1–68.
- ⁷Sobieczky, H., "Research on Inverse Design and Optimization in Germany," *Applied Mechanics Reviews*, Vol. 41, No. 6, 1988, pp. 217–238.
- ⁸Labrujere, T. E., "Review of Aerodynamic Design in The Netherlands," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, pp. 1–30.
- ⁹Fujii, K., and Takanashi, S., "Aerodynamic Design Methods for Aircraft and their Notable Applications—Survey of the Activity in Japan," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, pp. 31–44.
- ¹⁰Bry, P., Jacquotte, O. P., and Le Pape, M. C., "Recent Progress in Inverse Methods in France," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, pp. 123–144.
- ¹¹Liu, G. L., "Research on Inverse, Hybrid and Optimization Problems in Engineering Sciences With Emphasis on Turbomachine Aerodynamics: Review of Chinese Advances," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, pp. 145–164.
- ¹²Fornasier, L., "Numerical Optimization in Germany: A Non-Exhaustive Survey on Current Developments with Emphasis on Aeronautics," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, p. 607–625.
- ¹³Larocca, F., "Inverse Design Research Efforts in Italy," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravin, Washington, DC, Oct. 23–25, 1991, pp. 371–390.
- ¹⁴Volpe, G., "Inverse Design of Airfoil Contours: Constraints, Numerical Methods and Applications," AGARD CP-463, Loen, Norway, May 22–23, 1989, Chap. 4.
- ¹⁵Chin, W. C., "Class of Shock-Free Airfoils Producing the Same Surface Pressure," *Journal of Aircraft*, Vol. 17, No. 4, 1980, pp. 286–

- 288.
- ¹⁶Zhu, Z., and Sobieczky, H., "An Engineering Approach for Nearly Shock-Free Wing Design," *Proceedings of the International Conference on Fluid Mechanics*, Beijing, China, July 1987.
- ¹⁷Ives, D. C., "Inverse and Hybrid Compressor Cascade Design Methods," *Proceedings of the 1st International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-I)*, edited by G. S. Dulikravich, Dept. of Aerospace Engineering and Engineering Mechanics, Univ. of Texas, Austin, TX, Oct. 17-18, 1984, pp. 555-572.
- ¹⁸Papailiou, K., "An Investigation on Le Foll's Method used for Blade Optimization Based on Boundary Layer Concepts," *Proceedings of the XXth International Astronautical Congress*, Buenos Aires, Argentina, Aug. 1967.
- ¹⁹Lekoudis, S. G., Sankar, N. L., and Malone, J. B., "The Application of Inverse Boundary Layer Methods to the Three-Dimensional Viscous Design Problem," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 57-61.
- ²⁰Dulikravich, G. S., "A Criteria for Surface Pressure Specification in Aerodynamic Shape Design," AIAA Paper 90-0124, Reno, NV, Jan. 8-11, 1990.
- ²¹Tranen, T., "A Rapid Computer Aided Transonic Airfoil Design Method," McDonnell Douglas Corp. Rept. MDC A2584, St. Louis, MO, Dec. 31, 1973.
- ²²Garabedian, P., and McFadden, G., "Design of Supercritical Swept Wings," *AIAA Journal*, Vol. 20, No. 3, 1982, pp. 289-291.
- ²³Soinne, E., and Laine, S., "An Inverse Boundary Element Method for Single Component Airfoil Design," *Journal of Aircraft*, Vol. 22, No. 6, 1985, pp. 541-543.
- ²⁴Malone, J. B., Narramore, J. C., and Sankar, L. N., "An Efficient Airfoil Design Method Using the Navier-Stokes Equations," AGARD-CP-463, Loen, Norway, May 22-23, 1989, Chap. 5.
- ²⁵Fray, J. M. J., Slooff, J. W., Boerstael, J. W., and Kassies, A., "Design of Transonic Airfoils with Given Pressure, Subject to Geometric Constraints," Technical Rept. of National Aerospace Lab., Amsterdam, The Netherlands, July 13, 1984.
- ²⁶Giles, M. B., and Drela, M., "Two-Dimensional Transonic Aerodynamic Design Method," *AIAA Journal*, Vol. 25, No. 9, 1987, pp. 1199-1206.
- ²⁷Hassan, A. A., "A Viscous-Inviscid Coupling Method for the Design of Low Reynolds Number Airfoil Sections," *Proceedings of Conference on Low Reynolds Number Airfoil Aerodynamics*, edited by T. Mueller, Notre Dame Univ., Notre Dame, IN, June 1985, pp. 53-63.
- ²⁸Hirose, N., Takanashi, S., and Kawai, N., "Transonic Airfoil Design Procedure Utilizing a Navier-Stokes Analysis Code," *AIAA Journal*, Vol. 25, No. 3, March 1987, pp. 353-359.
- ²⁹Kennedy, J. L., and Marsden, D. J., "A Potential Flow Design Method for Multicomponent Airfoil Sections," *Journal of Aircraft*, Vol. 15, No. 1, 1978, pp. 47-52.
- ³⁰Jacquotte, O.-P., "A Finite Element Inverse Method for the Design of Turbomachinery Blades," *Proceedings of the 7th International Conference Finite Element Methods in Flow Problems*, edited by T. J. Chung, Univ. of Alabama in Huntsville, Huntsville, AL, April 3-7, 1988, pp. 908-914.
- ³¹Gelder, T. F., Moore, R. D., Sanz, J. M., and McFarland, E. R., "Wind Tunnel Turning Vanes of Modern Design," AIAA Paper 86-0044, Reno, NV, Jan. 6-8, 1986.
- ³²Leonard, O., and Van Den Braembussche, R., "Blade Design and Analysis Using a Modified Euler Solver," *Proceedings of 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23-25, 1991, pp. 325-336.
- ³³Miton, H. H., "Properties of a Space-wise Periodic Flow Application to Flow Computation and Design for Blade Cascades," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 101-112.
- ³⁴Luu, T. S., and Viney, B., "The Turbomachine Blading Design Achieved by Solving the Inverse Field Problem," ASME Paper 87-GT-215, Anaheim, CA, May 31-June 4, 1987.
- ³⁵Meauze, G., "On the Use of Inverse Modes of Calculation in Two-dimensional Cascades and Ducts," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 73-81.
- ³⁶Chen, N.-X., and Zhang, F.-X., "A Generalized Numerical Method for Solving Direct, Inverse and Hybrid Problems of Blade Cascade Flow by Using Streamline-Coordinate Equation," ASME Paper 87-GT-29, Anaheim, CA, May 31-June 4, 1987.
- ³⁷Bonataki, E., Chaviaropoulos, P., and Papailiou, K. D., "An Inverse Inviscid Method for the Design of Turbomachinery Cascades," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23-25, 1991, pp. 189-200.
- ³⁸Stanitz, J. D., "A Review of Certain Inverse Methods for the Design of Ducts With 2- or 3-Dimensional Potential Flow," *Applied Mechanics Reviews*, Vol. 41, No. 6, 1988, pp. 217-238.
- ³⁹Cedar, R. D., and Stow, P., "The Role of a Mixed Design and Analysis Method in a Turbomachinery Blade Design System," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 91-99.
- ⁴⁰Ribaut, M., and Martin, D., "A Quasi Three-dimensional Inverse Design Method Using Source and Vortex Integral Equations," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 63-72.
- ⁴¹Wang, Z.-M., "A Method of Aerodynamic Design of Blades in Quasi-Three-Dimensional Calculation of Turbomachine," American Society of Mechanical Engineers Paper 86-GT-192, Dusseldorf, Germany, June 8-12, 1986.
- ⁴²Zhao, X.-L., and Qin, L.-S., "An Approximate 3-D Aerodynamic Design Method for Centrifugal Impeller Blades," ASME Paper 89-GT-73, Toronto, Canada, June 4-8, 1989.
- ⁴³Novak, R. A., and Haymann-Haber, G., "A Mixed-Flow Cascade Passage Design Procedure Based on a Power Series Expansion," American Society of Mechanical Engineers Paper 82-GT-121, London, April 18-22, 1982.
- ⁴⁴Zannetti, L., di Torino, P., and Ayele, T. T., "Time Dependent Computation of the Euler Equations for Designing Fully 3D Turbomachinery Blade Rows, Including the Case of Transonic Shock Free Design," AIAA Paper 87-0007, Reno, NV, Jan. 12-15, 1987.
- ⁴⁵Schmidt, E., and Grein, H. D., "Supercritical Blade Design on Stream Surfaces of Revolution with an Inverse Method," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23-25, 1991, pp. 293-306.
- ⁴⁶Borges, J. E., "A Three Dimensional Inverse Method in Turbomachinery; Part 1—Theory," American Society of Mechanical Engineers Paper 89-GT-136, Toronto, Canada, June 4-8, 1989.
- ⁴⁷Hawthorne, W. R., and Tan, C. S., "Design of Turbomachinery Blading in Three-Dimensional Flow by the Circulation Method; A Progress Report," *Proceedings of the 2nd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-II)*, edited by G. S. Dulikravich, Dept. of Aerospace Engineering, Penn State Univ., University Park, PA, Oct. 26-28, 1987, pp. 207-226.
- ⁴⁸Ghaly, W. S., "A Design Method for Turbomachinery Blading in Three-Dimensional Flow," *International Journal for Numerical Methods in Fluids*, Vol. 10, 1990, pp. 179-197.
- ⁴⁹Takanashi, S., "Iterative Three-Dimensional Transonic Wing Design Using Integral Equations," *Journal of Aircraft*, Vol. 22, No. 8, 1985, pp. 655-660.
- ⁵⁰Gally, T. A., and Carlson, L. A., "Transonic Wing Design Using Inverse Methods in Curvilinear Coordinates," *Journal of Aircraft*, Vol. 25, No. 11, 1988, pp. 1009-1017.
- ⁵¹Hazarika, N., "An Efficient Inverse Method for the Design of Blended Wing-Body Configurations," Ph.D. Thesis, Aerospace Engineering Dept., Georgia Inst. of Technology, June 1988.
- ⁵²Fornasier, L., "An Iterative Procedure for the Design of Pressure-Specified Three-Dimensional Configurations at Subsonic and Supersonic Speeds by Means of a Higher-Order Panel Method," AGARD-CP-463, Loen, Norway, May 22-23, 1989, Chap. 6.
- ⁵³Kubrynski, K., "Design of 3-Dimensional Complex Airplane Configurations with Specified Pressure Distribution via Optimization," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23-25, 1991, pp. 263-280.
- ⁵⁴Couaillier, V., and Veuillot, J. P., "Inverse Method for the Euler Equations," *Proceedings of the 2nd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-II)*, edited by G. S. Dulikravich, Dept. of Aerospace Engineering, Penn State Univ., University Park, PA, Oct. 26-28, 1987, pp. 131-146.
- ⁵⁵Meauze, G., and Fourmaux, A., "A Coupled Inverse-Inverse Method for Over-Expanded Supersonic Nozzles," *7th International Symposium on Air Breathing Engines*, Paper 109, Beijing, China, Sept. 2-6, 1985.
- ⁵⁶Gu, C. G., Zhang, M. J., Chen, X., and Miao, Y. M., "A New Method of Optimal Design for Two-Dimensional Diffuser by Using Dynamic Programming," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering*

Sciences (ICIDES-III), edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 531–540.

⁵⁷Prasanth, K., Markin, R. E., and Whitaker, K. W., "Design of Thrust Vectoring Exhaust Nozzles for Real-Time Applications Using Neural Networks," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 79–86.

⁵⁸Ives, D. C., "Supercritical Inlet Design," AIAA Paper 83-1866, Danvers, MA, July 13–15, 1983.

⁵⁹Bell, R. A., and Cedar, R. D., "An Inverse Method for the Aerodynamic Design of Three-Dimensional Aircraft Engine Nacelles," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 405–418.

⁶⁰Zedan, M. F., and Dalton, C., "The Inverse Method Applied to a Body of Revolution with an Extended Favourable Pressure Gradient Forebody," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 113–119.

⁶¹Huang, C.-Y., and Dulikravich, G. S., "Stream Function and Stream-Function-Coordinate (SFC) Formulation for Inviscid Flow Field Calculations," *Computational Methods in Applied Mechanics and Engineering*, Vol. 59, 1986, pp. 155–177.

⁶²Barron, R. M., and An, C. F., "Analysis and Design of Transonic Airfoils Using Streamwise Coordinates," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 359–370.

⁶³Hobson, D. E., "Shock-Free Transonic Flow in Turbomachinery Cascades," Univ. of Cambridge, Cambridge, UK, CUED/A Turbo/TR 65, 1974.

⁶⁴Bauer, F., Garabedian, P., Korn, D., and Jameson, A., "Supercritical Wing Sections 1,2,3," *Lecture Notes in Economics and Mathematical Systems*, Nos. 66, 108, 150, Springer Verlag, Berlin, 1972, 1975, 1977.

⁶⁵Schrier, S., *Compressible Flow*, Wiley, New York, 1982.

⁶⁶Sobieczky, H., "Related Analytical, Analog and Numerical Methods in Transonic Airfoil Design," AIAA Paper 79-1556, Williamsburg, VA, July 23–25, 1979.

⁶⁷Nakamura, M., "A Method for Obtaining Shockless Transonic Flows past Two-Dimensional Airfoils whose Profiles are Partially Modified from a Given Arbitrary Profile," *Transactions of Japanese Society for Aeronautics and Space Science*, Vol. 23, No. 62, 1981, pp. 195–213.

⁶⁸Hassan, A., Sobieczky, H., and Seebass, A. R., "Subsonic Airfoils with a Given Pressure Distribution," *AIAA Journal*, Vol. 22, No. 9, 1984, pp. 1185–1191.

⁶⁹Dulikravich, D. S., and Sobieczky, H., "Shockless Design and Analysis of Transonic Cascade Shapes," *AIAA Journal*, Vol. 20, No. 11, 1982, pp. 1572–1578.

⁷⁰Beauchamp, P. P., and Seebass, A. R., "Shock-Free Turbomachinery Blade Design," *AIAA Journal*, Vol. 23, No. 2, 1985, pp. 249–255.

⁷¹Prince, T. C., and Beauchamp, P. P., "Shock-Free Transonic Rotor Design," *Communications in Applied Numerical Methods*, Vol. 2, No. 1, 1986, pp. 21–27.

⁷²Fung, K.-Y., Sobieczky, H., and Seebass, R., "Shock-Free Wing Design," *AIAA Journal*, Vol. 18, No. 10, 1980, pp. 1153–1158.

⁷³Raj, P., and Miranda, L. R., "A Cost-Effective Method for Shock-Free Supercritical Wing Design," *Journal of Aircraft*, Vol. 19, No. 4, 1982, pp. 283–289.

⁷⁴Sorensen, T., "Airfoil Optimization with Efficient Gradient Calculations," *Proceedings of 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 433–444.

⁷⁵Lee, K. D., and Eyi, S., "Aerodynamic Design Via Optimization," *Proc. of International Council of Aeronautical Sciences '90*, Stockholm, Sweden, Sept. 9–14, 1990.

⁷⁶Reneaux, J., and Thibert, J.-J., "The Use of Numerical Optimization for Airfoil Design," AIAA Paper 85-5026, Colorado Springs, CO, Oct. 14–16, 1985.

⁷⁷Sanger, N. L., "The Use of Optimization Techniques to Design Controlled Diffusion Compressor Blading," NASA TM 82763, April 1982.

⁷⁸Ormsbee, A. I., and Chen, A. W., "Multiple Element Airfoils Optimized for Maximum Lift Coefficient," *AIAA Journal*, Vol. 10, No. 12, 1972, pp. 1620–1624.

⁷⁹Misegades, K. P., "Optimization of Multi-Element Airfoils," Von

Karman Inst. for Fluid Dynamics, Rhode-St.-Grenese, Belgium, Project Rept. 1980-5, June 1980.

⁸⁰Cosentino, G. B., "Numerical Optimization Design of Advanced Transonic Wing Configurations," AIAA Paper 85-0424, Reno, NV, Jan. 14–17, 1985.

⁸¹Lock, R. C., "Comment on 'Numerical Optimization Design of Advanced Transonic Wing Configurations'," *Journal of Aircraft*, Vol. 24, No. 8, 1987, pp. 575–576.

⁸²Huddleston, D. H., and Mastin, C. W., "Optimization of Aerodynamic Designs Using Computational Fluid Dynamics," *Proceedings of 7th International Conference on Finite Element Methods in Flow Problems*, edited by T. J. Chung, and G. R. Karr, Univ. of Alabama in Huntsville Press, Huntsville, AL, April 3–7, 1989, pp. 899–907.

⁸³Dulikravich, G. S., and Sheffer, S., "Aerodynamic Shape Optimization of Arbitrary Hypersonic Vehicles," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 347–358; also AIAA Paper 92-2635, Palo Alto, CA, June 22–24, 1992.

⁸⁴Madabhushi, R. K., Levy, R., and Pinkus, S. M., "Design of Optimum Ducts Using an Efficient 3-D Viscous Computational Flow Analysis," *Proceedings of the 2nd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-II)*, edited by G. S. Dulikravich, Dept. of Aero. Eng., Penn State Univ., University Park, PA, Oct. 26–28, 1987, pp. 147–166.

⁸⁵Ghielmi, L., Marazzi, R., and Baron, A., "A Tool for Automatic Design of Airfoils in Different Operating Conditions," AGARD-CP-463, Loen, Norway, May 22–23, 1989, Chap. 18.

⁸⁶Savu, G., and Trifu, O., "On a Global Aerodynamic Optimization of a Civil Transport Aircraft," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 45–54.

⁸⁷Sharp, H. T., and Sirovich, L., "Constructing a Continuous Parameter Range of Computational Flows," *AIAA Journal*, Vol. 27, No. 10, 1989, pp. 1326–1331.

⁸⁸Baysal, O., and Eleshaky, M. I., "Aerodynamics and Sensitivity Analysis Methods for the Compressible Euler Equations," *Proceedings of the Symposium on Recent Advances and Applications in Computational Fluid Dynamics*, edited O. Baysal, American Society of Mechanical Engineers Winter Annual Meeting, Dallas, TX, Nov. 25–30, 1990.

⁸⁹Baysal, O., and Eleshaky, M. I., "Aerodynamic Design Optimization Using Sensitivity Analysis and Computational Fluid Dynamics," AIAA Paper 91-0471, Reno, NV, Jan. 7–10, 1991.

⁹⁰Rizk, M. H., "Aerodynamic Optimization by Simultaneously Updating Flow Variables and Design Parameters," AGARD CP-463, Loen, Norway, May 22–23, 1989, Chap. 15.

⁹¹Frank, P. D., and Shubin, G. R., "A Comparison of Optimization-Based Approaches for a Model Computational Aerodynamics Design Problem," Boeing Computer Service, ECA-TR-136, April 1990.

⁹²Lions, J. L., *Contrôle Optimal des Systèmes Gouvernés par des Equations aux Dérivées Partielles*, Dunod, Paris, 1969.

⁹³Angrand, F., "Optimum Design for Potential Flows," *International Journal for Numerical Methods in Fluids*, Vol. 3, 1983, pp. 265–282.

⁹⁴Gu, C. G., and Miao, Y. M., "Blade Design of Axial-Flow Compressors by the Method of Optimal Control Theory—Physical Model and Mathematical Expression," American Society of Mechanical Engineers Paper 86-GT-183, Dusseldorf, Germany, June 8–12, 1986.

⁹⁵Jameson, A., "Aerodynamic Design Via Control Theory," Inst. for Computer Applications in Science and Engineering, Rept. 88-64, NASA Langley, Hampton, VA., Nov. 1988.

⁹⁶Abergel, F., and Temam, R., "On Some Control Problems in Fluid Mechanics," *Theoretical and Computational Fluid Dynamics*, Vol. 1, 1990, pp. 303–325.

⁹⁷Cabuk, H., and Modi, V., "Shape Optimization Analysis: First and Second Order Necessary Conditions," *Optimal Control Applications and Methods*, Vol. 11, 1990, pp. 173–190.

⁹⁸Cabuk, H., and Modi, V., "Optimum Design of Oblique Flow Headers," *Proceedings of American Society for Helicopter Research and Aeronautical Engineering Winter Meeting*, New York, Jan. 19–23, 1991.

⁹⁹Cabuk, H., and Modi, V., "Adjoint Operator Approach to Shape Design for Internal Incompressible Flows," *Proceedings of the 3rd International Conference on Inverse Design Concepts and Optimization in Engineering Sciences (ICIDES-III)*, edited by G. S. Dulikravich, Washington, DC, Oct. 23–25, 1991, pp. 391–404.