

Method for Predicting the Rolling Resistance of Aircraft Tires in Dry Snow

Gerard W. H. van Es*

National Aerospace Laboratory/NLR, 1006 BM Amsterdam, The Netherlands

A method for predicting the rolling resistance of aircraft tires rolling in dry snow is described. Knowledge about the rolling resistance on a snow-covered surface is required when complying with aircraft certification and operational rules, which account for runway surface conditions. In addition to the rules, the Joint Aviation Authorities have issued Advisory Material Joint (AMJ) 25X1591, a document providing information, guidelines, and recommendations for calculating the rolling resistance of aircraft tires in dry snow. The analytical method presented in AMJ 25X1591 gives unsatisfactory results when compared to experimental data. A new method is presented for predicting the rolling resistance due to snow. This new method and the AMJ method are validated by comparing the results of both methods for single tires and full-scale aircraft with available experiments. In general, a much better agreement with experimental data is found for the new method than for the AMJ method.

Nomenclature

b	= effective tire width
D_c	= rolling resistance due to compression
D_d	= rolling resistance due to motion
D_r	= rolling resistance on a dry hard surface
h_f	= final snow depth after compression
h_0	= initial snow depth
ℓ_f	= tire footprint length
p	= pressure
R	= tire radius
r	= void ratio
u_f	= dimensionless final snow depth
u_0	= dimensionless initial snow depth
V_g	= ground speed
w	= maximum tire width
δ	= static vertical tire deflection
λ	= grain structure index
ρ	= snow density
ρ_f	= final snow density
ρ_i	= density of ice
ρ_0	= initial snow density
σ	= unconfined compressive strength of snow
σ_i	= compressive strength of ice

Introduction

WHEN taking off from a runway covered with slush, standing water, or snow, the required takeoff ground-run distance will be longer than that on a dry runway. This is the result of the slush, standing water, and snow on the runway generating a rolling resistance that increases the total resistance on the aircraft during the ground run. For this reason, the Joint Aviation Authorities (JAA) have established aircraft certification and operational rules accounting for runway surface conditions [see Joint Airworthiness Requirements (JAR) 25X1591]. In addition to the rules, the JAA have issued Advisory Material Joint (AMJ) 25X1591, a document providing information, guidelines, recommendations, and acceptable means of compliance concerning takeoffs and landings on wet and contaminated runways. A study conducted by the National Aerospace Laboratory (NLR)¹ has shown that there is a fourfold increase in the

probability of an accident for aircraft operating on wet and contaminated runways. This indicates the importance of certification and operational rules for wet and contaminated runway operations.

AMJ 25X1591 considers a number of contaminants like water, slush, ice, wet snow, and dry snow. The current version of AMJ 25X1591 (Change 14, 27 May 1994) assumes that the rolling resistance caused by dry snow on the runway can be calculated using the models originally developed for water- and slush-covered runways. Because snow is compressible and water and slush are not, this assumption is incorrect from a physical point of view. This is also clearly illustrated in Ref. 2, where experimentally determined rolling resistance in dry snow for a Falcon 20 aircraft shows quite different results from rolling resistance calculated according to AMJ 25X1591.

Currently a number of models are available to calculate the rolling resistance of tires in dry snow.³ Many of these models have been developed to analyze the mobility of military vehicles. These mobility models vary from purely empirical to analytical. From the study presented in Ref. 3 it becomes clear that these mobility models are not suited for aircraft tires. A more suitable model is developed by Lidstrom.⁴ This model gives better results for aeronautical use than the mobility models (see Ref. 3). However, Lidstrom's model can only be used for low snow densities and high tire pressures. Furthermore, a number of approximations and assumptions are made that reduce the accuracy of the model.

The objective of this paper is to present an accurate method for predicting the rolling resistance of aircraft tires in dry snow that can be used for all practical snow densities. This method should be considered instead of the current method recommended by the JAA. The paper is organized as follows. Basic snow characteristics are outlined first. A theoretical method for predicting the rolling resistance of a tire in dry snow is then described. The presented method is then compared with experimental data from tests employing single tires and full-scale aircraft.

Basic Snow Characteristics

Snow is a porous, permeable aggregate of ice grains that can be single crystals or close groupings of several crystals. Air and water vapor surround the crystals. Snow is a complicated material because of the variety of forms it can take and because it is thermodynamically unstable, which means that the physical properties of the snow can change with time (known as snow metamorphism). A large number of different types of snow are known. A possible classification of these types including typical densities is given as follows: 1) new snow (50–200 kg/m³), 2) powder snow (200–450 kg/m³), 3) compacted snow (450–700 kg/m³), and 4) wet snow (300–700 kg/m³).

Received 16 December 1998; revision received 3 June 1999; accepted for publication 5 June 1999. Copyright © 1999 by National Aerospace Laboratory/NLR. Published by the American Institute of Aeronautics and Astronautics, Inc., with permission.

*Research Engineer, P.O. Box 90502, Flight Testing and Safety Department; vanes@nlr.nl. Senior Member AIAA.

Table 1 Final snow densities used in the CRREL shallow snow mobility model⁷

Tire pressure, kPa (psi)	Final snow density, kg/m ³
<150 (<22)	450
150–211 (22–31)	500
211–350 (31–50)	550
351–700 (51–101)	600
>700 (>101)	650

All of these types of snow are compressible. This means that the volume changes when the snow is loaded. This volume change becomes evident as surface compaction. Density is probably the most useful single parameter of snow properties because, for example, structural characteristics show some correlation with density. The compression strength of snow, and thus its bearing capacity, also appears to be strongly influenced by its density. Below a density of 400 kg/m³ the bearing capacity of snow is usually very low, resulting in large volume changes of the snow when it is loaded. At higher densities higher loads are required to compress the snow. Whenever snow is subjected to loads, for example, by moving the snow with a bulldozer or running a tire over it, the snow becomes stronger than natural snow of the same density. This is a result of bond growth between the ice crystals. As was already pointed out, snow is metamorphic. Environmental influences like wind, temperature fluctuations, and rain can change the characteristics of snow within days and even within hours.

The behavior of undisturbed snow under loading has been studied by the U.S. Army Cold Regions Research and Engineering Laboratory (CRREL).^{5,6} Results of such studies show that the tire pressure has a significant influence on the final snow density after loading. Table 1 gives an overview of the final snow densities used in the CRREL snow mobility models as a function of the tire pressure. Note that the values listed in Table 1 refer to undisturbed snow. An adjustment to the original table was made for tires having a pressure of less than 150 kPa, based on experimental data for these tires. Most aircraft tires have pressures in the range of 560–1400 kPa. For such tire pressures the final snow density will be 600 or 650 kg/m³ according to Table 1.

Description of the Method

Introduction

When a tire moves over a surface covered with dry snow, it will deform the snow. The work needed for this deformation results in forces acting on the tire opposite to the direction of motion. In general the resistance of dry snow results from two forces³: 1) compression resistance D_c and 2) vertical displacement resistance D_d . Theoretical methods for predicting both these forces will be discussed.

Resistance Due to Compression

When a tire rolls over a snow-covered surface, compaction of the snow occurs. The work needed to compact the snow layer from an initial snow volume V_1 to a final snow volume V_2 is given by³

$$W = \int_{V_2}^{V_1} p dV \quad (1)$$

With p being the pressure exerted on the snow. Because the rolling resistance in snow due to compression is the work needed to compress the snow per distance covered, Eq. (1) can be rewritten as (using the relation $dV = b \cdot ds \cdot dh$, with ds being the distance traveled)^{3,4}

$$D_c = \int_{h_f}^{h_0} b \sigma dh \quad (2)$$

In which σ is the unconfined compressive strength of snow, b is the effective tire width at the point of contact between tire and snow surface, h_0 is the initial snow depth, and h_f is the snow depth

after compression. The effective tire width can be obtained through a geometrical analysis of the tire section in combination with the snow surface. This width is given by³

$$b = 2w \sqrt{(\delta + h_0)/w - [(\delta + h_0)/w]^2} \quad (3)$$

where δ is the vertical tire deflection (static load) and w is the maximum tire width. For $(\delta + h_0)/w \geq 0.5$ the effective tire width can be regarded as equal to the maximum tire width w .

The bearing capacity of natural snow is usually very low, especially for snow with a density of less than 400 kg/m³. This results in large snow deformations in the form of compaction. This deformation continues until there is equilibrium between the snow's bearing capacity and the load placed on the tire. Strength studies of snow have shown that a relation exists between the initial snow density and its unconfined compressive strength. Reference 8 gives the following empirical equation for the unconfined compressive strength of snow:

$$\sigma = \sigma_i e^{-\lambda r^2} \quad (4)$$

Where σ_i is the compressive strength of ice ($=1.10^6$ N/m²), λ is a grain structure index, and r is the void ratio defined as the ratio of void volume to the volume of solid ice grains. The void ratio is given by

$$r = \rho_i / \rho - 1 \quad (5)$$

In which ρ_i is the density of ice ($=920$ kg/m³) and ρ is the actual snow density. The grain structure index λ is an empirical constant that varies between 1 and 2 (Ref. 8). For natural snow this index is equal to 1.5 (Ref. 3).

Combining Eqs. (2) and (4) results in

$$D_c = b \sigma_i \int_{h_f}^{h_0} e^{-\lambda r^2} dh \quad (6)$$

By introducing the relation $u = \sqrt{(\lambda)(h/h_i - 1)} = \sqrt{(\lambda)(\rho_i/\rho - 1)}$, Eq. (6) can be written as

$$D_c = \frac{b \sigma_i \rho_0 h_0}{\rho_i \sqrt{\lambda}} \int_{u_f}^{u_0} e^{-u^2} du \quad (7)$$

in which

$$u_0 = \sqrt{\lambda}(\rho_i/\rho_0 - 1), \quad u_f = \sqrt{\lambda}(\rho_i/\rho_f - 1)$$

Note that ρ_0 is the initial snow density and ρ_f is the final snow density after compression by the tire. The integral in Eq. (7) is equal to the standard error function except for the missing term $2/\sqrt{\pi}$. Numerical solutions of the integral in Eq. (7) are presented in Fig. 1 for the five final snow densities of Table 1. The resistance due to snow compression can be obtained from Eq. (7) in combination with Fig. 1.

Figure 2 gives an example of the resistance due to compression of a single tire of type VII with a diameter of 0.37 m, a width of 0.14 m, tire pressure of 937 kPa, and with a normal load of 4400 N. Up to a snow density of about 350 kg/m³ the resistance due to compression increases linearly with increasing initial snow density. At an approximate snow density of 420 kg/m³ a maximum occurs in the resistance due to compression. For higher snow densities the resistance decreases because the bearing capacity of the snow increases, resulting in less deformation of the snow. For the same tire the variation of the grain structure index λ is analyzed. For a snow depth of 80 mm, D_c is calculated as function of initial snow density for three values of λ . The results are shown in Fig. 3. A higher grain structure index indicates stronger snow that results in a lower rolling resistance due to compression. Furthermore, the maximum drag due to compression occurs at a higher initial snow density when the grain structure index is increased.

Resistance Due to Motion

When a tire moves over a surface covered with snow, the snow particles that are being compressed have to be given enough dynamic energy for them to move in a vertical direction. The energy needed for this will result in a force acting on the tire opposing the forward

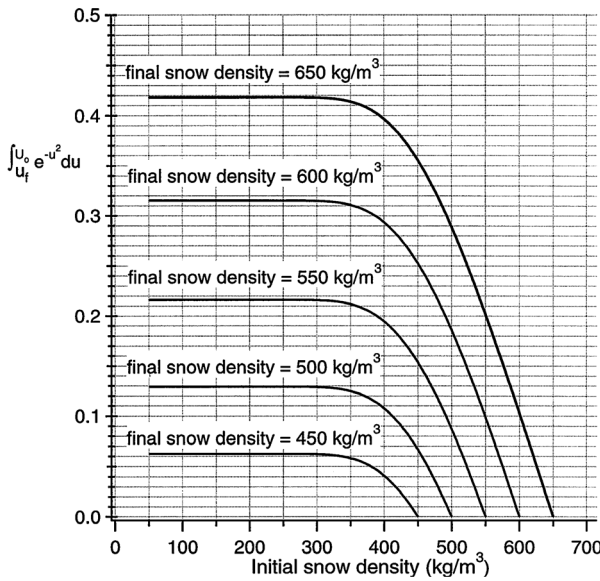


Fig. 1 Solution of the integral in Eq. (7) for several final snow densities as function of initial snow density ($\lambda = 1.5$).

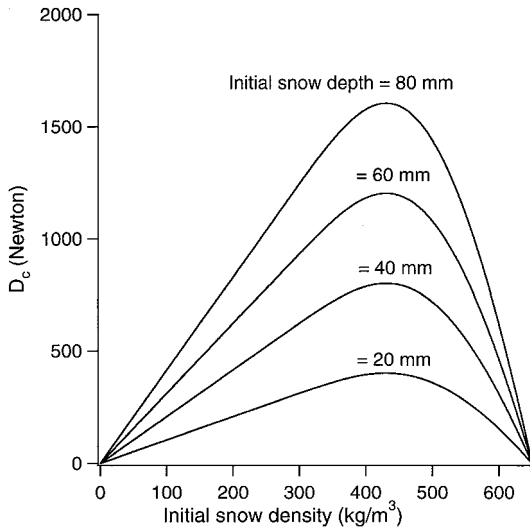


Fig. 2 D_c as function of initial snow density and snow depth.

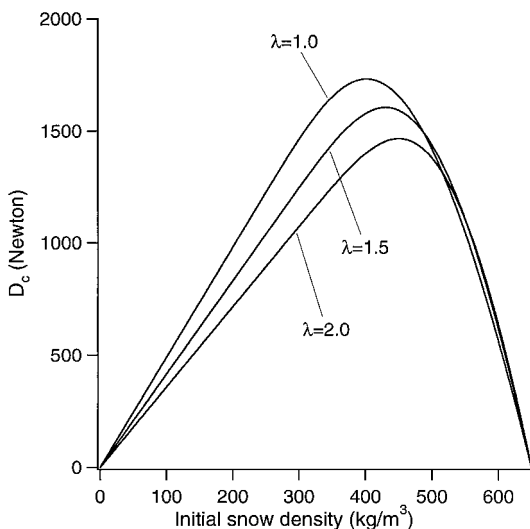


Fig. 3 Influence of grain structure index on D_c .

movement of the tire. This force can be obtained by considering the kinetic energy of a snow particle being compressed. The resulting force acting on the tire opposite to the direction of motion is given by^{3,4}

$$D_d = \frac{b}{2} \int_{h_f}^{h_0} \rho V_g^2 \sin^2 \alpha \, dh \quad (8)$$

Where V_g is the ground speed and α is defined in Fig. 4.

With the help of Fig. 4 and standard trigonometric relations, Eq. (8) can be solved. The result is

$$D_d = (b/2)h_0\rho_0V_g^2 \left\{ \left[1 - \cos^2 \alpha_1 - (2/R)h_f \cos \alpha_1 - h_f^2/R^2 \right] \ell n(h_0/h_f) + (h_0 - h_f) \left[(2/R) \cos \alpha_1 + 2h_f/R^2 \right] - (1/2R^2)(h_0^2 - h_f^2) \right\} \quad (9)$$

Where R is the tire radius. The final snow depth is given by the relation $h_f = h_0\rho_0/\rho_f$ (preservation of mass) assuming that all compacting in front of the tire occurs in the vertical direction only.

The dynamic resistance D_d appears to be directly influenced by the final snow depth and, therefore, by the initial snow density according to the relation $h_f = h_0\rho_0/\rho_f$. To illustrate this effect the dynamic snow resistance is defined by $D_d = kV_g^2$. Figure 5 gives an example of k as a function of initial snow density and snow depth for a single tire of type VII, with a diameter of 0.37 m, a tire width of 0.14 m, tire pressure of 937 kPa, and a normal load of 4400 N. It becomes clear that k in this example has a maximum at an approximate initial snow density ρ_0 of 200 kg/m³. Below this density the influence of the low density of the snow becomes a dominant factor [see Eq. (9)]. Above 200 kg/m³ the effect of the reduced sinkage

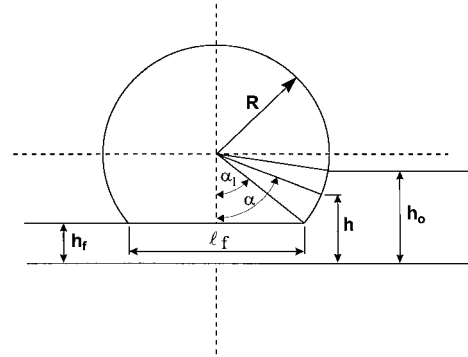


Fig. 4 Geometry of a tire rolling in snow.

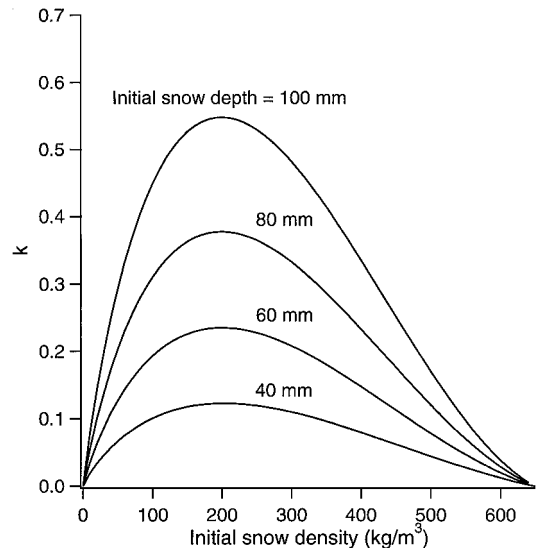


Fig. 5 For a single tire, k as function of initial snow density and snow depth.

($= h_0 - h_f$) becomes the dominant factor [see Eq. (9)]. This example shows that at low densities of approximately $150\text{--}300\text{ kg/m}^3$ the ground speed has a strong influence on the rolling resistance. In general, the maximum dynamic resistance is a complex function of tire radius, final snow depth, tire footprint length, and initial snow depth. An analysis of a number of aircraft configurations showed that, in general, the maximum dynamic resistance occurs at a snow density of approximately 200 kg/m^3 .

Calculation of the Rolling Resistance of a Complete Aircraft Rolling in Dry Snow

Basic Approach

The total rolling resistance of an aircraft rolling along a snow-covered runway is given by

$$D_{\text{rolling}} = D_r + D_c + D_d \quad (10)$$

in which D_r is the rolling resistance on a dry hard surface. The equations presented for D_c and D_d are for single tires. A complete aircraft has at least three tires, one on each main landing gear and one on the nose landing gear. To obtain the total aircraft rolling resistance due to snow, the resistance D_c and D_d for each single tire have to be calculated and summed.

The rolling resistance on dual tire landing gears (found on both nose and main gears) is simply the resistance of both single tires added together. The interference effects between both tires as found on dual tire configurations running through slush or water is not likely to be present when rolling over a snow covered surface. The rolling resistance originates from the vertical compaction of the snow layer. Although there is some deformation perpendicular to the tire motion direction present, this deformation occurs mainly at or below the bottom of the rut⁹ and, therefore, does not affect the deformation in front of the adjacent tire. Hence, interference effects can be ignored.

Another multiple-tire configuration is the bogie landing gear. After the initial compression of the snow by the leading tires, the snow in the rut becomes stronger and a higher pressure must be applied to compress the snow further.⁴ Therefore, the trailing tires will have a lower rolling resistance than the leading tires. Experimental data presented in Ref. 10 for tires with an inflation pressure of 179 kPa show that the resistance of the trailing tire can be approximately 20% of the resistance of the leading tire. However, as shown in Ref. 6, aircraft tires that have an inflation pressure in the range of 560–1400 kPa compact the snow such that further compaction of a significant level is only possible if the pressure of the trailing tire is at least more than 2100 kPa. The compaction of the snow in the rut by the trailing tires, which have an inflation pressure of 560–1400 kPa, will be minimal.⁶ Therefore, the rolling resistance of the trailing tires can be neglected when compared to the rolling resistance of the leading tires. Hence, the resistance on a bogie landing gear is equal to that of a dual tire configuration. All other multiple tire configurations can be treated in the same manner as described here.

Unpublished experimental results have shown that the snow sprays coming from the tires are limited to small portions that hardly strike the airframe. The speed and the density of the snow spray are much lower than, for instance, water spray. Therefore, the resistance due to snow impingement on the airframe can be neglected.

To calculate the rolling resistance the static tire deflection δ and tire footprint length have to be known. In the absence of experimental data, empirical equations presented in Refs. 11 and 12 can be used.

Limitations of the Presented Method

For all calculations the following limitations apply:

1) The snow depth must not exceed the tire radius. If it does, there will be additional resistance due to bulldozing, which is not considered in the presented method.

2) Great care must be taken when comparing the results of the presented method with results obtained on surfaces with processed snow (e.g., snow that has been blown back onto the runway by snow removal equipment). It is known that processed snow behaves in a significantly different manner than natural snow.¹³ This will result in

different values for the final snow densities than the snow densities presented in Table 1. Also, the grain structure index λ for processed snow will be different than that of natural snow.

3) The method only applies to dry snow.

Comparison with Test Data

Single Tire Test Data

Test data of single aircraft tires rolling in dry snow are scarce. A literature search revealed only a very limited number of sources that could be used. Unfortunately, most data cannot be used for analysis because processed snow was used during the tests rather than natural snow. Two data sources were found that could be used. First single tire test data from Ref. 14 are used for comparison with the presented method. Reference 14 provides test data obtained from a modified BV friction test vehicle. Tests were conducted with two different tires (radius 0.35 m, width between 0.12–0.254 m, and inflation pressures between 165–550 kPa) at a limited number of ground speeds that varied between 27–43 kn. The natural snow used in these tests had a low density that did not exceed 130 kg/m^3 . The snow depth varied between 10 and 90 mm. Reference 14 also presents data of several runs made on a dry, snow-free surface. These results are subtracted from the resistance values measured on a snow-covered surface to obtain the rolling resistance due to snow. These results are compared with the present method and the AMJ method. The method of JAA AMJ 25X1591 is presented in the Appendix of this paper. The results are shown in Fig. 6. The theoretical and experimental results for the presented method correlate better than the AMJ method. The standard deviation for the presented method is 31% compared to 50% for the AMJ method.

In addition to the data obtained from Ref. 14, resistance data for single tires rolling in natural snow presented in Ref. 10 are used. The tires used had a diameter of approximately 0.74 m, a width of 0.27 m, and an inflation pressure of 179 kPa. All tests reported in Ref. 10 were conducted at ground speeds of less than 6 kn. The natural snow used in these tests was of low density and did not exceed 250 kg/m^3 . The snow depth varied between 100 and 360 mm. The comparison between experimental results and theory is shown in Fig. 7. The theoretical and experimental results for the presented method appear to correlate much better than do those of the AMJ method. The standard deviation for the presented method is 36% compared to 98% of the AMJ method. The AMJ method completely underestimates the resistance.

Although in these two cases the presented method has a reasonably high standard deviation, it can still be regarded as accurate when considering the number of variables involved and the inaccuracies of, for example, the measurements of snow depth, snow density, and the resistance itself.

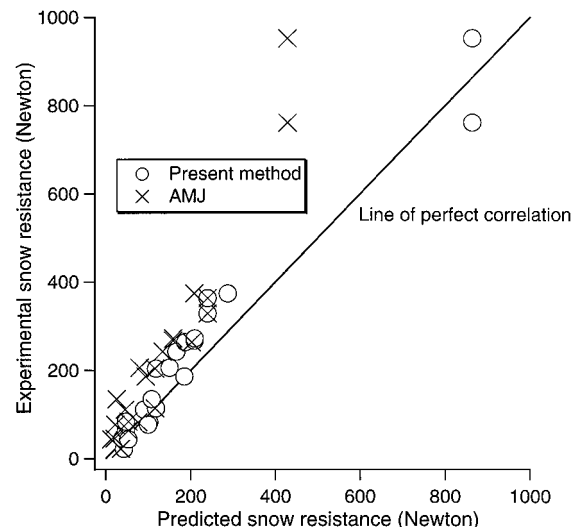


Fig. 6 Correlation of experimental data and theoretical results for a single tire.¹⁴

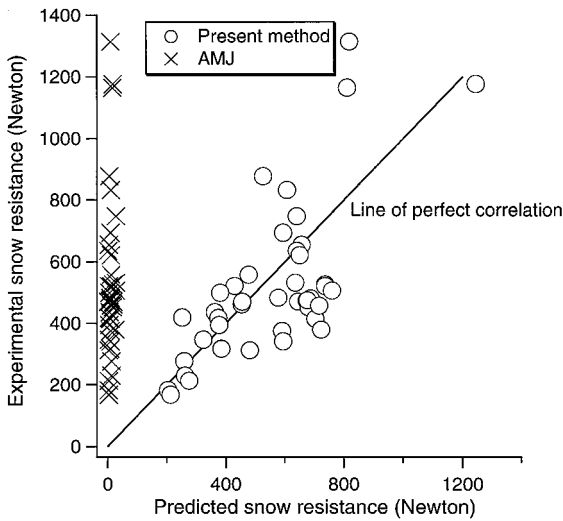


Fig. 7 Correlation of experimental data and theoretical results for a single tire.¹⁰

Full-Scale Test Data

Full-scale test data of aircraft rolling on snow-covered runways are available for a number of aircraft. Most of these tests were conducted in combination with braking friction tests. Unfortunately, a large number of the tests were not conducted in natural snow. Snow was either blown onto the runway or processed in another way before it was put on the runway surface. Examples of tests conducted in processed snow are given in Refs. 15–17. These test results cannot be used to validate the presented method. Fortunately, there were tests conducted in natural snow. Tests in natural snow have been conducted by the National Aerospace Laboratory/NLR, Saab AB, and Dassault Aviation using a Citation II, a Saab 2000, and a Falcon 2000, respectively. These tests were conducted as part of a project known as CONTAMRUNWAY. This project was funded by the European Commission under the transport Research and Technology Department (RTD) program, fourth framework. The National Research Council (Canada) (NRC) has conducted tests in natural snow using a Falcon 20. This work is part of the international Joint Winter Runway Friction Measurement Program.

The test results obtained in the CONTAMRUNWAY project and the Joint Winter Runway Friction Measurement Program will be compared with theoretical results of the method presented in this paper and with the method of JAA AMJ 25X1591 in the following sections.

Comparison with the Citation II Test Data

The National Aerospace Laboratory/NLR has conducted tests with a Citation II on a snow-covered runway of Skavsta airport, in Sweden (see Ref. 18 for details). The results of these tests will be compared with the method presented in this paper. Figure 8 shows the comparison between experimental results, the JAR AMJ 25X1591 method (noted as AMJ), and with the presented method. Correlation between the experimental data and the presented method appears to be good. The differences all lie within the overall accuracy of the experimental data. Note that the error bars in Fig. 8 were calculated considering the data reduction method and inaccuracies of the measured variables. The AMJ method does not correlate well with the experimental data. At low speeds the AMJ method gives almost no resistance, whereas the experimental data and the present method do show a considerable amount of resistance at these low speeds.

Comparison with the Saab 2000 Test Data

Saab AG has conducted tests with a Saab 2000 on a snow-covered runway of Linköping airport, in Sweden (see Ref. 19 for details). The results of these tests will be compared with the method presented in this paper. Figure 9 shows the comparison between experimental results, the JAR AMJ 25X1591 method, and the presented method. The present method predicts a higher rolling resistance than

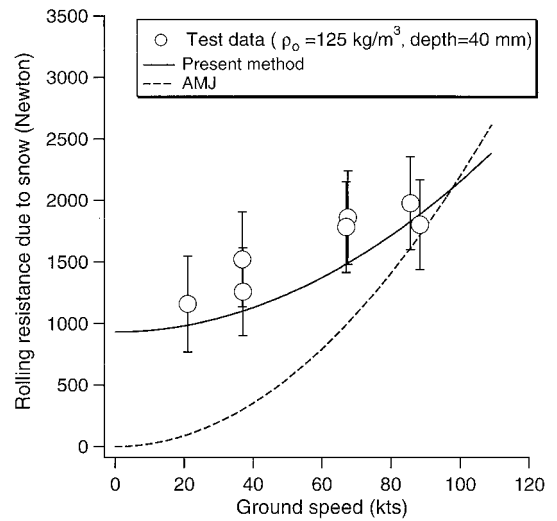


Fig. 8 Citation II rolling resistance on a snow-covered surface (snow depth = 40 mm and snow density = 120 kg/m³).

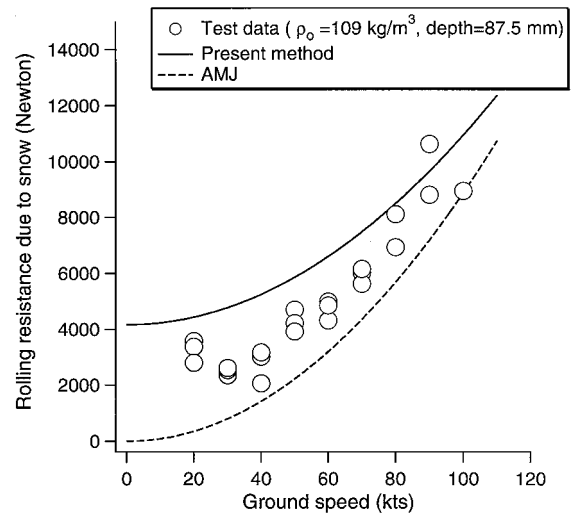


Fig. 9 Saab 2000 rolling resistance on a snow-covered surface (snow depth = 87.5 mm and snow density = 109 kg/m³).

measured. The resistance due to compression D_c is overestimated, whereas the variation of rolling resistance with ground speed is similar to the experimentally found variation. The snow in the tests was very homogenous and constant in depth. It is, therefore, unlikely that the difference between the present method and the experimental data is caused by variations in snow depth and/or density. During the tests the acceleration was measured. This acceleration was then compared to the calculated acceleration on a dry runway. The difference between both accelerations is then multiplied with the mass of the aircraft to obtain the rolling resistance due to snow. Reference 19 does not provide details about the accuracy of this approach.

In general, the AMJ method underestimates the rolling resistance due to snow. At low speeds the AMJ method gives almost no resistance, whereas the experimental data and the present method do show a considerable amount of resistance at these low speeds.

Comparison with the Falcon 2000 Test Data

Dassault Aviation has conducted tests with a Falcon 2000 on a snow-covered runway of Ivalo airport, in Finland (see Ref. 20 for details). The results of these tests will be compared with the method presented in this paper. Figure 10 shows the comparison between experimental results, the JAR AMJ 25X1591 method, and the presented method. In Fig. 10 the average rolling resistance due to snow for each test run is presented. To indicate the variation in the experimentally derived rolling resistance, the standard deviation of each data point is also plotted in Fig. 10. Correlation between the

experimental data and the presented method appears to be good. However, the two data points at low ground speeds are above those of the present method. The standard deviation of one data point at these low ground speeds is significant, which indicates some uncertainty for this result. The standard deviation of the other data point is much lower, so that for this result it is unclear why the present method underestimates the rolling resistance at low speeds. The AMJ method does not correlate well with the experimental data. At low speeds the AMJ method gives almost no resistance, whereas the experimental data and the present method do show a considerable amount of resistance at these low speeds.

Besides results for all tires in the snow, results for the nose gear only in snow are presented in Ref. 20. Figure 11 shows the results of these tests compared with the results of the present method and the AMJ method. Only results at high ground speeds are available. The present method correlates reasonably well with the experimental data. This confirms that the interference effects between both tires can be ignored and that the rolling resistance of a dual tire configuration due to snow is simply the resistance of both tires added together. The AMJ method underestimates the rolling resistance of the nose gear only.

Comparison with the Falcon 20 Test Data

The Falcon 20 of the Canadian Institute for Aerospace Research (IAR-NRC) was tested on a number of contaminated runways, including snow-covered runways. Some results of these tests are pre-

sented in Refs. 2, 15, and 19. Most of the tests were conducted in snow that was obtained by blowing snow from the runway infields onto the test sections. Only a limited number of tests were conducted in natural snow.²¹ The results of the tests conducted in natural snow will be compared with the method presented in this report.

Figures 12 and 13 show the comparison between experimental results, the JAR AMJ 25X1591 method, and the presented method. In Ref. 21 the average rolling resistance for each run is presented. To indicate the variation in the experimentally derived rolling resistance, the standard deviation of each data point is also plotted in Figs. 12 and 13. There is a similar variation of the rolling resistance with ground speed as there was for the Citation II tests. At low ground speeds a considerable amount of resistance is present, as there was for the Citation II results. The presented method tends to overestimate the rolling resistance. This difference between test data and the results of the presented method can be explained as follows. During the tests conducted by IAR-NRC, no engine parameters were recorded. It is assumed that all tests are conducted with idle thrust. In Ref. 21, Newton's second law is applied to an aircraft moving on the runway. The measured accelerations and ground speeds are combined with the data for the lift, drag, thrust, and other basic characteristics of the aircraft to calculate the rolling resistance due to snow. A simple equation is used to calculate the idle thrust as a function of air speed only. This simple approach for calculating the idle thrust can introduce inaccuracies in the derived rolling resistance. For instance, if there were actually more thrust than in the idle

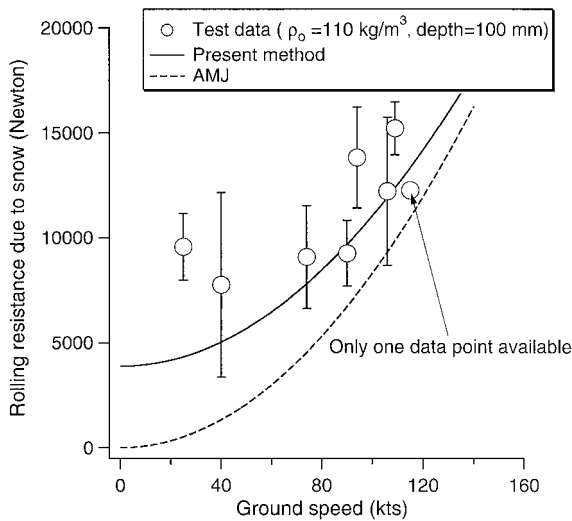


Fig. 10 Falcon 2000 rolling resistance on a snow-covered surface (snow depth = 100 mm and snow density = 110 kg/m³).

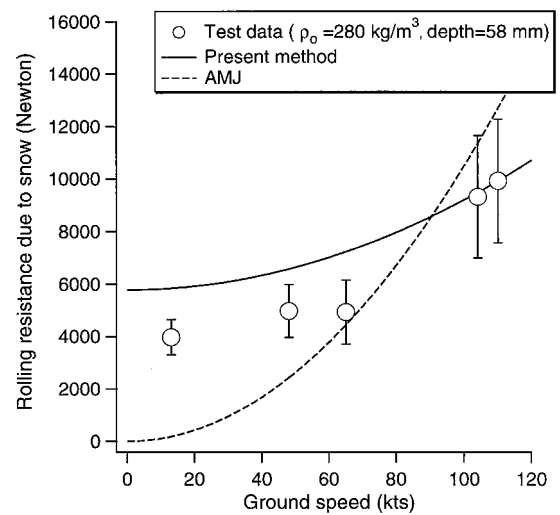


Fig. 12 Falcon 20 rolling resistance on a snow-covered surface (snow depth = 58 mm and snow density = 280 kg/m³).

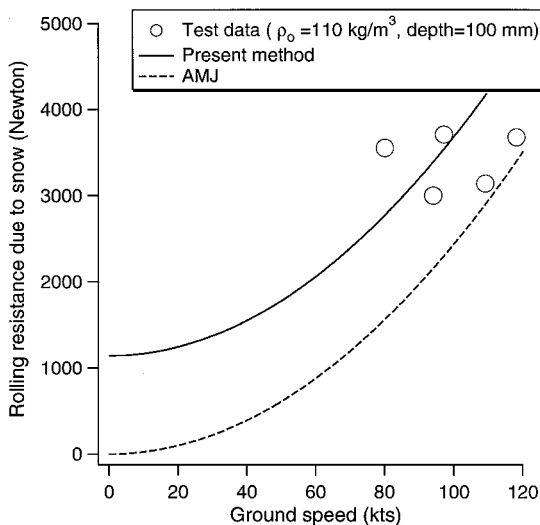


Fig. 11 Falcon 2000 nose gear rolling resistance on a snow-covered surface (snow depth = 100 mm and snow density = 110 kg/m³).

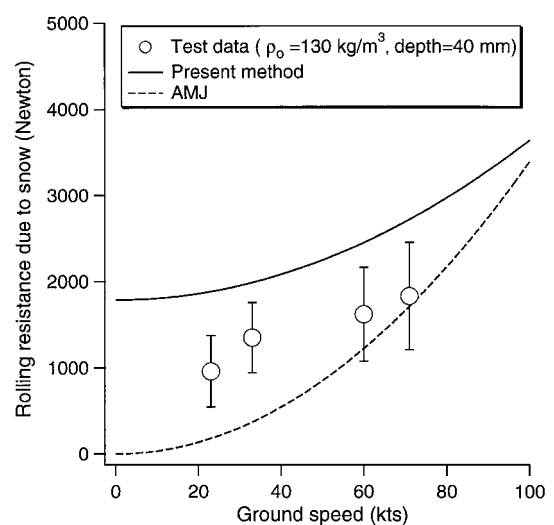


Fig. 13 Falcon 20 rolling resistance on a snow-covered surface (snow depth = 40 mm and snow density = 130 kg/m³).

setting during the tests, the derived rolling resistance would be too low. Tests conducted with idle thrust settings can also be influenced by considerable effective lags in the engine cycle during the transition from full takeoff thrust to idle thrust. Bias will be introduced into the thrust calculation when these lags are not accounted for. If these lags in engine cycle were present in the IAR-NRC tests, the derived rolling resistance due to snow would be too low. Note that the lags in engine cycle were accounted for when analyzing the data of the tests with the Citation II, which were also conducted with idle thrust settings.¹⁸ The test results presented in Fig. 13 were conducted with almost identical snow conditions (snow density and depth) as were the Citation II tests presented in Fig. 8. The nose and main gear tires of the Falcon 20 and the Citation II are similar in size. The Falcon 20 has a dual tire configuration on both nose and main gear, whereas the Citation II has single tires on both the nose and main gear. The rolling resistance due to snow compression for the Falcon under the conditions noted in Fig. 13 should, therefore, be roughly twice as high as the rolling resistance of the Citation II presented in Fig. 8. However, the rolling resistance of the Falcon 20 is of the same order as that of the Citation II. The present method does predict a rolling resistance that is almost twice as high as that for the Citation II. During the tests with the Citation II, engine parameters, needed to calculate the thrust using an engine database, were recorded. This approach results in a much more accurate and reliable estimation of the thrust during the tests than the simple method used by IAR-NRC. With the assumption that the results obtained with Citation II are accurate, it can be concluded that the rolling resistance due to snow obtained by IAR-NRC with the Falcon 20 is likely to be too low. However, a more detailed analysis of the IAR-NRC results should be conducted to confirm these conclusions.

The AMJ method does not correlate well with the experimental data obtained with the Falcon 20. At low speeds the AMJ method gives almost no resistance, whereas the experimental data and the present method show a considerable amount of resistance at these low speeds. The AMJ method also shows a stronger variation of the rolling resistance with the ground speed than the experimental data.

Conclusions

A new method for predicting the rolling resistance of a complete aircraft in dry snow is presented. It is concluded from a comparison with test data that the presented method is better than the method suggested in the current JAA AMJ 25X1591 (Change 14, 27 May 1994), which is used for certification. It is therefore recommended to consider the use of the presented method for the prediction of the rolling resistance due to dry snow, instead of the JAA AMJ 25X1591 method. However, further validation of the presented method is recommended. In particular, larger aircraft with bogie landing gears should be analyzed.

Appendix: Calculation Method of JAR AMJ 25X1591 (Change 14, 27 May 1994)

According to JAR AMJ 25X1591, calculations should take into account landing gear displacement drag as follows. (Note the JAR AMJ 25X1591 uses the term drag, whereas in this paper the term resistance is used instead of drag.)

Basic Tire Drag

The drag on a single tire is given by

$$D = \frac{1}{2} \rho V^2 b d C_D$$

Where ρ is the density of the precipitation, d is the depth of precipitation and b is the tire width at the surface and may be found from Eq. (3). The value of C_D may be taken as 0.75 for an isolated tire.

Multiple Wheels

A typical dual wheel trailing arm arrangement shows a drag 1.6 times the single wheel drag (including interference), whereas the factor can be up to twice the single wheel drag if the wheels are in

front of the main leg. For a typical four wheel bogie layout the drag was 3.35 times the single wheel drag (again including interference).

Acknowledgments

The author gratefully acknowledges the support of Paul W. Richmond of the U.S. Army Cold Regions Research and Engineering Laboratory. The author also thanks Jean-Marie Wolff and Guy Renee, both of Dassault Aviation, and Anders Andersson of Saab AB for providing experimental data obtained in the CONTAMRUNWAY project. Furthermore, the author thanks Matthew Bastian of the Canadian National Research Council, Institute for Aerospace Research, for providing experimental data from the Falcon 20 tests. Finally, the author thanks Eric A. C. Kruijsen of National Aerospace Laboratory for reviewing this paper and giving useful suggestions.

References

- Van Es, G. W. H., Roelen, A. L. C., Kruijsen, E. A. C., and Giesberts, M., "Safety Aspects of Aircraft Performance on Wet and Contaminated Runways," *Proceedings of the 10th Annual European Aviation Safety Seminar Flight Safety Foundation*, Flight Safety Foundation, Amsterdam, The Netherlands, 1998, pp. 155-190.
- Bastian, M., Croll, J. B., and Martin, J. T. C., "Braking Friction Coefficient and Contamination Drag Obtained for a Falcon 20 Aircraft on Winter Contaminated Runways," National Research Council, Rept. LTR-FR-132, Canada, Sept. 1996.
- Van Es, G. W. H., "Rolling Resistance of Aircraft Tires in Dry Snow," National Aerospace Laboratory/NLR, TR-98165, Amsterdam, 1998.
- Lidstrom, M., "Aircraft Rolling Resistance in Loose Dry Snow," Väg-och Transportforskningsinstitut, Rept. 173A, Linköping, Sweden, 1979.
- Abele, G., and Gow, A. J., "Compressibility Characteristics of Undisturbed Snow," U.S. Army Cold Regions Research and Engineering Lab., CRREL Research Rept. 336, Hanover, NH, 1975.
- Abele, G., and Gow, A. J., "Compressibility Characteristics of Compacted Snow," U.S. Army Cold Regions Research and Engineering Lab., CRREL Rept. 76-21, Hanover, NH, 1976.
- Richmond, P. W., "Vehicle Motion Resistance Due to Snow," *Proceedings of Army Science Conference*, Hanover, NH, 1990.
- Mellor, M., and Smith, J. H., "Strength Studies of Snow," U.S. Army Cold Regions Research and Engineering Lab., CRREL Research Rept. 168, Hanover, NH, 1966.
- Richmond, P. W., "Observations of Snow Deformation by a Wheel," *Proceedings of the Fifth ISTVS Conference*, USA, 1995.
- Richmond, P. W., "Motion Resistance of Wheeled Vehicles in Snow," U.S. Army Cold Regions Research and Engineering Lab., CRREL Rept. 95-7, Hanover, NH, 1995.
- Mitchell, D. J., "Vertical Deflection Characteristics of Aircraft Tires," Engineering Sciences Data Unit Item 86005, United Kingdom, 1986.
- Tanner, J. A., Stubbs, S. M., and McCarty, J. L., "Static and Yawed Rolling Mechanical Properties of Two Type VII Aircraft Tires," NASA TP-1863, 1981.
- Sinha, N. K., "Characteristics of Winter Contaminates on Runway Surfaces in North Bay—January and February—March 1997 Tests," National Research Council, Rept. LTR-ST-2159, Canada, 1998.
- Kihlgren, B., "The Rolling Resistance of Aircraft Wheels in Dry New Snow," Väg-och Transportforskningsinstitut, Rept. 128, Linköping, Sweden, 1977 (in Swedish).
- Bastian, M., Croll, J. B., and Martin, J. C. T., "Falcon 20 Aircraft Performance Testing on Contaminated Runway Surfaces During the Winter of 1996/1997," National Research Council, Rept. LTR-FR-137, Canada, 1997.
- Bastian, M., and Lamont, P. J., "Braking Friction Coefficient and Contaminated Drag of a B727 on Contaminated Runways," National Research Council, Rept. LTR-FR-147, TP13258E, Canada, 1998.
- Doogan, M., Herrmann, E., and Lamont, P. J., "Braking Friction Coefficient and Contaminated Drag of the Dash 8 on Winter Contaminated Runways," de Havilland Inc., Rept. DHC-D4547-97-09, Canada, 1997.
- Van Es, G. W. H., and Giesberts, M., "Precipitation Drag Measurements Obtained in Snow for a Citation II," National Aerospace Lab./NLR, TR-98192, Amsterdam, 1998.
- Andersson, A., "CONTAMRUNWAY Complementary Tests Turbo-props," Saab AB, Engineering Rept. 73ADS4283, Canada, 1999.
- Wolff, J. M., and Renee, G., "CONTAMRUNWAY Complementary Tests with a Falcon 2000 on a Snow Covered Runway," Dassault Aviation, Bordeaux, France, 1999.
- Bastian, M., Croll, J. B., and Martin, J. C. T., "Falcon 20 Aircraft Performance Testing on Contaminated Runway Surfaces During the Winter of 1997/1998," National Research Council, Rept. LTR-FR-151, Canada, 1998.