

Singular Perturbations and Time Scales in Guidance and Control of Aerospace Systems: A Survey

D. Subbaram Naidu

Idaho State University, Pocatello, Idaho 83209-8060

and

Anthony J. Calise

Georgia Institute of Technology, Atlanta, Georgia 30332-0150

I. Introduction

AFUNDAMENTAL problem in the theory of systems and control is the mathematical modeling of a physical system. The realistic representation of many systems calls for high-order dynamic equations. The presence of some parasitic parameters, such as small time constants, resistances, inductances, capacitances, moments of inertia, and Reynolds number, is often the source for the increased order and stiffness of these systems. The stiffness, attributed to the simultaneous occurrence of slow and fast phenomena, gives rise to time scales. The systems in which the suppression of a small parameter is responsible for the degeneration (or reduction) of dimension (or order) of the system are labeled as singularly perturbed systems, which are a special representation of the general class of time scale systems. The curse of dimensionality coupled with stiffness poses formidable computational complexities for the analysis and design of multiple time scale systems.

A. Singular Perturbations in Mathematics and Fluid Dynamics

Singular perturbations has its birth in the boundary layer theory in fluid dynamics due to Prandtl.³⁰⁰ In a paper, given at the Third International Congress of Mathematicians in Heidelberg in 1904, he pointed out that, for high Reynolds numbers, the velocity in incompressible viscous flow past an object changes very rapidly from zero at the boundary to the value as given by the solution of the Navier–Stokes equation. This change takes place in a region near the wall, which is called the *boundary layer*, the thickness of which

is proportional to the inverse of the square root of the Reynolds number. Boundary-layer theory was further developed into an important topic in fluid dynamics.^{102,173} The term *singular perturbations* was first introduced by Friedrichs and Wasow.¹²² In Russia, mainly at Moscow State University, research activity on singular perturbations for ordinary differential equations, originated and developed by Tikhonov³⁷⁴ and his students, especially Vasiléva,³⁷⁸ continues to be vigorously pursued even today.³⁸² An excellent survey of the historical development of singular perturbations is found in a recent book by O'Malley.²⁹⁰ Other historical surveys concerning the research activity in singular perturbation theory at Moscow State University and elsewhere are found in Refs. 379, 380.

In studying singular perturbation problems in fluid dynamics, Kaplun¹⁷³ introduced several notions such as degenerate solution, limit process, nonuniform convergence, inner and outer expansions, and matching. Fluid dynamics is still an abundant source of many challenging problems. Attention is drawn to the important works on singular perturbations in fluid dynamics in Refs. 90, 102, 106, 111, 152–154, 157, 173, 219, 231, 233, 282, 284, 297, and 303. Reference 219 is a survey on the essential ideas not on the literature.

In Ref. 303, the boundary value technique (BVT), advanced by Roberts,³¹³ is extended to the solution of the Navier–Stokes equation at high Reynolds numbers. Three standard flows, uniform flow past a plate, flow with a linearly adverse external velocity, and shear flow past a flat plate, were considered. The BVT is different from the method of matched asymptotic expansion (MAE) [also called the

Desineni “Subbaram” Naidu received a B.S. degree in electrical engineering from Sri Venkateswara University, Tirupati, India, and an M.S. degree in electrical engineering (control systems engineering) and a Ph.D. degree in electrical engineering from the Indian Institute of Technology (IIT), Kharagpur. He was associated with IIT, Kharagpur; NASA Langley Research Center, Hampton, Virginia (Senior National Research Council Fellow), Old Dominion University, Norfolk, Virginia, and United States Air Force Research Laboratory at Wright-Patterson Air Force Base, Ohio (Senior National Research Council Fellow). At present, he is Professor in electrical engineering, Director of Measurement and Control Engineering Research Center, and Associate Dean of graduate studies at the College of Engineering, Idaho State University, Pocatello, Idaho. His primary areas of teaching and research include electrical engineering, optimal control, singular perturbations in control systems, orbital transfer, and guidance and control of aerospace vehicles. He has over 100 publications including two research monographs and a book. He is (or has been) a member of the editorial boards of the *IEEE Transaction on Automatic Control*, the *International Journal of Robust and Nonlinear Control*, the *International Journal of Control-Theory and Advanced Technology*, and *Mechatronics: The Science of Intelligent Machines*, an *International Journal*. He is a Fellow of the Institute of Electrical and Electronics Engineers (IEEE), an Associate Fellow of AIAA, and a member of several other professional organizations.



Prior to joining the faculty at Georgia Institute of Technology, Anthony J. Calise was Professor of Mechanical Engineering at Drexel University for eight years. He also worked for 10 years in industry for the Raytheon Missile Systems Division and Dynamics Research Corporation, where he was involved with analysis and design of inertial navigation systems, optimal missile guidance, and aircraft flight-path optimization. Since leaving industry he has worked continuously as a consultant for 25 years. He was the recipient of the USAF Systems Command Technical Achievement Award, and the AIAA Mechanics and Control of Flight Award. He is a fellow of the AIAA and former associate editor for the *Journal of Guidance, Control, and Dynamics* and for the *IEEE Control Systems Magazine*. The subject areas that he has published in include optimal control theory, aircraft flight control, optimal guidance of aerospace vehicles, adaptive control using neural networks, robust linear control, and control of flexible structures. In the area of adaptive control, he has developed a novel combination for employing neural-network-based control in combination with feedback linearization. Applications include flight control of fighter aircraft, helicopters, and missile autopilot design. He received an Aviation Week 2000 Laurel citation for his participation in a successful flight test demonstration of a neural network adaptive flight control system on the X-36 aircraft.



coefficient matching technique (CMT)] in evaluating the boundary conditions of the outer solution. The principal difference is that “the adjoining of the outer and inner solutions in the BVT is carried out at a *point* in the domain of the problem, this point being found interactively, while in the CMT the inner and the outer expansions are matched *asymptotically*.”

The fundamental concepts of matching and boundary layers are revisited by Eckhaus¹⁰⁵ and Van Dyke¹⁰³ with a clear exposition of the two main approaches in matching, that is, those of Kaplun-Lagerstrom and Van Dyke. Van Dyke¹⁰³ in particular presents an excellent history of boundary-layer ideas and summarizes the applications of matching to problems in hydrostatics, hydrodynamics, elasticity, electrostatics, and acoustics.

B. Singular Perturbations and Time Scales (SPaTS) in Control

The methodology of singular perturbations and time scales (SPaTS), gifted with the remedial features of both dimensional reduction and stiffness relief, is considered as a boon to systems and control engineers. The technique has now attained a high level of maturity in the theory of continuous-time and discrete-time control systems described by ordinary differential and difference equations, respectively. From the perspective of systems and control, Kokotovic and Sannuti³²⁵ were the first to explore the application of the theory of singular perturbations for ordinary differential equations to optimal control, both open-loop formulation leading to two-point boundary value problem²⁰⁹ and closed-loop formulation leading to the matrix Riccati equation (see Ref. 328). The growth of research activity in the field of SPaTS resulted in the publication of excellent survey papers (see Refs. 66, 129, 165, 202, 203, 207, 217, 219, 259, 261, 263, 267, 268, 274, 323, 378 and references therein) reports and proceedings of special conferences,^{10,106,208} and research monographs and books (see Refs. 1, 2, 35, 36, 83, 102, 104, 125–127, 135, 161, 173, 184–186, 205, 206, 218, 240, 257, 278, 283, 289, 290, 296, 331, 381, 382, 398 and references therein).

In this paper we present a survey of the applications of the theory and techniques of SPaTS in guidance and control of aerospace systems. In particular, emphasis will be placed on problem formulation and solution approaches that are useful in applying the theory for various types of problems arising in aerospace systems. A unique feature of this survey is that it assumes no prior knowledge in SPaTS and, hence, provides a brief introduction to the subject. Further, the survey covers related fields such as fluid dynamics, space structures, and space robotics.

II. Modeling

A. Singularly Perturbed Systems

In this section, we present some basic definitions and mathematical preliminaries of SPaTS. For simplicity, consider a system described by a linear, second-order, initial value problem

$$\begin{aligned} \epsilon \ddot{x}(t, \epsilon) + \dot{x}(t, \epsilon) + x(t, \epsilon) &= 0 \\ x(t=0) &= x(0), \quad \dot{x}(t=0) = \dot{x}(0) \end{aligned} \quad (1)$$

where the small parameter ϵ multiplies the highest derivative. Here and in the rest of this paper, dot and double dot indicate first and second derivatives, respectively, with respect to t . The degenerate (outer or reduced-order) problem is obtained by suppressing the small parameter ϵ in Eq. (1) as

$$\dot{x}^{(0)}(t) + x^{(0)}(t) = 0, \quad x^{(0)}(t=0) = x(0) \quad (2)$$

with the solution as

$$x^{(0)}(t) = x^{(0)}(0)e^{-t} = x(0)e^{-t} \quad (3)$$

Because the degenerate problem in Eq. (2) is only of first order and cannot be expected to satisfy both the given initial conditions given in Eq. (1), one of the initial conditions $\dot{x}(0)$ has been sacrificed in the process of degeneration. The problem given by Eq. (1), where the small parameter ϵ is multiplying the highest derivative is called a singularly perturbed (singular perturbation) problem,³⁹⁸ where the order of the problem becomes lower for $\epsilon = 0$ than for $\epsilon \neq 0$.

B. Continuous-Time Control Systems

We now introduce the idea of singular perturbations from the systems and control point of view. When the state variable representation is used for a general case, a linear time-invariant system is identified as

$$\begin{aligned} \dot{\mathbf{x}}(t, \epsilon) &= \mathbf{A}_{11}\mathbf{x}(t, \epsilon) + \mathbf{A}_{12}\mathbf{z}(t, \epsilon) + \mathbf{B}_1\mathbf{u}(t, \epsilon) \\ \mathbf{x}(t=0) &= \mathbf{x}_0 \in \mathbb{R}^n \\ \epsilon \dot{\mathbf{z}}(t, \epsilon) &= \mathbf{A}_{21}\mathbf{x}(t, \epsilon) + \mathbf{A}_{22}\mathbf{z}(t, \epsilon) + \mathbf{B}_2\mathbf{u}(t, \epsilon) \\ \mathbf{z}(t=0) &= \mathbf{z}_0 \in \mathbb{R}^m \end{aligned} \quad (4)$$

where, $\mathbf{x}(t, \epsilon)$ and $\mathbf{z}(t, \epsilon)$ are n - and m -dimensional state vectors, respectively, $\mathbf{u}(t, \epsilon)$ is an r -dimensional control vector, and ϵ is a small, scalar parameter. The matrices \mathbf{A} and \mathbf{B} are of appropriate dimensions. The system given by Eq. (4) is said to be in the singularly perturbed form in the sense that by making $\epsilon = 0$ in Eq. (4) the degenerate system

$$\begin{aligned} \mathbf{x}^{(0)}(t) &= \mathbf{A}_{11}\mathbf{x}^{(0)}(t) + \mathbf{A}_{12}\mathbf{z}^{(0)}(t) + \mathbf{B}_1\mathbf{u}(t), \quad \mathbf{x}^{(0)}(t=0) = \mathbf{x}_0 \\ 0 &= \mathbf{A}_{21}\mathbf{x}^{(0)}(t) + \mathbf{A}_{22}\mathbf{z}^{(0)}(t) + \mathbf{B}_2\mathbf{u}(t), \quad \mathbf{z}^{(0)}(t=0) \neq \mathbf{z}_0 \end{aligned} \quad (5)$$

is a combination of a differential system in $\mathbf{x}^{(0)}(t)$ of order n and an algebraic system in $\mathbf{z}^{(0)}(t)$ of order m . The effect of degeneration is not only to cripple the order of the system from $(n+m)$ to n by dethroning $\mathbf{z}(t)$ from its original state variable status, but also to desert its initial conditions \mathbf{z}_0 . This is a harsh punishment on $\mathbf{z}(t)$ for having a close association (multiplication) with the singular perturbation parameter ϵ . We assume that the matrix \mathbf{A}_{22} is nonsingular. However, an important contribution¹⁸⁹ deals about the situation where \mathbf{A}_{22} may be singular. We can also view the degeneration as equivalent to letting the forward gain of the system go to infinity.

In the nonlinear case, the singularly perturbed system is represented as

$$\begin{aligned} \dot{\mathbf{x}}(t, \epsilon) &= \mathbf{f}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t], \quad \mathbf{x}(t=0) = \mathbf{x}_0 \\ \epsilon \dot{\mathbf{z}}(t, \epsilon) &= \mathbf{g}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t], \quad \mathbf{z}(t=0) = \mathbf{z}_0 \end{aligned} \quad (6)$$

In the preceding discussion, we assumed an initial value problem. As a boundary value problem, we have the conditions as $\mathbf{x}(t=0) = \mathbf{x}_0$ and $\mathbf{z}(t=t_f) = \mathbf{z}_f$ or other sets of boundary conditions.

The important features of singular perturbations are summarized as follows.

- 1) The degenerate problem, also called the unperturbed problem, is of reduced order and cannot satisfy all of the given boundary conditions of the original (full or perturbed) problem.
- 2) There exists a boundary layer where the solution changes rapidly. It is believed that the boundary conditions that are lost during the process of degeneration are buried inside the boundary layer.
- 3) To recover the lost initial conditions, it is required to stretch the boundary layer using a stretching transformation such as $\tau = t/\epsilon$.
- 4) The degenerate problem, also called the unperturbed problem, is of reduced order and cannot satisfy all of the given boundary conditions of the original problem.
- 5) The singularly perturbed problem described by Eq. (1) has two widely separated characteristic roots giving rise to slow and fast components (modes) in its solution. Thus, the singularly perturbed problem possesses a two-time scale property. The simultaneous presence of slow and fast phenomena makes the problem stiff from the numerical solution point of view.

To illustrate these features, reconsider the simple problem given by Eq. (1) in singularly perturbed, state variable form as

$$\begin{aligned} \frac{dx(t, \epsilon)}{dt} &= z(t, \epsilon), \quad x(t=0) = x(0) \\ \epsilon \frac{dz(t, \epsilon)}{dt} &= -x(t, \epsilon) - z(t, \epsilon), \quad z(t=0) = z(0) \end{aligned} \quad (7)$$

For this problem, with some specific values of $\epsilon = 0.1$, $x(0) = 2$, and $z(0) = 3$, Fig. 1 shows various solutions. Note the following points.

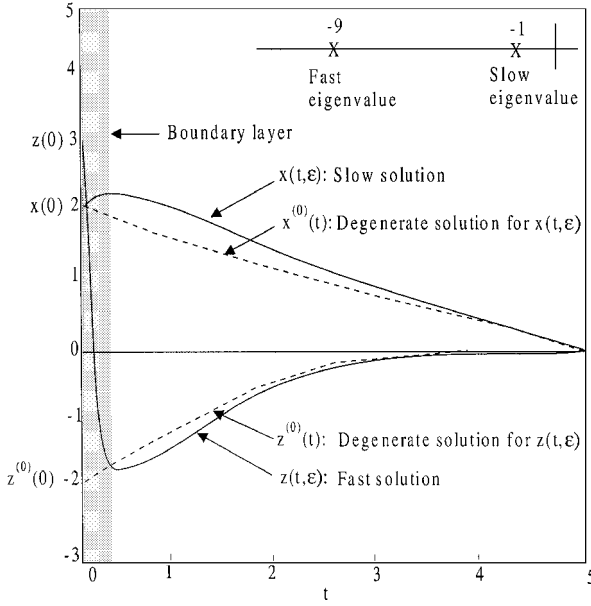


Fig. 1 Basic concepts of singular perturbations and time scales.

- 1) For $\epsilon = 0.1$, the eigenvalues for Eq. (7) are (approximately) -1 and -9 corresponding to slow and fast solutions, respectively.
- 2) The predominantly slow solution is $x(t, \epsilon)$ and the predominantly fast solution is $z(t, \epsilon)$, which has been associated (multiplied) with ϵ , obtained by solving the full-order or the exact problem given by Eq. (7).
- 3) The boundary layer (or region of rapid transition) exists near the initial point $t = 0$.
- 4) Here, $x^{(0)}(t)$ and $z^{(0)}(t)$ are the degenerate solutions of $x(t, \epsilon)$ and $z(t, \epsilon)$, respectively, obtained by solving the degenerate problem, with $\epsilon = 0$ in Eq. (7) as

$$\begin{aligned} \frac{dx^{(0)}(t)}{dt} &= z^{(0)}(t), & x^{(0)}(t=0) &= x(0) \\ 0 &= -x^{(0)}(t) - z^{(0)}(t) \end{aligned} \quad (8)$$

- 5) Here $z^{(0)}(t) = -x^{(0)}(t)$ and $z^{(0)}(t=0) \neq z(0)$, in general.
- 6) The degenerate solution $z^{(0)}(t)$ is close to its exact solution $z(t, \epsilon)$ only outside the boundary layer.
- 7) One $[z(0)]$ of the given two conditions $x(0)$ and $z(0)$ is destroyed in the process of degeneration or $z(t, \epsilon)$ has lost its initial condition $z(0)$ while letting $\epsilon \rightarrow 0$.

C. Discrete-Time Control Systems

Similar to continuous-time systems, there are singularly perturbed, discrete-time control systems. Basically, there are two sources of modeling the discrete-time systems.^{278,257}

Source 1: Pure Difference Equations

Consider a general linear, time-invariant discrete-time system,

$$\begin{aligned} \mathbf{x}(k+1) &= \mathbf{A}_{11}\mathbf{x}(k) + \epsilon^{1-j}\mathbf{A}_{12}\mathbf{z}(k) + \mathbf{B}_1\mathbf{u}(k) \\ \epsilon^{2i}\mathbf{z}(k+1) &= \epsilon^j\mathbf{A}_{21}\mathbf{x}(k) + \epsilon\mathbf{A}_{22}\mathbf{z}(k) + \epsilon^j\mathbf{B}_2\mathbf{u}(k) \end{aligned} \quad (9)$$

where $i \in \{0, 1\}$, $j \in \{0, 1\}$, $\mathbf{x}(k)$ and $\mathbf{z}(k)$ are n - and m -dimensional state vectors, respectively, and $\mathbf{u}(k)$ is an r -dimensional control vector. Depending on the values for i and j , the three limiting cases of Eq. (9) are 1) C model ($i=0, j=0$), where the small parameter ϵ appears in the column of the system matrix, 2) R model ($i=0, j=1$), where we see the small parameter ϵ in the row of the system matrix, and 3) D model ($i=1, j=1$), where ϵ is positioned in an identical fashion to that of the continuous-time system given by Eq. (4) described by differential equations. For further details, see Refs. 24, 42, 91, 234, 257, 276, 278, 299, 304, and 370.

Source 2: Discrete-Time Modeling of Continuous-Time Systems

Here either numerical solution or sampling of singularly perturbed continuous-time systems results in discrete-time models. Consider the continuous-time system given by Eq. (4). When a block diagonalization transformation is applied,²³⁵ the original state variables $\mathbf{x}(t)$ and $\mathbf{z}(t)$ can be expressed in terms of the decoupled system consisting of slow and fast variables $\mathbf{x}_s(t)$ and $\mathbf{z}_f(t)$, respectively. Using a sampling device with the decoupled continuous-time system, we get a discrete-time model which critically depends on the sampling interval T (Ref. 172).

Depending on the sampling interval, we get a fast (subscripted by f) or slow (subscripted by s) sampling model. In a particular case, when $T_f = \epsilon$, we get the fast sampling model as

$$\mathbf{x}(n+1) = (\mathbf{I}_s + \epsilon\mathbf{D}_{11})\mathbf{x}(n) + \epsilon\mathbf{D}_{12}\mathbf{z}(n) + \epsilon\mathbf{E}_1\mathbf{u}(n)$$

$$\mathbf{z}(n+1) = \mathbf{D}_{21}\mathbf{x}(n) + \mathbf{D}_{22}\mathbf{z}(n) + \mathbf{E}_2\mathbf{u}(n) \quad (10)$$

where n denotes the fast sampling instant (not to be confused with the system order described earlier). Similarly, if $T_s = 1$, we obtain the slow sampling model as

$$\mathbf{x}(k+1) = \mathbf{E}_{11}\mathbf{x}(k) + \epsilon\mathbf{E}_{12}\mathbf{z}(k) + \mathbf{E}_1\mathbf{u}(k)$$

$$\mathbf{z}(k+1) = \mathbf{E}_{21}\mathbf{x}(k) + \epsilon\mathbf{E}_{22}\mathbf{z}(k) + \mathbf{E}_2\mathbf{u}(k) \quad (11)$$

where k represents the slow sampling instant and $n = k[1/\epsilon]$. Also, the \mathbf{D} and \mathbf{E} matrices are related to the matrices \mathbf{A} and \mathbf{B} , and transformation matrices.¹⁷² Note that the fast sampling model given by Eq. (10) can be viewed as the discrete analog (either by exact calculation using the exponential matrix or by using the Euler approximation) of the continuous-time system

$$\begin{aligned} \frac{d\mathbf{x}}{d\tau} &= \epsilon\mathbf{A}_{11}\mathbf{x}(\tau) + \epsilon\mathbf{A}_{12}\mathbf{z}(\tau) + \epsilon\mathbf{B}_1\mathbf{u}(\tau) \\ \frac{d\mathbf{z}}{d\tau} &= \mathbf{A}_{21}\mathbf{x}(\tau) + \mathbf{A}_{22}\mathbf{z}(\tau) + \mathbf{B}_2\mathbf{u}(\tau) \end{aligned} \quad (12)$$

which itself is obtained from the continuous-time system given by Eq. (4) using the stretching transformation $\tau = t/\epsilon$. It is usually said that the singularly perturbed continuous-time systems shown in Eqs. (4) and (12) are the slow time scale, t , and fast time scale, τ , versions, respectively. Also, note that the slow sampling model given by Eq. (11) is the same as the state space C model.

See a recent result in Refs. 131, 155, 156 for stability bounds on the singular perturbation parameter.

III. Singular Perturbation Techniques

A. Basic Theorems

Consider the nonlinear initial value problem given by Eq. (6). Also, to make the analysis simple, let us consider Eq. (6) without input function \mathbf{u} as

$$\begin{aligned} \dot{\mathbf{x}}(t, \epsilon) &= \mathbf{f}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \epsilon, t], & \mathbf{x}(t=0) &= \mathbf{x}_0 \\ \epsilon\dot{\mathbf{z}}(t, \epsilon) &= \mathbf{g}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \epsilon, t], & \mathbf{z}(t=0) &= \mathbf{z}_0 \end{aligned} \quad (13)$$

Here, we follow the seminal works of Tikhonov³⁷⁴ and Vasiléva.³⁷⁸ When the small parameter $\epsilon = 0$ is set in Eq. (13), the degenerate problem is given by

$$\dot{\mathbf{x}}^{(0)}(t) = \mathbf{f}[\mathbf{x}^{(0)}(t), \mathbf{z}^{(0)}(t), 0, t] \quad (14)$$

$$0 = \mathbf{g}[\mathbf{x}^{(0)}(t), \mathbf{z}^{(0)}(t), 0, t] \quad (15)$$

Assuming that we are able to solve the algebraic Eq. (15), we have

$$\mathbf{z}^{(0)}(t) = \mathbf{h}[\mathbf{x}^{(0)}(t), t] \quad (16)$$

When Eq. (16) is used in Eq. (14), the reduced-order problem becomes

$$\dot{\mathbf{x}}^{(0)}(t) = \mathbf{f}^0(\mathbf{x}^{(0)}(t), t), \quad \mathbf{x}^{(0)}(t=0) = \mathbf{x}_0 \quad (17)$$

From Eq. (16), it is evident that $\mathbf{z}^{(0)}(0)$ is not in general equal to \mathbf{z}_0 . The two main features of singular perturbation theory are degeneration and asymptotic expansion.

Some important assumptions are given before we state the main results.^{8,398}

Assumption 1: The functions f and g in Eq. (13) must depend on ϵ in a regular way.

Assumption 2: The root $z^{(0)}(t)$ of Eq. (16) is called an isolated root, if there exists an $\epsilon > 0$ such that Eq. (15) has no solution other than $h[x^{(0)}(t), t]$ for $|z^{(0)}(t) - h(x^{(0)}(t), t)| < \epsilon$.

Assumption 3: The solution $z^{(0)}(t)$ from Eq. (15) is an asymptotically stable equilibrium point of the boundary-layer equation

$$\frac{dz(\tau)}{d\tau} = g[x^{(0)}(t), z(\tau), 0, t] \quad (18)$$

as $\tau \rightarrow \infty$. This means that the Jacobian matrix g_z of Eq. (18) has all eigenvalues with negative real parts and that the boundary conditions are in the domain of influence of the equilibrium point.

In degeneration, our interest is to find the conditions under which the solution of the full problem given by Eq. (13) tends to the solution of the degenerate problem of Eq. (17). A theorem due to Tikhonov⁵ concerning degeneration is given next (for details see Refs. 8, 257, and 398).

Theorem 1: The exact solutions $x(t, \epsilon)$ and $z(t, \epsilon)$ of the full problem given by Eq. (13) are related to the solutions $x^{(0)}(t)$ and $z^{(0)}(t)$ of the degenerate problem given by Eqs. (14) and (15) as

$$\begin{aligned} \lim_{\epsilon \rightarrow 0} [x(t, \epsilon)] &= x^{(0)}(t), & 0 \leq t \leq T \\ \lim_{\epsilon \rightarrow 0} [z(t, \epsilon)] &= z^{(0)}(t), & 0 < t \leq T \end{aligned} \quad (19)$$

under certain assumptions.^{257,398} Here, T is any number such that $z^{(0)}(t) = h[x^{(0)}(t), t]$ is an isolated stable root of Eq. (15) for $0 \leq t \leq T$. The convergence is uniform in $0 \leq t \leq T$ for $x(t, \epsilon)$, and in any interval $0 < t_1 \leq t \leq T$ for $z(t, \epsilon)$, and the convergence of $z(t, \epsilon)$ will usually be nonuniform at $t = 0$.

The second feature in singular perturbation theory is the asymptotic expansion for the solutions. [Note that, in general, a function $f(\epsilon)$ has the asymptotic power series expansion,²⁹⁰ if it can be expressed as

$$f(\epsilon) = \sum_{j=0}^N f_j \epsilon^j + \mathcal{O}(\epsilon^{N+1}); \quad \epsilon \rightarrow 0$$

where \mathcal{O} is Landau order symbol.] The main result was given by Vasiléva,³⁷⁸ Wasow,³⁹⁸ and Naidu²⁵⁷ in the form of the following theorem.

Theorem 2: There exist an $\epsilon_0 > 0$, with $0 \leq \epsilon \leq \epsilon_0$, and $R(t, \epsilon)$ and $S(t, \epsilon)$ having (regular) asymptotic expansions and uniformly bounded in the interval considered, such that

$$\begin{aligned} x(t, \epsilon) &= \sum_{i=0}^j [x^{(i)}(t) + \bar{x}^{(i)}(\tau) - \underline{x}^{(i)}(\tau)] \epsilon^i + R(t, \epsilon) \epsilon^{j+1} \\ z(t, \epsilon) &= \sum_{i=0}^j [z^{(i)}(t) + \bar{z}^{(i)}(\tau) - \underline{z}^{(i)}(\tau)] \epsilon^i + S(t, \epsilon) \epsilon^{j+1} \end{aligned} \quad (20)$$

where $\tau = t/\epsilon$, $x^{(i)}(t)$, and $z^{(i)}(t)$ are the outer or degenerate series solutions (so called because these solutions are valid outside the boundary layer), $\bar{x}^{(i)}(\tau)$ and $\bar{z}^{(i)}(\tau)$ are the inner solutions (so called because these solutions are valid inside the boundary layer), and $\underline{x}^{(i)}(\tau)$ and $\underline{z}^{(i)}(\tau)$ are the intermediate solutions (so called because of the common part of the outer and inner solutions).

The details of obtaining these various series solutions are given in Refs. 257 and 398. The inner and intermediate series solutions are obtained from the stretched system

$$\frac{dx(\tau)}{d\tau} = \epsilon f[x(\tau), z(\tau), \epsilon, \epsilon\tau], \quad \frac{dz(\tau)}{d\tau} = g[x(\tau), z(\tau), \epsilon, \epsilon\tau] \quad (21)$$

obtained by using the stretching transformation $\tau = t/\epsilon$ in Eq. (13).

Alternatively, the solution is obtained as

$$x(t, \epsilon) = x_0(t, \epsilon) + x_c(\tau, \epsilon), \quad z(t, \epsilon) = z_0(t, \epsilon) + z_c(\tau, \epsilon) \quad (22)$$

where $x_0(t, \epsilon)$ and $z_0(t, \epsilon)$ are called outer solutions, and $x_c(\tau, \epsilon) = \bar{x}(\tau, \epsilon) - \underline{x}(\tau, \epsilon)$ and $z_c(\tau, \epsilon) = \bar{z}(\tau, \epsilon) - \underline{z}(\tau, \epsilon)$ are often called boundary-layer corrections, which are obtained as series solutions from^{257,289}

$$\begin{aligned} \frac{dx_c(\tau)}{d\tau} &= \epsilon f[x_0(\epsilon\tau, \epsilon) + x_c(\tau, \epsilon), z_0(\epsilon\tau, \epsilon) + z_c(\tau, \epsilon), \epsilon, \epsilon\tau] \\ &\quad - \epsilon f[x_0(\epsilon\tau, \epsilon), z_0(\epsilon\tau, \epsilon), \epsilon, \epsilon\tau] \\ \frac{dz_c(\tau)}{d\tau} &= g[x_0(\epsilon\tau, \epsilon) + x_c(\tau, \epsilon), z_0(\epsilon\tau, \epsilon) + z_c(\tau, \epsilon), \epsilon, \epsilon\tau] \\ &\quad - g[x_0(\epsilon\tau, \epsilon), z_0(\epsilon\tau, \epsilon), \epsilon, \epsilon\tau] \end{aligned} \quad (23)$$

In the case of a singularly perturbed linear, time-invariant system given by Eq. (4), the preceding two theorems imply that stability conditions require that

$$\text{Re}\{\lambda_i[A_{22}]\} < 0, \quad i = 1, \dots, m \quad (24)$$

In other words, if the matrix A_{22} is stable, then the asymptotic expansions can be carried out to arbitrary order.^{66,206}

In the case of a general boundary value problem, it is expected to have initial and final boundary layers, and, hence, the asymptotic solution is obtained as an outer solution in terms of the original independent variable t , initial layer correction in terms of an initial stretched variable $\tau = t/\epsilon$, and final layer correction in terms of a final stretched variable²⁹⁰ $\sigma = (t_f - t)/\epsilon$.

Again, to illustrate the earlier given points, reconsider the simple initial value problem given by Eq. (7) with $\epsilon = 0.1$, $x(0) = 2$, and $z(0) = 3$. For the state variable $z(t, \epsilon)$, the various zeroth-order solutions shown in Fig. 2 are as follows.

1) The outer solution, $z^{(0)}(t)$ is obtained from Eq. (8).

2) The inner solution, $\bar{z}^{(0)}(\tau)$ is obtained as $\bar{z}^{(0)}(\tau) = -x(0) + [x(0) + z(0)]e^{-\tau}$ by solving

$$\frac{d\bar{z}^{(0)}(\tau)}{d\tau} = 0, \quad \bar{z}^{(0)}(\tau = 0) = x(0)$$

$$\frac{d\bar{z}^{(0)}(\tau)}{d\tau} = -\bar{x}^{(0)}(\tau) - \bar{z}^{(0)}(\tau), \quad \bar{z}^{(0)}(\tau = 0) = z(0) \quad (25)$$

3) The intermediate solution, $\underline{z}^{(0)}(\tau)$ is obtained as $\underline{z}^{(0)}(\tau) = -x(0)$ by solving

$$\frac{d\underline{z}^{(0)}(\tau)}{d\tau} = 0, \quad \underline{z}^{(0)}(\tau = 0) = x^{(0)}(0) = x(0)$$

$$\frac{d\underline{z}^{(0)}(\tau)}{d\tau} = -\underline{x}^{(0)}(\tau) - \underline{z}^{(0)}(\tau), \quad \underline{z}^{(0)}(\tau = 0) = z^{(0)}(0) \quad (26)$$

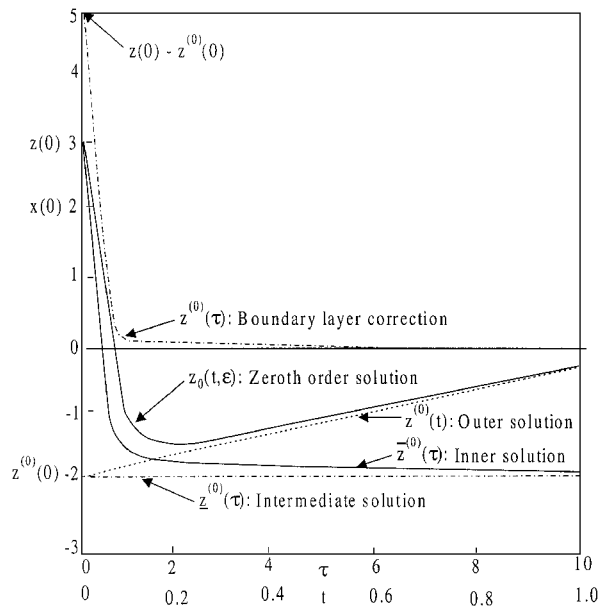


Fig. 2 Outer, inner, intermediate, and boundary-layer correction solutions.

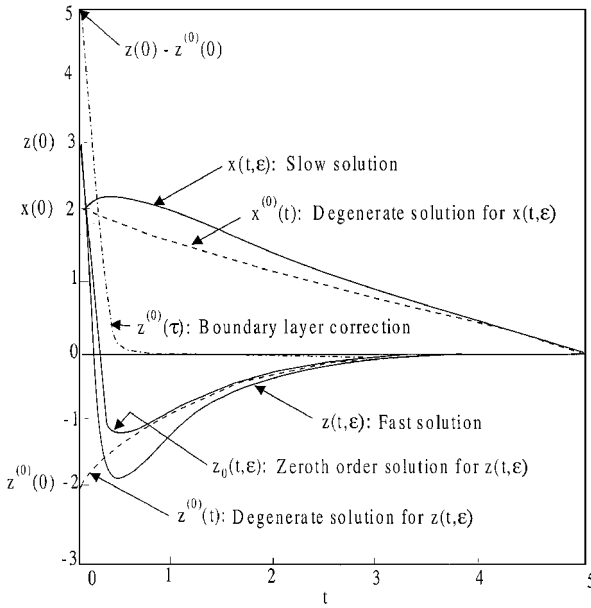


Fig. 3 Basic solutions of singular perturbation technique.

4) The boundary layer correction is $z_c^{(0)}(\tau) = \bar{z}^{(0)}(\tau) - \underline{z}^{(0)}(\tau) = [x(0) + z(0)]e^{-\tau}$.

5) The zeroth-order solution is $z_0(t, \epsilon) = z^{(0)}(t) + \bar{z}^{(0)}(\tau) - \underline{z}^{(0)}(\tau)$.

The various zeroth-order solutions for both $x(t, \epsilon)$ and $z(t, \epsilon)$ are shown in Fig. 3.

1) The boundary-layer corrections are $x_c(\tau, \epsilon)$ and $z_c(\tau, \epsilon)$.

2) The zeroth-order solutions are

$$x_0(t, \epsilon) = x^{(0)}(t) + x_c(\tau, \epsilon), \quad z_0(t, \epsilon) = z^{(0)}(t) + z_c(\tau, \epsilon) \quad (27)$$

3) However, the zeroth-order boundary-layer correction $x_c(\tau, \epsilon)$ for the slow solution turns out to be zero in the present formulation.

B. Method of Matched Asymptotic Expansions

A method closely related to Vasiléva's called the method of MAE, has been used extensively in fluid mechanics.^{90,102,115–117} Briefly, in this method for the singularly perturbed, initial value problem given by Eq. (13), the approximate composite solution is expressed in three parts, outer, inner, and common solutions. The outer solution is valid in the region outside the boundary layer, whereas the inner solution is valid inside the boundary layer. Because these two regions are bound to overlap, a matching process is required to identify the common solution. A composite solution, valid in the entire region, is constructed as the sum of the outer solution and inner solution from which we need to subtract the common solution.

Thus matching is accomplished by extending the outer solution into the inner region by transforming the outer variable t to that of the inner variable τ and taking the limit as $\epsilon \rightarrow 0$. This is called the inner limit of the outer solution or expansion. Similarly, the outer limit of the inner solution or expansion is obtained by extending the inner solution into the outer region by transforming the inner variable τ to that of the outer variable t and taking the limit as $\epsilon \rightarrow 0$. By equating the inner limit of outer expansion with the outer limit of inner expansion, we can determine the common solution.

Thus, the composite solution is composed of

$$x_c = x^o + x^i - (x^o)^i = x^o + x^i - (x^i)^o \quad (28)$$

where x^o is the outer solution, x^i is the inner solution, $(x^o)^i$ is the inner expansion of the outer solution, and $(x^i)^o$ is the outer expansion of the inner solution. A critical step in the method of MAE is the evaluation of initial values for the outer solution. This is evaluated by using the matching principle, which is simply stated as

$$\begin{aligned} &\text{inner expansion of outer solution, } (x^o)^i \\ &= \text{outer expansion of inner solution, } (x^i)^o \end{aligned} \quad (29)$$

Similar expressions are easily written down for the fast variable z . It was further shown in Ref. 273 that the common solution $(x^o)^i = (x^i)^o$ is equivalent to the intermediate solution used in the singular perturbation method. Further details of the method of MAE are given in Refs. 184, 185, 260, 273, 383.

C. Time Scale Analysis

In general, the time scale system need not be in the singularly perturbed structure with a small parameter multiplying the highest derivative or some of the state variables of the state equation describing the system as given in Eq. (4) or (6). In other words, a singularly perturbed structure is only one form of two-time scale systems. In time scale analysis of a linear system, a block diagonalization transformation is used to decouple the original two time-scale system into two low-order slow and fast subsystems. Let us consider a general two-time scale, linear system

$$\begin{aligned} \dot{x}(t) &= A_{11}x(t) + A_{12}z(t) + B_1u(t) \\ \dot{z}(t) &= A_{21}x(t) + A_{22}z(t) + B_2u(t) \end{aligned} \quad (30)$$

possessing two widely separated groups of eigenvalues. Thus, we assume that n eigenvalues of the system given by Eq. (30) are small and that the remaining m eigenvalues are large, giving rise to slow and fast responses, respectively. We now use a two-stage linear transformation,^{73,201}

$$x_s(t) = (I_s - ML)x(t) - Mz(t), \quad z_f(t) = Lx(t) + I_fz(t) \quad (31)$$

to decouple the original system described by Eq. (30) into two slow and fast subsystems,

$$\dot{x}_s(t) = A_sx_s(t) + B_su(t), \quad \dot{z}_f(t) = A_fz_f(t) + B_fu(t) \quad (32)$$

where

$$\begin{aligned} A_s &= A_{11} - A_{12}L, & A_f &= A_{22} + LA_{12} \\ B_s &= B_1 - MLB_1 - MB, & B_f &= B_2 + LB_1 \end{aligned} \quad (33)$$

L and M are the solutions of the nonlinear algebraic Riccati-type equations

$$\begin{aligned} LA_{11} + A_{12} - LA_{12}L - A_{22}L &= 0 \\ A_{11}M - A_{12}LM - MA_{22} - MLA_{12} + A_{12} &= 0 \end{aligned} \quad (34)$$

and I is unity matrix.

Similar analysis exists for two-time scale discrete-time systems.^{235,257,278}

D. Open-Loop Optimal Control

From the guidance and control point of view, we focus on the SPaTS in optimal control systems and the related area of differential games. The need for order reduction associated with singular perturbation methodology is most acutely felt in optimal control design that demands the solution of state and costate equations with initial and final conditions. For the singularly perturbed continuous-time, nonlinear system given by Eq. (6), the performance index in a simplified form is usually taken as

$$J = S[x(t_f), z(t_f), t_f, \epsilon)] + \int_0^{t_f} V[x(t, \epsilon), z(t, \epsilon), u(t, \epsilon), t, \epsilon] dt \quad (35)$$

When the well-known theory of optimal control⁵⁵ is used, the optimization of the performance index given by Eq. (35), subject to the plant equation given by Eq. (6) and the boundary conditions [with fixed initial conditions $x(t=0) = x_0, z(t=0) = z_0$ and free final conditions $x(t_f) = x_f, z(t_f) = z_f$], leads us to (for unconstrained control)

$$\begin{aligned}
0 &= \frac{\partial \mathcal{H}}{\partial \mathbf{u}} = -\mathcal{H}_{\mathbf{u}} \\
\frac{d\lambda_x}{dt} &= -\frac{\partial \mathcal{H}}{\partial \mathbf{x}} = -\mathcal{H}_{\mathbf{x}}, \quad \lambda_x(t_f) = \frac{\partial S}{\partial \mathbf{x}} \Big|_{t_f} \\
\epsilon \frac{d\lambda_z}{dt} &= -\frac{\partial \mathcal{H}}{\partial \mathbf{z}} = -\mathcal{H}_{\mathbf{z}}, \quad \epsilon \lambda_z(t_f) = \frac{\partial S}{\partial \mathbf{z}} \Big|_{t_f} \quad (36)
\end{aligned}$$

where λ_x and $\epsilon \lambda_z$ are the costates or adjoints corresponding to the states $\mathbf{x}(t)$ and $\mathbf{z}(t)$, respectively, and \mathcal{H} is the Hamiltonian given by

$$\begin{aligned}
\mathcal{H} &= V[\mathbf{x}(t), \mathbf{z}(t), \mathbf{u}(t), t, \epsilon] + \lambda_x' f[\mathbf{x}(t), \mathbf{z}(t), \mathbf{u}(t), t, \epsilon] \\
&\quad + \lambda_z' g[\mathbf{x}(t), \mathbf{z}(t), \mathbf{u}(t), t, \epsilon] \quad (37)
\end{aligned}$$

where the prime denotes transpose. For constrained control, $\mathbf{u}(t) = \arg \min_{\mathbf{u} \in U} \mathcal{H}$, where U is a set of admissible controls. The state and costate systems given by Eqs. (6) and (36), respectively, constitute a singularly perturbed, two-point boundary value problem (TPBVP) as^{119,120}

$$\begin{aligned}
\frac{d\mathbf{x}(t, \epsilon)}{dt} &= \mathbf{f}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t] \\
\frac{d\lambda_x(t, \epsilon)}{dt} &= -\mathcal{H}_{\mathbf{x}}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \lambda_x(t, \epsilon), \lambda_z(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t] \\
\epsilon \frac{d\lambda_z(t, \epsilon)}{dt} &= \mathbf{g}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t] \\
\epsilon \frac{d\lambda_z(t, \epsilon)}{dt} &= -\mathcal{H}_{\mathbf{z}}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \lambda_x(t, \epsilon), \lambda_z(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t] \\
0 &= \mathcal{H}_{\mathbf{u}}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \lambda_x(t, \epsilon), \lambda_z(t, \epsilon), \mathbf{u}(t, \epsilon), \epsilon, t] \quad (38)
\end{aligned}$$

with boundary conditions \mathbf{x}_0 , \mathbf{z}_0 , $\lambda_x(t_f)$, and $\lambda_z(t_f)$. Using the boundary-layer method, the solution to the preceding full problem is obtained as

$$\begin{aligned}
\mathbf{x}(t, \epsilon) &= \mathbf{x}_o(t, \epsilon) + \mathbf{x}_i(\tau_i, \epsilon) + \mathbf{x}_f(\tau_f, \epsilon) \\
&\quad \dots \\
\mathbf{u}(t, \epsilon) &= \mathbf{u}_o(t, \epsilon) + \mathbf{u}_i(\tau_i, \epsilon) + \mathbf{u}_f(\tau_f, \epsilon) \quad (39)
\end{aligned}$$

where $\mathbf{x}_o(t, \epsilon)$, $\mathbf{x}_i(\tau_i, \epsilon)$, and $\mathbf{x}_f(\tau_f, \epsilon)$ are outer, initial boundary-layer correction and final boundary-layer correction solutions, respectively, having asymptotic expansions in power of ϵ , and $\tau_i = t/\epsilon$ and $\tau_f = (t_f - t)/\epsilon$ are initial and final stretching transformations, respectively. Further details are found in Refs. 119 and 120.

Note that the final boundary-layer system needs to be asymptotically stable in backward time, that is, inherently unstable in forward time. This situation can create difficulties in trying to satisfy the given boundary conditions, and Kelley¹⁸¹ and Cliff et al.⁸⁹ suggested a proper selection of boundary conditions to suppress any unstable component of the boundary-layers solution.

The Mayer problem in which the performance index in Eq. (35) contains only the terminal cost function (see Ref. 54) is an important special case. The optimal control problem has been studied by many workers.^{10,21,100,101,119,120,171,288,289,326,350,396}

Dynamic programming has also been used for singularly perturbed optimal control problems.^{37,214} Similar results exist for singularly perturbed, discrete-time optimal control systems.^{170,228,229,257,278,307}

E. Closed-Loop Optimal Control

The closed-loop optimal control problem has some very elegant results for linear systems leading to a matrix Riccati equation. For the singularly perturbed, linear continuous-time system given by Eq. (4), consider a quadratic performance index²⁵⁷

$$J = \frac{1}{2} \mathbf{y}'(t_f) S \mathbf{y}(t_f) + \frac{1}{2} \int_0^{t_f} [\mathbf{y}'(t) Q \mathbf{y}(t) + \mathbf{u}'(t) R \mathbf{u}(t)] dt \quad (40)$$

where $\mathbf{y} = [\mathbf{x}, \epsilon \mathbf{z}]'$, S and Q are positive semidefinite $(n+m) \times (n+m)$ -dimensional matrices, and R is a positive definite $r \times r$ matrix. We arrive at the closed-loop optimal control as

$$\mathbf{u}(t) = -R^{-1} B' P \mathbf{y}(t) \quad (41)$$

where P is an $(n+m) \times (n+m)$ -dimensional, positive-definite, symmetric matrix satisfying the singularly perturbed matrix Riccati differential equation

$$\dot{P}(t) = -P(t)A - A'P(t) + P(t)BR^{-1}B'P(t) - Q, \quad P(t_f) = S \quad (42)$$

where

$$A = \begin{bmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \\ \epsilon & \epsilon \end{bmatrix}, \quad B = \begin{bmatrix} B_1 \\ B_2 \\ \epsilon \end{bmatrix} \quad (43)$$

$$P(t) = \begin{bmatrix} P_{11}(t) & \epsilon P_{12}(t) \\ \epsilon P_{12}'(t) & \epsilon P_{22}(t) \end{bmatrix} \quad (44)$$

Note that the matrix P in the preceding Riccati equation is dependent on the small parameter ϵ and is in the singularly perturbed form. Assuming series expansions for P , we can get their asymptotic series solutions. There are several studies on closed-loop optimal control of singularly perturbed continuous-time systems.^{4,70,101,170,202,203,230,255,396} The linear quadratic regulator problem with three-time scale behavior has been investigated in Ref. 329. Related work is the closed-loop optimal control of linear and nonlinear systems decomposed into slow and fast subsystems.^{121,134,144,171,174,286,287,289,317,371}

A two-time scale approximation to the linear quadratic optimal output regulator problem was examined in Refs. 253–255. Also, see Ref. 1 for optimal control of bilinear systems. Time-optimal control of singularly perturbed systems was studied in Refs. 15, 16, 101, 140, 141, and 336.

Near-optimal control of a class of singularly perturbed systems nonlinear in fast states and linear in slow states was investigated by Sannuti,³²⁶ Chow and Kokotovic,⁸⁴ Kokotovic and Chow,²⁰⁴ Saberi and Khalil,³¹⁶ Kokotovic and Khalil,²⁰⁵ Kokotovic et al.,²⁰⁶ and Khalil and Hu.¹⁹²

Another class of problems occurring in optimal control, where the condition on the Hamiltonian \mathcal{H}_{uu} becomes singular, is called singular optimal control problems.⁵⁴ If $\mathcal{H}_{uu} = 0$ during a finite interval of time, the corresponding trajectories are called singular arcs. Such problems were treated in Refs. 9 and 66. Some singular problems can be treated as limiting cases of cheap control problems as in Refs. 291 and 292. A related problem arises when the full problem contains a state-constrained arc, which was treated in Ref. 68.

Similar results exist for closed-loop optimal control of singularly perturbed, discrete-time linear systems, leading to matrix Riccati difference equation (see Refs. 169, 170, 199, 228, 229, 257, 277, 278, 294, and 302). Time scale analysis of optimal regulator problems in discrete-time control systems was considered in Refs. 171, 172, 270, 271, and 294.

F. Differential Games

Another type of problem that often arise in aerospace systems is differential games. In the design of multi-input control problems, the objective in the optimal policy may be met by formulating the control problem as a differential game. In a general differential game, there are several players, each trying to minimize their individual cost functional. Each player controls a different set of inputs to a single system. The strategies usually considered are Pareto optimal, Nash equilibrium, or Stackelberg (see Refs. 128 and 196). In the case of two-player Nash game, we have

$$\begin{aligned}
\dot{\mathbf{x}}(t, \epsilon) &= \mathbf{f}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}_1(t), \mathbf{u}_2(t), t], & \mathbf{x}(t=0) &= \mathbf{x}_0 \\
\epsilon \dot{\mathbf{z}}(t, \epsilon) &= \mathbf{g}[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}_1(t), \mathbf{u}_2(t), t], & \mathbf{z}(t=0) &= \mathbf{z}_0 \quad (45)
\end{aligned}$$

and the performance index

$$J = \int_0^{t_f} V_i[\mathbf{x}(t, \epsilon), \mathbf{z}(t, \epsilon), \mathbf{u}_1(t), \mathbf{u}_2(t), t] dt, \quad i = 1, 2 \quad (46)$$

The main question investigated has been one of well posedness whereby the limit of performance using the exact strategies as $\epsilon \rightarrow 0$ is compared to the performance using simplified strategies with $\epsilon = 0$. The problem is said to be well posed if the two limits are equal and the singularly perturbed zero-sum games are always well posed. Also, note that the structure of a well-posed singularly perturbed (two-player) Nash game is composed of a reduced-order Nash game and two independent optimal control problems of the players (see Ref. 320). These and other aspects of differential games have been studied in Refs. 124, 187, 188, 194–196, 211, 319, 321–323, and 324.

Application of SPaTS to other control topics (only typical publications are referenced) such as observers,²⁹³ high-gain feedback,⁴⁰⁷ multimodeling,^{97,132,193} stochastic control,¹⁹¹ averaging and differential inclusion,¹³³ invariant manifolds,^{210,361} H_∞ control,^{30,190,373} robust control,^{85,386} sliding mode control,³ parameter identification,⁷⁴ uncertain systems,^{41,96} distributed parameter systems,^{22,32} and adaptive control^{161,312} are not discussed in detail here.

IV. Applications of SPaTS to Aerospace Guidance and Control

Singular perturbation and time scale problems arise in a natural way in many fields of applied mathematics, engineering, and biological sciences such as fluid dynamics, electrical and electronic circuits and systems, electrical power systems, aerospace systems, nuclear reactors, biology, and ecology.^{106,384} In this section, we present various problems in aerospace systems that possess SPaTS character.⁶⁶ A brief historical development of SPaTS follows first.

A. Brief History of SPaTS in Aerospace Systems

An excellent account of the “historical development of techniques for flight path optimization of high performance aircraft” is found in a NASA report by Mehra et al.²⁴⁷ The report starts with the work of Kaiser¹⁶⁶ in 1944 on the vertical-plane minimum-time problem and reviews other works due to Miele²⁵¹ (1950), Kelley¹⁷⁹ (1959), and so on. In the horizontal-plane, minimum-time problem, the report reviews the works of Connor⁹² (1967), Bryson and Lele⁵² (1969), and others. In the three-dimensional, minimum-time problem, important contributions were made by Kelley and Edelbaum¹⁸³ (1970), Hedrick and Bryson¹⁴² (1971), and others.

Singular perturbation analysis in flight mechanics is intimately connected with the concept of energy-state approximation, first introduced by Kaiser¹⁶⁶ in 1944. Kaiser introduced the notion of resultant height, which is today called energy height or specific energy, as the sum of an aircraft’s potential and kinetic energy per unit weight.

An excellent account of the connection of Kaiser’s¹⁶⁶ early work and that of singular perturbation analysis of aircraft energy climbs can be found in Ref. 250. The use of energy-state approximation in both two- and three-dimensional optimal trajectory analysis persisted until the late 1960s. Excellent examples of such analyses can be found in the work of Rutowski³¹⁵ in 1954 and later by Bryson et al.⁵¹ and Hedrick and Bryson¹⁴³ in the late 1960s and early 1970s.

Specific investigation on the application of the theory of SPaTS to aerospace systems began in the early 1970s by Kelley^{176,181} and Kelley and Edelbaum.¹⁸³ Kelley in particular was the first to suggest the use of an artificial small parameter to provide a singular perturbation structure. This analysis was later called forced singular perturbation analysis.³⁵² However, we note the article by Ashley,²³ who first suggested the use of multiple time scales in vehicle dynamic analysis.

According to Mehra et al.,²⁴⁷ Kelley and his associates,^{176,181,183} in the early 1970s, were the first to apply the theory of singular perturbations to aircraft trajectory optimization problems. In the first paper, Kelley and Edelbaum¹⁸³ addressed three-dimensional maneuvers, both energy climbs and energy turns. Subsequently, some general theoretical problems for a two-state system¹⁷⁶ and horizontal plane control¹⁷⁵ of a rocket were studied. Other problems considered by Kelley were energy state models with turns¹⁷⁷ and three-dimensional maneuvers with variable mass.^{178,181} In Ref. 181, Kelley gave a detailed account of singular perturbations in aircraft optimization.

Ardema⁷ applied the method of MAE to the vertical plane minimum time-to-climb problem and further gave an excellent general treatment of aircraft problems via singular perturbations.⁸ Breakwell^{45,46} considered the vertical plane minimum-time problem where drag D is much less than lift L , thus defining a natural singular perturbation parameter $\epsilon = D/L$.

The works so far applied the theory of SPaTS to obtain open-loop optimal controls. Calise, in a series of papers, focused on complete time scale separation and obtained closed-loop (feedback) controls. In particular, Calise considered the vertical plane minimum-time problem in Refs. 60 and 61. An excellent study devoted entirely to the application of singular perturbation theory to a variety of aerospace problems with special emphasis on real-time computation of nonlinear feedback controls for optimal three-dimensional aircraft maneuvers is given by Mehra et al.²⁴⁷

Thereafter, there was a steady interest in this area of the application of SPaTS to aerospace problems. Among others are Ardema,¹¹ Ardema and Rajan,¹⁷ Calise,⁶⁶ Kelley et al.,¹⁸² Naidu and Price,²⁷² and Shinar and Farber.³⁵²

Problems in flight mechanics are by their very nature nonlinear, particularly in formulations that are appropriate for aircraft performance analysis and development of guidance and control strategies. The nonlinear equations of motion are further complicated by the presence of aerodynamic and propulsive forces that are dependent on flight conditions, often given in the form of tabular data. Consequently, from the very beginning, simplified analysis models based on quasi-steady approximations were employed in studies of aircraft performance analysis and design. These approximations were invariably introduced to achieve an order reduction and, thus, simplification in the equations of motion, permitting an approximate analysis of an otherwise complicated optimization problem, thus leading naturally to an interest in singular perturbation methods in flight dynamics. These methods of approximation were essential before the advent of high-speed digital computation and the present-day availability of powerful numerical optimization algorithms based on either the calculus of variations or nonlinear programming. However, the development of simplified models, order reduction, and perturbation methods of analysis continue to play an important role mainly because these methods lead to the development of near-optimal, closed-loop (often simple) solutions, which enhance our physical insight into the problem, and in most cases these solutions are useful for onboard implementation.

The importance of singular perturbations in flight mechanics is that it represents a mathematical realization of the intuitive approach to simplified models obtained via order reduction. More important, the theory of SPaTS provides a mechanism for correcting the solutions for the neglected dynamics that is essential to the development of guidance and control strategies for many aerospace systems. For example, a slow phugoid mode and a fast short-period mode are well-known time-scale characteristics of the longitudinal motion of an airplane.

In many aerospace problems, no singular perturbation parameter appears explicitly on physical considerations. In such cases, a parameter may be artificially inserted to suppress the variables in the equations that are expected to have relatively negligible effects. For example, in a flight dynamics problem for a crewed vehicle, a complete set of equations of motion would consist of the coupled system of the six equations of rigid-body motion of the vehicle as a whole, the equations describing the dynamics of the control systems, the pilot’s arm and foot, etc. It is obvious that many of these effects can be neglected if, for example, the vehicle trajectory is the only thing of interest. In particular, in the minimum time-to-climb (MTC) problem, it has been found in practical problems for supersonic aircraft that the flight-path angle is capable of relatively rapid change as compared with the altitude, which, in turn, is fast compared to specific energy. It is this separation of the speed of the variables that motivates the formulation of singular perturbation problems by the artificial (forced) insertion of the singular perturbation parameter. This is often referred to as the forced singular perturbation technique. A good account of the applications of SPaTS theory to a variety of aerospace problems, such as piloting a missile by controlling the transverse acceleration while keeping a constant role angle and a pursuit problem, are described by Fossard et al.¹¹⁴

B. Selection of Time Scales

Singular perturbation and, hence, the (slow-fast) time scale character is often associated with a small parameter multiplying the highest derivative of the differential equation or multiplying some of the state variables of the state equations describing a physical system. However, often the small parameter does not appear in the desired form, or the small parameter may not be identifiable at all. Only by physical insight and past experience does one know that a particular system has slow and fast modes. For cases where it is not possible to identify the small parameter ϵ , one can artificially introduce the small parameter ϵ to be associated with the fast dynamics. Thus, the selection of time scales is an important aspect of the theory of SPaTS^{17,18,69,247} and can be categorized into three approaches: 1) direct identification of small parameters such as small time constants, moments of inertia, high Reynolds number, and so on; 2) transformation of state equations; and 3) linearization of the state equations. Although it is possible to identify the small parameters in some simple cases,^{45,63} it is quite tedious in the case of more complex problems of interest. Kelley^{180,181} considered transformations of state variables for nonlinear systems that reduce dynamic coupling and expose time scale separation, but obtaining the transformations requires solving partial differential equations. In the third approach, the standard linearization of a nonlinear system around an operating point is performed, and the eigenvalues of the linearized dynamics are examined for time scale separation.³⁷⁰

Ardema and Rajan^{17,18} proposed "a rational method of identifying time-scale separation that is based on the concept of the speed of state variables and requires the knowledge only of the state equation."¹⁷ They chose the F-4C aircraft to illustrate their method. Furthermore, it is noted that in the case of supersonic aircraft, the state variables altitude h and velocity V are approximately of the same speed and are, therefore, not time scale separable for singular perturbation analysis. Consider the three-dimensional dynamics of an aircraft center of mass,

$$\begin{aligned}\dot{x} &= V \cos \gamma \cos \psi, & \dot{y} &= V \cos \gamma \sin \psi \\ \dot{h} &= V \sin \gamma, & \dot{V} &= g(T - D - \sin \gamma) \\ \dot{\psi} &= gL \sin \sigma / V \cos \gamma, & \dot{\gamma} &= g(L \cos \sigma - \cos \gamma) / V\end{aligned}\quad (47)$$

where x and y are the horizontal position coordinates, ψ is the heading angle, γ is the flight-path angle, and σ is the bank angle. T , D , and L are the thrust, drag, and lift per unit weight, respectively, given as

$$\begin{aligned}T &= \beta T_M(h, V), & D &= D_0(h, V) + D_I(h, V)L^2 \\ L_m &\leq L \leq L_M = \min[n, \hat{L}(h, V)] \\ \hat{L}(h, V) &= C_{L_\alpha}(h, V)\alpha_M \rho(h)V^2/2W\end{aligned}\quad (48)$$

where the control variables are the throttle angle β , the bank angle γ , and the lift per unit weight L . The preceding relations are obtained under the normal assumptions^{8,388} of 1) flat Earth, 2) constant weight, 3) thrust being independent of angle of attack, and so on. Although one can assume¹⁷ that x , y , and ψ are the slowest state variables and that γ is the fastest variable, a transformation of state variables³⁰⁵ is needed to provide a better time scale separation for the intermediate variables. Thus, we transform h and V to a new set of variables E and f resulting in the state equations^{18,182}

$$\begin{aligned}\dot{x} &= V \cos \gamma \sin \psi, & \dot{y} &= V \cos \gamma \cos \psi \\ \dot{\psi} &= gL \sin \mu / V \sin \gamma, & \epsilon \dot{E} &= P \\ \epsilon^2 \dot{f} &= f_h V \sin \gamma + f_V g(P - V \sin \gamma) / V \\ \epsilon^2 \dot{\gamma} &= g(L \cos \mu - \cos \gamma) / V\end{aligned}\quad (49)$$

where $E = V^2/2 + gh$ is specific energy, P is specific excess power, and f is a variable that is constant along the reduced solution. For zoom climbs and dives that provide rapid variations in h and V by the interchange of kinetic and potential energy, the changes in E are relatively slow.

Another approach to the identification of time scales in dynamic systems proposed by Ardema¹² is called the computational singular

perturbation (CSP) method, the development of which was based on analysis of complex chemical reactions.^{222–225} The CSP method produces time scale information in the course of numerical computation. Also, see recent work by Rao and Mease^{308,309} for further use of CSP in solving hypersensitive optimal control problems.

Recently, a systematic approach was developed for identifying the singular perturbation parameter via nondimensionalization of the problem variables arising in airbreathing vehicles with hypersonic cruise and orbital capabilities.⁶⁹ For example, the flight dynamics of the center of mass of an aircraft in flight in a vertical plane are governed by

$$\begin{aligned}\dot{E} &= V(T - D)/m, & \dot{\gamma} &= L/mV - (g \cos \gamma)/V \\ \dot{h} &= V \sin \gamma\end{aligned}\quad (50)$$

In Refs. 7, 60, 64, and 183, based on experience, an artificial parameter ϵ (whose nominal value is equal to 1) is inserted to make γ and h fast variables:

$$\epsilon \dot{\gamma} = L/mV - (g \cos \gamma)/V, \quad \epsilon \dot{h} = V \sin \gamma \quad (51)$$

On the other hand, in Ref. 69, the authors define a set $S \equiv \{t_0, E_0, h_0, V_0, T_0, D_0, L_0\}$ of nondimensional quantities as

$$\begin{aligned}\tau &= t/t_0, & E_n &= E/E_0, & h_n &= h/h_0, & V_n &= V/V_0 \\ T_n &= T/T_0, & D_n &= D/D_0, & L_n &= L/L_0\end{aligned}\quad (52)$$

and imposing the following conditions $T_0 = D_0$, $T_0 t_0 V_0 / E_0 m = 1$, and $L_0 h_0 / m V_0^2 = 1$, it was possible to put Eq. (50) as

$$\begin{aligned}\frac{dE_n}{d\tau} &= V_n(T_n - D_n), & \epsilon \frac{d\gamma}{d\tau} &= \frac{(L_n - \cos \gamma)}{V_n} \\ \epsilon \frac{dh_n}{d\tau} &= V_n \sin \gamma\end{aligned}\quad (53)$$

where now the singular perturbation parameter $\epsilon = h_0 / V_0 t_0$. Thus, it is possible to identify a parameter ϵ naturally instead of introducing the same artificially.

Further consideration is given to choice of state variables suitable for singular perturbation analysis in Ref. 182 in connection with the MTC problem. See Ref. 360 for separation of time scales for the use of nonlinear dynamic inversion if the design of a flight control system for a supermaneuverable aircraft where angle of attack, sideslip angle, and bank angle are identified as the slow variables and the fast variables are the three angular rates: body-axis roll and pitch and yaw rates. Use of time scale separation technique for inverse simulation, where control inputs are to be determined for a prescribed flight maneuver, is found in Ref. 27 with an application to F-16 fighter aircraft and in Ref. 25 with an application to helicopter model. Other related material is found in Ref. 159.

Before proceeding, it is better to have some typical solutions of aircraft motion showing slow and fast solutions. In Ref. 26 for a typical aircraft, it was shown, for an F-16 fighter aircraft, that the slow variables are the inertial position and velocity components and that the fast variables are the Euler angles and the angular velocity components. One of the slow variables, the velocity V , and two of the fast variables, the angular velocity p and the Euler angle θ , are shown in Fig. 4.

C. Atmospheric Flight

The MTC problem is solved by Ardema⁷ using the technique of MAE. In the MTC problem, we wish to minimize the final time t_f subject to the equations of motion [a rearranged form of Eq. (50)]

$$\begin{aligned}\dot{h} &= V \sin \gamma, & \dot{E} &= V(F - D_L) \\ \dot{\gamma} &= (1/V)(L - \cos \gamma)\end{aligned}\quad (54)$$

and the boundary conditions $h(0) = h_0$, $h(t_f) = h_f$, $E(0) = E_0$, $E(t_f) = E_f$, $\gamma(0)$, and $\gamma(t_f)$ are either free or fixed. Here, h is altitude divided by the acceleration due to gravity at sea level g , v is velocity divided by acceleration due to gravity at sea level, L is the lift divided by weight, D_L is the drag due to lift divided by weight, and F is the thrust less zero lift drag, divided by weight. Experience

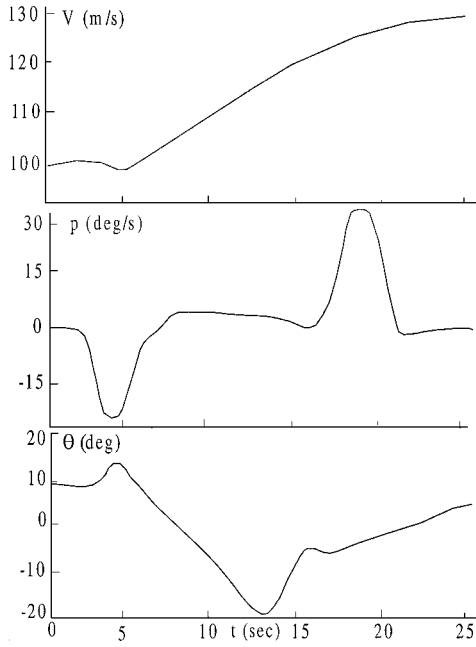


Fig. 4 Slow and fast solutions for an F-16 aircraft.²⁶

“indicates that among the state variables, E is *slow* relative to h , and h is *slow* relative to γ . It is this separation of the *speed* of the variables that motivates the selection of E as a state variable instead of V .”⁸ Thus, a possible formulation for the singular perturbation structure is

$$\begin{aligned}\dot{E} &= V(F - D_L), & \epsilon \dot{h} &= V \sin \gamma \\ \epsilon \dot{\gamma} &= (1/V)(L - \cos \gamma)\end{aligned}\quad (55)$$

The application of optimal control theory to the preceding singularly perturbed problem given by Eq. (55) leads to singularly perturbed TPBVP in terms of the state and costate variables. When the method of MAE is used, results are obtained in Ref. 8 up to first-order approximation. Furthermore, in Ref. 11, specific numerical algorithms of Picard, Newton, and averaging types are formally developed for solving the TPBVP arising in nonlinear singularly perturbed optimal control and compared with the computational requirements of the method of MAE. The (approximate) solutions for MTC problem by MAE are shown in Fig. 5 to illustrate the zeroth- and first-order solutions. In particular, note the improvement of the first-order solution over the zeroth-order solution for the flight-path angle γ .

Also, see Ref. 410 for obtaining a feedback solution by modifying the performance index and obtaining the same eigenvalues in the Hamiltonian matrix for the linearized problem obtained by Ardema.⁸

Next, consider three-dimensional flight-path optimization⁵⁹ with equations of motion as

$$\begin{aligned}\dot{V} &= (T - D)/m - g \sin \gamma, & \dot{h} &= V \sin \gamma \\ \dot{\gamma} &= (L \cos \sigma/m - g \cos \gamma)/V, & \dot{\psi} &= L \sin \sigma/mV \cos \gamma\end{aligned}\quad (56)$$

A singularly perturbed structure for Eq. (56) is

$$\begin{aligned}\dot{E} &= (T - D)V/mg, & \dot{\psi} &= L \sin \sigma/mV \cos \gamma \\ \epsilon \dot{h} &= V \sin \gamma, & \epsilon \dot{\gamma} &= (L \cos \sigma/m - g \cos \gamma)/V\end{aligned}\quad (57)$$

where the singular perturbation parameter ϵ , nominally equal to 1.0, is associated with the fast state variable $V = [2g(E - h)]^{1/2}$. Separation of the \dot{E} and $\dot{\psi}$ dynamics in Eq. (57) is accomplished by introducing a second time scaling parameter. Then the dynamics becomes

$$\begin{aligned}\epsilon_1 \dot{E} &= (T - D)V/mg, & \dot{\psi} &= L \sin \sigma/mV \cos \gamma \\ \epsilon_2 \dot{h} &= V \sin \gamma, & \epsilon_2 \dot{\gamma} &= (L \cos \sigma/m - g \cos \gamma)/V\end{aligned}\quad (58)$$

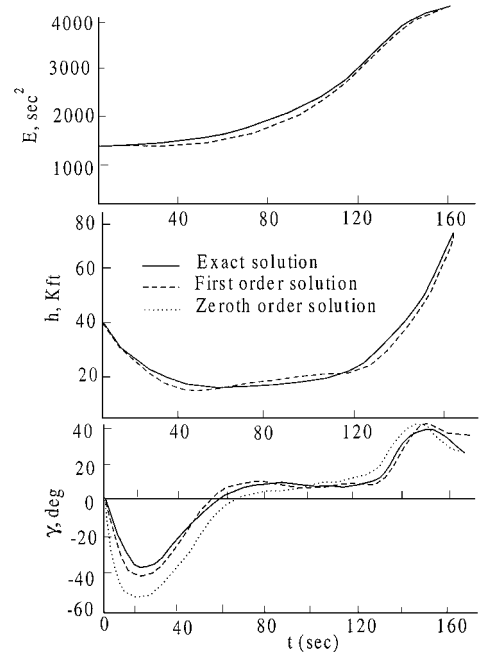


Fig. 5 Solutions for MTC problem.⁸

where ϵ_1 and ϵ_2 are taken such that

$$\lim_{\epsilon_1 \rightarrow 0, \epsilon_2 \rightarrow 0} \{\epsilon_2/\epsilon_1\} = 0 \quad (59)$$

Alternatively, in Eq. (58), we can take $\epsilon_1 = \epsilon$ and $\epsilon_2 = \epsilon^2$. For minimum-time flight, the optimization problem was solved with specific numerical results for an F-106 and an F-4E aircraft.

A different procedure was presented for the MAE to separately analyze state dynamics even when they vary on the same time scale. Several examples dealing with optimal aircraft flight that fall within this class of problems were discussed in Ref. 61. For optimal thrust magnitude control (TMC) and optimal lift control, the singular perturbation model considered for horizontal plane dynamics in Ref. 62 was

$$\begin{aligned}\dot{x} &= V \cos \psi, & \dot{y} &= V \sin \psi \\ \epsilon \dot{\phi} &= g L_n / W V, & \epsilon^2 \dot{V} &= g(T - D)/W\end{aligned}\quad (60)$$

The thrust T is constrained as $T_{\min} \leq T \leq T_{\max}$. The performance index to minimize the time-of-flight and fuel was chosen as

$$J = \int_{t_0}^{t_f} [ncT + (1 - n)] dt \quad (61)$$

where t_f is free, $n = 1$ corresponds to minimum fuel, and $n = 0$ corresponds to minimum time. The parameter c is the fuel flow per pound of thrust or a suitable scaling parameter.

Linearized models of longitudinal dynamics of airplanes are cast in the singularly perturbed form, and an output-feedback design method for linear, two-time scale systems was used to analyze specifically a stable (F8 aircraft) and an unstable (Boeing transport plane) airplane.⁷⁵ In this method, a fast compensator is designed first using the fast model; then a slow compensator is designed using a modified slow model.

An interesting problem dealing with synthesis of nonlinear flight-test trajectory controllers using results of prelinearizing transformation theory and singular perturbation theory was presented by Menon et al.²⁴⁸ The equations of motion for aircraft flight are written in a compact form as

$$\begin{aligned}\dot{x} &= A_1(x) + B_1(x) + C_1(x)u_1 \\ \epsilon \dot{z} &= A_2(x, u_1, z) + B_2(z) + C_2(x)u_2\end{aligned}\quad (62)$$

where $x = [V, \gamma, \beta, \theta, \phi, h, H]'$, $z = [p, q, r]'$, $u_1 = T$, $u_2 = [\delta_e, \delta_a, \delta_r]'$, β is angle of sideslip, θ is pitch attitude, ϕ is roll attitude, h is altitude, H is altitude rate, p is the total aerodynamic and thrust moment, q is pitch body rate, r is yaw body rate, T is engine

thrust, δ_e is elevator deflection, δ_a is aileron deflection, δ_r is rudder deflection, and ϵ is the artificial small parameter forced into the system dynamics such that the system exhibits the singular perturbation (time scale) character. The controller synthesis was carried out for an operational, fixed-wing, high-performance fighter/military aircraft.

Also, viewing high-gain feedback systems as a class of singular perturbation problems, decoupling of linear multivariable systems were discussed in Ref. 311 with applications to fighter/military aircraft (an experimental vertical/standard takeoff and landing aircraft) performing a number of maneuvers.

Another interesting application of the singular perturbation method in time-controlled optimal flight trajectory involving a military aircraft was provided in Ref. 385. The analysis included the effects of risk from a threat environment. Assuming that the risk can be quantified in terms of risk index per unit time, the cost due to risk is minimized in the optimization process. Here, in considering the horizontal plane aircraft motion using lateral equations, the slow variables identified are downrange position and aircraft mass, whereas cross-track position, energy height, and heading angle are identified as fast variables.

In the analysis of onboard, real-time, near-optimal guidance for the climb-dash mission involving a high-performance aircraft,⁴⁰⁰ some of the boundary-layer structure and hierarchical ideas of singular perturbations were used. Here, the singularly perturbed model used was

$$\begin{aligned}\epsilon^2 \dot{h} &= V \sin \gamma, & \epsilon^2 \dot{\gamma} &= (L - W \cos \gamma)/mV \\ \epsilon \dot{E} &= V(\eta T - D)/W, & \dot{x} &= V \cos \gamma\end{aligned}\quad (63)$$

where η is the throttle coefficient.

The equations of motion for longitudinal dynamic stability and response of an aircraft to small disturbances in terms of short- and long-term periods were analyzed using singular perturbation theory in Ref. 404. By the use of the theory of decoupling of input-output maps of nonlinear systems, Singh³⁵⁵ considered a scheme that gives rise to a singularly perturbed system describing the fast dynamics of the control vector for a nonlinear model of an aircraft.

An interesting application of SPaTS to atmospheric flight was proposed in Ref. 113 where "the objective was to optimize a direct operating cost over the whole trajectory, with a weighting for the price per minute of flight and the consumption."

Also, see Ref. 88 for a simple model that includes attitude dynamics in booster optimization and Ref. 87 for a simple model that includes thrust-vector control in aircraft optimization, where for certain boundary conditions there are two families of extremal solutions giving rise to a Darboux locus.

Robust control of a high-performance aircraft (model of the NASA high-angle-of-attack research vehicle) using feedback linearization coupled with structured singular value μ synthesis was studied by Reiner et al.,³¹⁰ where feedback linearization uses natural time scale separation between pitch rate and angle of attack.

In a typical singularly perturbed optimal control problem, the approximate solution consists of an outer solution, initial boundary-layer solution (correction) and terminal boundary-layer solution (correction). These solutions are of reduced order, and it is assumed that these are continuous functions of time for getting the asymptotic series solutions.²⁰ Many trajectory optimization problems, however, have discontinuous reduced-order solutions. Typical situations are the vertical-plane optimal climb problem when posed so that energy E is the single slow variable,^{7,8} and altitude h and velocity V are modeled as slow variables.⁴⁵ For supersonic aircraft, the outer solution, that is, the energy climb path, is typically discontinuous in the transonic region.^{305,399} These discontinuities, which occur at interior points, give rise to instantaneous jumps called interior transition layers and have the nature of boundary (initial and final) layers. To get uniformly valid approximate solutions, these interior transition layers are treated as the composition of two boundary layers, a forward layer and a backward layer, both beginning at the time, for example, \bar{t} , where the discontinuity occurs. In particular, the vertical-plane, point-mass, two-dimensional energy state model²⁰ that is in the singularly perturbed form and gives rise to interior transition layers is

$$\dot{E} = P, \quad \epsilon \dot{h} = V \sin \gamma, \quad \epsilon \dot{\gamma} = g(n - \cos \gamma)/V \quad (64)$$

where $P(E, H, n) = V(T - D)/W$, $V(E, h) = \sqrt{2g(E - h)}$, $n = L/W$, and $D(E, h, n) = A + Bn^2$.

The examples just given all suggest that altitude and flight path angle dynamics should be analyzed on the same time scale. This is due to the fact that complex eigenvalues appear in the Hamiltonian matrix associated with the necessary conditions for optimality associated with the boundary layer analysis of these dynamics.^{7,8} However, when h and γ are analyzed on the same time scale, it is not possible to obtain a feedback solution. A highly accurate method for obtaining a feedback which permits the analysis of h and γ dynamics on separate time scales can be found in Ref. 410.

D. Pursuit-Evasion and Target Interception

Pursuit-evasion problems, having their origin in differential games, were first discussed thoroughly by Shinar³⁴⁹ in all aspects of modeling and analysis by using (forced) singular perturbation technique (SPT). Subsequently, Shinar,³⁵⁰ Mishe and Speyer,³⁵² and Shinar³⁵¹ solved a class of pursuit-evasion problems using forced SPT.

The interception problem in the horizontal plane is described by Breakwell et al.,⁵⁰

$$\begin{aligned}\dot{R} &= V_E \cos \psi - V_p \cos(\psi - \theta) \\ \dot{\psi} &= -[V_E \sin \psi - V_p \sin(\psi - \theta)]/R, & \dot{\theta} &= (V_p/r_p)u\end{aligned}\quad (65)$$

where V_E and V_p are the constant velocities of the evader (target) and the pursuer (interceptor), r_p is the minimum turn radius of the pursuer, R is the range, and $u(t) \leq 1$ is the normalized control function. In the preceding problem, if the initial range R_0 is much larger than r_p , then ψ varies much more slowly than θ , and hence, ψ is much slower than θ . This time scale separation is expressed mathematically by first defining a small parameter as $\epsilon = r_p/R_0$ and rewriting Eq. (65) as

$$\begin{aligned}\dot{R} &= V_E \cos \psi - V_p \cos(\psi - \theta) \\ \dot{\psi} &= -[V_E \sin \psi - V_p \sin(\psi - \theta)]/R, & \epsilon \dot{\theta} &= (V_p/r_p)u\end{aligned}\quad (66)$$

which is now in the singularly perturbed structure. The performance index to be minimized here is

$$J = \int_{t_0}^{t_f} (1 + ku^2) dt \quad (67)$$

where k is a constant. Here, the authors⁵⁰ developed a method to construct a feedback control law for this class of singularly perturbed nonlinear optimization problems¹¹⁹ by assuming that the optimal cost functional J^* can be expanded in an asymptotic power series in the small parameter ϵ .

In Ref. 305, the problem of minimum-time interception of a target flying in three-dimensional space was analyzed using an energy-state approximation. A sixth-order model considered was approximated by assuming that there is a time scale separation between the faster (x, y, E, ψ) and the slower (h, γ) variables. The aircraft considered was an F4-C.

An approach based on a composite control as the sum of a reduced control and two boundary-layer controls was developed for the problem of steering the state of a nonlinear singularly perturbed system (whose fast dynamics are weakly nonlinear in the fast variables and control inputs) from a given initial state to a given final state, while minimizing a cost functional. The problem was that of planar pursuit in which a pursuer of constant speed attempts to intercept a constant speed target in a given direction.¹⁹²

A singular perturbation method was used to develop computer algorithms for online control of the minimum-time intercept problem using an F-4C aircraft.⁶⁴ Furthermore, the optimization of aircraft altitude and flight-path angle dynamics in a form suitable for online computation and control was addressed in Ref. 11. In Ref. 19, one finds an algorithm for real-time, near-optimal, three-dimensional energy-state guidance for high-performance aircraft (the F-15 was used as an example) in pursuit-evasion and target-interception missions. The work in Ref. 395 obtained a neighboring optimal (minimum-time) guidance scheme for a long-range, air-to-air

intercept, three-dimension problem. Here, the resulting sixth-order nonlinear differential equation was simplified to a fourth-order problem using the energy-state approximation, that is, by neglecting the speed (derivative terms) of the two fast variables: velocity and flight-path angle.

In another work in Ref. 342, a feedback control law was developed for three-dimensional minimum-time interception. The dynamics considered, which was slightly different from others, was

$$\begin{aligned}\dot{x} &= V \cos \gamma \cos \psi - u_T, & \dot{y} &= V \cos \gamma \sin \psi - v_T \\ \dot{z} &= -V \sin \gamma - w_T, & \dot{E} &= [(T - D)V]/W \\ \dot{\gamma} &= (g/V)(n_c - \cos \gamma), & \dot{\psi} &= (g/V)(n_s / \cos \gamma)\end{aligned}\quad (68)$$

Here x , y , and z are the components of vector $\mathbf{R} = \mathbf{R}_I - \mathbf{R}_T$; \mathbf{R}_I and \mathbf{R}_T are the interceptor's and target's position vectors, respectively, in an inertial frame; u_T , v_T , and w_T are the target velocity components; n_c , n_s , and n_s are the aerodynamic load factors, and $n \cos \sigma$ and $n \sin \sigma$. In this work, the relative position (x, y, z) and the specific energy E are considered as slow variables and the heading ψ and flight-path angle γ as fast variables for singular perturbation analysis.

E. Digital Flight Control Systems

The first applications of digital technology to flight control was a digital implementation of basic analog autopilot functions.^{38,139} A digital control system uses a digital computer to implement its logic and the development of reliable, faster and inexpensive microcomputers made possible for many military and civilian aircraft to have digital control systems or digital-fly-by-wire systems.⁵³

In Sec. II.C., singular perturbations in discrete-time systems were briefly described. In this section, we focus on the applications of SPaTS developed for digital (discrete-time) systems described by ordinary difference equations as opposed to those developed for continuous-time systems. The theory and applications of SPaTS in digital control systems is of relatively recent origin.^{24,42,91,234,257,276,278,299,304} Some attempts have been made to apply the SPaTS technique to digital flight control systems, limited to a class of digital control of continuous systems.^{44,367,368} In Ref. 270, a composite, discrete-time, feedback control was obtained in terms of the lower order slow and fast controls for a microcomputer-controlled aircraft flight control system^{318,359} where the original fifth-order model has pitch angle, velocity, and altitude as slow variables and angle of attack and pitch rate as fast variables.

A good account of the applications of SPaTS to digital flight control systems may be found in Refs. 271 and 272. Also see Ref. 397 for near-optimal observer-based controller design for a twin-engine aircraft model.

F. Atmospheric Entry

Some of the earlier work using perturbation procedures for the atmospheric entry problem was done by Shen,^{340,341} Shi,³⁴³ and Shi and associates.^{344–347} Basically, in these works, the equations of motion (for both planar and nonplanar entry) are obtained for a vehicle entering an atmosphere; the small parameter ϵ is identified in most of these cases as the ratio of the atmospheric scale height to the radius of the Earth and a perturbation method such as the method of MAE is used to obtain approximate solutions. Furthermore, Shi³⁴³ use the method of MAE to solve the problem of optimal lift control of a hypersonic lifting body entering the atmosphere from the Keplerian region as well as from low altitudes. Separate expansions were introduced for the outer Keplerian region, where gravitational forces are dominant, and the inner atmospheric region, where the aerodynamic forces are dominant.

In a typical three-dimensional atmospheric entry problem, the equations of motion are given by^{387,389} (assuming a nonrotating spherical Earth)

$$\begin{aligned}\dot{r} &= V \sin \gamma, & \dot{\theta} &= (V \cos \gamma \cos \psi)/(r \cos \phi) \\ \dot{\phi} &= (V \cos \gamma \sin \psi)/r, & \dot{V} &= F_T/m - g \sin \gamma \\ V\dot{\gamma} &= (F_N/m) \cos \sigma - (g - V^2/r) \cos \gamma \\ V\dot{\psi} &= F_N \sin \sigma/(m \cos \gamma) - (V^2/r) \cos \gamma \cos \psi \tan \phi\end{aligned}\quad (69)$$

where $F_T = T \cos \alpha - D$, $F_N = T \sin \alpha + L$, α is the thrust angle of attack, F_T is the component of the combined aerodynamic and propulsive forces along the velocity vector, and F_N is its component orthogonal to the velocity in the lift-drag plane. In applying the method of MAE to the atmospheric entry problem, the small parameter is identified as $\epsilon = 1/\beta r$, where the constant βr , the reciprocal of the scale height, is large, for example, for Earth, $\beta r = 900$.

When optimization was introduced into the atmospheric entry problem using the method of MAE, Frostic and Vinh¹²³ used a dimensionless altitude as the independent variable, whereas other approaches were taken by using Chapman variables (see Ref. 58) and using radial distance r as the independent variable instead of the time t (Refs. 258 and 260).

The work of Willis et al.⁴⁰¹ contributed to the usefulness of the method of MAE as an analytical tool for problems in hypervelocity mechanics with “significantly different dynamic structures of entry trajectories into Mars and Titan as opposed to Earth and Venus or Jupiter and Saturn.”

In a recent work, using singular perturbation theory, Sero-Guillaume et al.^{337,338} solved an optimal control problem to find the thrust that must be applied to a vehicle during an extra-atmospheric flight such that the vehicle reaches a minimum time at given point on the surface of the Earth. The singular perturbation parameter was based on the small ratio of thrust time to the rotation time for the vehicle.

Also, see Ref. 393 for improved MAE solutions for evaluating the maximum deceleration during atmospheric entry of space vehicles. The improvement was obtained by extending the previous work beyond the first-order composite solutions by artificially extending the endpoint boundaries to strengthen the physical assumptions on the outer and inner expansions for the matching procedure.

G. Satellite and Interplanetary Trajectories

First to be discussed is the trajectories of satellites. In the study of asymptotic stability of steady spins of satellites,¹³⁷ a singular perturbation formulation was obtained for attitude maneuvers of a torque-free rigid gyrost with a discrete damper. The model consisted of a rigid body with rigid axisymmetric rotors and a mass particle constrained to move along a line fixed in the rigid body and the small parameter was represented as the ratio of the particle mass and the system mass.

The limiting case of the restricted three-body (Earth, moon, and a particle of negligible mass) problem, in which the mass of one of the bodies (Earth) is much larger than the mass of the second body (moon), is analyzed for finite time intervals by perturbation methods in Refs. 220 and 221. However, the straightforward first-order perturbation solution is not uniformly valid because it has a logarithmic singularity at the position of the moon, and higher approximations are increasingly more singular in the region of nonuniformity. Hence, this three-body problem is of the singular perturbation type.²⁸¹ An interesting comparison analysis of this singularly perturbed three-body problem was done in Ref. 281 using three methods: method of MAE, the method of strained coordinates (Poincaré-Lighthill-Kuo method) (see Ref. 376), and the generalized method of treating singular perturbation problems,²⁸⁰ where “the intermediate region is treated equally with the outer and inner regions” unlike the method of MAE. An interplanetary trajectory transfer is, in general, divided into a heliocentric portion (where the gravitational attraction of the sun is greater than that of the planets) and two planet-centered portions.⁴⁹

The early work by Lagerstrom and Kevorkian^{220,221} focused on applying a patched conics idea to obtain an approximate solution to the planar restricted three-body problem by carrying out the asymptotic matching when the normalized initial angular momentum with respect to the larger body was very small (of the order of $\epsilon^{1/2}$, where ϵ is the mass ratio between the smaller and larger bodies). In particular, with ϵ as the ratio of the mass of Earth to the total mass of Earth and moon, for motions of a particle of negligible mass, which pass within a distance of order ϵ of the moon, the gravitational attraction of the moon is not uniformly small during the entire motion, and hence, singular perturbation methods were used. The orbit is decomposed into three parts: approach orbit to moon (outer

solution), moon passage (boundary layer and inner solution), and the orbit after moon passage (outer solution).

Further results^{47,298} concentrated on obtaining an approximate solution for all three-dimensional trajectories that reach the target planet with finite velocity to include interplanetary trajectories. Here, the perturbation series is expanded in powers of a small parameter $\lambda (= m_1/m_0 \ll 1)$, where, m_0 is the mass of the sun and m_1 is the mass of the planet. In particular, the authors^{47,298} considered "fly-by (or swing-by) interplanetary trajectories," such as a trajectory from Earth to Mars via Venus.

The method of MAE was applied to the optimization of a minimum-fuel power-limited interplanetary trajectory in Refs. 48 and 49. The composite solution was obtained in terms of an outer solution, valid between planets, consisting of heliocentric portion of the trajectory perturbed by the planets, and an inner solution, valid in the vicinity of planets, consisting of a large number of revolutions, slightly perturbed by the sun, during which the small acceleration causes the trajectory to spiral away gradually from the planet, and matching of the outer and inner solutions.

Other related works study a special case of the restricted three-body problem by a perturbation technique that leads to an asymptotic representation of the solution valid for long times.¹⁰⁸ Here, the model consists of a primary body (planet) having a mass much smaller than the second body (sun) and a third body (satellite) of negligible mass taken very close to the planet.

Further, the influence of the sun on the motion of a spacecraft traveling from the Earth to the moon was found in Ref. 345 to be substantial, and the problem was formulated for noncoplanar Earth-to-Moon trajectories in the restricted four-body problem and solved by using the method of MAE. Here, the small parameter ϵ used in the expansion procedure was again taken as the ratio of the mass of moon to the mass of Earth.

H. Missiles

Calise⁶³ investigates the performance improvement due to the use of optimal TMC on a conventional missile that utilizes proportional navigation guidance. The missile state equations are

$$\begin{aligned} \dot{x} &= V \cos \psi, & \dot{y} &= V \sin \psi - V_T \\ \epsilon \dot{\phi} &= L_n/mV = N\dot{\theta}, & \epsilon^2 \dot{V} &= (T - D)/m \end{aligned} \quad (70)$$

where x is cross-range position, y is downrange position, ϕ is missile heading, V is missile velocity, T is thrust, D is drag, V_T is target velocity, L_n is the component of the missile lift L vector in the horizontal plane, N is the navigational gain, and m is missile mass. Here, the singular perturbation parameter ϵ , whose nominal value is 1, is introduced intentionally to extract the time scale character of the missile dynamics. Thus, the downrange and cross-range coordinates x and y are slow variables, ψ is a fast variable, and V is the fastest variable. The controls given by Eq. (70) are the lift L and thrust T . The singular perturbation parameter is nominally set to 1.0 so that the state dynamics are ordered on separate time scales in accordance with relative speeds. Using singular perturbation method, examples were presented for air-launched tactical missiles to show the effect of TMC on increasing the missile launch envelope and in reducing the track crossing angle at intercept.

Another formulation of the missile problem was considered by Chichka et al.⁸² Here the dynamic system considered for optimal range-fuel-time trajectories for a scramjet missile is in the singularly perturbed form as

$$\begin{aligned} \epsilon^2 \dot{h} &= V \sin \gamma, & \epsilon^2 \dot{\gamma} &= (g/V)[(L/W) - \cos \gamma] \\ \epsilon \dot{E} &= [(T - D)/W]V, & \dot{R} &= V \cos \gamma, & \dot{W}_F &= Q \end{aligned} \quad (71)$$

where W is the weight, W_F is the specific amount of fuel to be used, and Q is the fuel rate.

The application of singular perturbation techniques for missile guidance has been discussed by many workers.^{64,77,82,301,366} In particular, Cheng et al.⁷⁸ studied the pulse ignition problem for a generic medium-range air-to-air missile from an optimal control point of view.

Another interesting application of time scale analysis to missile problems is given by Hepner and Geering,¹⁴⁷ who considered the time scale separation inherent in the tracking dynamics and developed a method that is a combination of tracking filter (based on extended Kalman filter) and guidance law. In particular, the tracking dynamics considered consists of a slow part of bearing rate, range rate, bearing angle, and range as slow variables and a fast part of bearing rate, target heading angle, and target heading angle rate as fast variables.

In developing near-optimal midcourse guidance laws for air-to-air missiles using singular perturbation methods,²⁴⁹ four state variables are treated as slow and two state variables are treated as fast. Thus, the point-mass equations of motion for a missile flying over a flat, nonrotation Earth with a quiescent atmosphere are formulated as

$$\begin{aligned} \dot{E} &= VT_D/mg, & \dot{\phi} &= gn_h/V \cos \gamma \\ \dot{x} &= V \cos \gamma \cos \phi, & \dot{y} &= V \cos \gamma \sin \phi \\ \epsilon \dot{h} &= V \sin \gamma, & \epsilon \dot{\gamma} &= (g/V)(n_v - \cos \gamma) \end{aligned} \quad (72)$$

where n_h and n_v are the control variables representing horizontal and vertical components of the load factor, respectively. The performance index considered for the optimal guidance problem is

$$\min_{n_h, n_v} \left[-\zeta E(t_f) + (1 - \zeta) \int_0^{t_f} dt \right] \quad (73)$$

where ζ is the weighting factor enabling the tradeoff between flight time and terminal energy.

In Ref. 366, based on the time constants of the missile dynamics, the intercept problem was divided into six parts: missile velocity (very slow), relative position (slow), missile flight path angle and heading angle (fast), and acceleration and its direction (very fast) to pave the way for singular perturbation analysis and to obtain optimal guidance laws.

Visser and Shinar,³⁹⁶ using first-order correction terms, developed a new method based on the classical method of MAE to obtain uniformly valid feedback control laws for a class of singularly perturbed nonlinear optimal control problems frequently arising in aerospace applications. The new technique, based on the explicit solution of the integrals arising from the first-order matching conditions, was applied to a constant speed planar pursuit problem.

For a bank-to-turn, air-to-air missile, the closed-loop stability was examined in Ref. 335 with a dynamic inversion controller using two-time scale separation of inner-loop dynamics consisting of the fast variables roll, pitch, and yaw rates and the outer-loop dynamics consisting of the slow variables angle of attack, sideslip angle, and bank angle. The two nonlinear controllers based on gain-scheduled H_∞ design and nonlinear dynamic inversion design were presented in Ref. 334.

In Ref. 226, a new approach to acceleration control of skid-to-turn missiles was proposed that can handle effectively the nonminimum phase property as well as nonlinearities of the missile dynamics by incorporating the singular perturbation technique into the functional inversion technique. The singular perturbation parameter was associated with a design parameter in a linear controller.

I. Launch Vehicles and Hypersonic Flight

Space Shuttle

In one of the earliest and interesting works³⁰⁶ on the application of singular perturbation theory to aerospace problems, the longitudinal dynamics of a space shuttle during entry into the Earth's atmosphere was investigated. Under the usual assumptions, the equations of motion are formulated as

$$\begin{aligned} \dot{V} &= -\rho SC_D V^2/(2m) - g \sin \gamma \\ \dot{\gamma} &= \rho SC_L V/2m - (g/V - V/r) \cos \gamma \\ \dot{q} &= \rho S L C_m V/2I_y - (3g/2Vr)[(I_x - I_z)/I_y] \sin 2\theta \\ \dot{\theta} &= q + (V/r) \cos \gamma, & \dot{r} &= V \sin \gamma \end{aligned} \quad (74)$$

where $\theta = \gamma + \bar{\alpha}$; $\bar{\alpha}$ is the angle of attack; q is angular velocity in pitch relative to Earth; I_x , I_y , and I_z are principle moments of inertia; and θ is the pitch angle. The interesting feature of the analysis is that by the elimination of θ and V from the preceding equations, linearizing the aerodynamic coefficients, and changing the independent variable from t to κ , the preceding equations of motion are transformed into a second-order equation in a perturbation of the angle of attack ($\alpha = \bar{\alpha} - \alpha_0$) as

$$\ddot{\alpha} + \omega_1(\kappa)\dot{\alpha} + \omega_0(\kappa)\alpha = f(\kappa) \quad (75)$$

where the prime denotes differentiation with respect to κ and the coefficients ω_1 and ω_0 are functions of the various parameters in Eq. (74). Further, experience with entry trajectories of missile and space shuttle suggests that the coefficients of Eq. (75) can be realistically considered to be slowly varying compared to the time constant of the motion of the vehicle. Thus, the coefficients of Eq. (75) vary on a new slow variable $\bar{\kappa} = \epsilon\kappa$, where ϵ is a small positive parameter; this allows Eq. (75) to be cast in the singularly perturbed form as

$$\epsilon^2 \ddot{\alpha} + \epsilon \omega_1(\bar{\kappa})\dot{\alpha} + \omega_0(\bar{\kappa})\alpha = f(\bar{\kappa}) \quad (76)$$

In particular, the longitudinal dynamics of the space shuttle vehicle 049 about a prescribed optimal trajectory was discussed.

In Ref. 367, the effects of deterministic and stochastic parameter variations on the lateral directional stability of an aircraft, using space shuttle dynamic model, were studied. Here, a fourth-order linear model was used with the Dutch roll motions as slow variables and roll and spiral motions as fast variables. Also, see Ref. 353 for the use of multitimescale continuous sliding-mode control during the descent portion of a reusable launch vehicle.

Hypersonic Vehicles

This section is adapted from a recent status survey by the first author on guidance and control issues for hypersonic vehicles conducted at the U.S. Air Force Research Laboratory (see Refs. 262, 264–266, and 269). The U.S. Air Force has recognized hypersonics as one of the key technologies to be developed for the 21st century. Another study, by the Committee on Hypersonic Technology for Military Applications of the Air Force Studies Board,¹⁵⁸ concluded that hypersonic technology and ramjet/supersonic combustion ramjet propulsion offer potentially large increases in speed, altitude, and range with flexible recall, en route redirection, and return to base for military aircraft.

Singular perturbation techniques have been very effective in addressing problems associated with onboard trajectory optimization, propulsion system cycle selection, and the synthesis of guidance laws for ascent to low Earth orbit of an airbreathing, single-stage-to-orbit (SSTO) vehicle as given by Corban⁹³ and Corban et al.⁹⁴ The governing equations of flight in a vertical plane are

$$\begin{aligned} \dot{E} &= V(F_C - D)/m, & \dot{m} &= -f(r, E, \pi, \alpha) \\ \epsilon \dot{\gamma} &= (F_S + L) \cos \sigma / m V - \mu \cos \gamma / V r^2 + V \cos \gamma / r \\ \epsilon \dot{r} &= V \sin \gamma \end{aligned} \quad (77)$$

where the specific energy $E = V^2/2 - \mu/r$ and mass m are found to be slow variables and the flight-path angle γ and radial distance r (or altitude) are considered as fast variables. It can be shown, however, that ϵ is a small parameter depending on physical constants of the system.^{69,93,258} Also, it was recently rediscovered by Hermann and Schmidt¹⁴⁵ and Schmidt and Hermann³³³ that the energy-state approach to the system dynamics during the scramjet-powered phase of the hypervelocity vehicle does exhibit a two- (or multi-) time scale character, which was verified by actual simulation of the dynamics using a nonlinear programming routine and a multiple shooting algorithm.³⁹

In Eq. (77), the control variables are angle of attack α , bank angle σ , fuel equivalence ratios ϕ_i for engine types $1-n$ and engine throttle settings η_j for engine types $n+1-p$. Using the performance index $J = -m(t_f)$ for maximum payload to orbit (or minimum-fuel consumption), an algorithm for generating fuel-optimal climb

profiles was obtained using singular perturbation theory and the Pontryagin minimum principle. In addition, switching conditions, under appropriate assumptions, are derived for transition from one propulsion mode to another (turbojet, ramjet, scramjet, and rocket engine). The problem of state-variable inequality constraints was discussed by Calise and Corban⁶⁸ and Markopoulos and Calise,²³⁸ where it was shown that the state constraint of the full problem is transformed into state and control constraints in the boundary-layer problem. Also, see a similar treatment by Ardema et al.¹⁴ for using the theory of SPaTS to investigate the optimal throttle switching of airbreathing and rocket engine modes; it was found that the airbreathing engine is always at full throttle and that the rocket is on full at takeoff and at very high Mach numbers, but off otherwise.

An interesting problem for an aerospace plane (horizontal take-off, SSTO vehicle) guidance was investigated by Van Buren and Mease⁵⁷ using the theories of singular perturbations and feedback linearization. Here, the minimum-fuel problem is formulated for the vehicle along the super- and hypersonic segments of the trajectory, and feedback guidance logic was obtained, and the effects of dynamic pressure, acceleration, and heating constraints are studied. Further, it was shown that by Kremer²¹² and Kremer and Mease²¹³ that for the cases where the slow solution lies on the state constraint boundary, the constraint may be modeled in the initial boundary-layer solution using an appropriate penalty function (soft constraint). Also, see Ref. 369 for a four-dimensional guidance scheme for atmospheric vehicles using model predictive control, nonlinear inverse control and singular perturbation theory.

In a study of hypersonic flight trajectories under a class of path constraints, Lu²³² obtained explicit analytical solutions to flight-path angle and altitude using a natural singular perturbation parameter ϵ (inverse of atmospheric scale height). However, only outer solutions are obtained without any corrections to the boundary layer. Calise and Bae⁶⁷ used singular perturbation theory for obtaining optimal heading changes with minimum energy loss for a hypersonic gliding vehicle.

Other investigations by Ardema et al.¹³ focused on using singular perturbation methods for examining the occurrence of instantaneous transitions in altitude and velocity in the energy-state formulation of optimal trajectories by modeling the transition as two boundary layers back-to-back, one in backward time and the other in forward time, and by matching the two boundary layers at the transition energy to obtain the location of the transition.

Also, see recent work by Kuo and Vinh²¹⁶ for an improved MAE method for a three-dimensional atmospheric entry trajectory by considering discrepancies between the exact solutions and uniformly valid first-order solutions and generating and solving the second-order solutions.

Feedback linearization is an elegant technique for control of a nonlinear system, in which a nonlinear coordinate transformation converts the original nonlinear system into an equivalent linear system.¹⁶² This technique along with singular perturbation theory was effectively used for hypersonic vehicles by Corban et al.,⁹⁴ Van Buren and Mease,⁵⁷ and Mease and Van Buren.²⁴⁵ In particular, the feedback linearization technique was used for the fast dynamics under certain conditions and a variable structure (sliding-mode) control obtained to drive the linear state to the origin by Mease and Van Buren.²⁴⁵

Also, in Ref. 243 matched asymptotic expansion solutions were developed for trajectories of a direct launch system projectiles during atmospheric ascent, where the small parameter was taken as the ratio of atmospheric scale height to the mean equatorial radius of the Earth.

An interesting application of SPaTS to supersonic transportation has been given in Refs. 402 and 403 for the first time.

J. Orbital Transfer

Here, we include both aeroassisted and nonaeroassisted orbital transfers. The problem of ascent or descent from an initial Keplerian orbit by a constant low-thrust force was examined by using a two-variable expansion procedure in Ref. 344. In particular, the planar motion of a satellite accelerated by low thrust in a central force field is governed by

$$\frac{d^2 r}{dt^2} - r \left(\frac{d\theta}{dt} \right)^2 = -\frac{1}{r^2} + \epsilon \cos \alpha, \quad \frac{d}{dt} \left(r^2 \frac{d\theta}{dt} \right) = r \epsilon \sin \alpha \quad (78)$$

where r and θ are the polar coordinates, α is the angle between the thrust vector and the center of attraction, and the small dimensionless parameter ϵ is the ratio of the magnitude of thrust vector to the initial weight of the satellite at its initial distance.

In analyzing the problem of departure from a circular orbit by a small thrust in the circumferential direction, described by a third-order nonlinear differential equation, an approximate solution is obtained by neglecting the radial acceleration compared to the centrifugal acceleration.³⁷⁵ In this approximation, the original third-order differential equation degenerates to a first-order differential equation, thus leading to a singular perturbation situation. The small parameter ϵ was chosen as the ratio of thrust to the initial gravitational force. In particular, the general case of thrust vector at a nonzero angle to the radius vector, instead of circumferential thrust only, was considered and the method of MAE was applied for obtaining higher-order solutions uniformly valid in the entire time interval.

Moss²⁵⁶ was one of the first to use a perturbation method for orbit analysis. Here, an approximate solution to the problem of orbit expansion by constant circumferential low-thrust, including the case of constant acceleration, was presented using the two variable expansion technique. The two time scales considered are the normal time and a slow time characteristic of the gradual evolution of the orbit.

In using perturbation methods for problems arising in orbital transfer, Mease and McCreary²⁴⁶ developed guidance laws for coplanar skip trajectories based on a method of matched asymptotic expansions. The small parameter was identified as the ratio of atmospheric scale height to a reference radius.

In Ref. 252, an approximate suboptimal feedback control law was developed by an asymptotic expansion about a zeroth-order solution obtained by assuming that inertial forces are negligible compared to the aerodynamic forces. The small parameter used in the expansion essentially represents the ratio of inertial forces to the atmospheric forces.

Anthony⁶ developed approximate analytical solutions of the problem of transfer between coplanar circular orbits using very small tangential thrust, where the thrust acceleration is constant. For both ascending and descending motions, a two-variable expansion method, based on the work of Moss,²⁵⁶ was developed. Here, the small parameter is proportional to the thrust acceleration, and the orbit eccentricity changes slowly with one time variable t_1 and oscillates in the other time variable t_2 , where t_1 and t_2 are the two time variables used in describing the motion. The approximate analytical results obtained using the two-variable expansion method compare remarkably well with the numerical results obtained by integrating the actual equations using a fourth-order Runge-Kutta procedure.

With a typical aeroassisted orbital transfer vehicle (AOTV), the transfer from a high Earth orbit to a low Earth orbit with plane change is achieved by three impulses: a deorbit impulse, a boost impulse, and a reorbit impulse. The objective of the optimal orbital plane change problem is to minimize the fuel required for the three impulsive maneuver. Regarding energy as a slow variable and altitude and flight-path angle as fast variables, a three-state model that is suitable for singular perturbation analysis is⁶⁵

$$\begin{aligned} \dot{\phi} &= C_L^* \rho S V \lambda \sin \mu / 2m \cos \gamma, & \dot{h} &= V \sin \gamma \\ \epsilon \dot{\gamma} &= C_L^* \rho S V (\lambda \cos \mu + M \cos \gamma) / 2m \end{aligned} \quad (79)$$

where h is the altitude, V is the velocity, ϕ is the cross-range angle, $\lambda = C_L / C_L^*$ is the normalized lift coefficient, C_L is the lift coefficient, μ is the bank angle, ρ is the density, and the asterisk indicates the maximum lift-to-drag ratio.

In developing analytical methods for optimal guidance of AOTV problems using singular perturbations, the resulting TPBVP was solved in terms of reduced-order and boundary-layer solutions and compared to the numerical optimal solutions obtained using multiple shooting methods.⁵⁶ When alternative approximations were consid-

ered to solve the boundary-layer problem, three guidance laws in feedback form were obtained.⁶⁷

Also, see an excellent survey on optimal strategies in aeroassisted orbital transfer by Mease,²⁴⁴ a research monograph by Naidu,²⁶⁰ and important contributions by Calise and Melamed,^{411,412} Vinh and Hanson,³⁹⁰ Vinh and Johannesen,²⁴⁴ and Vinh et al.^{392,394}

V. Other Aerospace Related Applications

A. Structures and Other Mechanical Systems

Another interesting area of the application of SPaTS is structural dynamics and control.

In Ref. 332, the deformed state of a thin, inextensible beam, which is under the action of axial and transverse loading and which also rests on an elastic foundation, is governed by¹¹²

$$\begin{aligned} \epsilon \dot{\kappa} &= -Q, & \epsilon \dot{Q} &= -\kappa \sec \theta - \epsilon \kappa \tan \theta + (\lambda^2 y - p) \cos \theta \\ \dot{x} &= \cos \theta, & \dot{\theta} &= \kappa \end{aligned} \quad (80)$$

Here the constants and variables are dimensionless and proportional to arc length t , curvature $\kappa(t)$, normal component of the inner force $Q(t)$, horizontal and vertical displacement $x(t)$ and $y(t)$, gradient angle $\theta(t)$, transversal loading $p(t)$, resistance of the foundation λ^2 , and bending stiffness ϵ . For thin beams the bending stiffness ϵ is small, and hence, the system given by Eq. (80) is a singularly perturbed system of ordinary differential equations. Formal approximations of the solutions to Eq. (80) are obtained in the form of MAE.

The asymptotic solution of a time-optimal, soft-constrained, cheap control problem was obtained using a new approach solely based on expanding the controllability gramian without resorting to the method of MAE. The method was applied to the time-optimal single-axis rotation problem for a system consisting of a rigid hub with an elastic appendage due to an external torque applied at the hub.⁴⁰

Other works dealing with singular perturbations in structures are found in Refs. 31, 112, 164, 242, and 377. Mechanical systems involving flexible dual rudder are considered in Ref. 95.

Singular perturbation concepts are exploited to develop a procedure for designing a constant gain, output feedback control system with application to a large space structure.⁷⁰ In this system, the third and fourth modes are approximately five time faster than the first and second modes, thus leading to the small parameter value as $\epsilon = \frac{1}{5}$. A singular perturbation analysis that relaxes the requirement on boundary-layer system stability (but not necessarily asymptotic stability, as required in the normal case) was provided by an application to a flexible dual-rudder steering mechanism in Ref. 95.

Recently, an analysis of the underlying geometric structure of two-time scale, nonlinear optimal control systems was developed by Rao and Mease^{308,309} without requiring a priori knowledge of the singular perturbation structure. The methodology is based on splitting the Hamiltonian boundary-value problem into stable and unstable components using a dichotomic basis. An illustration of a mass connected to a nonlinear spring was given.

B. Space Robotics

This is a new area where the theory of SPaTS has an important application. In robotics, the singular perturbation parameter is usually identified as the inverse of a stiffness parameter associated with a flexible mode. For example, in a typical flexible slewing arm with a rigid-body rotation and flexible clamped mass modes, one can select the quantity $\epsilon = (1/k_2)^{1/2}$ as the singular perturbation parameter, where k_2 is the stiffness parameter associated with the second flexible mode. Thus, the slow subsystem states are the joint angle, the first flexible modal displacement, and their respective rates, whereas the fast subsystem states are the second flexible modal displacement and its rate.³⁵⁴

In particular, work has been done in space robotics⁴⁰⁵ and teleoperation,³⁵⁶ intelligent robotics systems for space exploration,⁹⁸ and perturbation techniques for flexible manipulators in Ref. 118 and robotics in Refs. 34, 71, 79, 80, 130, 197, 198, 237, 354, and 363–365.

VI. Other Applications

There are a number of other interesting and challenging applications of singular perturbation and time scale methodologies in a variety of fields.^{106,257,358,384} Some typical applications include Markov chains,⁴⁰⁶ electrical circuits,³²⁷ electrostatics,⁸¹ semiconductor modeling,²³⁹ computer disk drives,¹⁶ electrical machines,^{279,408} and power systems,^{83,160} chemical reactions,¹³⁸ chemical reactors,^{76,86} nuclear reactor,¹⁶⁸ soil mechanics,⁹⁹ celestial mechanics,^{281,330,357,384} quantum mechanics,¹¹⁰ thermodynamics,^{149,236,314} plates and shells,^{295,384} elasticity,^{109,241} lubrication,⁷² vibration,³⁵⁷ renewal processes,¹⁵⁰ compressors,²²⁷ magnetohydrodynamics,³⁴⁸ oceanography,¹⁴⁶ welding,⁵ queuing theory,²⁰⁰ production inventory systems⁴³ and manufacturing,^{163,339,362} wave propagation,³³ ionization of gases,¹⁴⁸ lasers,¹⁰⁷ automobiles and biped locomotion,^{136,227} agricultural engineering,³⁷² reliability,²¹⁵ two-dimensional image modeling and processing,^{28,29,167,409} ecology,^{151,275} and biology.²⁸⁵

VII. Conclusions

This paper focused on a survey of the applications of the theory and techniques of singular perturbations and time scales in guidance and control of aerospace systems such as aircraft, missiles, spacecraft, transatmospheric vehicles, and aeroassisted orbital transfer vehicles. In particular, emphasis was placed on problem formulation and solution approaches that were useful in applying the theory for various types of problems arising in aerospace systems. A unique feature of this survey is that it assumes no prior knowledge in the subject and hence provides a brief introduction to the subject. Furthermore, the survey included related fields such as fluid dynamics, space structures, and space robotics.

Besides seeking new applications for the theory of SPaTS in aerospace systems, there remain numerous theoretical issues that require further investigation. These include the development of a systematic methodology for (slow and fast) state-variable selection in general nonlinear optimal control problems and further work on the application of SPaTS to state- and/or control-constrained optimal control problems.

Acknowledgments

The work on this topic began while the first author was with Guidance and Control Division, NASA Langley Research Center, Hampton, Virginia, during the period of January 1985 to August 1990. The authors would like to thank Douglas B. Price and Daniel D. Moerder of NASA Langley Research Center, for their interest, cooperation, and support of this research. In particular, the present paper is based on an earlier paper by the authors²⁶⁸ presented at the AIAA Guidance, Navigation, and Control Conference held in 1995. Next, thanks are due to National Research Council, Washington, DC, and Siva S. Banda, of the U.S. Air Force Research Laboratory, Wright-Patterson Air Force Base, Ohio for the encouragement and cooperation during the first author's sabbatical period 1998-1999. Appreciation is recorded for the facilities and the scholarly atmosphere provided over the years by late Hary Charyulu and present Jay Kunze of the College of Engineering, Idaho State University, Pocatello, Idaho. Permission given by Gordon and Breach Science publishers is acknowledged for adapting the material from the paper by the first author.²⁶³ Finally, the authors would like to thank profusely Associate Editors Gene Cliff and Mark Ardema and the anonymous reviewers who spent countless hours in reading the manuscript and making several excellent suggestions to improve the quality of this paper. The authors apologize for any omission of papers that should have been included in this survey.

References

- Aganović, Z., and Gajić, Z., *Linear Optimal Control of Bilinear Systems with Applications to Singular Perturbations and Weak Coupling*, Vol. 206, Lecture Notes in Control and Information Sciences, Springer-Verlag, London, 1995.
- Albeverio, S., and Kurasov, P., *Singular Perturbations of Differential Operators: Solvable Schrödinger Type Operators*, London Mathematical Society Lecture Note Series, Vol. 271, Cambridge Univ. Press, Cambridge, England, U.K., 2000.
- Alvarez-Gallegos, J., and Silva-Navarro, G., "Two-Time Scale Sliding-Mode Control for a Class of Nonlinear Systems," *International Journal of Robust and Nonlinear Control*, Vol. 7, 1997, pp. 865-879.
- Anderson, L. R., Brewer, D. W., and Baykan, A. R., "Numerical Solution of the Symmetric Riccati Equation Through Riccati Iteration," *Optimal Control: Applications and Methods*, Vol. 4, 1983, pp. 239-251.
- Andrews, J. G., and Atthey, D. R., "Hydrodynamic Limit to Penetration of a Material by a High Power Beam," *Journal of Physics D: Applied Physics*, Vol. 9, 1976, pp. 2181-2194.
- Anthony, M. L., "Orbit Adjustment Maneuvers Using Very Small Tangential Thrusts," *Proceedings of the 38th Congress of International Astronautical Federation*, 1987.
- Ardema, M. D., "Solution of the Minimum Time-to-Climb Problem by Matched Asymptotic Expansions," *AIAA Journal*, Vol. 14, No. 7, 1976, pp. 843-850.
- Ardema, M. D., "Singular Perturbations in Flight Mechanics," NASA TM X-62, 380, 1977.
- Ardema, M. D., "Nonlinear Singularly Perturbed Optimal Control Problems with Singular Arcs," *Automatica*, Vol. 16, 1980, pp. 99-104.
- Ardema, M. D. (ed.), *Singular Perturbations in Systems and Control*, Springer-Verlag, Wien, Austria, 1983.
- Ardema, M. D., "Solution Algorithms for Nonlinear Singularly Perturbed Optimal Control Problems," *Optimal Control: Applications and Methods*, Vol. 4, 1983, pp. 283-302.
- Ardema, M. D., "Computational Singular Perturbation Method for Dynamical Systems," *Journal of Guidance, Control, and Dynamics*, Vol. 14, No. 3, 1991, pp. 661-664.
- Ardema, M. D., Bowles, J. V., Terjesen, E. J., and Whittaker, T., "Approximate Altitude Transitions for High-Speed Aircraft," *Journal of Guidance, Control, and Dynamics*, Vol. 18, No. 3, 1995, pp. 561-566.
- Ardema, M. D., Bowles, J. V., and Whittaker, T., "Near-Optimal Propulsion System Operation for an Air-Breathing Launch Vehicle," *Journal of Spacecraft and Rockets*, Vol. 32, No. 6, 1995, pp. 951-956.
- Ardema, M. D., and Chou, H. C., "Second Order Algorithm for Time Optimal Control of a Linear System," *Computational Optimal Control*, edited by R. Bulirsch and D. Kraft, Birkhäuser Verlag, Boston, MA, 1994, pp. 117-126.
- Ardema, M. D., and Cooper, E., "Singular Perturbation Time-Optimal Controller for Disk Drives," *Optimal Control*, edited by R. Bulirsch, A. Miele, J. Stoer, and K. H. Well, Birkhäuser Verlag, Boston, MA, 1993, pp. 251-263.
- Ardema, M. D., and Rajan, N., "Separation of Time-Scales in Aircraft Trajectory Optimization," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 2, 1985, pp. 275-278.
- Ardema, M. D., and Rajan, N., "Slow and Fast State Variables for Three-Dimensional Flight Dynamics," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 4, 1985, pp. 532-535.
- Ardema, M. D., Rajan, N., and Yang, L., "Three-Dimensional Energy-State Extremals in Feedback Form," *Journal of Guidance, Control, and Dynamics*, Vol. 12, No. 4, 1989, pp. 601-605.
- Ardema, M. D., and Yang, L., "Interior Transition Layers in Flight-Path Optimization," *Journal of Guidance, Control, and Dynamics*, Vol. 11, No. 1, 1988, pp. 13-18.
- Artstein, Z., and Gaitgory, V., "Tracking Fast Trajectories Along Slow Dynamics: A Singular Perturbation Approach," *SIAM Journal on Control and Optimization*, Sec. A, Vol. 126, 1999, pp. 541-569.
- Asatani, K., "Near Optimum Control of Distributed Parameter Systems via Singular Perturbation Theory," *Journal of Mathematical Analysis and Applications*, Vol. 54, 1976, pp. 799-819.
- Ashley, H., "Multiple Scaling in Flight Vehicle Dynamic Analysis: A Preliminary Look," *Proceedings of the AIAA Guidance, Control, and Dynamics Conference*, AIAA, New York, 1967, pp. 1-9.
- Atluri, R., and Kao, Y. K., "Sampled-Date Control of Systems with Widely Varying Time Constants," *International Journal of Control*, Vol. 33, March 1981, pp. 555-564.
- Avanzini, G., and de Matteis, G., "Two-Timescale Inversion Simulation of a Helicopter Model," *Journal of Guidance, Control, and Dynamics*, Vol. 24, No. 2, 2001, pp. 330-339.
- Avanzini, G., de Matteis, G., and de Socio, L., "Natural Description of Aircraft Motion," *Journal of Guidance, Control, and Dynamics*, Vol. 21, No. 2, 1998, pp. 229-233.
- Avanzini, G., de Matteis, G., and de Socio, L., "Two-Timescale-Integration Method for Inverse Simulation," *Journal of Guidance, Control, and Dynamics*, Vol. 22, No. 3, 1999, pp. 395-401.
- Azimi-Sadjadi, M. R., and Khorasani, K., "Reduced-Order Strip Kalman Filtering Using Singular Perturbation Method," *IEEE Transactions on Circuits and Systems*, Vol. 37, 1990, pp. 284-290.
- Azimi-Sadjadi, M. R., and Khorasani, K., "A Model Reduction Method for a Class of 2D Systems," *IEEE Transactions on Circuits and Systems*, Vol. 39, 1992, pp. 28-41.

- ³⁰Başar, T., and Bernhard, P., *H[∞]-Optimal Control and Related Minimax Design Problems*, 2nd ed., Birkhäuser, Boston, MA, 1995.
- ³¹Balas, M. J., "Trends in Large Space Structure Control Theory: Fond-est Hopes and Wildest Dreams," *IEEE Transactions on Automatic Control*, Vol. AC-27, June 1982, pp. 522-533.
- ³²Balas, M. J., "Stability of Distributed Parameter Systems with Finite-Dimensional Controller-Compensators Using Singular Perturbations," *Journal of Mathematical Analysis and Applications*, Vol. 99, 1984, pp. 90-108.
- ³³Barker, J. W., "Interaction of Fast and Slow Waves in Problems with Two-Time Scales," *Journal of Mathematical Analysis and Applications*, Vol. 15, 1984, pp. 500-513.
- ³⁴Beji, L., and Abichou, A., "A Singular Perturbation Approach for Tracking Control of a Parallel Robot Including Motor Dynamics," *International Journal of Control*, Vol. 68, 1997, pp. 689-707.
- ³⁵Bender, C. M., and Orszag, S. A., *Advanced Mathematical Methods for Scientists and Engineers I: Asymptotic Methods and Perturbation Theory*, Springer-Verlag, New York, 1999.
- ³⁶Bensoussan, A. (ed.), *Perturbation Methods in Optimal Control*, Wiley, Chichester, England, U.K., 1988.
- ³⁷Bensoussan, A., Blankenship, G. L., and Kokotović, P. V. (eds.), *Singular Perturbations and Optimal Control*, Springer-Verlag, Berlin, 1984.
- ³⁸Berman, H., and Gran, R., "Design Principles for Digital Autopilot Synthesis," *Journal of Aircraft*, Vol. 11, No. 7, 1974, pp. 414-422.
- ³⁹Betts, J. T., "Survey of Numerical Methods for Trajectory Optimization," *Journal of Guidance, Control, and Dynamics*, Vol. 21, No. 2, 1998, pp. 193-207.
- ⁴⁰Bikdash, M. V., Nayfeh, A. H., and Cliff, E. M., "Singular Perturbation of the Time-Optimal Soft-constrained Cheap Control Problem," *IEEE Transactions on Automatic Control*, Vol. 38, 1993, pp. 466-469.
- ⁴¹Binning, H. S., and Goodall, D. P., "Constrained Output Feedbacks for Singularly Perturbed Imperfect Known Nonlinear Systems," *Journal of Franklin Institute*, Vol. 336, 1999, pp. 449-472.
- ⁴²Blankenship, G., "Singularly Perturbed Difference Equations in Optimal Control Problems," *IEEE Transactions on Automatic Control*, Vol. AC-26, 1981, pp. 911-917.
- ⁴³Bradshaw, A., Mak, K. L., and Porter, B., "Singular Perturbation Methods in the Synthesis of Control Policies for Production-Inventory Systems," *International Journal of Systems Science*, Vol. 13, 1982, pp. 589-600.
- ⁴⁴Bradshaw, A., and Porter, B., "Singular Perturbation Methods in the Design of Tracking Systems Incorporating Fast Sampling Error Actuated Controllers," *International Journal of Systems Science*, Vol. 12, 1981, pp. 1181-1191.
- ⁴⁵Breakwell, J. V., "Optimal Flight-Path-Angle Transitions in Minimum Time Airplane Climbs," *Journal of Aircraft*, Vol. 14, No. 8, 1977, pp. 782-786.
- ⁴⁶Breakwell, J. V., "More About Flight-Path-Angle Transitions in Optimal Airplane Climbs," *Journal of Guidance and Control*, Vol. 1, 1978, 205-208.
- ⁴⁷Breakwell, J. V., and Perko, L. M., "Matched Asymptotic Expansions, Patched Conics and the Computation of Interplanetary Trajectories," *Proceedings of the AIAA/ION Astrodynamics Specialists Conference*, 1965, pp. 291-300.
- ⁴⁸Breakwell, J. V., and Rauch, H. E., "Optimum Guidance for a Low Thrust Interplanetary Vehicle," *AIAA Journal*, Vol. 4, No. 4, 1966, pp. 693-704.
- ⁴⁹Breakwell, J. V., and Rauch, H. E., "Asymptotic Matching in Power-Limited Interplanetary Transfers," *Proceedings of the Space Flight Mechanics Specialists Symposium*, edited by E. Burgers, American Astronautical Society, Washington, DC, 1967, pp. 291-300.
- ⁵⁰Breakwell, J. V., Shinar, J., and Visser, H. G., "Uniformly Valid Feedback Expansions for Optimal Control of Singularly Perturbed Dynamic Systems," *Journal of Optimization Theory and Applications*, Vol. 46, 1985, pp. 441-453.
- ⁵¹Bryson, A. E., Jr., Desai, M. N., and Hoffman, W. C., "The Energy-State Approximation in Performance Optimization of Supersonic Aircraft," *Journal of Aircraft*, Vol. 6, No. 6, 1969, pp. 481-487.
- ⁵²Bryson, A. E., Jr., and Lele, M. L., "Minimum Fuel Lateral Turns at Constant Altitude," *AIAA Journal*, Vol. 7, No. 6, 1969, pp. 559-560.
- ⁵³Bryson, A. E., Jr., "New Concepts in Control Theory, 1959-1984," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 4, 1985, pp. 417-425.
- ⁵⁴Bryson, A. E., Jr., *Dynamic Optimization*. Addison Wesley Longman, Menlo Park, CA, 1999.
- ⁵⁵Bryson, A. E., Jr., and Ho, Y. C., *Applied Optimal Control: Optimization, Estimation and Control*, rev. printing, Hemisphere, New York, 1975.
- ⁵⁶Bulirsch, R., "The Multiple Shooting Method for Numerical Solution of Nonlinear Boundary Value Problems and Optimal Control Problems," TR Carl-Cranz-Gesellschaft, Heideberg, Germany, Oct. 1971.
- ⁵⁷Van Buren, M. A., and Mease, K. D., "Aerospace Plane Guidance Using Timescale Decomposition and Feedback Linearization," *Journal of Guidance, Control, and Dynamics*, Vol. 15, No. 5, 1992, pp. 1166-1174.
- ⁵⁸Busemann, A., Vinh, N. X., and Culp, R. D., "Solution of the Exact Equations for Three-Dimensional Atmospheric Entry Using Directly Matched Asymptotic Expansions," NASA CR-2643, March 1976.
- ⁵⁹Calise, A. J., "Singular Perturbation Methods for Variational Problems in Aircraft Flight," *IEEE Transactions on Automatic Control*, Vol. AC-21, 1976, pp. 345-352.
- ⁶⁰Calise, A. J., "Extended Energy Management Methods for Flight Performance Optimization," *AIAA Journal*, Vol. 15, No. 3, 1977, pp. 314-321.
- ⁶¹Calise, A. J., "A New Boundary Layer Matching Procedure for Singularly Perturbed Systems," *IEEE Transactions on Automatic Control*, Vol. AC-23, 1978, pp. 434-438.
- ⁶²Calise, A. J., "A Singular Perturbation Analysis of Optimal Aerodynamic and Thrust Magnitude Control," *IEEE Transactions on Automatic Control*, Vol. AC-24, 1979, pp. 720-729.
- ⁶³Calise, A. J., "Optimal Thrust Control with Proportional Navigation Guidance," *Journal of Guidance and Control*, Vol. 3, 1980, pp. 312-318.
- ⁶⁴Calise, A. J., "Singular Perturbation Techniques for On-Line Optimal Flight-Path Control," *Journal of Guidance and Control*, Vol. 4, No. 4, 1981, pp. 398-405.
- ⁶⁵Calise, A. J., "Singular Perturbation Analysis of the Atmospheric Orbital Plane Change Problem," *Journal of Astronautical Sciences*, Vol. 36, 1988, pp. 35-43.
- ⁶⁶Calise, A. J., "Singular Perturbations in Flight Mechanics," *Applied Mathematics in Aerospace Science and Engineering*, edited by A. Miele and A. Salvetti, Plenum, New York, 1994, pp. 115-132.
- ⁶⁷Calise, A. J., and Bae, G. H., "Optimal Heading Change with Minimum Energy Loss for a Hypersonic Gliding Vehicle," *Journal of Guidance, Control, and Dynamics*, Vol. 13, No. 4, 1990, pp. 609-614.
- ⁶⁸Calise, A. J., and Corban, J. E., "Optimal Control of Two-Timescale Systems with State-Variable Inequality Constraints," *Journal of Guidance, Control, and Dynamics*, Vol. 15, No. 2, 1992, pp. 468-476.
- ⁶⁹Calise, A. J., Markopoulos, N., and Corban, J. F., "Nondimensional Forms for Singular Perturbation Analysis of Aircraft Energy Climbs," *Journal of Guidance, Control, and Dynamics*, Vol. 17, No. 3, 1994, pp. 584-590.
- ⁷⁰Calise, A. J., and Moerder, D. D., "Optimal Output Feedback Design of Systems with Ill-Conditioned Dynamics," *Automatica*, Vol. 21, 1985, pp. 271-276.
- ⁷¹Calise, A. J., Prasad, J. V. R., and Siciliano, B., "Design of Output Feedback Compensators in Two-Time Scale Systems," *IEEE Transactions on Automatic Control*, Vol. 35, 1990, pp. 488-492.
- ⁷²Capriz, G., and Cimmatti, G., "On Some Singular Perturbation Problems in the Theory of Lubrication," *Applied Mathematics and Applications*, Vol. 4, 1978, pp. 287-297.
- ⁷³Chang, K. W., "Diagonalization Method for a Vector Boundary Value Problem of Singular Perturbation Type," *Journal of Mathematical Analysis and Applications*, Vol. 48, 1974, pp. 652-665.
- ⁷⁴Chaplais, F., and Alaoui, K., "Two Time Scaled Parameter Identification by Coordination of Local Identifiers," *Automatica*, Vol. 32, 1996, pp. 1303-1309.
- ⁷⁵Chen, F. C., and Khalil, H. K., "Two-Timescale Longitudinal Control of Airplanes Using Singular Perturbations," *Journal of Guidance, Control, and Dynamics*, Vol. 13, No. 6, 1990, pp. 952-960.
- ⁷⁶Chen, J., and O'Malley, R. E., Jr., "On the Asymptotic Solution of a Two-Parameter Boundary Value Problem of Chemical Reactor Theory," *SIAM Journal on Applied Mathematics*, Vol. 26, 1974, pp. 719-729.
- ⁷⁷Cheng, V. L., and Gupta, N. K., "Advanced Midcourse Guidance for Air-to-Air Missiles," *Journal of Guidance, Control, and Dynamics*, Vol. 9, No. 2, 1986, pp. 135-142.
- ⁷⁸Cheng, V. L., Menon, P. A., Gupta, N. K., and Briggs, M. M., "Reduced-Order Pulse-Motor Ignition Control Logic," *Journal of Guidance, Control, and Dynamics*, Vol. 14, No. 4, 1987, pp. 343-350.
- ⁷⁹Chernousko, F. L., "Dynamics of Systems with Elastic Elements of Large Stiffness," *Mechanics of Solids*, Vol. 18, 1983, pp. 99-112.
- ⁸⁰Chernousko, F. L., and Shamaev, A. S., "Asymptotic Behavior of Singular Perturbations in the Problem of Dynamics of a Rigid Body with Elastic Joints and Dissipative Elements," *Mechanics of Solids*, Vol. 18, 1983, pp. 31-41.
- ⁸¹Chew, W. C., and Kong, J. A., "Microstrip Capacitance for Circular Disc Through Matched Asymptotic Expansions," *SIAM Journal on Applied Mathematics*, Vol. 42, 1982, pp. 301-317.
- ⁸²Chichka, D. F., Shankar, U. J., Cliff, E. M., and Kelley, H. J., "Cruise-Dash-Climb Analysis of an Airbreathing Missile," *Journal of Guidance, Control, and Dynamics*, Vol. 11, No. 4, 1988, pp. 293-299.
- ⁸³Chow, J. H., *Time-Scale Modeling of Dynamic Networks with Applications to Power Systems*, Vol. 46, Lecture Notes in Control and Information Sciences, Springer-Verlag, Berlin, 1982.
- ⁸⁴Chow, J. H., and Kokotović, P. V., "Near-Optimum Feedback Stabilization of a Class of Nonlinear Singularly Perturbed Systems," *SIAM Journal on Control and Optimization*, Vol. 16, 1978, pp. 756-770.
- ⁸⁵Christofides, P. D., "Robust Output Feedback Control of Nonlinear Singularly Perturbed Systems," *Automatica*, Vol. 36, 2000, pp. 45-52.

- ⁸⁶Christofides, P. D., and Daoutidis, P., "Compensation of Measurable Disturbances for Two-Time-Scale Nonlinear Systems," *Automatica*, Vol. 32, 1996, pp. 1553-1573.
- ⁸⁷Cliff, E. M., "A Singular Perturbation Approach to Pitch-Loop Design," *Proceedings of the American Control Conference*, 1990.
- ⁸⁸Cliff, E. M., Kelley, H. J., and Lefton, L., "Thrust-Vectored Energy Turns," *Proceedings of the IFAC Workshop on Control Applications of Nonlinear Programming and Optimization*, 1980.
- ⁸⁹Cliff, E. M., Well, K. H., and Schnepfer, K., "Flight-Test Guidance for Airbreathing Hypersonic Vehicles," *Proceedings of the AIAA Guidance, Navigation and Control Conference*, AIAA, Washington, DC, 1992, pp. 1-6.
- ⁹⁰Cole, J. D., *Perturbation Methods in Applied Mathematics*, Blaisdell, Waltham, MA, 1968.
- ⁹¹Comstock, C., and Hsiao, G. C., "Singular Perturbations for Difference Equations," *Rocky Mountain Journal of Mathematics*, Vol. 6, 1976, pp. 561-567.
- ⁹²Connor, M. A., "Optimization of a Lateral Turn at a Constant Height," *AIAA Journal*, Vol. 5, No. 4, 1967, pp. 335-338.
- ⁹³Corban, J. E., "Real-Time Guidance and Propulsion Control for Single-Stage-to-Orbit Air-breathing Vehicles," Ph.D. Dissertation, Georgia Inst. of Technology, Atlanta, GA, Nov. 1989.
- ⁹⁴Corban, J. E., Calise, A. J., and Flandro, G. A., "Rapid Near-Optimal Aerospace Plane Trajectory Generation and Guidance," *Journal of Guidance, Control, and Dynamics*, Vol. 14, 1991, pp. 1181-1190.
- ⁹⁵Corless, M., "Asymptotic Stability of Singularly Perturbed Systems which have Marginally Stable Boundary Layer Systems," *Journal of Dynamics and Control*, Vol. 1, 1991, pp. 95-108.
- ⁹⁶Corless, M., Garofalo, F., and Gilielmo, L., "New Results on Composite Control of Singularly Perturbed Uncertain Linear Systems," *Automatica*, Vol. 29, 1993, pp. 387-400.
- ⁹⁷Coumarbatch, C., and Gajić, Z., "Exact Decomposition of the Algebraic Riccati Equation of Deterministic Multimodeling Optimal Control Problems," *IEEE Transactions on Automatic Control*, Vol. 45, 2000, pp. 790-794.
- ⁹⁸Desrochers, A. A. (ed.), *Intelligent Robotic Systems for Space Exploration*, Kluwer Academic, Boston, 1992.
- ⁹⁹Dicker, D., and Babu, D. K., "A Singular Perturbation Problem in Unsteady Ground Water Flows with a Free Surface," *International Journal of Engineering Science*, Vol. 12, 1974, pp. 967-980.
- ¹⁰⁰Dontchev, A. L., and Veliov, V. M., "Singular Perturbations in Mayer's Problem for Linear Systems," *SIAM Journal on Control and Optimization*, Vol. 21, 1983, pp. 566-581.
- ¹⁰¹Dontchev, A. L., and Veliov, V. M., "Singular Perturbations in Linear Control Systems with Weakly Coupled Stable and Unstable Fast Subsystems," *Journal of Mathematical Analysis and Applications*, Vol. 110, 1985, pp. 1-30.
- ¹⁰²Van Dyke, M., *Perturbation Methods in Fluid Mechanics*, Academic Press, New York, 1964.
- ¹⁰³Van Dyke, M., "Nineteenth-Century Roots of the Boundary Layer Idea," *SIAM Review*, Vol. 36, 1994, pp. 415-424.
- ¹⁰⁴Eckhaus, W., *Matched Asymptotic Expansions and Singular Perturbations*, North-Holland, Amsterdam, 1973.
- ¹⁰⁵Eckhaus, W., "Fundamental Concepts of Matching," *SIAM Review*, Vol. 36, 1994, pp. 431-439.
- ¹⁰⁶Eckhaus, W., and de Jager, E. M. (eds.), *Theory and Applications of Singular Perturbations*, Vol. 942, Lecture Notes in Mathematics, Springer-Verlag, Berlin, 1982.
- ¹⁰⁷Eckhaus, W., Harten, A. V., and Peradzynski, Z., "A Singularly Perturbed Free Boundary Value Problem Describing a Laser Sustained Plasma," *SIAM Journal on Applied Mathematics*, Vol. 45, 1985, pp. 1-31.
- ¹⁰⁸Eckstein, M. C., Shi, Y. Y., and Kevorkian, J., "Satellite Motion for Arbitrary Eccentricity and Inclination Around the Smaller Primary in the Restricted Three-Body Problem," *Astronomical Journal*, Vol. 71, 1966, pp. 248-263.
- ¹⁰⁹Esham, B. F., and Weinacht, R. J., "Singular Perturbations and the Coupled/Quasi-Static Approximation in Linear Thermoelasticity," *SIAM Journal on Mathematical Analysis*, Vol. 25, Nov. 1994, pp. 1521-1536.
- ¹¹⁰Fattorini, H. O., "On Schrödinger Singular Perturbation Problem," *SIAM Journal on Mathematical Analysis*, Vol. 16, 1985, pp. 1000-1019.
- ¹¹¹Fisher, T. M., Hsiao, G. C., and Wendland, W. L., "Singular Perturbations for the Exterior Three-Dimensional Slow Viscous Problem," *Journal of Mathematical Analysis and Applications*, Vol. 110, 1985, pp. 583-603.
- ¹¹²Flaherty, J. E., and O'Malley, R. E., Jr., "Singularly Perturbed Boundary Value Problems for Nonlinear Systems Including a Challenging Problem for a Nonlinear Beam," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Springer-Verlag, Berlin, 1982, pp. 170-191.
- ¹¹³Fossard, A. J., "Minimization of the Operating Cost of an Aircraft Flight by Optimization of the Trajectory," *The Digital Control of Systems*, edited by C. Fargeon, Van Nostrand Reinhold, New York, 1989, pp. 351-373.
- ¹¹⁴Fossard, A. J., Foisneau, J., and Hun Huynh, T., "Approximate Closed-Loop Optimization of Nonlinear Systems by Singular Perturbation Technique," *Nonlinear Systems: Control*, edited by A. J. Fossard and D. Normand-Cyrot, Chapman and Hall, London, 1993, pp. 189-246.
- ¹¹⁵Fraenkel, L. E., "On the Method of Matched Asymptotic Expansions: Part I: A Matching Principle," *Proceedings of the Cambridge Philosophical Society*, Vol. 65, 1969, pp. 209-231.
- ¹¹⁶Fraenkel, L. E., "On the Method of Matched Asymptotic Expansions: Part II: Some Applications of the Composite Series," *Proceedings of the Cambridge Philosophical Society*, Vol. 65, 1969, pp. 233-261.
- ¹¹⁷Fraenkel, L. E., "On the Method of Matched Asymptotic Expansions: Part III: Two Boundary-Value Problems," *Proceedings of the Cambridge Philosophical Society*, Vol. 65, 1969, pp. 263-284.
- ¹¹⁸Fraser, A. R., and Daniel, R. W., (ed.), *Perturbation Techniques for Flexible Manipulators*, Kluwer Academic, Boston, 1991.
- ¹¹⁹Freedman, M. I., and Granoff, B., "Formal Asymptotic Solution of a Singularly Perturbed Nonlinear Optimal Control Problem," *Journal of Optimization Theory and Applications*, Vol. 19, June 1976, pp. 301-325.
- ¹²⁰Freedman, M. I., and Kaplan, J. L., "Singular Perturbations of Two-Point Boundary Value Problems Arising in Optimal Control," *SIAM Journal on Control and Optimization*, Vol. 14, No. 2, 1976, pp. 189-215.
- ¹²¹Fridman, E., "Exact Slow-Fast decomposition of the Non-Linear Singularly Perturbed Optimal Control Problem," *Systems and Control Letters*, Vol. 40, 2000, pp. 121-131.
- ¹²²Friedrichs, K. O., and Wasow, W., "Singular Perturbations of Nonlinear Oscillations," *Duke Mathematical Journal*, Vol. 13, 1946, pp. 367-381.
- ¹²³Frostic, F., and Vinh, N. X., "Optimal Aerodynamic Control by Matched Asymptotic Expansions," *Acta Astronautica*, Vol. 3, 1976, pp. 319-332.
- ¹²⁴Gaitsgory, V., "Limit Hamilton-Jacobi-Isaacs Equations for Singularly Perturbed Zero-Sum Differential Games," *Journal of Mathematical Analysis and Applications*, Vol. 202, 1996, pp. 862-899.
- ¹²⁵Gajić, Z., and Lim, M., *Optimal Control of Singularly Perturbed Linear Systems and Applications: High-Accuracy Techniques*, Marcel Dekker, New York, 2001.
- ¹²⁶Gajić, Z., Petrovski, D., and Shen, X., *Singularly Perturbed and Weakly Coupled Linear Control Systems: A Recursive Approach*, Vol. 140, Lecture Notes in Control and Information Sciences, Springer-Verlag, New York, 1990.
- ¹²⁷Gajić, Z., and Shen, X., *Parallel Algorithms for Optimal Control of Large Scale Systems*, Springer-Verlag, London, 1993.
- ¹²⁸Gardner, B. F., and Cruz, J. B., Jr., "Well-Posedness of Singularly Perturbed Nash Games," *Journal of Franklin Institute*, Vol. 306, 1978, pp. 355-374.
- ¹²⁹Genesio, R., and Milanese, M., "A Note on the Derivation and the Use of Reduced-Order Models," *IEEE Transactions on Automatic Control*, Vol. AC-21, Feb. 1976, pp. 118-122.
- ¹³⁰Ghorbel, F., Hung, J. Y., and Spong, M. W., "Adaptive Control of Flexible-Joint Manipulators," *IEEE Control Systems Magazine*, Vol. 9, 1989, pp. 9-13.
- ¹³¹Ghosh, R., Sen, S., and Datta, K. B., "Method for Evaluating Stability Bounds for Discrete-Time Singularly Perturbed Systems," *IEEE Proceedings: Control Theory and Applications*, Vol. 146, March 1999, pp. 227-233.
- ¹³²Golec, J., and Ladde, G., "On Multitime Method and the Rate of Convergence for a Class of Singularly Perturbed Stochastic Systems," *Journal of Mathematical Systems, Estimation, and Control*, Vol. 2, 1992, pp. 245-262.
- ¹³³Grammel, G., "Averaging of Singularly Perturbed Systems," *Nonlinear Analysis, Theory, Methods and Applications*, Vol. 28, No. 11, 1997, pp. 1851-1997.
- ¹³⁴Grujić, L. T., "On the Theory and Synthesis of Nonlinear Non-Stationary Tracking Singularly Perturbed Systems," *Control: Theory and Advanced Technology*, Vol. 4, 1988, pp. 395-410.
- ¹³⁵Grujić, L. T., Martynyuk, A. A., and Ribbens-Pavella, M., *Large Scale Systems Stability Under Structural and Singular Perturbations*, Springer-Verlag, Berlin, 1987.
- ¹³⁶Ha, I. J., Tugcu, A. K., and Boustany, N. M., "Feedback Linearizing Control of Vehicle Longitudinal Acceleration," *IEEE Transactions on Automatic Control*, Vol. 34, 1989, pp. 689-698.
- ¹³⁷Hall, C. D., "Momentum Transfer Dynamics of a Gyrostat with a Discrete Damper," *Journal of Guidance, Control, and Dynamics*, Vol. 20, No. 6, 1997, pp. 1072-1075.
- ¹³⁸Van Harten, A., "Singularly Perturbed Systems of Diffusion Type and Feedback Control," *Automatica*, Vol. 20, 1984, pp. 79-91.
- ¹³⁹Hartmann, U., "Application of Model Control Theory to the Design of Digital Flight Control Systems," *Proceedings of Advances in Control Systems*, CP-137, AGARD, Vol. 5, 1974, pp. 1-21.
- ¹⁴⁰Heck, B. S., and Haddad, A. H., "Singular Perturbation Analysis of Linear Systems with Scaled Quantized Control," *Automatica*, Vol. 24, 1988, pp. 755-764.

- ¹⁴¹Heck, B. S., and Haddad, A. H., "Singular Perturbation in Piecewise-Linear Systems," *IEEE Transactions on Automatic Control*, Vol. 34, 1989, pp. 87–90.
- ¹⁴²Hedrick, J. K., and Bryson, A. E., Jr., "Minimum-Time Turns for a Supersonic Airplane at Constant Altitude," *Journal of Aircraft*, Vol. 8, No. 1, 1971, pp. 182–187.
- ¹⁴³Hedrick, J. K., and Bryson, A. E., Jr., "Three-Dimensional Minimum-Time Turns for a Supersonic Aircraft," *Journal of Aircraft*, Vol. 9, No. 1, 1972, pp. 115–121.
- ¹⁴⁴Helton, J. W., Kronewitter, F. D., McEneaney, W. M., and Stankus, M., "Singularly Perturbed Control Systems Using Non-Commutative Computer Algebra," *International Journal of Robust and Nonlinear Control*, Vol. 10, 2000, pp. 983–1003.
- ¹⁴⁵Hermann, J. A., and Schmidt, D. K., "Fuel-Optimal SSTO Mission Analysis of a Generic Hypersonic Vehicle," *Proceedings of the AIAA Guidance, Navigation, and Control Conference*, AIAA, Washington, DC, pp. 1813–1823.
- ¹⁴⁶Hermans, A. J., "Wave Pattern of a Ship Sailing at Low Speeds," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Vol. 942, Springer-Verlag, Berlin, 1982, pp. 181–194.
- ¹⁴⁷Hepner, S. A., and Geering, H. P., "Adaptive Two-Timescale Tracking for Target Acceleration Estimation," *Journal of Guidance, Control, and Dynamics*, Vol. 14, No. 3, 1991, pp. 581–588.
- ¹⁴⁸Hilhorst, D., "A Perturbed Free Boundary Value Problem Arising in the Physics of Ionized Gases," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Springer-Verlag, Berlin, 1982, pp. 309–317.
- ¹⁴⁹Hirschfelder, J. O., Curtis, C. F., and Campbell, D. F., "The Theory of Flame Propagation," *Journal of Physical Chemistry*, Vol. 34, 1953, pp. 324–330.
- ¹⁵⁰Hoppensteadt, F. C., "An Algorithm for Approximate Solutions to Weakly Coupled Filtered Synchronous Control Systems and Nonlinear Processes," *SIAM Journal on Applied Mathematics*, Vol. 43, 1983, pp. 834–843.
- ¹⁵¹Hosono, Y., and Mimura, M., "Localized Cluster Solutions of Nonlinear Degenerate Diffusion Equations Arising in Population Dynamics," *SIAM Journal on Mathematical Analysis*, Vol. 20, 1989, pp. 845–869.
- ¹⁵²Howes, F. A., "The Asymptotic Solution of Singularly Perturbed Divichlet Problem with Applications to the Study of Incompressible Flows at High Reynolds Number," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Springer-Verlag, Berlin, 1982, pp. 245–257.
- ¹⁵³Howes, F. A., "The Asymptotic Solution of a Class of Third Order Boundary Value Problems Arising in the Theory of Thin Film Flows," *SIAM Journal on Applied Mathematics*, Vol. 43, 1983, pp. 993–1004.
- ¹⁵⁴Howes, F. A., "Shock Layers in Perturbed Systems Related to Steady Conservation Systems," *SIAM Journal on Mathematical Analysis*, Vol. 18, 1987, pp. 127–136.
- ¹⁵⁵Hsiao, F.-H., Pan, S.-T., and Hwang, J.-D., "D-Stabilization Control for Discrete-Time Two-Time-Scale Systems," *IEEE Control Systems Magazine*, Vol. 20, 2000, pp. 56–66.
- ¹⁵⁶Hsiao, F.-H., Pan, S.-T., and Teng, C. C., "An Efficient Algorithm for Finding the D-Stability Bound of Discrete Singularly Perturbed Systems with Multiple Time-Delays," *International Journal of Control*, Vol. 72, 1999, pp. 1–17.
- ¹⁵⁷Hsiao, G. C., and MacCamy, R. C., "Singular Perturbations for the Two-Dimensional Viscous Flow Problem," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Springer-Verlag, Berlin, 1982, pp. 229–244.
- ¹⁵⁸*Hypersonic Technology for Military Applications*, National Research Council, National Academy, Washington, DC, 1989.
- ¹⁵⁹Hu, Y. N., "Singularly Perturbed Model in Flight Vehicles- a Study of Time-Scale Separation," *Journal of Control Systems and Technology*, Vol. 1, 1993, pp. 147–153.
- ¹⁶⁰Ilic, M., and Zaborsky, J., *Dynamics and Control of Large Electric Power Systems*, Wiley, New York, 1999.
- ¹⁶¹Ioannou, P. A., and Kokotović, P. V., *Adaptive Systems with Reduced Models*, Vol. 47, Lecture Notes in Control and Information Sciences, Springer-Verlag, Berlin, 1983.
- ¹⁶²Isidori, A., *Nonlinear Control Systems*, 3rd ed. Springer-Verlag, Berlin, 1995.
- ¹⁶³Jiang, J., and Lou, S. X. C., "Production Control of Manufacturing Systems: A Multiple Time Scale Approach," *IEEE Transactions on Automatic Control*, Vol. 39, 1994, pp. 2292–2297.
- ¹⁶⁴Junkins, J. L., *Introduction to Dynamics and Control of Flexible Structures*, AIAA, Washington, DC, 1993.
- ¹⁶⁵Kadalbajoo, M. K., and Reddy, Y. N., "Asymptotic and Numerical Analysis of Singular Perturbation Analysis: A Survey," *Applied Mathematics and Computation*, Vol. 30, 1989, pp. 223–259.
- ¹⁶⁶Kaiser, F., "Der Steifflug mit Strahlflugzeugen teilbericht 1," TR, Messerschmitt, A. G., Lechfeld, Germany, 1944.
- ¹⁶⁷Kando, H., "Model Reduction for 2D Separable Denominator Systems: A Singularly Perturbed Approach," *International Journal of Systems Science*, Vol. 28, 1997, pp. 529–545.
- ¹⁶⁸Kando, H., and Iwazumi, T., "Asymptotic Series Solution of Singularly Perturbed Fixed-End-Point Problem of Nuclear Reactor," *Journal of Nuclear Science and Technology*, Vol. 15, 1978, pp. 466–468.
- ¹⁶⁹Kando, H., and Iwazumi, T., "Initial Value Problems of Singularly Perturbed Discrete Systems via Time-Scale Decomposition," *International Journal of Systems Science*, Vol. 14, 1983, pp. 555–570.
- ¹⁷⁰Kando, H., and Iwazumi, T., "Suboptimal Control of Discrete Regulator Problems via Time-Scale Decomposition," *International Journal of Control*, Vol. 37, 1983, pp. 1323–1347.
- ¹⁷¹Kando, H., and Iwazumi, T., "Suboptimal Control of Large Scale Linear Quadratic Problems Using Time-Scale Decomposition," *Large Scale Systems*, Vol. 4, 1983, pp. 1–25.
- ¹⁷²Kando, H., and Iwazumi, T., "Multirate Digital Control Design of an Optimal Regulator via Singular Perturbation Theory," *International Journal of Control*, Vol. 44, 1986, pp. 1555–1578.
- ¹⁷³Kaplan, S., *Fluid Mechanics and Singular Perturbations*, Academic Press, New York, 1967.
- ¹⁷⁴Kecman, V., Bingulac, S., and Gajić, Z., "Eigenvector Approach for Order Reduction of Singularly Perturbed Linear-Quadratic Optimal Control Problems," *Automatica*, Vol. 35, 1999, pp. 151–158.
- ¹⁷⁵Kelley, H. J., "Boundary Layer Approximations to Powered-Flight Altitude Transients," *Journal of Spacecraft and Rockets*, Vol. 7, 1970, p. 879.
- ¹⁷⁶Kelley, H. J., "Singular Perturbations for a Mayer Variational Problem," *AIAA Journal*, Vol. 8, 1970, No. 9, pp. 1177, 1178.
- ¹⁷⁷Kelley, H. J., "Flight Path Optimization with Multiple Time Scales," *Journal of Aircraft*, Vol. 8, No. 2, 1971, pp. 238–240.
- ¹⁷⁸Kelley, H. J., "Reduced-Order Modeling in Aircraft Mission Analysis," *AIAA Journal*, Vol. 9, No. 3, 1971, pp. 349, 350.
- ¹⁷⁹Kelley, H. J., "An Investigation of Optimum Zoom Climb Techniques," *Journal of Aerospace Sciences*, Vol. 8, 1972, pp. 794–802.
- ¹⁸⁰Kelley, H. J., "State Variable Selection and Singular Perturbations," *Singular Perturbations: Order Reduction in Control System Design*, edited by P. V. Kokotović and W. R. Perkins, American Society of Mechanical Engineers, New York, 1972, pp. 37–43.
- ¹⁸¹Kelley, H. J., "Aircraft Maneuver Optimization by Reduced Order Approximation," *Control and Dynamic Systems*, edited by C. T. Leondes, Academic Press, New York, 1973, pp. 131–178.
- ¹⁸²Kelley, H. J., Cliff, E. M., and Weston, A. R., "Energy State Revisited," *Optimal Control Applications and Methods*, Vol. 7, 1986, pp. 195–200.
- ¹⁸³Kelley, H. J., and Edelbaum, T. N., "Energy Climbs, Energy Turns, and Asymptotic Expansions," *Journal of Aircraft*, Vol. 7, No. 1, 1970, pp. 93–95.
- ¹⁸⁴Kevorkian, J., and Cole, J. D., *Perturbation Methods in Mathematics*, Springer-Verlag, New York, 1981.
- ¹⁸⁵Kevorkian, J. K., and Cole, J. D., *Multiple Scale and Singular Perturbation Methods*, Springer-Verlag, New York, 1996.
- ¹⁸⁷Khalil, H. K., "Approximation of Nash Strategies," *IEEE Transactions on Automatic Control*, Vol. AC-25, 1980, pp. 247–250.
- ¹⁸⁸Khalil, H. K., "Multimodel Design of a Nash Strategy," *Journal of Optimization Theory and Applications*, Vol. 31, 1980, pp. 553–564.
- ¹⁸⁹Khalil, H. K., "Feedback Control of Nonstandard Singularly Perturbed Systems," *IEEE Transactions on Automatic Control*, Vol. AC-34, 1989, pp. 1052–1060.
- ¹⁹⁰Khalil, H. K., and Chen, F., " H_∞ Control of Two-Time-Scale Systems," *Systems and Control Letters*, Vol. 19, 1992, pp. 35–42.
- ¹⁹¹Khalil, H. K., and Gajić, Z., "Near Optimum Regulators for Stochastic Linear Singularly Perturbed Systems," *IEEE Transactions on Automatic Control*, Vol. AC-29, 1984, pp. 531–544.
- ¹⁹²Khalil, H. K., and Hu, Y. N., "Steering Control of Singularly Perturbed Systems: A Composite Control Approach," *Automatica*, Vol. 25, 1989, pp. 65–75.
- ¹⁹³Khalil, H. K., and Kokotović, P. V., "Control Strategies for Decision Makers Using Different Models of the Same System," *IEEE Transactions on Automatic Control*, Vol. AC-23, 1978, pp. 289–298.
- ¹⁹⁴Khalil, H. K., and Kokotović, P. V., "Control of Linear Systems with Multiparameter Singular Perturbations," *Automatica*, Vol. 15, 1979, pp. 197–207.
- ¹⁹⁵Khalil, H. K., and Kokotović, P. V., "Feedback and Well-Posedness of Singularly Perturbed Nash Games," *IEEE Transactions on Automatic Control*, Vol. AC-24, 1979, pp. 699–708.
- ¹⁹⁶Khalil, H. K., and Medanic, J. V., "Closed-Loop Stackelberg Strategies for Singularly Perturbed Linear Quadratic Problems," *IEEE Transactions on Automatic Control*, Vol. AC-25, 1980, pp. 66–71.
- ¹⁹⁷Khorasani, K., and Kokotović, P. V., "Feedback Linearization of a Flexible Manipulator Near Its Rigid Body Manifold," *Systems and Controls Letters*, Vol. 6, 1985, pp. 187–192.

- ¹⁹⁸ Khorasani, K., and Kokotović, P. V., "A Corrective Feedback Design for Nonlinear Systems with Fast Actuators," *IEEE Transactions on Automatic Control*, Vol. AC-31, 1986, pp. 67–69.
- ¹⁹⁹ Kimura, H., "On the Matrix Riccati Equation for a Singularly Perturbed Linear Discrete Control System," *International Journal of Control*, Vol. 38, 1983, pp. 959–975.
- ²⁰⁰ Knessl, C., Matkowsky, B. J., Schuss, Z., and Tier, C., "On the Performance of State-Dependent Single Server Queues," *SIAM Journal on Applied Mathematics*, Vol. 46, 1986, pp. 657–697.
- ²⁰¹ Kokotović, P. V., "A Riccati Equation for Block-Diagonalization of Ill-Conditioned Systems," *IEEE Transactions on Automatic Control*, Vol. AC-20, 1975, pp. 812–814.
- ²⁰² Kokotović, P. V., "Applications of Singular Perturbation Techniques to Control Problems," *SIAM Review*, Vol. 26, 1984, pp. 501–550.
- ²⁰³ Kokotović, P. V., "Recent Trends in Feedback Design: An Overview," *Automatica*, Vol. 21, 1985, pp. 225–236.
- ²⁰⁴ Kokotović, P. V., and Chow, J. H., "Composite Feedback Control of Nonlinear Singularly Perturbed Systems," *Singular Perturbations in Systems and Control*, edited by M. D. Ardema, Springer-Verlag, Wien, Austria, 1983, pp. 162–167.
- ²⁰⁵ Kokotović, P. V., and Khalil, H. K. (eds.), *Singular Perturbations in Systems and Control*, reprint, IEEE Press, New York, 1986.
- ²⁰⁶ Kokotović, P. V., Khalil, H. K., and O'Reilly, J., *Singular Perturbation Methods in Control: Analysis and Design*, Academic Press, London, 1986.
- ²⁰⁷ Kokotović, P. V., O'Malley, R. E., Jr., and Sannuti, P., "Singular Perturbations and Order Reduction in Control Theory—An Overview," *Automatica*, Vol. 12, 1976, pp. 123–132.
- ²⁰⁸ Kokotović, P. V., and Perkins, W. R. (eds.), *Singular Perturbations: Order Reduction in Control Systems Design*, American Society of Mechanical Engineers, New York, 1972.
- ²⁰⁹ Kokotović, P. V., and Sannuti, P., Singular Perturbation Method for Reducing Model Order in Optimal Control Design, *IEEE Transactions on Automatic Control*, Vol. AC-13, 1968, pp. 377–384.
- ²¹⁰ Kokotović, P. V., and Sauer, P. W., "Integral Manifold as a Tool for Reduced-Order Modeling of Nonlinear Systems: A Synchronous Machine Case Study," *IEEE Transactions on Automatic Control*, Vol. 36, 1989, pp. 403–410.
- ²¹¹ Krasovskii, N. N., and Reshetov, V. M., "Encounter-Evasion Problems in Systems with a Small Parameter in the Derivatives," *Applied Mathematics and Mechanics*, Vol. 38, 1974, pp. 723–731.
- ²¹² Kremer, J. P., "Studies in Flight Guidance Involving Nonlinear Techniques and Optimization," Ph.D. Dissertation, Princeton Univ., Princeton, NJ, Jan. 1996.
- ²¹³ Kremer, J. P., and Mease, K. D., "Near-Optimal Control of Altitude and Path Angle During Aerospace Plane Ascent," *Journal of Guidance, Control, and Dynamic Systems*, Vol. 20, No. 4, 1997, pp. 789–796.
- ²¹⁴ Krikorian, K. V., and Leondes, C. T., "Dynamic Programming Using Singular Perturbations," *Journal of Optimization Theory and Applications*, Vol. 38, 1982, pp. 221–240.
- ²¹⁵ Krtolica, R., "A Singular Perturbation Model of Reliability in System Control," *Journal of Optimization Theory and Applications*, Vol. 20, 1984, pp. 51–57.
- ²¹⁶ Kuo, Z. S., and Vinh, N. X., "Improved Matched Asymptotic Solutions for Three-Dimensional Atmospheric Skip Trajectories," *Journal of Spacecraft and Rockets*, Vol. 34, No. 4, 1998, pp. 496–502.
- ²¹⁷ Kurina, G. A., "Singular Perturbations of Control Problems with Equations of State not Solved for the Derivative (a Survey)," *Journal of Computer and System Sciences International*, Vol. 31, No. 6, 1993, pp. 17–45.
- ²¹⁸ Kushner, H. J., *Weak Convergence Methods and Singularly Perturbed Stochastic Control and Filtering Problems*, Birkhäuser, Boston, 1990.
- ²¹⁹ Lagerstrom, P. A., and Casten, R. G., "Basic Concepts Underlying Singular Perturbation Techniques," *SIAM Review*, Vol. 14, 1972, pp. 63–120.
- ²²⁰ Lagerstrom, P. A., and Kevorkian, J., "Earth-to-Moon Trajectories in the Restricted Three-Body Problem," *Journal de Mecanique*, Vol. 2, 1963, pp. 189–218.
- ²²¹ Lagerstrom, P. A., and Kevorkian, J., "Matched-Cortic Approximation to the Two Fixed Force-Center Problem," *Astronautical Journal*, Vol. 68, 1963, pp. 84–92.
- ²²² Lam, S. H., "Using CSP to Understand Complex Chemical Kinetics," *Combustion Science and Technology*, Vol. 89, 1993, pp. 375–404.
- ²²³ Lam, S. H., and Goussis, D. A., "Understanding Complex Chemical Kinetics with Computational Singular Perturbations," TR 1799-MAE, Princeton Univ., Princeton, NJ, 1988.
- ²²⁴ Lam, S. H., and Goussis, D. A., "Basic Theory and Demonstration of Computational Singular Perturbation for Stiff Equations," *Proceedings of the 12th IMACS World Congress on Scientific Computation*, 1989, pp. 487–492.
- ²²⁵ Lam, S. H., and Goussis, D. A., "The CSP Method for Simplifying Kinetics," *International Journal of Chemical Kinetics*, Vol. 26, 1994, pp. 461–486.
- ²²⁶ Lee, J. I., and Ha, I. J., "Autopilot Design for Highly Maneuvering SST Missiles via Singular Perturbation-Like Technique," *IEEE Transactions on Control System Technology*, Vol. 7, Sept. 1999, pp. 527–541.
- ²²⁷ Liakopoulos, A., and Boykin, W. H., Jr., "Singular Perturbation Analysis of Speed Controlled Reciprocating Compressors," *Journal of Dynamic Systems, Measurement, and Control*, Vol. 111, 1989, pp. 313–321.
- ²²⁸ Litkouhi, B., and Khalil, H. K., "Infinite Time Regulators for Singularly Perturbed Difference Equations," *International Journal of Control*, Vol. 39, 1984, pp. 567–598.
- ²²⁹ Litkouhi, B., and Khalil, H. K., "Multirate and Composite Control of Two-Time-Scale Discrete-Time Systems," *IEEE Transactions on Automatic Control*, Vol. AC-30, 1985, pp. 645–651.
- ²³⁰ Longchamp, R., "Singular Perturbation Analysis of a Receding Horizon Controller," *Automatica*, Vol. 19, 1983, pp. 303–308.
- ²³¹ Lorenz, J., and Sanders, R., "On the Rate of Convergence of Viscosity Solutions for Boundary Value Problems," *SIAM Journal on Mathematical Analysis*, Vol. 18, 1987, pp. 306–320.
- ²³² Lu, P., "Analytical Solution to Constrained Hypersonic Flight Trajectories," *Journal of Guidance, Control, and Dynamics*, Vol. 16, No. 5, 1993, pp. 956–960.
- ²³³ MacGillivray, A. D., "On the Leading Term of the Inner Asymptotic Expansion of Van der Pol's Equation," *SIAM Journal on Applied Mathematics*, Vol. 43, 1983, pp. 594–612.
- ²³⁴ Mahmoud, M., "Order Reduction and Control of Discrete Systems," *IEE Proceedings: Control Theory and Applications*, Vol. 129, 1982, pp. 129–135.
- ²³⁵ Mahmoud, M. S., and Singh, M. G., *Discrete Systems: Analysis, Control, and Optimization*, Springer-Verlag, Berlin, 1984.
- ²³⁶ Margolis, S. B., and Matkowsky, B. J., "Flame Propagation with Multiple Fuels," *SIAM Journal on Applied Mathematics*, Vol. 42, 1982, pp. 982–1003.
- ²³⁷ Marino, R., and Nicosia, S., "On the Feedback Control of Industrial Robots with Elastic Joints: A Singular Perturbation Approach," TR R84.01, University of Rome, Rome, Italy, 1984.
- ²³⁸ Markopoulos, N., and Calise, A. J., "Near-Optimal Asymptotic Tracking in Control Problems Involving State-Variable Inequality Constraints," *Proceedings of the AIAA Guidance, Navigation, and Control Conference*, AIAA, Washington, DC, 1993, pp. 417–426.
- ²³⁹ Markowich, P. A., Ringhofer, C. A., Selberherr, S., and Lentin, M., "A Singular Perturbation Approach for the Analysis of the Fundamental Semiconductor Equations," *IEEE Transactions on Electron Devices*, Vol. ED-30, 1983, pp. 1165–1181.
- ²⁴⁰ Martynyuk, A. A., *Stability by Liapunov's Matrix Function Method with Applications*, Marcel Dekker, New York, 1998.
- ²⁴¹ Matkowsky, B. J., and Reiss, E. L., "Singular Perturbations of Bifurcations," *SIAM Journal on Applied Mathematics*, Vol. 33, 1977, pp. 230–255.
- ²⁴² Maybeck, P. S., and Schore, M. R., "Reduced-Order Multiple Model Adaptive Controller for Flexible Space Structures," *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 28, 1992, pp. 756–767.
- ²⁴³ McInnes, C. R., "Matched Asymptotic Expansion Solutions for an Ablating Hypervelocity Projectile," *Journal of Guidance, Control, and Dynamics*, Vol. 18, No. 3, 1995, pp. 644–646.
- ²⁴⁴ Mease, K. D., "Optimization of Aeroassisted Orbital Transfer: Current Status," *Journal of Astronautical Sciences*, Vol. 36, Jan.–June 1988, pp. 7–33.
- ²⁴⁵ Mease, K. D., and Van Buren, M. A., "Geometric Synthesis of Aerospace Plane Ascent Guidance Logic," *Automatica*, Vol. 30, No. 12, 1994, pp. 1839–1849.
- ²⁴⁶ Mease, K. D., and McCreary, F. A., "Atmospheric Guidance Law for Planar Skip Trajectories," *Proceedings of the AIAA Atmospheric Flight Mechanics Conference*, AIAA, New York, 1985, pp. 408–415.
- ²⁴⁷ Mehra, R., Washburn, R., Sajan, S., and Carrol, J., "A Study of the Application of Singular Perturbation Theory," NASA CR 3167, Scientific Systems, Cambridge, MA, 1979.
- ²⁴⁸ Menon, P. K. A., Badgett, M. E., Walker, R. A., and Duke, E. L., "Nonlinear Flight Test Trajectory Controllers for Aircraft," *Journal of Guidance, Control, and Dynamics*, Vol. 10, No. 1, 1987, pp. 67–72.
- ²⁴⁹ Menon, P. K. A., and Briggs, M. M., "Near-Optimal Midcourse Guidance for Air-to-Air Missiles," *Journal of Guidance, Control, and Dynamics*, Vol. 13, No. 4, 1990, pp. 596–602.
- ²⁵⁰ Merritt, S. R., Cliff, E. M., and Kelley, H. J., "Energy-Modeled Climb and Climb-Dash: The Kaiser Technique," *Automatica*, Vol. 21, 1985, pp. 319–321.
- ²⁵¹ Miele, A., "Problemi di minimo tempo ne volo non-stazionario degli i aeroplani," *Atti della Accademia delle Scienze di Torino*, Vol. 85, 1950, pp. 41–52.
- ²⁵² Mishne, D., and Speyer, J. L., "Optimal Control of Aeroassisted Plane Change Maneuver Using Feedback Coefficients," *Proceedings of the AIAA Atmospheric Flight Mechanics Conference*, AIAA, New York, 1986.
- ²⁵³ Moerder, D. D., and Calise, A. J., "Convergence of a Numerical

Algorithm for Calculating Optimal Output Feedback Gains," *IEEE Transactions on Automatic Control*, Vol. AC-30, 1985, pp. 900-903.

²⁵⁴Moerder, D. D., and Calise, A. J., "Two-Timescale Stabilization of Systems with Output Feedback," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 6, 1985, pp. 731-736.

²⁵⁵Moerder, D. D., and Calise, A. J., "Near Optimal Output Feedback Regulation of Ill-Conditioned Linear Systems," *IEEE Transactions on Automatic Control*, Vol. AC-33, 1988, pp. 463-466.

²⁵⁶Moss, J. B., "Perturbation Techniques and Orbit Expansion by Continuous Low Thrust," *Journal of British Interplanetary Society*, Vol. 27, 1974, pp. 213-325.

²⁵⁷Naidu, D. S., *Singular Perturbation Methodology in Control Systems*, Peter Peregrinus, Stevenage Herts, England, U.K., 1988.

²⁵⁸Naidu, D. S., "Three-Dimensional Atmospheric Entry Problem Using Method of Matched Asymptotic Expansions," *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 25, 1989, pp. 660-667.

²⁵⁹Naidu, D. S., "Singular Perturbations and Time Scales (SPaTS) in Control Theory and Applications: Overview 1983-1992," *Proceedings of the 9th International Conference on Systems Engineering*, 1993.

²⁶⁰Naidu, D. S., *Aeroassisted Orbital Transfer: Guidance and Control Strategies*, Vol. 188, Lecture Notes in Control and Information Sciences, Springer-Verlag, London, 1994.

²⁶¹Naidu, D. S., "Guidance and Control Strategies for Aeroassisted Orbital Transfer: Status Survey," *Proceedings of the AIAA Atmospheric Flight Mechanics Conference*, AIAA, Washington, DC, 1994.

²⁶²Naidu, D. S., "Guidance and Control Strategies for Hypersonic Vehicles," TR, Idaho State Univ., Pocatello, ID, Aug. 1999.

²⁶³Naidu, D. S., "Singular Perturbations and Time Scales in Aerospace Systems: An Overview," *Nonlinear Problems in Aviation and Aerospace*, edited by S. Sivasundaram, Gordon and Breach Science, U.K., 1999, pp. 251-262.

²⁶⁴Naidu, D. S., Banda, S. S., and Buffington, J. M., "Unified Approach to H_2 and H_∞ Optimal Control of Hypersonic Vehicles," *Proceedings of the 1999 American Control Conference*, 1999, pp. 2737-2741.

²⁶⁵Naidu, D. S., Buffington, J. M., and Banda, S. S., "Further Results on Nondimensional Forms for Singularly Perturbed Structures," *Proceedings of the AIAA Guidance, Navigation and Control Conference*, AIAA, Reston, VA, 1999, pp. 226-236.

²⁶⁶Naidu, D. S., Buffington, J. M., and Banda, S. S., "Resurrection in Hypersonics: Why, What and When," *Proceedings of the AIAA Guidance, Navigation and Control Conference*, AIAA, Reston, VA, 1999, pp. 563-573.

²⁶⁷Naidu, D. S., and Calise, A. J., "Singular Perturbations and Time Scales in Control Theory and Applications: Survey 1983-1989," *IFAC Workshop on Singular Perturbations and Asymptotic Methods in Systems and Control*, 1989.

²⁶⁸Naidu, D. S., and Calise, A. J., "Singular Perturbations and Time Scales in Guidance, Navigation and Control of Aerospace Systems: Survey," *Proceedings of the AIAA Guidance, Navigation and Control Conference* (invited survey paper), AIAA, Washington, DC, 1995, pp. 1338-1362.

²⁶⁹Naidu, D. S., Doman, D. B., and Banda, S. S., "Sky print for X-33 Vehicle via Neighboring Optimal Control," *2000 American Control Conference*, 2000, pp. 3870-3874.

²⁷⁰Naidu, D. S., and Price, D. B., "Timescale Synthesis of a Closed-Loop Discrete Optimal Control System," *Journal of Guidance, Control, and Dynamics*, Vol. 10, No. 5, 1987, pp. 417-421.

²⁷¹Naidu, D. S., and Price, D. B., "Singular Perturbation and Timescale Approaches in Discrete Control Systems," *Journal of Guidance, Control, and Dynamics*, Vol. 11, No. 5, 1988, pp. 592-594.

²⁷²Naidu, D. S., and Price, D. B., "Singular Perturbations and Time Scales in the Design of Digital Flight Control Systems," NASA, TP 2844, Dec. 1988.

²⁷³Naidu, D. S., and Price, D. B., "On the Method of Matched Asymptotic Expansions," *Journal of Guidance, Control and Dynamics*, Vol. 12, No. 2, 1989, pp. 277-279.

²⁷⁴Naidu, D. S., Price, D. B., and Hibey, J. L., "Singular Perturbations and Time Scales in Discrete Control Systems—An Overview," *Proceedings of the 26th IEEE Conference on Decision and Control* (invited survey paper) Inst. of Electrical and Electronics Engineers, New York, 1987, pp. 2096-2103.

²⁷⁵Naidu, D. S., and Rajagopalan, P. K., "Application of Vasil'eva's Singular Perturbation Method to a Problem in Ecology," *International Journal of Systems Science*, Vol. 10, 1979, pp. 761-774.

²⁷⁶Naidu, D. S., and Rao, A. K., "Singular Perturbation Method for Initial Value Problems with Inputs in Discrete Control Systems," *International Journal of Control*, Vol. 33, 1981, pp. 935-965.

²⁷⁷Naidu, D. S., and Rao, A. K., "Singular Perturbation Analysis of Closed Loop Discrete Optimal Control Problem," *Optimal Control: Applications and Methods*, Vol. 5, 1984, pp. 19-28.

²⁷⁸Naidu, D. S., and Rao, A. K., *Singular Perturbation Analysis of Discrete Control Systems*, Vol. 1154, Lecture Notes in Mathematics, Springer-Verlag, New York, 1985.

²⁷⁹Naidu, D. S., and Sen, S., "Singular Perturbation Method for the Tran-

sient Analysis of a Transformer," *Electric Power Systems Research*, Vol. 5, 1982, pp. 307-313.

²⁸⁰Nayfeh, A. H., "A Generalized Method for Treating Singular Perturbation Problems," Ph.D. Dissertation, Dept. of Aeronautical Engineering, Stanford Univ., Stanford, CA, 1964.

²⁸¹Nayfeh, A. H., "A Comparison of Three Perturbation Methods for Earth-Moon-Spaceship Problem," *AIAA Journal*, Vol. 3, No. 9, 1965, pp. 1682-1687.

²⁸²Nayfeh, A. H., *Perturbation Methods*, Wiley-Interscience, New York, 1973.

²⁸³Nayfeh, A. H., *Problems in Perturbation*, Wiley, New York, 1985.

²⁸⁴Nefedov, N. N., "On Some Singularly Perturbed Problems for Viscous Stratified Fluids," *Journal of Mathematical Analysis and Applications*, Vol. 131, 1987, pp. 118-126.

²⁸⁵Nipp, K., "Invariant Manifolds of Singularly Perturbed Ordinary Differential Equations," *Journal of Applied Mathematical Physics (JAMP)*, Vol. 36, 1985, pp. 309-320.

²⁸⁶O'Malley, R. E., Jr., "Singular Perturbation of the Time-Invariant Linear State Regulator Problem," *Journal of Differential Equations*, Vol. 12, 1972, pp. 117-128.

²⁸⁷O'Malley, R. E., Jr., "The Singularly Perturbed Linear State Regulator Problem," *SIAM Journal on Control*, Vol. 10, 1972, pp. 399-413.

²⁸⁸O'Malley, R. E., Jr., "Boundary Layer Methods for Certain Nonlinear Singularly Perturbed Optimal Control Problems," *Journal of Mathematical Analysis and Applications*, Vol. 45, 1974, pp. 468-484.

²⁸⁹O'Malley, R. E., Jr., *Introduction to Singular Perturbations*, Academic Press, New York, 1974.

²⁹⁰O'Malley, R. E., Jr., *Singular Perturbation Methods for Ordinary Differential Equations*, Springer-Verlag, New York, 1991.

²⁹¹O'Malley, R. E., Jr., and Jameson, A., "Singular Perturbations and Singular Arcs—part I," *IEEE Transactions on Automatic Control*, Vol. AC-20, 1975, pp. 218-3226.

²⁹²O'Malley, R. E., Jr., and Jameson, A., "Singular Perturbations and Singular Arcs—part II," *IEEE Transactions on Automatic Control*, Vol. AC-22, 1977, pp. 328-337.

²⁹³O'Reilly, J., "Full-Order Observers for a Class of Singularly Perturbed Linear Time-Varying Systems," *International Journal of Control*, Vol. 30, 1979, pp. 745-756.

²⁹⁴Othman, H. A., Khraishi, N. M., and Mahmoud, M. S., "Discrete Regulators with Time-Scale Separation," *IEEE Transactions on Automatic Control*, Vol. AC-30, 1985, pp. 293-297.

²⁹⁵Oyediran, A. A., and Gbadeyan, J. A., "Vibration of a Prestressed Orthotropic Rectangular Thin Plate via Singular Perturbation Technique," *Acta Mechanica*, Vol. 64, 1986, pp. 165-178.

²⁹⁶Kokotović, P. V., Bensoussan, A., and Blankenship, G. (eds.), *Singular Perturbations and Asymptotic Analysis in Control Systems*, Vol. 90, Lecture Notes in Control and Information Sciences, Springer-Verlag, Berlin, 1987.

²⁹⁷Parter, S. V., "On the Swirling Flow Between Rotating Coaxial Disks: A Survey," *Theory and Applications of Singular Perturbations*, edited by W. Eckhaus and E. M. de Jager, Springer-Verlag, Berlin, 1982, pp. 258-280.

²⁹⁸Perko, L. M., "Interplanetary Trajectories in the Restricted Three-Body Problem," *AIAA Journal*, Vol. 2, No. 12, 1964, pp. 2187-2192.

²⁹⁹Phillips, R. G., "Reduced Order Modelling and Control of Two-Time Scale Discrete Systems," *International Journal of Control*, Vol. 31, 1980, pp. 765-780.

³⁰⁰Prandtl, L., "Über flüssigkeitsbewegung bei kleiner reibung," *Verhandlungen, III International Mathematical Kongresses, Tuebner, Leipzig*, 1905, pp. 484-491.

³⁰¹Price, D. B., Calise, A. J., and Moerder, D. D., "Piloted Simulation of an Onboard Trajectory Optimization Algorithm," *Journal of Guidance, Control, and Dynamics*, Vol. 7, No. 2, 1984, pp. 355-360.

³⁰²Priel, B., and Shaked, U., "Cheap Optimal Control of Discrete Single Input Single Output Systems," *International Journal of Control*, Vol. 38, 1984, pp. 1087-1113.

³⁰³Qassim, R. Y., and Silva Freire, A. P., "Application of the Boundary Value Technique to Singular Perturbation Problems at High-Reynolds Numbers," *Journal of Mathematical Analysis and Applications*, Vol. 122, 1987, pp. 70-87.

³⁰⁴Rajagopalan, P. K., and Naidu, D. S., "A Singular Perturbation Method for Discrete Control Systems," *International Journal of Control*, Vol. 32, 1980, pp. 925-936.

³⁰⁵Rajan, N., and Ardema, M. D., "Interception in Three Dimensions: An Energy Formulation," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 1, 1985, pp. 23-30.

³⁰⁶Ramnath, R. V., and Sinha, P., "Dynamics of the Space Shuttle During Entry Into Earth's Atmosphere," *AIAA Journal*, Vol. 13, No. 3, 1975, pp. 337-342.

³⁰⁷Rao, A. K., and Naidu, D. S., "Singular Perturbation Method Applied to Open-Loop Discrete Optimal Control Problem," *Optimal Control: Applications and Methods*, Vol. 3, 1982, pp. 121-131.

- ³⁰⁸Rao, A. V., and Mease, K. D., "Dichomatic Basis Approach to Solving Hyper-Sensitive Optimal Control Problems," *Automatica*, Vol. 35, 1999, pp. 633–642.
- ³⁰⁹Rao, A. V., and Mease, K. D., "Eigenvector Approximate Dichomatic Basis Method for Solving Hyper-Sensitive Optimal Control Problems," *Optimal Control: Applications and Methods*, Vol. 20, 1999, pp. 59–77.
- ³¹⁰Reiner, J., Balas, G. J., and Garrard, W. L., "Flight Control Design Using Robust Dynamic Inversion and Time-Scale Separation," *Automatica*, Vol. 32, 1996, pp. 1493–1504.
- ³¹¹Ridgely, D. B., Banda, S. S., and D'Azzo, J. J., "Decoupling of High-Gain Multivariable Tracking System," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 1, 1985, pp. 44–49.
- ³¹²Riedle, B. D., and Kokotović, P. V., "Stability Analysis of an Adaptive System with Unmodelled Dynamics," *International Journal of Control*, Vol. 41, 1985, pp. 389–402.
- ³¹³Roberts, S. M., "A Boundary-Value Technique for Singular Perturbation Problems," *Journal of Mathematical Analysis and Applications*, Vol. 87, 1982, pp. 489–508.
- ³¹⁴Rudraih, N., and Musuoka, T., "Asymptotic Analysis of Natural Convection Through Horizontal Porous Layer," *International Journal of Engineering Science*, Vol. 30, 1982, pp. 29–39.
- ³¹⁵Rutowski, E. S., "Energy Approach to the General Aircraft Performance Problem," *Journal of Aeronautical Sciences*, March 1954, pp. 187–195.
- ³¹⁶Saberi, A., and Khalil, H. K., "Stabilization and Regulation of Nonlinear Singularly Perturbed Systems-Composite Control," *IEEE Transactions on Automatic Control*, Vol. AC-30, 1985, pp. 739–747.
- ³¹⁷Saberi, A., and Sannuti, P., "Cheap and Singular Controls for Linear Quadratic Regulators," *IEEE Transactions on Automatic Control*, Vol. AC-32, 1987, pp. 2008–2019.
- ³¹⁸Saksena, V. R., "A Microcomputer-Based Aircraft Flight Control System," M.S. Thesis, Univ. of Illinois, Urbana, IL, 1980.
- ³¹⁹Saksena, V. R., and Başar, T., "Multimodelling, Singular Perturbations and Stochastic Decision Problems," *Control and Dynamic Systems*, edited by C. T. Leondes, Academic Press, New York, 1986, pp. 1–58.
- ³²⁰Saksena, V. R., and Cruz, J. B., "Robust Nash Strategies for a Class of Nonlinear Singularly Perturbed Problems," *International Journal of Control*, Vol. 39, 1984, pp. 293–310.
- ³²¹Saksena, V. R., and Cruz, J. B., "Optimal and Near Optimal Incentive Strategies in the Hierarchical Control of Markov Chains," *Automatica*, Vol. 21, 1985, pp. 181–191.
- ³²²Saksena, V. R., and Cruz, J. B., "A Unified Approach to Reduced Order Modelling and Control of Large Scale Systems with Multiple Decision Makers," *Optimal Control: Applications and Methods*, Vol. 4, 1985, pp. 403–420.
- ³²³Saksena, V. R., O'Reilly, J., and Kokotović, P. V., "Singular Perturbations and Time-Scale Methods in Control Theory: Survey 1976–1983," *Automatica*, Vol. 20, 1984, pp. 273–293.
- ³²⁴Salman, M. A., and Cruz, J. B., "Optimal Coordination of Multimodel Interconnected Systems with Slow and Fast Modes," *Large Scale Systems*, Vol. 5, 1983, pp. 207–219.
- ³²⁵Sannuti, P., "Singular Perturbation Method in the Theory of Optimal Control," Ph.D. Dissertation, Univ. of Illinois, Urbana, IL, 1968.
- ³²⁶Sannuti, P., "Asymptotic Series Solution of Singularly Perturbed Optimal Control Problems," *Automatica*, Vol. 10, 1974, pp. 183–194.
- ³²⁷Sannuti, P., "Singular Perturbations in the State Space Approach of Electric Networks," *Circuit Theory and Applications*, Vol. 9, 1981, pp. 47–57.
- ³²⁸Sannuti, P., and Kokotović, P. V., "Near Optimum Design of Linear Systems by Singular Perturbation Method," *IEEE Transactions on Automatic Control*, Vol. AC-14, 1969, pp. 15–22.
- ³²⁹Sannuti, P., and Wason, H. S., "Multiple Time-Scale Decomposition in Cheap Control Problems-Singular Control," *IEEE Transactions on Automatic Control*, Vol. AC-30, 1985, pp. 633–644.
- ³³⁰Sarlet, W., "On a Common Derivation of the Averaging Method and the Two-Time-Scale Method," *Celestial Mechanics*, Vol. 17, 1978, pp. 299–312.
- ³³¹Sastry, S., *Nonlinear Systems: Analysis, Stability, and Control*, Springer-Verlag, New York, 1999.
- ³³²Schmeiser, C., "Finite Deformation of Thin Beams: Asymptotic Analysis by Singular Perturbation Methods," *Journal of Applied Mathematics*, Vol. 34, 1985, pp. 155–164.
- ³³³Schmidt, D. K., and Hermann, J. A., "Use of Energy-State Analysis on a Generic Airbreathing Hypersonic Vehicle," *Journal of Guidance, Control, and Dynamics*, Vol. 21, No. 1, 1998, pp. 71–76.
- ³³⁴Schumacher, C., and Khargonekar, P. P., "Missile Autopilot Designs Using H_∞ Control with Gain Scheduling and Dynamic Inversion," *Journal of Guidance, Control, and Dynamics*, Vol. 21, No. 2, 1998, pp. 234–243.
- ³³⁵Schumacher, C., and Khargonekar, P. P., "Stability Analysis of a Missile Control System with a Dynamic Inversion Controller," *Journal of Guidance, Control, and Dynamics*, Vol. 21, No. 3, 1998, pp. 508–515.
- ³³⁶Sen, S., and Naidu, D. S., "A Time-Optimal Control Algorithm for Two-Time Scale Discrete System," *International Journal of Control*, Vol. 47, 1988, pp. 1595–1602.
- ³³⁷Sero-Guillaume, O., Bernardin, D., Felici, T., and Zouaoui, D., "Optimal Time Reentry of Vehicles by Asymptotic Matching," *Journal of Guidance, Control, and Dynamics*, Vol. 19, No. 1, 1996, pp. 223–230.
- ³³⁸Sero-Guillaume, O., Felici, T., and Bernardin, D., "Asymptotic Matching and Genetic Optimization Applied to Optimal Aerospace Design," *International Journal of Systems Science*, Vol. 28, 1997, pp. 229–240.
- ³³⁹Sethi, S. P., and Zhang, Q., *Hierarchical Decision Making in Stochastic Manufacturing Systems*, Birkhäuser, Boston, 1995.
- ³⁴⁰Shen, Y. C., "Series Solution of Equations of Reentry Vehicles with Variable Lift and Drag Coefficients," *AIAA Journal*, Vol. 1, No. 11, 1963, pp. 2487–2490.
- ³⁴¹Shen, Y. C., "Systematic Expansion Procedure and General Unified Theory for Direct and Indirect Problems in Reentry Mechanics," *Proceedings of the 14th International Astronautical Congress*, 1963, pp. 235–260.
- ³⁴²Sheu, D., Vinh, N. X., and Howes, R. M., "Application of Singular Perturbation Methods for Three-Dimensional Minimum-Time Interception," *Journal of Guidance, Control, and Dynamics*, Vol. 14, No. 2, 1991, pp. 360–367.
- ³⁴³Shi, Y. Y., "Matched Asymptotic Solutions for Optimum Life Controlled Atmospheric Entry," *AIAA Journal*, Vol. 9, No. 11, 1971, pp. 2229–2238.
- ³⁴⁴Shi, Y. Y., and Eckstein, M. C., "Ascent or Descent from Satellite Orbit Law Thrust," *AIAA Journal*, Vol. 4, No. 12, 1966, pp. 2203–2209.
- ³⁴⁵Shi, Y. Y., and Eckstein, M. C., "Uniformly Valid Asymptotic Solution of Nonplanar Earth-to-Moon Trajectories in the Restricted Four-Body Problem," *Astronautical Journal*, Vol. 72, 1967, pp. 685–701.
- ³⁴⁶Shi, Y. Y., and Pottsepp, L., "Asymptotic Expansion of a Hypervelocity Atmospheric Entry Problem," *AIAA Journal*, Vol. 7, No. 2, 1969, pp. 353–355.
- ³⁴⁷Shi, Y. Y., Pottsepp, L., and Eckstein, M. C., "A Matched Asymptotic Solution for Skipping Entry into Planetary Atmosphere," *AIAA Journal*, Vol. 9, No. 4, 1971, pp. 736–738.
- ³⁴⁸Shih, S. D., and Kellogg, R. B., "Asymptotic Analysis of a Singular Perturbation Problem," *SIAM Journal on Mathematical Analysis*, Vol. 18, 1987, pp. 1467–1511.
- ³⁴⁹Shinar, J., "Solution Techniques for Realistic Pursuit-Evasion Games," *Control and Dynamic Systems*, edited by C. T. Leondes, Vol. 17, Academic Press, New York, 1981, pp. 63–124.
- ³⁵⁰Shinar, J., "On applications of Singular Perturbation Techniques in Nonlinear Optimal Control," *Automatica*, Vol. 19, 1983, pp. 203–211.
- ³⁵¹Shinar, J., "Zeroth-Order Feedback Strategies for Medium-Range Interception in a Horizontal Plane," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 1, 1985, pp. 9–15.
- ³⁵²Shinar, J., and Farber, N., "Horizontal Variable Speed Interception Game Solved by Forced Singular Perturbation Technique," *Journal of Optimization Theory and Applications*, Vol. 42, 1984, pp. 603–636.
- ³⁵³Shtessel, Y., Hall, C., and Jackson, M., "Reusable Launch Vehicle Control in Multiple-Timescale Sliding Modes," *Journal of Guidance, Control, and Dynamics*, Vol. 23, No. 6, 2000, pp. 1013–1020.
- ³⁵⁴Siciliano, B., and Book, W. J., "A Singular Perturbation Approach to Control of Lightweight Flexible Manipulators," *International Journal of Robotic Research*, Vol. 7, 1988, pp. 79–90.
- ³⁵⁵Singh, S. N., "Control of Nearly Singular Decoupling Systems and Nonlinear Aircraft Maneuver," *IEEE Transactions on Aerospace and Electronic Systems*, Vol. 24, 1988, pp. 775–784.
- ³⁵⁶Skaar, S. B., and Ruoff, C. F., (eds.), *Teleoperation and Robotics in Space*, AIAA, Washington, DC, 1994.
- ³⁵⁷Smith, D. R., "The Multivariable Method in Singular Perturbation Analysis," *SIAM Review*, Vol. 17, 1975, pp. 221–273.
- ³⁵⁸Smith, D. R., *Singular Perturbation Theory: An Introduction with Applications*, Cambridge Univ. Press, Cambridge, England, U.K. 1985.
- ³⁵⁹Smyth, J. S., "Digital Flight Control System Design Using Singular Perturbation Methods," M.S. Thesis, U.S. Air Force Inst. of Technology, Wright-Patterson AFB, OH, 1981.
- ³⁶⁰Snell, S. A., Enns, D. F., and Garrard, W. L., Jr., "Nonlinear Inversion Flight Control for a Supermaneuverable Aircraft," *Journal of Guidance, Control, and Dynamics*, Vol. 15, No. 4, 1992, pp. 976–984.
- ³⁶¹Sobolev, V. A., "Integral Manifolds and Decomposition of Singularly Perturbed Systems," *Systems and Control Letters*, Vol. 5, 1984, pp. 169–179.
- ³⁶²Soner, H. M., "Singular Perturbations in Manufacturing," *SIAM Journal on Control and Optimization*, Vol. 31, 1993, pp. 132–146.
- ³⁶³Spong, M. W., "Modelling and Control of Elastic Joint Robots," *Journal of Dynamic Systems, Measurement and Control*, Vol. 109, 1987, pp. 310–319.
- ³⁶⁴Spong, M. W., "On the Forced Control Problem for Flexible Joint Manipulators," *IEEE Transactions on Automatic Control*, Vol. 34, 1989, pp. 107–111.

- ³⁶⁵Spong, M. W., Khorasani, K., and Kokotović, P. V., "A Slow Manifold Approach to Feedback Control of Flexible Joint Robots," *IEEE Journal of Robotics and Automation*, Vol. RA-3, 1987, pp. 291–300.
- ³⁶⁶Sridhar, B., and Gupta, N. K., "Missile Guidance Laws Based on Singular Perturbation Methodology," *Journal of Guidance and Control*, Vol. 3, No. 2, 1980, pp. 158–165.
- ³⁶⁷Stengel, R. F., "Some Effects of Parameter Variations on the Lateral-Directional Stability of Aircraft," *Journal of Guidance and Control*, Vol. 3, No. 2, 1980, pp. 124–131.
- ³⁶⁸Stengel, R. F., Broussard, J. R., and Berry, P. W., "Digital Control for VTOT Aircraft," *IEEE Transactions on Aerospace and Electronic Systems*, Vol. AES-14, 1978, pp. 54–63.
- ³⁶⁹Stiharu-Alexe, I., and O'Shea, J., "Four-Dimensional Guidance of Atmospheric Vehicles," *Journal of Guidance, Control, and Dynamics*, Vol. 19, No. 1, 1996, pp. 113–122.
- ³⁷⁰Syracos, G. P., and Sannuti, P., "Singular Perturbation Modelling of Continuous and Discrete Physical Systems," *International Journal of Control*, Vol. 37, 1983, pp. 1007–1022.
- ³⁷¹Syracos, G. P., and Sannuti, P., "Near Optimum Regulator Design of Singularly Perturbed Systems via Chandrasekhar Equations," *International Journal of Control*, Vol. 39, 1984, pp. 1083–1102.
- ³⁷²Tap, R. F., van Willigenburg, L. G., van Straten, G., and van Henten, E. J., "Optimal Control of Green House Climate: Computation of the Influence of Fast and Slow Dynamics," *Proceedings of the 12th Triennial World Congress of the IFAC*, edited by G. C. Goodwin and R. J. Evans, Vol. 4, Elsevier Science, Oxford, England, U.K., 1994, pp. 1147–1150.
- ³⁷³Taun, H. D., and Hosoe, S., "On Linear Robust H_∞ Controllers for a Class of Nonlinear Singular Perturbed Systems," *Automatic*, Vol. 35, April 1999, pp. 735–739.
- ³⁷⁴Tikhonov, A. N., "Systems of Differential Equations Containing Small Parameters Multiplying Some of the Derivatives," *Mathematic Sbovenic*, Vol. 31, No. 73, 1952, pp. 575–586.
- ³⁷⁵Ting, L., and Brofman, S., "On Take-Off from Circular Orbit by Small Thrust," *Zeitschrift für Angewandte Mathematik und Mechanik (ZAMM)*, Vol. 44, 1964, pp. 417–428.
- ³⁷⁶Tsien, H. S., "The Poincare-Lighthill-Kuo Method," *Advances in Applied Mechanics*, Vol. 4, Academic Press, New York, 1956, pp. 281–349.
- ³⁷⁷van Woerkom, P. T. M., "Mathematical Models of Flexible Spacecraft Dynamics: A Survey of Order Reduction Approaches," *Control: Theory and Advanced Technology*, Vol. 6, 1990, pp. 609–632.
- ³⁷⁸Vasil'eva, A. B., "Asymptotic Behavior of Solutions to Certain Problems Involving Nonlinear Ordinary Differential Equations Containing a Small Parameter Multiplying the Highest Derivatives," *Russian Mathematical Surveys*, Vol. 18, 1963, pp. 13–84.
- ³⁷⁹Vasil'eva, A. B., "The Development of the Theory of Ordinary Differential Equations with a Small Parameter Multiplying the Highest Derivatives in the Years 1966–1976," *Russian Mathematical Surveys*, Vol. 31, 1976, pp. 109–131.
- ³⁸⁰Vasil'eva, A. B., "On the Development of Singular Perturbation Theory at Moscow State University and Elsewhere," *SIAM Review*, Vol. 36, 1994, pp. 440–452.
- ³⁸¹Vasil'eva, A. B., and Butuzov, V. F., *Asymptotic Expansions of Solutions of Singularly Perturbed Differential Equations*, Izdat. Nauka, Moscow, 1973.
- ³⁸²Vasil'eva, A. B., Butuzov, V. F., and Kalachev, L. V., *The Boundary Function Method for Singular Perturbation Problems*, SIAM Studies in Applied Mathematics, Society for Industrial and Applied Mathematics, Philadelphia, 1995.
- ³⁸³Verhulst, F., "Matched Asymptotic Expansions in the Two-Body Problem with Quick Loss of Mass," *Journal of the Institute of Mathematical Applications*, Vol. 18, 1976, pp. 87–92.
- ³⁸⁴Verhulst, F. (ed.), *Asymptotic Analysis: From Theory to Applications*, Vol. 711, Lecture Notes in Mathematics, Springer-Verlag, Berlin, 1979.
- ³⁸⁵Vian, J. L., and Moore, J. R., "Trajectory Optimization with Risk Minimization for Military Aircraft," *Journal of Guidance, Control, and Dynamics*, Vol. 12, No. 3, 1989, pp. 311–317.
- ³⁸⁶Vidyasagar, M., "Robust Stabilization of Singularly Perturbed Systems," *Systems and Control Letters*, Vol. 5, 1985, pp. 413–418.
- ³⁸⁷Vinh, N. X., *Optimal Trajectories in Atmospheric Flight*, Elsevier Scientific, Amsterdam, 1981.
- ³⁸⁸Vinh, N. X., *Flight Mechanics of High Performance Aircraft*, Cambridge Univ. Press, Cambridge, England, U.K., 1993.
- ³⁸⁹Vinh, N. X., Busemann, A., and Culp, R. D., *Hypersonic and Planetary Entry Flight Dynamics*, Univ. of Michigan Press, Ann Arbor, MI, 1980.
- ³⁹⁰Vinh, N. X., and Hanson, J. M., "Optimal Aeroassisted Return for High Earth Orbit with Plane Change," *Acta Astronautica*, Vol. 12, 1985, pp. 11–25.
- ³⁹¹Vinh, N. X., and Johannesen, J. R., "Optimal Aeroassisted Transfer Between Coplanar Elliptic Transfers," *Acta Astronautica*, Vol. 13, 1986, pp. 291–299.
- ³⁹²Vinh, N. X., Kuo, S. H., and Marchal, C., "Optimal Time-Free Nodal Transfers Between Elliptic Orbits," *Journal of Astronautical Sciences*, Vol. 36, 1988, pp. 179–197.
- ³⁹³Vinh, N. X., and Kuo, Z.-S., "Improved Matched Asymptotic Solutions for Deceleration Control During Atmospheric Entry," *Acta Astronautica*, Vol. 40, 1997, pp. 1–11.
- ³⁹⁴Vinh, N. X., Mease, K. D., and Hanson, J. M., "Explicit Guidance of Drag-Modulated Aeroassisted Transfer Between Elliptical Orbits," *Journal of Guidance, Control, and Dynamics*, Vol. 9, No. 2, 1986, pp. 274–280.
- ³⁹⁵Visser, H. G., Kelley, H. J., and Cliff, E. M., "Energy Management of Three-Dimensional Minimum-Time Intercept," *Journal of Guidance, Control, and Dynamics*, Vol. 10, No. 2, 1987, pp. 574–580.
- ³⁹⁶Visser, H. G., and Shinar, J., "First-Order Corrections in Optimal Feedback Control of Singularly Perturbed Nonlinear Systems," *IEEE Transactions on Automatic Control*, Vol. AC-31, 1986, pp. 387–393.
- ³⁹⁷Wang, M. S., Li, T. H. S., and Sun, Y. Y., "Design of Near-Optimal Observer-Based Controllers for Singularly Perturbed Discrete Systems," *JSME International Journal*, Vol. 39, 1996, pp. 234–241.
- ³⁹⁸Wasow, W., *Asymptotic Expansions for Ordinary Differential Equations*, Wiley-Interscience, New York, 1965.
- ³⁹⁹Weston, A. R., Cliff, E. M., and Kelley, H. J., "Altitude Transitions in Energy Climbs," *Automatica*, Vol. 19, 1983, pp. 199–202.
- ⁴⁰⁰Weston, A. R., Cliff, E. M., and Kelley, H. J., "Onboard Near-Optimal Climb-Dash Management," *Journal of Guidance, Control, and Dynamics*, Vol. 8, No. 3, 1985, pp. 320–324.
- ⁴⁰¹Willes, R. E., Francisco, M. C., and Reid, J. G., "An Application of Matched Asymptotic Expansions to Hypervelocity Flight Mechanics," *Proceedings of the AIAA Guidance, Control and Flight Dynamics Conference*, AIAA, New York, 1967.
- ⁴⁰²Windhorst, R., Ardema, M., and Kinney, D., "Fixed-Range Optimal Trajectories of Supersonic Aircraft by First-Order Approximations," *Journal of Guidance, Control, and Dynamics*, Vol. 24, No. 4, 2001, pp. 700–709.
- ⁴⁰³Windhorst, R., and Ardema, M., "Supersonic Transport Trajectories," *Proceedings of the AIAA Guidance, Control, and Navigation Conference*, AIAA, Reston, VA, 2000.
- ⁴⁰⁴Xu, P. Y., "Singular Perturbation Theory of Horizontal Dynamic Stability and Response of Aircraft," *Aeronautical Journal*, Vol. 89, 1985, pp. 179–184.
- ⁴⁰⁵Xu, Y., and Kanade, T. (eds.), *Space Robotics: Dynamics and Control*, Kluwer Academic, Boston, 1993.
- ⁴⁰⁶Yin, G., and Zhang, Q., *Continuous-Time Markov Chains and Applications: A Singular Perturbation Approach*, Springer-Verlag, New York, 1998.
- ⁴⁰⁷Young, K. D., Kokotović, P. V., and Utkin, V. I., "A Singular Perturbation Analysis of High-Gain Feedback Systems," *IEEE Transactions on Automatic Control*, Vol. AC-22, 1977, pp. 385–400.
- ⁴⁰⁸Zaid, S. A., Sauer, P. W., Pai, M. A., and Sarioglu, M. K., "Reduced Order Modeling of Synchronous Machines Using Singular Perturbation," *IEEE Transactions on Circuits and Systems*, Vol. CAS-21, 1982, pp. 782–786.
- ⁴⁰⁹Zhou, K., Aravena, J. L., Gu, G., and Xiong, D., "2-D Model Reduction by Quasi-Balanced Truncation and Singular Perturbation," *IEEE Transactions on Circuits and Systems-II: Analog and Digital Signal Processing*, Vol. 41, 1994, pp. 593–602.
- ⁴¹⁰Calise, A. J., "Optimization of Aircraft Altitude and Flight-Path Angle Dynamics," *Journal of Guidance, Control, and Dynamics*, Vol. 7, No. 1, 1984, pp. 123–125.
- ⁴¹¹Calise, A. J., and Melamed, N., "Optimal Guidance of Aeroassisted Transfer Vehicles Based on Matched Asymptotic Expansions," *Journal of Guidance, Control, and Dynamics*, Vol. 18, No. 4, 1995, pp. 709–717.
- ⁴¹²Melamed, N., and Calise, A. J., "Evaluation of Optimal-Guidance Algorithm for Aeroassisted Orbital Transfer," *Journal of Guidance, Control, and Dynamics*, Vol. 18, No. 4, 1995, pp. 718–722.