

# Nutational Stability of a Dual-Spin Satellite under the Influence of Applied Reaction Torques

P. M. BAINUM\*

Howard University, Washington, D.C.

AND

J. V. FEDOR†

NASA Goddard Space Flight Center, Greenbelt, Md.

The nutational stability of a dual-spin satellite under the influence of an applied reaction torque is analyzed. It is assumed that since the solar paddle attachments to the hub of the spacecraft are not rigidly locked, the effect of the solar panels can be replaced by a constant reaction torque acting on the hub of the spacecraft. This could result in the satellite having an equilibrium motion about an axis displaced from the nominal axis of symmetry. The variational equations of motion are developed about such an equilibrium position using the SAS-A spacecraft as a model. Energy dissipation on the rotor as well as the main body is included. This nonautonomous set of differential equations are linearized and transformed to an autonomous set using the Lyapunov Reducibility Theorem. The stability of the kinematically similar system is examined numerically using representative SAS-A parameters for the case when either pair of solar panels is assumed to be loosely attached. Stability is verified for small system nutation angles ( $0.1^\circ$ ) although the time constant associated with the least damped mode is approximately one order of magnitude larger than that for the SAS-A system without the influence of the reaction torques.

## Nomenclature

$A, B, C$  = main body moments of inertia about the  $x, y, z$  axes, respectively.  
 $\bar{A}, \bar{B}, \bar{C}$  = composite moments of inertia about the  $x, y, z$  axes, respectively  
 $A(t)$  = system matrix, appears when linear equations are written in vector form  
 $\bar{b}_i$  = unit vectors along the  $x, y, z$  axes, respectively ( $i = 1, 2, 3$ )  
 $\bar{b}_i'$  = unit vectors fixed to the nominal plane of the undeflected wheel and rotating with it.  
 $C_i$  = coefficients occurring in the linear equations  
 $D$  = system matrix appearing in the kinematically similar system equations  
 $H$  = magnitude of system angular momentum vector,  $\bar{H}$   
 $I_{Ri}$  = moment of inertia of rotor about its  $\bar{b}_i$  axis  
 $K$  = the restoring spring constant of the damper torsion wire system  
 $K_R$  = the restoring spring constant of the rotor  
 $k$  = the nutation damper damping (rate) constant  
 $k_R$  = rotor damping constant  
 $L_{di}$  = the applied reaction torque about the  $\bar{b}_i$  axis  
 $L_{fi}$  = the damping torques about the  $\bar{b}_i$  axis  
 $l$  = height of damper plane above  $x, z$  plane  
 $M$  = the mass of the main satellite and the rotor  
 $\bar{M}$  = the total system mass  
 $m$  = the pendulum end mass  
 $r$  = radial coordinate of a differential mass on the rotor  
 $\bar{r}_i$  = unit vectors directed along the rotor principal axes  
 $r_o$  = the distance from the nominal spin ( $y$ ) axis to the pendulum hinge point  
 $r_l$  = the length of the pendulum  
 $S(t)$  = bounded nonsingular transformation matrix used to transform nonautonomous system of equations to an autonomous set

$s$  = spin rate of rotor relative to main body  
 $t$  = time  
 $x, y, z$  = principal axes of main satellite  
 $\alpha$  = angle between the main body symmetry axis ( $\bar{b}_2$ ) and the main body angular velocity vector  
 $\alpha_x, \alpha_z$  = rotor deflection angles about the  $-\bar{b}_1', \bar{r}_3$  axes, respectively  
 $\beta_1, \beta_2$  = transformed rotor deflection coordinates in the kinematically similar system  
 $\delta, \epsilon, \psi$  = variational coordinates corresponding to perturbations in  $\omega_2, \omega_1$ , and  $\omega_3$ , respectively, from the equilibrium motion  
 $\Gamma$  =  $lm/\bar{M}$   
 $\gamma$  = the nutation angle, i.e. the angle between the  $\bar{b}_2$  axis and  $\bar{H}$   
 $\Omega$  = nominal main body spin rate  
 $\omega_i$  = angular velocities about the  $x, y, z$  axes, respectively ( $i = 1, 2, 3$ )  
 $\phi_1$  = nutation damper displacement angle

## Introduction

NASA Goddard Space Flight Center is currently directing the design and development of a series of Small Astronomy Satellites (SAS) whose purpose is to support orbitally-based experiments in modern astronomy. The first of these satellites, SAS-A, is a dual-spin spacecraft which has the capability of scanning the entire celestial sphere to determine the relative position and intensity of x-ray emitting sources with respect to the fixed position of the stars. It is important that the attitude of the satellite be precisely known and maintained in order to accurately determine the location of the x-ray emitting sources. The attitude control system for the SAS-A satellite has been designed and developed by the Applied Physics Lab. of the Johns Hopkins University.

An analysis of the attitude motion and stability of such a dual-spin spacecraft with damping only on the slowly spinning main part was reported previously.<sup>1</sup> The resulting differential equations of rotational motion when linearized were an autonomous set of four equations with constant coefficients resulting in a fifth-order characteristic equation for the general asymmetrical case. Analytical stability criteria were developed from these equations using the method of Routh-Hurwitz.

Received August 10, 1972; presented as Paper 72-885 at the AIAA Guidance and Control Conference, Stanford, Calif., August 14-16, 1972; revision received December 6, 1972. This research was supported by the NASA-ASEE Summer Faculty Fellowship Program, during the summer of 1971.

Index category: Spacecraft Attitude Dynamics and Control.

\* Associate Professor of Aerospace Engineering. Member AIAA.

† Stabilization and Control Branch. Member AIAA.

Subsequent to this analysis, it was demonstrated by static and dynamic tests of the SAS-A momentum wheel that there was some energy dissipation in the shaft-momentum wheel assembly. A recent investigation<sup>2</sup> incorporated the effects of momentum wheel damping into the rotational equations of motion for the SAS-A spacecraft, and analytically considered the attitude stability of such a system. Wheel energy dissipation was modeled by assuming the wheel could flex with two degrees of freedom relative to the hub. The nonlinear attitude equations derived for small wheel flexural motion were a ninth-order nonautonomous set. An averaging process was used to determine the zeroth and first-order secular perturbations on the behavior of the system nutation angle. From this a general analytic stability criterion was established. A numerical evaluation of this criterion using parameters and measured wheel damping data for the Small Astronomy-A satellite indicated that stability about a 0° nutation angle is insured by a factor of 128 under normal operating conditions. Numerical integration of the nonlinear equations confirmed the analytic results for special cases.

The SAS-A satellite was launched in Dec. 1970. After initial despin maneuvers and a command to pulse the nutation damper magnet to a more optimum damping constant, the nutation angle amplitude was reduced from approximately 1° to approximately 0.10–0.15°. Although this is within the mission requirement of 0.20°, it is about an order of magnitude greater than that predicted by prelaunch computer simulations.<sup>3</sup> In addition, the damping time constant for the transient nutational motion is considerably longer than theoretically predicted.<sup>3,4</sup> Several hypotheses which might explain this discrepancy are currently under investigation. Among these are: possible periodic fluctuations in solar panel lengths due to thermal expansion/contraction as the satellite rotates in the sunlight and which could excite nutations; excessive mass unbalance of the satellite in-orbit configuration, in which the state of zero nutation angle may not correspond to the lowest energy state, and where nutation damping may approach a steady-state condition of minimum energy but with non-zero nutation; and thirdly, since the solar paddle attachments to the hub of the spacecraft are not rigidly locked, but rather spring-connected, the effect of the (loose) solar paddles could be replaced by a constant reaction torque acting on the spacecraft hub. This could cause the satellite to reach an equilibrium motion about an axis slightly displaced from the nominal figure or symmetry axis, thus possibly explaining the anomalous nutational behavior of the SAS-A system.

The third theory will be the basis for the investigation considered herein. Although the results will be applied directly to the SAS-A spacecraft, it should also be of interest to the designers of other dual-spin systems having nonrigidly connected solar paddles.

### Analysis

It is a well-known textbook problem that a rotating rectangular plate with a constant angular velocity can be forced to rotate about a nonprincipal axis of inertia under the influence of a reaction torque which acts about an axis perpendicular to the plate and rotates with it.<sup>5</sup> In 1963 Garber studied the stability of a gravity-gradient stabilized satellite under the influence of a constant disturbing torque.<sup>6</sup> He concluded that if this torque were sufficient to produce a nonzero steady-state pitch (in plane) motion, it could lead to instabilities in the roll-yaw out-of-plane motion.<sup>6</sup>

This idea may be applied to the motion of a spinning satellite with loosely attached solar paddles; a plausible model is shown in Fig. 1. A possible equilibrium configuration is described by two body-axis components of the spacecraft spin vector that are nonzero

$$\omega_2 = \Omega \cos \alpha, \quad \omega_1 = 0, \quad \omega_3 = \Omega \sin \alpha \quad (1)$$

where  $\alpha$  is the angle between the axis of rotation and the

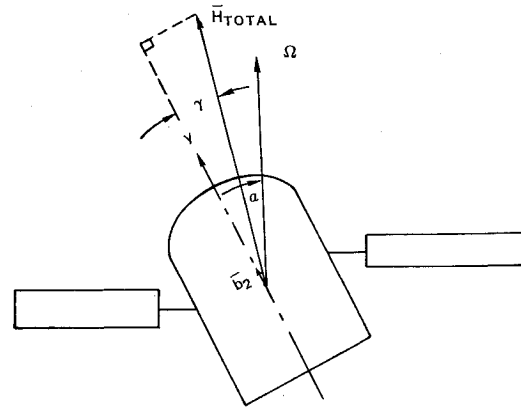


Fig. 1 Possible SAS-A in-orbit equilibrium.

desired system spin axis, and  $\Omega$  is the nominal value of the satellite spin rate.

The equations of motion for an undamped dual-spin satellite system where the desired axis of rotation is the "y" axis can be represented by

$$\bar{B}\dot{\omega}_2 + \omega_1\omega_3(\bar{A} - \bar{C}) = L_{d2} \quad (2a)$$

$$\bar{A}\dot{\omega}_1 + \omega_2\omega_3(\bar{C} - \bar{B}) - \omega_3 I_{R2} s = L_{d1} \quad (2b)$$

$$\bar{C}\dot{\omega}_3 + \omega_1\omega_2(\bar{B} - \bar{A}) + \omega_1 I_{R2} s = L_{d3} \quad (2c)$$

where the composite inertia terms  $\bar{A}$ ,  $\bar{B}$ ,  $\bar{C}$  refer to that part of the system which is assumed to still be rigidly attached. If we calculate the disturbance torque,  $\bar{L}_d$ , necessary to give this system a forced rotation represented by Eq. (1), we find that

$$L_{d2} = L_{d3} = 0 \quad (3a)$$

$$L_{d1} = \Omega \sin \alpha [\Omega \cos \alpha (\bar{C} - \bar{B}) - I_{R2} s] \quad (3b)$$

The variational equations of motion about the equilibrium motion, Eqs. (1), can be developed by assuming

$$\omega_2 = \Omega \cos \alpha + \delta, \quad \omega_1 = \epsilon, \quad \omega_3 = \Omega \sin \alpha + \psi \quad (4)$$

and substituting, Eqs. (4) back into the equations of motion (2). After linearization, the equations are of the form

$$\delta + C_1 \epsilon = 0, \quad \dot{\epsilon} + C_2 \psi + C_3 \delta = 0, \quad \dot{\psi} + C_4 \epsilon = 0 \quad (5)$$

where

$$C_1 = (\bar{A} - \bar{C})\Omega \sin \alpha / \bar{B}$$

$$C_2 = -[(\bar{B} - \bar{C})\Omega \cos \alpha + I_{R2} s] / \bar{A}$$

$$C_3 = -[(\bar{B} - \bar{C})\Omega \sin \alpha] / \bar{A}$$

$$C_4 = [(\bar{B} - \bar{A})\Omega \cos \alpha + I_{R2} s] / \bar{C}$$

If the first of Eqs. (5) is multiplied by  $C_4$ , the third by  $-C_1$ , and the result added, the linear dependence between  $\delta$  and  $\psi$  can be established. After elimination of  $\delta$  as a dependent coordinate, the independent variational equations of motion can be written

$$\dot{\epsilon} + \left( \frac{C_2 C_4 + C_3 C_1}{C_4} \right) \psi = -\frac{C_3}{C_4} [C_4 \delta(0) - C_1 \psi(0)] \quad (6a)$$

$$\dot{\psi} + C_4 \epsilon = 0 \quad (6b)$$

where  $\delta(0)$ ,  $\psi(0)$  represent the initial conditions in the variational coordinates. The homogeneous part of system (6) has the following characteristic equation in the variable,  $\lambda$

$$\lambda^2 - (C_2 C_4 + C_1 C_3) = 0 \quad (7)$$

In order for the motion to be bounded [or for the roots of Eq. (7) to be purely imaginary] the following condition must be satisfied:

$$\bar{B}[(\bar{A} - \bar{C})\Omega \sin \alpha][(\bar{B} - \bar{C})\Omega \sin \alpha] + \bar{C}[(\bar{B} - \bar{C})\Omega \cos \alpha + I_{R2} s][(\bar{B} - \bar{A})\Omega \cos \alpha + I_{R2} s] > 0 \quad (8)$$

Inequality (8) is obviously satisfied for the case of a SAS-type spacecraft where  $s \gg \Omega$  and approximately 90% of the system momentum is contributed by the rotor.

For nonzero initial conditions in  $\delta$  or  $\psi$  it is seen from Eq. (6) that nonzero steady-state values of  $\delta$  and  $\psi$  would result, but also that  $\varepsilon_{ss} = 0$ . It is clear that, even in the presence of damping, this system would never be asymptotically stable about the assumed equilibrium motion of Eqs. (1). Or, in other words, for small initial perturbations in the variational coordinates, regardless of the time elapsed, the system motion would never return exactly to its original equilibrium state.

Up to this point the analysis has considered the forced rotation of a general asymmetric dual-spin satellite without energy dissipation on either the main part or the rotor. To consider the motion and stability of this system with energy dissipation, first on the main part, and later on both parts of the spacecraft, a specific model for the energy dissipation must be selected. For this purpose the nutation damping system employed in the SAS-type satellites will be considered.

The satellite, wheel, and damping systems are illustrated in Fig. 2. The elements of the attitude control system are: 1) the main part of the spacecraft, essentially a right circular cylinder where the nominal spin axis is the  $\bar{b}_2$  body axis, 2) a small momentum wheel or rotor assumed to be connected to the primary part near its center of mass, and whose spin axis is nominally parallel to the  $\bar{b}_2$  body axis, and 3) a pendulous-type nutation damper which is attached to the main part and constrained to move in a plane a distance  $l$  above the  $\bar{b}_1, \bar{b}_3$  plane (determined by the body axes perpendicular to the symmetry axis,  $\bar{b}_2$ ). The damper is hinged about a torsion wire support which offers a restoring torque in addition to the dissipative torque associated with the damper motion.

The equations of motion for this system under the reaction torque described above and with energy dissipation on the main body may be expressed

$$\bar{B}\ddot{\omega}_2 + \omega_1\omega_3(\bar{A} - \bar{C}) = L_{f2} \quad (9a)$$

$$\bar{A}\dot{\omega}_1 + \omega_2\omega_3(\bar{C} - \bar{B}) - \omega_3 I_{R2}s = L_{d1} + L_{f1} \quad (9b)$$

$$\bar{C}\dot{\omega}_3 + \omega_1\omega_2(\bar{B} - \bar{A}) + \omega_1 I_{R2}s = L_{f3} \quad (9c)$$

in addition to an equation describing the single-degree-of-freedom damper. The damping terms,  $L_{fi}$ , and the damper equation as previously derived,<sup>1</sup> can be expanded to yield the following system of first-order nonlinear differential equations under the assumptions that

$$\omega_1/\omega_2 \ll 1, \dot{\phi}_1/\omega_2 \ll 1, \phi_1 \ll 1$$

to yield

$$\bar{B}\ddot{\omega}_2 + \omega_1\omega_3(\bar{A} - \bar{C}) + mr_1(r_1 + r_0)\ddot{\phi}_1 = 0 \quad (10a)$$

$$\bar{A}\dot{\omega}_1 + \omega_2\omega_3(\bar{C} - \bar{B}) - \omega_3 I_{R2}s - 2m\omega_2 r_1 \Gamma \dot{\phi}_1 = L_{d1} \quad (10b)$$

$$\bar{C}\dot{\omega}_3 + \omega_1\omega_2(\bar{B} - \bar{A}) + \omega_1 I_{R2}s - mr_1 \Gamma \dot{\phi}_1 + m\omega_2^2 r_1 \Gamma \phi_1 = 0 \quad (10c)$$

$$mr_1^2 \ddot{\phi}_1 - mr_1 \Gamma \dot{\omega}_3 + mr_1(r_0 + r_1)\dot{\omega}_2 + \omega_2^2 mr_1 \left( r_0 + \frac{mr_1}{M} \right) \phi_1 + m\omega_2 r_1 \Gamma \omega_1 = -k\dot{\phi}_1 - K\phi_1 \quad (10d)$$

where the super-barred composite inertia terms now include the contributions of the main body, rotor, and the nutation damper.

The linearized variational equations can again be obtained by substituting Eqs. (4) into Eqs. (10) and linearizing, assuming:  $\delta \ll 1$ ,  $\varepsilon \ll 1$ ,  $\psi \ll 1$ . The following set of linearized equations result:

$$\begin{aligned} \delta + C_1 \varepsilon + C_5 \ddot{\phi}_1 &= 0, \quad \dot{\varepsilon} + C_2 \psi + C_3 \delta + C_6 \dot{\phi}_1 = 0 \\ \dot{\psi} + C_4 \varepsilon + C_7 \ddot{\phi}_1 + C_8 \phi_1 &= 0 \\ \ddot{\phi}_1 + C_9 \dot{\phi}_1 + C_{10} \phi_1 + C_{11} \delta + C_{12} \dot{\psi} + C_{13} \varepsilon &= 0 \end{aligned} \quad (11)$$

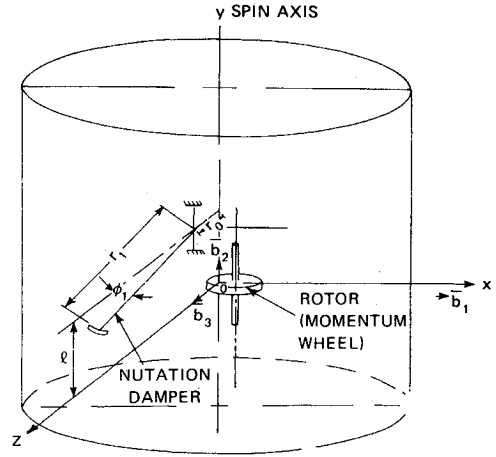


Fig. 2 Elements of SAS-A attitude control system.

where  $C_1 - C_4$  have already been defined, after Eq. (5), and, in addition

$$\begin{aligned} C_5 &= mr_1(r_1 + r_0)/\bar{B}; \quad C_6 = -2m(\Omega \cos \alpha)r_1 \Gamma/\bar{A} \\ C_7 &= -mr_1 \Gamma/\bar{C}; \quad C_8 = mr_1(\Omega^2 \cos^2 \alpha) \Gamma/\bar{C}; \quad C_9 = k/mr_1^2 \\ C_{10} &= K/mr_1^2 + \Omega^2 \cos^2 \alpha(r_0/r_1 + m/\bar{M}); \quad C_{11} = (r_0 + r_1)/r_1 \\ C_{12} &= -\Gamma/r_1; \quad C_{13} = \Gamma(\Omega \cos \alpha)/r_1 \end{aligned}$$

Again after some algebraic manipulation to eliminate the dependent degree of freedom, it can be shown that the system characteristic equation corresponding to the homogeneous linear system can be expressed as

$$f(\lambda) = a_0 \lambda^4 + a_1 \lambda^3 + a_2 \lambda^2 + a_3 \lambda + a_4 = 0 \quad (12)$$

where

$$\begin{aligned} a_0 &= 1 - C_5 C_{11} - C_7 C_{12}; \quad a_1 = C_9 \\ a_2 &= -(C_2 C_4 + C_1 C_3)(1 - C_5 C_{11} - C_7 C_{12}) + \\ &\quad (C_{10} - C_8 C_{12}) - (-C_2 C_7 - C_3 C_5 + C_6) \times \\ &\quad (C_{13} - C_1 C_{11} - C_4 C_{12}) \\ a_3 &= -C_9(C_2 C_4 + C_1 C_3) \\ a_4 &= C_2(-C_4 C_{10} + C_8 C_{13}) \end{aligned}$$

A necessary condition for stability is that all of the coefficients of the characteristic equation be nonzero and have the same sign. After substituting for the  $C$ 's it is found that

$$a_0 = 1 - [m(r_0 + r_1)^2/\bar{B}] - m\Gamma^2/\bar{C}$$

and that for the actual SAS-type system the last two terms are much less than one. Also,

$$a_1 = C_9 = k/mr_1^2; \quad a_1 > 0$$

if nutation damping is present;

$$a_3 = C_9(-C_2 C_4 - C_1 C_3)$$

if  $C_9 > 0$ , the condition that:  $-C_2 C_4 - C_1 C_3 > 0$ , is the same as inequality (8) already discussed.

For  $\alpha \ll 1$ , but not zero, the necessary condition that  $a_4 > 0$  can be reduced, after some algebra, to

$$\frac{r_0}{r_1} + \frac{m}{\bar{M}} + \frac{K}{mr_1^2 \Omega^2} > \frac{m\Gamma^2}{\bar{B} - \bar{A} + I_{R2}s/\Omega} - \frac{m\Gamma(r_0 + r_1)(\bar{A} - \bar{C})\alpha}{\bar{B}[\bar{B} - \bar{A} + I_{R2}s/\Omega]} \quad (13)$$

When  $\alpha = 0$ ,  $L_{d1} = 0$ , and condition (13) is identical to the necessary and sufficient stability condition (18) of Ref. 1.

The condition that  $a_2 > 0$  is automatically satisfied for the case when  $\alpha = 0$ , and  $a_0 > 0$ . For  $\alpha \ll 1$ , it can be shown that  $a_2 > 0$  when  $s \gg \Omega$ . For  $\alpha$  not restricted to be small the

conditions that:  $a_2 > 0$ ,  $a_3 > 0$ ,  $a_4 > 0$  are not as apparent, but could be developed and evaluated numerically.

Wheel energy dissipation has been previously modeled by assuming that the momentum wheel could have two degrees of flexural freedom relative to the main spacecraft hub.<sup>2</sup> Figure 3 describes the momentum wheel deflection geometry for the assumed small deflections, the Euler angles,  $\alpha_z$  and  $\alpha_x$ .

If it is assumed that the rotor is attached at or very near to the system center of mass and that the wheel is homogeneous (such that  $I_{R1} = 2I_{R1}$ ), together with the previous assumptions on the magnitudes of the  $\omega_i$ ,  $\dot{\phi}_1$  and  $\phi_1$ , the first-order nonlinear equations of motion are obtained<sup>2</sup>

$$\bar{B}\dot{\omega}_2 + \omega_1\omega_3(\bar{A} - \bar{C}) + m r_1(r_1 + r_0)\ddot{\phi}_1 = L_2 \quad (14)$$

$$\begin{aligned} \bar{A}\dot{\omega}_1 + \omega_2\omega_3(\bar{C} - \bar{B}) - \omega_3 I_{R2} s - 2m\omega_2 r_1 \Gamma \dot{\phi}_1 + \\ I_{R1}\{[\ddot{\alpha}_z + (\omega_2 + s)^2 \alpha_z] \sin st \\ - [\ddot{\alpha}_x + (\omega_2 + s)^2 \alpha_x] \cos st\} = L_1 \end{aligned} \quad (15)$$

$$\begin{aligned} \bar{C}\dot{\omega}_3 + \omega_1\omega_2(\bar{B} - \bar{A}) + \omega_1 I_{R2} s \\ - m r_1 \Gamma \dot{\phi}_1 + m\omega_2^2 r_1 \Gamma \phi_1 + \\ I_{R1}\{[\ddot{\alpha}_z + (\omega_2 + s)^2 \alpha_z] \cos st \\ + [\ddot{\alpha}_x + (\omega_2 + s)^2 \alpha_x] \sin st\} = L_3 \end{aligned} \quad (16)$$

$$\begin{aligned} m r_1^2 \left(1 - \frac{m}{M}\right) \ddot{\phi}_1 - m r_1 \Gamma \dot{\omega}_3 + m r_1(r_0 + r_1)\dot{\omega}_2 + \\ \omega_2^2 m r_1 \left(r_0 + \frac{m r_1}{M}\right) \phi_1 + m\omega_2 r_1 \Gamma \omega_1 = -k\dot{\phi}_1 - K\phi_1 \end{aligned} \quad (17)$$

$$\begin{aligned} I_{R1}\ddot{\alpha}_z + k_R \dot{\alpha}_z + [K_R + I_{R1}(\omega_2 + s)^2] \alpha_z + \\ I_{R1}\{[\dot{\omega}_1 - (\omega_2 + 2s)\omega_3] \sin st \\ + [\dot{\omega}_3 + (\omega_2 + 2s)\omega_1] \cos st\} = 0 \end{aligned} \quad (18)$$

$$\begin{aligned} I_{R1}\ddot{\alpha}_x + k_R \dot{\alpha}_x + [K_R + I_{R1}(\omega_2 + s)^2] \alpha_x + \\ I_{R1}\{[\dot{\omega}_3 + (\omega_2 + 2s)\omega_1] \sin st \\ - [\dot{\omega}_1 - (\omega_2 + 2s)\omega_3] \cos st\} = 0 \end{aligned} \quad (19)$$

If it is assumed that  $L_2 = L_3 = 0$  and that  $L_1 = L_{d1}$ , Eqs. (14–19) may be linearized about the equilibrium motion where

$$\omega_2 = \Omega \cos \alpha + \delta, \quad \omega_1 = \varepsilon, \quad \omega_3 = \Omega \sin \alpha + \psi$$

and  $\phi_1$ ,  $\alpha_z$ ,  $\alpha_x$  are each  $\ll 1$ , to yield in terms of the previously defined constants

$$\delta + C_1 \varepsilon + C_5 \ddot{\phi}_1 = 0 \quad (20)$$

$$\begin{aligned} \varepsilon + C_2 \psi + C_3 \delta + C_6 \dot{\phi}_1 + (I_{R1}/\bar{A}) \\ \{\sin st[\ddot{\alpha}_z + (\Omega \cos \alpha + s)^2 \alpha_z] \\ - \cos st[\ddot{\alpha}_x + (\Omega \cos \alpha + s)^2 \alpha_x]\} = 0 \end{aligned} \quad (21)$$

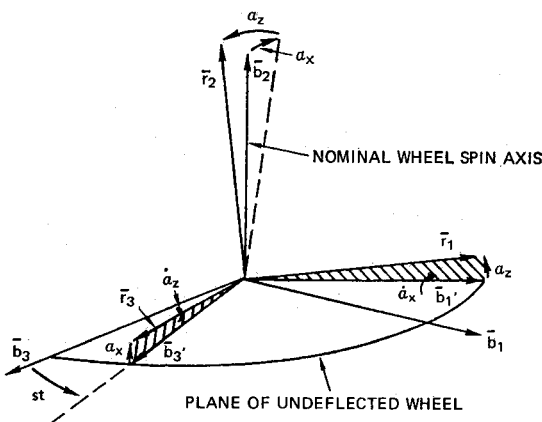


Fig. 3 Momentum wheel deflection geometry.

$$\begin{aligned} \psi + C_4 \varepsilon + C_7 \ddot{\phi}_1 + C_8 \phi_1 + (I_{R1}/\bar{C})\{\cos st[\ddot{\alpha}_z + \\ (\Omega \cos \alpha + s)^2 \alpha_z] + \sin st[\ddot{\alpha}_x + (\Omega \cos \alpha + s)^2 \alpha_x]\} = 0 \end{aligned} \quad (22)$$

$$\ddot{\phi}_1 + C_9 \dot{\phi}_1 + C_{10} \phi_1 + C_{11} \delta + C_{12} \psi + C_{13} \varepsilon = 0 \quad (23)$$

$$\begin{aligned} \ddot{\alpha}_z + (k_R/I_{R1})\dot{\alpha}_z + [K_R/I_{R1} + (\Omega \cos \alpha + s)^2] \alpha_z + \\ [\dot{\varepsilon} - (\Omega \cos \alpha + 2s)\psi + (\Omega \sin \alpha)\delta] \sin st + \\ [\dot{\psi} + (\Omega \cos \alpha + 2s)\varepsilon] \cos st \\ = (\sin st)\Omega \sin \alpha (\Omega \cos \alpha + 2s) \end{aligned} \quad (24)$$

$$\begin{aligned} \ddot{\alpha}_x + (k_R/I_{R1})\dot{\alpha}_x + [K_R/I_{R1} + (\Omega \cos \alpha + s)^2] \alpha_x + \\ [\dot{\psi} + (\Omega \cos \alpha + 2s)\varepsilon] \sin st - [\dot{\varepsilon} - (\Omega \cos \alpha + 2s)\psi \\ + (\Omega \sin \alpha)\delta] \cos st = -(\cos st)\Omega \sin \alpha (\Omega \cos \alpha + 2s) \end{aligned} \quad (25)$$

Equations (20–25) represent a ninth-order nonhomogeneous set of nonautonomous differential equations. The stability of the homogeneous system could be analyzed using Floquet theory similar to the treatment of Mingori.<sup>7</sup> The application of Floquet theory for this problem would necessitate the use of a digital computer to study the stability point by point by varying different satellite and rotor inertia, spin, and damping system parameters in a systematic manner.

Instead of the Floquet analysis the Lyapunov Reducibility Theorem may be applied to reduce the linear system of differential equations with periodic coefficients to a kinematically similar system of autonomous differential equations.<sup>8</sup> This method has been recently employed by Guha<sup>9</sup> in studying the attitude stability of dissipative dual-spin spacecraft. (A similar type of transformation was employed earlier by Barba, Hooker, and Leliakov<sup>10</sup> to reduce a nonautonomous system of equations, although not specifically identified with the Lyapunov Reducibility Theorem.)

The homogeneous system of linear nonautonomous differential equations can be expressed in standard state vector form:

$$\dot{x} = A(t)x \quad (26)$$

where, for this system,  $A(t)$  represents a  $12 \times 12$  matrix. According to the Lyapunov Reducibility Theorem<sup>8,9</sup> there is a bounded nonsingular transformation matrix  $S(t)$  with a bounded inverse  $S^{-1}(t)$  such that a matrix  $D$ , defined by the equation

$$D = S^{-1}AS - S^{-1}\dot{S} \quad (27)$$

is a constant matrix. We can then relate

$$x = S(t)y \quad (28)$$

and obtain the system

$$\dot{y} = Dy \quad (29)$$

The system of autonomous equations (29), is said to be kinematically similar to the original system, (26), and has similar stability properties since the characteristic roots of the matrix  $D$  are the characteristic exponents of the original equation (26). According to a theorem of Lyapunov, every equation with periodic coefficients is reducible, and the major problem is to determine the bounded transformation  $S(t)$ .

Guha has shown<sup>9</sup> in applying this technique to the system considered in Ref. 2, that a suitable transformation of the form of Eq. (28) can be expressed:

$$\begin{bmatrix} \omega_1 \\ \omega_3 \\ \phi_1 \\ \alpha_z \\ \alpha_x \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & \cos st & \sin st \\ 0 & 0 & 0 & \sin st & -\cos st \end{bmatrix} \begin{bmatrix} \omega_1 \\ \omega_3 \\ \phi_1 \\ \beta_1 \\ \beta_2 \end{bmatrix} \quad (30)$$

It can be verified that this same type of nonsingular bounded transformation can be applied to the present system, Eqs. (20–25). The following autonomous, and kinematically

similar system in the variational coordinates  $\delta$ ,  $\varepsilon$ ,  $\psi$ ,  $\phi_1$ ,  $\beta_1$ , and  $\beta_2$ , results:

$$\delta + C_1\varepsilon + C_5\ddot{\phi}_1 = 0 \quad (31)$$

$$\dot{\varepsilon} + C_2\psi + C_3\delta + C_6\dot{\phi}_1 + C_{14}\dot{\beta}_1 + C_{15}\dot{\beta}_2 + C_{16}\beta_2 = 0 \quad (32)$$

$$\dot{\psi} + C_4\varepsilon + C_7\ddot{\phi}_1 + C_8\phi_1 + C_{17}\dot{\beta}_1 + C_{18}\beta_1 + C_{19}\beta_2 = 0 \quad (33)$$

$$\ddot{\phi}_1 + C_9\dot{\phi}_1 + C_{10}\phi_1 + C_{11}\delta + C_{12}\psi + C_{13}\varepsilon = 0 \quad (34)$$

$$\ddot{\beta}_1 + C_{20}\dot{\beta}_1 + C_{21}\beta_1 + C_{22}\dot{\beta}_2 + C_{23}\beta_2 + \dot{\psi} + C_{24}\varepsilon = 0 \quad (35)$$

$$\ddot{\beta}_2 + C_{20}\dot{\beta}_2 + C_{21}\beta_2 - C_{22}\dot{\beta}_1 - C_{23}\beta_1 + \dot{\varepsilon} - C_{24}\psi + C_{25}\delta = \Omega \sin\alpha(\Omega \cos\alpha + 2s) \quad (36)$$

where  $C_1 - C_{13}$  have been defined previously and, in addition,

$$C_{14} = -2I_{R1}s/\bar{A}; C_{15} = I_{R1}/\bar{A}$$

$$C_{16} = I_{R1}\Omega \cos\alpha(\Omega \cos\alpha + 2s)/\bar{A}; C_{17} = I_{R1}/\bar{C}$$

$$C_{18} = I_{R1}\Omega \cos\alpha(\Omega \cos\alpha + 2s)/\bar{C}; C_{19} = 2I_{R1}s/\bar{C}$$

$$C_{20} = k_R/I_{R1}; C_{21} = (K_R/I_{R1}) + \Omega \cos\alpha(\Omega + 2s)$$

$$C_{22} = 2s; C_{23} = k_{RS}/I_{R1}; C_{24} = \Omega \cos\alpha + 2s; C_{25} = \Omega \sin\alpha$$

Equation (35) is obtained by multiplying Eq. (24) by  $\cos st$  and Eq. (25) by  $\sin st$  and adding; Eq. (36) is similarly obtained by multiplying Eq. (24) by  $\sin st$  and Eq. (25) by  $-\cos st$  and adding.

The stability analysis of this system is a standard exercise in linear systems theory. The stability of the zero solution of the corresponding homogeneous system may be analyzed by Routh's method. The characteristic polynomial may be evaluated, and the system stability dependent on the roots of the characteristic equation all having negative real parts.

For the nonhomogeneous system, the steady-state solution may be obtained by assuming

$$\delta_{ss} = K_1, \varepsilon_{ss} = K_2, \psi_{ss} = K_3, \phi_{1ss} = K_4, \beta_{1ss} = K_5$$

and  $\beta_{2ss} = K_6$  and substituting back into Eqs. (31-36). It can be seen that

$$\delta_{ss} = C_{24}C_{25}/(C_{25} + C_{24}C_3/C_2); \psi_{ss} = -(C_3/C_2)\delta_{ss}$$

and  $\varepsilon_{ss} = \phi_{1ss} = \beta_{1ss} = \beta_{2ss} = 0$ . An examination of the constants involved in  $\delta_{ss}$  and  $\psi_{ss}$  indicates that the steady-state motion of the kinematically similar system is bounded.

### Numerical Results

The characteristic equation was developed for the linear autonomous homogeneous system corresponding to Eqs. (31-36). Equilibrium values of  $\alpha_0$  corresponding to the reportedly observed nutation angles of  $0.1^\circ$  and  $0.2^\circ$  were calculated as follows:

$$\tan\gamma_0 = C\Omega \sin\alpha_0/(I_{R2}s + B\Omega \cos\alpha_0) \quad (37)$$

where the momentum components are approximated by

$$H_2 \approx I_{R2}s + B(\Omega \cos\alpha), H_1 \approx 0, H_3 \approx C(\Omega \sin\alpha)$$

since  $A \approx \bar{A}$ ,  $B \approx \bar{B}$ , and  $C \approx \bar{C}$ .

Two cases of interest were considered, where, first one pair of SAS-A solar paddles was assumed to be loosely attached to the hub with the other pair rigidly connected, and secondly, vice versa. The moments of inertia for the two different cases are:

#### Case I

$$A = 28.11929 \text{ kg-m}^2, B = 17.747422 \text{ kg-m}^2, \\ C = 15.32054 \text{ kg-m}^2$$

Table 1 Numerical solution of system characteristic equation

Real part	Imaginary part—(rad/sec)
Case I	
$-3.7874 \times 10^{-2}$	$\pm .88380 \times 10^{-1}$
$-.8058 \times 10^{-4}$	$\pm .11455$
$-.58874$	$\pm .27962 \times 10^2$
$-.58843$	$\pm .44670 \times 10^3$
Case II	
$-.38139 \times 10^{-2}$	$\pm .88468 \times 10^{-1}$
$-.4834 \times 10^{-4}$	$\pm .11374$
$-.58875$	$\pm .27963 \times 10^2$
$-.58844$	$\pm .4467 \times 10^3$

#### Case II

$$A = 15.18496 \text{ kg-m}^2, B = 17.74742 \text{ kg-m}^2, \\ C = 28.634496 \text{ kg-m}^2$$

It is seen that from Eq. (37), for Case I,  $\alpha_0 = 1^\circ 55'$  and for Case II,  $\alpha_0 = 1^\circ 1'$ , for  $\gamma_0 = 0.1^\circ$ ; also for  $\gamma_0 = 0.2^\circ$ ,  $\alpha_0 = 2^\circ 6'$ , and  $3^\circ 49'$  for Case II and I, respectively.

The roots of the characteristic equation were calculated for the two cases using the following nominal SAS-A orbital parameters:

$$\Gamma = 0.453 \text{ m}, r_0 = 0.0189 \text{ m}, r_1 = 0.1735 \text{ m} \\ m = 0.2451 \text{ kg}, I_{R2} = 0.011525 \text{ kg-m}^2, I_{R1} = 0.0050799 \\ \text{kg-m}^2 = I_{R3} \\ s = 209.43 \text{ rad/sec}, \Omega = 0.008727 \text{ rad/sec} \\ k = 5.7 \times 10^{-5} \text{ N-m-sec/rad}, K = 5.8 \times 10^{-5} \text{ N-m/rad} \\ \ddagger k_R = 6.779 \times 10^{-3} \text{ N-m-sec/rad}, *K_R = 71.61074 \text{ N-m/rad} \\ M = 114 \text{ kg}$$

For this system, after elimination of the dependence between coordinates, an eighth-order characteristic equation results. The roots were obtained using digital computations with a polynomial root-finder subroutine on the XDS-9300 computer. The results are summarized in Table 1 for  $\gamma_0 = 0.1^\circ$  (for  $\gamma_0 = 0.2^\circ$ , changes are observed only in the third or fourth significant figure).

It is seen that all of the roots for both cases contain only negative real parts. The higher frequency modes are essentially the same for the two cases. The time constant for the least damped mode is about 12,400 sec (3.44 hr) for the first case and 20,700 sec (5.75 hr) for the second case. This represents a considerable degradation in the performance of the nutation damping system about the equilibrium position  $\gamma_0 = 0$  previously considered.<sup>1,2</sup>

The highest frequency mode for the kinematically similar system has the frequency of 446.7 rad/sec, approximately 2.14 times the wheel relative angular velocity of 209.4 rad/sec. It should be noted that in the original system the wheel deflection equations, Eqs. (24) and (25), have forcing terms on the right-hand side at frequency  $s = 209.4$  rad/sec. The possibility of forced resonance in the original system might exist, especially as the highest frequency of the kinematically similar system approaches  $2s$ . This eventuality could be examined more closely by numerical integration of the system equations.

It has been noted in the SAS-A post launch performance, that in addition to the somewhat larger nutation angles experienced than predicted by prelaunch analyses, a noticeable degradation of the nutation damping time constant occurs. Figures 4, based on reduced orbital flight data, illustrate the nutational motion of the SAS-A spacecraft early in 1971.<sup>4</sup>

‡ Determined experimentally at The Johns Hopkins University, Applied Physics Laboratory (see Ref. 2).

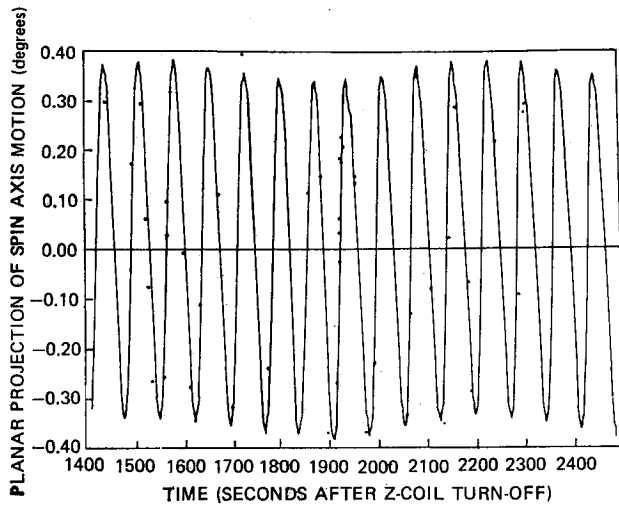


Fig. 4a Nutational motion of the SAS-A satellite, orbit 401, day 7, 1971.

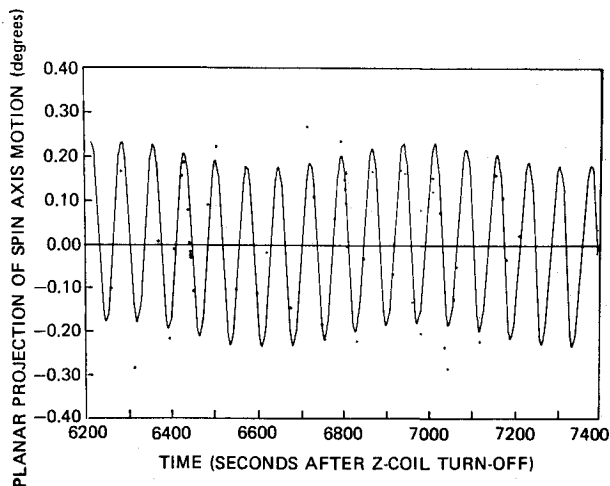


Fig. 4b Nutational motion of the SAS-A satellite, orbit 402, day 7, 1971.

Figure 4a shows that a peak amplitude in the planar projection of spin axis motion (proportional to the system nutation angle) slightly below  $0.4^\circ$  was obtained at 1400 sec UT, about 23 min after the last magnetic maneuver. Figure 4b shows that approximately 80 min later this same motion has been damped down to approximately  $0.2^\circ$ , yielding a damping time constant considerably longer than theoretically predicted. Other orbital data have revealed time constants as large as three hours.<sup>4</sup> An exact correlation between the present analysis and the anomalous observed behavior could only be made conclusively with specific observations of the orientation of the solar paddles relative to the hub. No such instrumentation was included on the SAS-A payload.

The present analysis does suggest, however, a possible mechanism for future problems, especially in connection with high pointing accuracy dual-spin missions.

It has also been demonstrated by computer simulations that external torques having amplitudes of about 4000 dyne-cm would be necessary to produce nutational motion of the SAS-A satellite with amplitudes of  $0.1^\circ$ .<sup>11</sup> Torques of this magnitude would be difficult to justify using even conservative aerodynamic density values at the SAS-A orbital altitude. The magnitude of the reaction torque,  $L_{d1}$ , as given by Eq. (3) was calculated for the two cases previously considered; for

Case I,  $L_{d1} = -7090$  dyne-cm, whereas for Case II,  $L_{d1} = -3620$  dyne-cm. There is a strong suggestion, therefore, that the solar panels and not the atmosphere are providing the higher amplitude torques associated with the anomalous nutational motion.

### Conclusions—Closing Comments

Based on the present stability analysis and numerical results the following concluding comments can be made:

1) The motion of a dual-spin satellite system, under the influence of applied reaction torques, about an axis of rotation slightly displaced from the nominal spin axis remains bounded. For small initial perturbations, the system, however, is not asymptotically stable about the original equilibrium state.

2) For the case of energy dissipation only on the main body it is seen that the necessary Routh stability criteria for this motion are satisfied; for the general case of damping on both the main spacecraft and the wheel, stability is indicated by a numerical examination of the roots of the system characteristic equation of the kinematically similar system.

3) The Lyapunov Reducibility Theorem can be used in studying the stability of the original nonautonomous system for the case of energy dissipation on both parts of the dual-spin system.

4) A possible mechanism for the somewhat anomalous nutational motion and large nutational time constants observed in the postlaunch SAS-A flight data is suggested. For this system it is assumed that the applied reaction torques would be provided by either pair of nonrigidly attached solar paddles.

### References

- <sup>1</sup> Bainum, P. M., Fuechsel, P. G., and Mackison, D. L., "Motion and Stability of a Dual-Spin Satellite with Nutation Damping," *Journal of Spacecraft and Rockets*, Vol. 7, No. 6, June 1970, pp. 690-696; also TG-1072, June 1969, Applied Physics Lab., The Johns Hopkins Univ., Silver Spring, Md.
- <sup>2</sup> Bainum, P. M., "Stability of SAS-A Dual-Spin Spacecraft with Energy Dissipation on the Momentum Wheel," Rept. X-732-70-344, Sept. 1970, NASA; also Bainum, P. M., Fuechsel, P. G., and Fedor, J. V., "Stability of a Dual-Spin Spacecraft with a Flexible Momentum Wheel," *Journal of Spacecraft and Rockets*, Vol. 9, No. 9, Sept. 1972, pp. 640-646.
- <sup>3</sup> Fuechsel, P. G., Bainum, P. M., and Grunberger, P. J., "Attitude Motion of a Nutationally Damped Dual-Spin Spacecraft in the Presence of Near-Earth Environment," *Journal of Spacecraft and Rockets*, Vol. 8, No. 9, Sept. 1971, pp. 913-914.
- <sup>4</sup> Fischell, R. E. and Kershner, R. B., "Attitude Control System for a Small Astronomy Satellite," *4th IFAC Symposium on Automatic Control in Space*, Dubrovnik, Yugoslavia, Sept. 6-10, 1971.
- <sup>5</sup> Synge, J. L. and Griffith, B. A., *Principles of Mechanics*, 2nd ed., McGraw-Hill, New York, 1949, pp. 352-353.
- <sup>6</sup> Garber, T. B., "The Influence of Constant Disturbing Torques on the Motion of Gravity-Gradient Stabilized Satellites," *AIAA Journal*, Vol. 1, No. 4, April 1963, pp. 968-969.
- <sup>7</sup> Mingori, D. L., "Effects of Energy Dissipation on the Attitude Stability of Dual-Spin Satellites," *AIAA Journal*, Vol. 7, No. 1, Jan. 1969, pp. 20-27.
- <sup>8</sup> Hahn, W., *Stability of Motion*, Springer-Verlag, Berlin, Heidelberg, 1967, pp. 120-122, 296-304.
- <sup>9</sup> Guha, A. K., "Spin-Stability of Dual-Spin Spacecraft," AIAA Paper 72-16, San Diego, Calif., 1972.
- <sup>10</sup> Barba, P. M., Hooker, W. W., and Leliakov, I., "Parameter Selection for a Class of Dual-Spin Satellites," *Proceedings of the Symposium on Attitude Stabilization and Control of Dual-Spin Spacecraft*, Aug. 1967; TR-0158 (3307-01)-16, Nov. 1967, pp. 37-44, Aerospace Corp., El Segundo, Calif.
- <sup>11</sup> Fuechsel, P. G., private communication, Aug. 1971, Applied Physics Lab., Johns Hopkins Univ., Silver Spring, Md.