

Carbon Dioxide Capture and Use: Organic Synthesis Using Carbon Dioxide from Exhaust Gas**

Seung Hyo Kim, Kwang Hee Kim, and Soon Hyeok Hong*

Dedicated to Professor Robert H. Grubbs

Abstract: A carbon capture and use (CCU) strategy was applied to organic synthesis. Carbon dioxide (CO₂) captured directly from exhaust gas was used for organic transformations as efficiently as hyper-pure CO₂ gas from a commercial source, even for highly air- and moisture-sensitive reactions. The CO₂ capturing aqueous ethanolamine solution could be recycled continuously without any diminished reaction efficiency.

Recycling carbon dioxide (CO₂) as a renewable and environment-friendly source of carbon is one of the most attractive solutions to reduce our dependence on petrochemicals. One of the main approaches to recycle CO₂ is its capture and use (CCU);^[1] this approach has the potential to afford value-added products from the sustainable C₁ feedstock and to make large-scale cuts in atmospheric CO₂ emissions by capturing anthropogenic CO₂ without restructuring or closing the industrial plants.

Currently, amine scrubbing technology is used for capturing CO₂ in industry,^[2] while the development of advanced CO₂ capture materials such as ionic liquids and metal-organic framework materials is underway.^[3] In the amine-based CO₂ capture process, alkanolamines selectively react with CO₂ in flue gas to form the corresponding carbamates (Figure 1).^[4] The alkanolamines can be recovered by stripping CO₂ with water vapor at 100–120 °C and recycled back to the beginning of the process. After the water is condensed from the stripper vapor, the CO₂ is compressed to 100–150 bar. The condensed CO₂ is then transported using pipeline or ship for geologic sequestration, and only a small portion of it is used as a C₁ source for chemical synthesis.^[5] A high cost is paid for the transportation and sequestration.

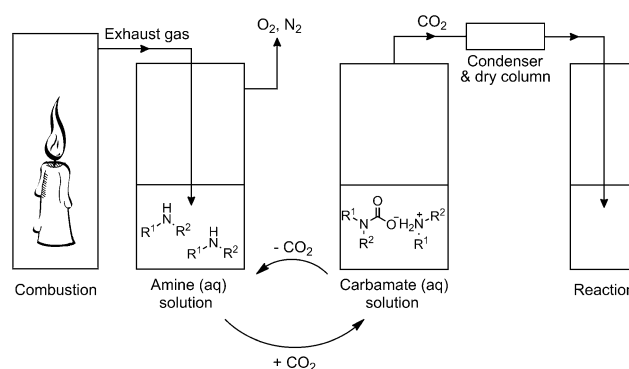


Figure 1. Carbon dioxide capture and use for organic synthesis.

Therefore, it is highly desirable to use the environment-friendly raw material, CO₂, as a C₁ source for synthesizing fine chemicals. Urea has already been synthesized on an industrial scale using CO₂.^[6] Moreover, catalytic syntheses of polycarbonates^[7] and cyclic carbonates^[8] have recently been commercially used. Significant amounts of academic research have been conducted to transform CO₂ into fine chemicals.^[9,10] Inspired by the overall CCU concept, we envisioned that the CO₂ from exhaust gas rather than commercial CO₂ gas can be used for usual organic syntheses. Herein, we report an unprecedented strategy for using CO₂ that is captured from combustion sources for organic syntheses (Figure 1).


We devised our strategy as follows: 1) selective capturing of CO₂ generated from fossil fuel combustion using an alkanolamine solution^[11] and then 2) conduct organic reactions with CO₂ released from the captured material (Figure 1). The alkanolamine solution used in the process can be recycled for subsequent capture and release processes. To test this idea, previously reported silver-catalyzed carboxylation of alkynes^[12] was chosen as the model reaction to confirm if the amount and purity of CO₂ released from the captured materials are sufficient to carry out an organic reaction (Table 1).^[13] When hyper-pure CO₂ (> 99.999%) obtained from a commercial supplier was directly applied to the reaction mixture under atmospheric pressure, the carboxylation of acetylene afforded the corresponding product in 83% yield (Table 1, entry 1).^[12]

Several alkanolamine solutions either in DMF or water (e.g., 7 molality (m), about 30% ethanolamine (MEA) by weight, the most used concentration and CO₂ capture material in industry, respectively) have been tested as CO₂ capture and release materials.^[11] To optimize the reaction conditions, hyper-pure CO₂ gas was introduced into the alkanolamine solution for 15 min, and the saturated CO₂

[*] S. H. Kim, K. H. Kim, Prof. Dr. S. H. Hong
Center for Nanoparticle Research
Institute for Basic Science (IBS), Seoul 151-742 (Republic of Korea)
and
Department of Chemistry, College of Natural Sciences
Seoul National University, Seoul 151-747 (Republic of Korea)
and
Korea Carbon Capture Sequestration R&D Center (KCRC)
Daejeon 305-303 (Republic of Korea)
E-mail: soonhong@snu.ac.kr
Homepage: <http://gomc.snu.ac.kr>

[**] This work was supported by the Korea CCS R&D Center (grant number NRF-2013M1A8A1035844) and Institute for Basic Science (IBS), funded by the Korea government (Ministry of Science, ICT & Future Planning).

Supporting information for this article is available on the WWW under <http://dx.doi.org/10.1002/ange.201308341>.

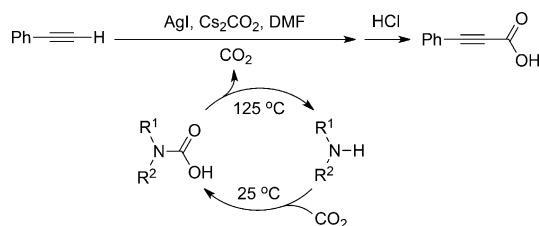Table 1: Alkyne carboxylation reaction to test efficiencies of CO₂ capturing solutions.^[a]


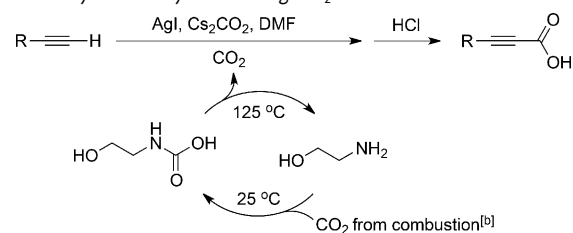
Entry	Amine ^[b]	Solvent	Volume [mL] ^[c]	Yields ^[d]
1 ^[e]	Pure CO ₂ (> 99.999%)	–	–	83%
2		H ₂ O	25	82%
3		H ₂ O	5	67%
4		DMF	5	73%
5		H ₂ O	5	73%
6		DMF	5	59%
7		H ₂ O	5	8%
8		DMF	5	67%
9		H ₂ O	5	19%
10		H ₂ O	5	69%

[a] Reaction conditions: phenylacetylene (1.0 mmol, 1.0 equiv), AgI (2.5 mol%), Cs₂CO₃ (1.5 equiv), CO₂ (ambient pressure) from an amine solution, DMF (10 mL), 25 °C, 16 h. [b] Pure CO₂ was captured by the amine solution for 15 minutes. [c] Volume of solvent, and molality of amine solutions: 7 m. [d] Yield of isolated products. [e] The reaction was performed with hyper-pure CO₂ gas.

solution was used as the CO₂ source for the model reactions. Most of the tested alkanolamine solutions were suitable to be used as CO₂ capture and release material (Table 1). Both DMF and water worked well as the solvent for MEA (Table 1, entries 2–4).^[2] For our reaction scale (1 mmol), about 35 mL of aqueous MEA solution (7 m, 25 mL of the solvent) was enough to show activity comparable to that obtained using commercial hyper-pure CO₂ gas (Table 1, entries 1 and 2). In the case of diethanolamine, a secondary amine, the reaction afforded better yield of the product in water than in DMF (Table 1, entries 5 and 6). The use of diisopropanolamine afforded a poor yield (8%) of the product in water; however, a moderate yield (67%) was obtained in DMF (Table 1, entries 7 and 8).^[14] Because tertiary *N*-methyldiethanolamine (no acidic H present) cannot react with CO₂, its solution in DMF could not be used to capture CO₂ and no reaction occurred.^[15] However, its aqueous solution afforded 19% yield of the product (Table 1, entry 9). This is because *N*-methyldiethanolamine acts as a base and promotes CO₂ hydrolysis to afford carbonates that can produce CO₂ upon heating.^[15] Sterically hindered 2-amino-2-methyl-1-propanol that was used to prevent degradation at high temperature afforded the product in good yields (69%, Table 1, entry 10).^[15] Among the alkanolamine solutions tested, the aqueous MEA solution was chosen as the optimum CO₂-capturing solution because of excellent CO₂ capture and

release capability and low costs, which also account for it being the most popularly used in industry.^[16]

Encouraged by the initial results, the strategy to use CO₂ from exhaust gas was further applied to the carboxylation of various alkynes (Table 2).^[12] A burning candle, a mixture of C₂₀–C₄₀ hydrocarbons, was selected as the combustion source. An aqueous MEA solution (7 m, 25 mL of H₂O) in a reaction tube was chosen to capture CO₂ from the combustion source and then release CO₂ for the target reaction. The recycled solution was used for all the experiments listed in Tables 2 and 4. Photographs of the reaction set up following the design in Figure 1 are presented in the Supporting Information (Figures 1S and 2S in the Supporting Information). Although some soot was produced due to incomplete combustion, to our delight, the carboxylation reactions with released CO₂, which was captured by the MEA solution from the combus-

Table 2: Alkyne carboxylation using CO₂ from combustion.^[a]


Entry	Substrates	Recycle times	Yields [%]
1		1	82
2		55	80
3 ^[c]		3	81
4 ^[d]		–	0
5 ^[e]		–	39
6		2	84
7		24	78
8		26	80
9		14	88
10 ^[f]		32	81
11		30	85
12		21	90
13 ^[f]		20	89
14 ^[f]		18	67
15 ^[f]		12	65

[a] Reaction conditions: alkynes (1.0 mmol, 1.0 equiv), AgI (2.5 mol%), Cs₂CO₃ (1.5 equiv), CO₂ (ambient pressure) from an aqueous MEA solution (7 m, 25 mL of H₂O), DMF (10 mL), 25 °C, 16 h. [b] A candle was burned for 3 h, and the CO₂ from the exhaust gas was captured in the MEA solution. [c] CO₂ was generated by methanol combustion. [d] Exhaust gas was directly introduced to the reaction mixture for 7 h. [e] Dry ice was directly added to the reaction mixture. [f] 50 °C, 24 h.

tion of the candle, were as efficient as that with hyper-pure CO₂ gas (80–82% yields, Table 2, entries 1–3). Furthermore, even after recycling the MEA solution 55 times, the reaction yield did not reduce significantly (80% yield, Table 2, entry 2). When another combustion source, methanol, was used for CO₂ generation, the reaction efficiency was not affected either (81% yield, Table 2, entry 3). However, no reaction occurred when the exhaust gas from the combustion of candle was directly introduced into the reaction medium (Table 2, entry 4), which showed that it was essential to use the MEA solution to increase the CO₂ concentration and purity of the combustion gas. Dry ice, a general source of CO₂ in organic chemistry, was directly introduced into the reaction; however, the yield (39%) was low, presumably due to the reaction being sensitive to air and water (Table 2, entry 5). The substrate scope was expanded using the recycled aqueous MEA solution (Table 2). All the reactions were run twice, and proceeded smoothly exhibiting comparable reaction yields with previously reported studies using hyper-pure CO₂ gas.^[12] The reaction yields were consistent regardless of the number of times that the aqueous MEA solution was recycled.

Next, CO₂ was incorporated into epoxides to form cyclic carbonates to check for the applicability of this method to other reactions.^[8] There is an increasing demand for cyclic carbonates in both industry and academia.^[8,17] Carbonates are used as monomers to synthesize polycarbonates and polyurethanes.^[7] Furthermore, the hydrogenation of cyclic carbonates is a promising route to convert CO₂ to methanol, an excellent alternative fuel.^[18] Therefore, the syntheses of carbonates using CO₂ gas from combustion sources are an attractive route for carbon recycling. The incorporation of CO₂ into epoxides to synthesize carbonates is usually performed at pressures higher than 1 atm.^[8] Very recently, Shi and co-workers reported a carbonate synthesis under atmospheric pressure using commercially available N-heterocyclic carbene (NHC) and ZnBr₂ as the catalyst.^[19] We applied our strategy to evaluate this reaction. Although the reactions involving NHC are usually air and moisture sensitive, all the products were obtained in excellent yields using the released CO₂ that was captured by the MEA solution from the combustion source (90–93%, Table 3). Therefore, the quality of CO₂ captured using the MEA solution was sufficient to conduct even air and moisture sensitive reactions using NHC-based transition metal catalysts.

Finally, we applied our strategy to one of the most widely used organic reactions, Grignard reaction.^[20] The reaction of Grignard reagents with CO₂ using dry ice is a well-known synthetic route to obtain carboxylic acids. We conducted Grignard reactions to confirm the quality of CO₂ captured using the recycled aqueous MEA solution that had been used for alkyne carboxylation. Grignard reagents are very sensitive to moisture, as it causes protonation, and to O₂ in air, as it forms peroxides.^[20] Therefore, it would be good to verify if this strategy can be applied to highly moisture and oxygen sensitive reactions. The incorporation of CO₂ into phenyl magnesium bromide using our set-up afforded benzoic acid in excellent yield (98% yield, Table 4, entry 1), which was

Table 3: Cyclic carbonate synthesis using CO₂ from combustion.^[a]

Entry	Substrate	Yields [%] ^[c]	Entry	Substrate	Yields [%] ^[c]
1		90	3		93
2		91 %	4		92

[a] Reaction conditions: epoxides (2.0 mmol 1.0 equiv), ZnBr₂ (2 mol%), K₂CO₃ (2 mol%), 1,3-bis-(2,6-diisopropylphenyl)imidazolium chloride (2 mol%), CO₂ (ambient pressure) from the captured material, DMSO (1 mL), 24 h, 80 °C. [b] A candle was burned for 5 h, and the CO₂ from the exhaust gas was captured in the MEA (aq) solution (70 mL, 7 m). [c] Yield of isolated products.

comparable to that of the reaction with dry ice (96%, Table 4, entry 2). The reaction could also be applied to other Grignard reagents performing carboxylations in high yields (89–99%, Table 4, entries 3–4). Notably, the use of 54-times-recycled MEA solution did not diminish the reaction efficiency (Table 4, entry 4).

In conclusion, an unprecedented organic synthesis strategy using CO₂ from exhaust gas was demonstrated. We have validated that the CO₂ generated from several combustion sources could be used in organic syntheses as efficiently as

Table 4: Grignard reaction with CO₂ from combustion.^[a]

Entry	Substrate	Yields [%] ^[c]	Entry	Substrate	Yields [%] ^[c]
1		98	3		89
2 ^[d]		96	4		99

[a] Reaction conditions: Grignard reagents (1.0 mmol), THF (1 mL), CO₂ (ambient pressure) from the recycled captured material, 25 °C, 1 h. [b] A candle was burned for 3 h, and the CO₂ from the exhaust gas was captured in the aqueous MEA solution (7 m, 25 mL of H₂O). [c] Yield of isolated products. [d] Dry ice was directly added into the reaction tube as the CO₂ source.

hyper-pure CO₂ gas with > 99.999 % purity from a commercial source. More importantly, the CO₂-capturing aqueous MEA solution could be recycled continuously without any decrease in the CO₂ capture and release efficiency. Furthermore, no difficulty was encountered in performing air and moisture sensitive reactions. Thus, in addition to demonstrating a model for CO₂ gas capture and use from combustion sources in fine chemical syntheses, we hope that our strategy could be used for carrying out organic reactions requiring CO₂ without using high-purity CO₂ gas and related equipment in an ordinary organic synthesis laboratory.

Experimental Section

General procedure of CO₂ capture and use from exhaust gas: MEA (10 mL, 166 mmol) and distilled water (25 mL) were placed in a Schlenk flask. To capture CO₂, the exhaust gas from the combustion of a candle was bubbled through the MEA solution for 3 h at room temperature. The CO₂-saturated solution could be stored at room temperature for more than a week and used when needed. The flask with the solution was connected to a reflux condenser. The top end of the reflux condenser was connected to a dry column linked to a bubbler. The MEA solution was heated to 125 °C for 10–15 minutes to purge the set up with CO₂. Next, the bubbler was replaced with a gas line with a needle in the end. The target organic reaction (1 mmol scale) was set up separately in a Schlenk flask under inert conditions. The line from the captured CO₂ solution and the vent line with a bubbler were introduced into the target reaction flask while CO₂ evolution continued. The reaction flask was purged with CO₂ gas from the MEA solution for 5 minutes. Next, the vent line was exchanged with a balloon. CO₂ was captured in the balloon for 10–25 minutes until no more CO₂ evolved from the captured material. Next, the line from the CO₂ source was closed, and the reaction flask was isolated. The reaction continued under closed conditions with the equipped CO₂ balloon (see Figures 1S and 2S).

Received: September 24, 2013

Published online: December 4, 2013

Keywords: carbon dioxide capture · carbon dioxide fixation · ethanolaniline · renewable resources · sustainable chemistry

- [1] a) Z.-Z. Yang, L.-N. He, J. Gao, A.-H. Liu, B. Yu, *Energy Environ. Sci.* **2012**, *5*, 6602–6639; b) Y. Takeda, S. Okumura, S. Tone, I. Sasaki, S. Minakata, *Org. Lett.* **2012**, *14*, 4874–4877; c) L. N. He, J. Q. Wang, J. L. Wang, *Pure Appl. Chem.* **2009**, *81*, 2069–2080.
- [2] G. T. Rochelle, *Science* **2009**, *325*, 1652–1654.
- [3] a) X. Zhang, X. Zhang, H. Dong, Z. Zhao, S. Zhang, Y. Huang, *Energy Environ. Sci.* **2012**, *5*, 6668–6681; b) K. Sumida, D. L. Rogow, J. A. Mason, T. M. McDonald, E. D. Bloch, Z. R. Herm, T. H. Bae, J. R. Long, *Chem. Rev.* **2012**, *112*, 724–781; c) N. MacDowell, N. Florin, A. Buchard, J. Hallett, A. Galindo, G. Jackson, C. S. Adjiman, C. K. Williams, N. Shah, P. Fennell, *Energy Environ. Sci.* **2010**, *3*, 1645–1669.
- [4] a) G. S. Goff, G. T. Rochelle, *Ind. Eng. Chem. Res.* **2006**, *45*, 2513–2521; b) P. V. Danckwerts, *Chem. Eng. Sci.* **1979**, *34*, 443–446.
- [5] R. S. Haszeldine, *Science* **2009**, *325*, 1647–1652.
- [6] a) F. Shi, Y. Deng, T. SiMa, J. Peng, Y. Gu, B. Qiao, *Angew. Chem.* **2003**, *115*, 3379–3382; *Angew. Chem. Int. Ed.* **2003**, *42*, 3257–3260; b) C.-C. Tai, M. J. Huck, E. P. McKoon, T. Woo, P. G. Jessop, *J. Org. Chem.* **2002**, *67*, 9070–9072.
- [7] a) X. B. Lu, D. J. Darensbourg, *Chem. Soc. Rev.* **2012**, *41*, 1462–1484; b) S. Sujith, J. K. Min, J. E. Seong, S. J. Na, B. Y. Lee, *Angew. Chem.* **2008**, *120*, 7416–7419; *Angew. Chem. Int. Ed.* **2008**, *47*, 7306–7309; c) D. J. Darensbourg, *Chem. Rev.* **2007**, *107*, 2388–2410; d) K. Nakano, T. Kamada, K. Nozaki, *Angew. Chem.* **2006**, *118*, 7432–7435; *Angew. Chem. Int. Ed.* **2006**, *45*, 7274–7277; e) G. W. Coates, D. R. Moore, *Angew. Chem.* **2004**, *116*, 6784–6806; *Angew. Chem. Int. Ed.* **2004**, *43*, 6618–6639.
- [8] a) Y. Yang, Y. Hayashi, Y. Fujii, T. Nagano, Y. Kita, T. Ohshima, J. Okuda, K. Mashima, *Catal. Sci. Technol.* **2012**, *2*, 509–513; b) A. Decortes, A. M. Castilla, A. W. Kleij, *Angew. Chem.* **2010**, *122*, 10016–10032; *Angew. Chem. Int. Ed.* **2010**, *49*, 9822–9837; c) C. J. Whiteoak, N. Kielland, V. Laserna, E. C. Escudero-Adán, E. Martin, A. W. Kleij, *J. Am. Chem. Soc.* **2013**, *135*, 1228–1231; d) M. North, R. Pasquale, C. Young, *Green Chem.* **2010**, *12*, 1514–1539.
- [9] a) L. Zhang, Z. Hou, *Chem. Sci.* **2013**, *4*, 3395–3403; b) I. Omae, *Coord. Chem. Rev.* **2012**, *256*, 1384–1405; c) K. Huang, C. L. Sun, Z. J. Shi, *Chem. Soc. Rev.* **2011**, *40*, 2435–2452; d) M. Cokoja, C. Bruckmeier, B. Rieger, W. A. Herrmann, F. E. Kühn, *Angew. Chem.* **2011**, *123*, 8662–8690; *Angew. Chem. Int. Ed.* **2011**, *50*, 8510–8537; e) R. W. Dorner, D. R. Hardy, F. W. Williams, H. D. Willauer, *Energy Environ. Sci.* **2010**, *3*, 884–890; f) S. N. Riduan, Y. G. Zhang, *Dalton Trans.* **2010**, *39*, 3347–3357; g) *Carbon Dioxide as Chemical Feedstock* (Ed.: M. Aresta), Wiley-VCH, Weinheim, **2010**; h) T. Sakakura, J.-C. Choi, H. Yasuda, *Chem. Rev.* **2007**, *107*, 2365–2387.
- [10] For use of atmospheric carbon dioxide, see: a) M. Yoshida, Y. Komatsuzaki, M. Ihara, *Org. Lett.* **2008**, *10*, 2083–2086; b) M. Yoshida, T. Mizuguchi, K. Shishido, *Chem. Eur. J.* **2012**, *18*, 15578–15581.
- [11] a) M. A. Rebolledo-Morales, M. E. Rebolledo-Libreros, A. Trejo, *J. Chem. Thermodyn.* **2011**, *43*, 690–695; b) U. E. Aronu, H. F. Svendsen, K. A. Hoff, *Int. J. Greenhouse Gas Control* **2010**, *4*, 771–775; c) U. E. Aronu, H. F. Svendsen, K. A. Hoff, O. Juliussen, *Energy Procedia* **2009**, *1*, 1051–1057; d) P. M. M. Blauwhoff, G. F. Versteeg, W. P. M. Vanswaaij, *Chem. Eng. Sci.* **1984**, *39*, 207–225.
- [12] X. Zhang, W. Z. Zhang, X. Ren, L. L. Zhang, X. B. Lu, *Org. Lett.* **2011**, *13*, 2402–2405.
- [13] a) X. Wang, Y. N. Lim, C. Lee, H.-Y. Jang, B. Y. Lee, *Eur. J. Org. Chem.* **2013**, 1867–1871; b) F. Manjolinho, M. Arndt, K. Gooßen, L. J. Gooßen, *ACS Catal.* **2012**, *2*, 2014–2021; c) D. Y. Yu, M. X. Tan, Y. G. Zhang, *Adv. Synth. Catal.* **2012**, *354*, 969–974; d) D. Y. Yu, Y. G. Zhang, *Green Chem.* **2011**, *13*, 1275–1279; e) L. J. Gooßen, N. Rodríguez, F. Manjolinho, P. P. Lange, *Adv. Synth. Catal.* **2010**, *352*, 2913–2917; f) D. Y. Yu, Y. G. Zhang, *Proc. Natl. Acad. Sci. USA* **2010**, *107*, 20184–20189.
- [14] P. N. Sutar, A. Jha, P. D. Vaidya, E. Y. Kenig, *Chem. Eng. J.* **2012**, *207*, 718–724.
- [15] C. Gouedard, D. Picq, F. Launay, P. L. Carrette, *Int. J. Greenhouse Gas Control* **2012**, *10*, 244–270.
- [16] For literature summary of CO₂ capturing ability and relevant thermodynamic data of amine solutions, see: P. Singh, PhD thesis, University of Twente, The Netherlands, **2011**.
- [17] B. Schäffner, F. Schäffner, S. P. Verevkin, A. Börner, *Chem. Rev.* **2010**, *110*, 4554–4581.
- [18] a) Z. B. Han, L. C. Rong, J. Wu, L. Zhang, Z. Wang, K. L. Ding, *Angew. Chem.* **2012**, *124*, 13218–13222; *Angew. Chem. Int. Ed.* **2012**, *51*, 13041–13045; b) E. Balaraman, C. Gunanathan, J. Zhang, L. J. W. Shimon, D. Milstein, *Nat. Chem.* **2011**, *3*, 609–614.
- [19] X. Liu, C. S. Cao, Y. F. Li, P. Guan, L. G. Yang, Y. H. Shi, *Synlett* **2012**, 1343–1348.
- [20] *Handbook of Grignard Reagents* (Eds.: G. S. Silverman, P. E. Rakita), Marcell Dekker, New York, **1996**.