

Broadcast Engineering

THE JOURNAL OF DIGITAL TELEVISION

ESPN goes HD

Innovative
solutions
required

NAB Replay

- Hundreds of new products
- Pick Hit awards

Automating multichannel facilities

What does it take
to make it work?

Digital Audio Network Router

The Bridge

The Bridge Router can hold all the electronics you'll need for a small console: I/O cards, mix engines, and DSP processors. Naturally, it can also have automatic fail-over DSP and CPU cards to keep you on-air. You can expand the system with a simple cage-to-cage interconnect.



It's not just a Digital Console, IT'S AN ENTIRE AUDIO INFRASTRUCTURE

YOU CAN START with a simple AES router with analog and digital inputs and outputs. From there you can add logic I/O cards and scheduling software; you can link multiple master bridge cages together to achieve thousands and thousands of I/O ports; you can create a custom system that includes multiple smaller remote satellite cages— with everything interconnected via CAT5 or fiberoptic links.

BUT THAT'S JUST THE BEGINNING: you can also add mix engine cards, interface to your automation system; you can choose from two different WHEATSTONE series control surfaces (D-5.1 or D-9), each specially configured for production room, on-air or remote truck applications. We also provide a full complement of Ethernet protocol remote router control panels, as well as a complete family of plug-in modules that interface the routing system to existing Wheatstone digital and analog standalone consoles.



The D-9 is Compact yet Powerful:

It can route, generate and monitor 5.1 surround signals and produce simultaneous 5.1 and stereo master signals for your dual broadcast chain. The console also provides extensive, rapid communication paths throughout your entire Bridge system. Motorized faders and control setting storage and recall make show-to-show transitions fast, easy and accurate.



Wheatstone Knows Live Audio. The D-5.1 is loaded with MXMs, foldbacks, and clear easy-to-read displays. You'll have all the power you need when the news breaks! Its intuitive layout helps your operators work error-free, and it can handle and generate all the 5.1 content and simultaneous stereo capability any large or medium market station could need.

 **Wheatstone**

600 Industrial Drive, New Bern, North Carolina, USA 28562
tel 252-638-7000 / fax 252-635-4857 / sales@wheatstone.com

the digital audio leaders



Made in USA

www.wheatstone.com

Copyright © 2003 by Wheatstone Corporation

It's 5:37 pm with thunderstorms.
The transmitter needs to be checked.
And you're stuck in traffic. Have a nice day.



Where Would You Rather Be?

Isn't it time for remote, in-depth transmitter and transmitter facility analysis and management...anywhere, anytime...from Harris?

Tired of the personal sacrifices you make every time something's not right at the transmitter? Tired of watching your 50-hour week turn into 80?

We understand. And **we've got the solution: Harris Remote Management.** Now, take advantage of a fully integrated suite of remote tools that offer complete studio monitoring and control, transmitter monitoring, and transmitter facility monitoring. With an unmatched history as the technology leader for broadcast facility management, Harris provides the ultimate IP-driven control and intelligence products, products you can integrate as separate components (with later upgrades) or as complete solution. You'll enjoy web-based monitoring available through wireless laptop, cell phone, and PDA. You'll be able to solve problems with your counterparts dozens...or thousands of miles away. Best of all, you'll work more efficiently...and get your life back.

For more information about Harris Remote Management and ReCon, eCDI™ and HBM, contact your local District Sales Manager or visit us online at www.broadcast.harris.com.

eCDI™, ReCon and HBM are three separate packages that work great together.


eCDI™ - Transmitter Remote Management:
Transmitter status control and monitoring with transmitter signal performance monitoring.

ReCon - Facilities Remote Management:
Remote control power and flexibility along with ease of installation and use.

HBM - Network Remote Management:
Consolidate expert manpower, cut response time and increase broadcast system availability.

www.broadcast.harris.com

HARRIS

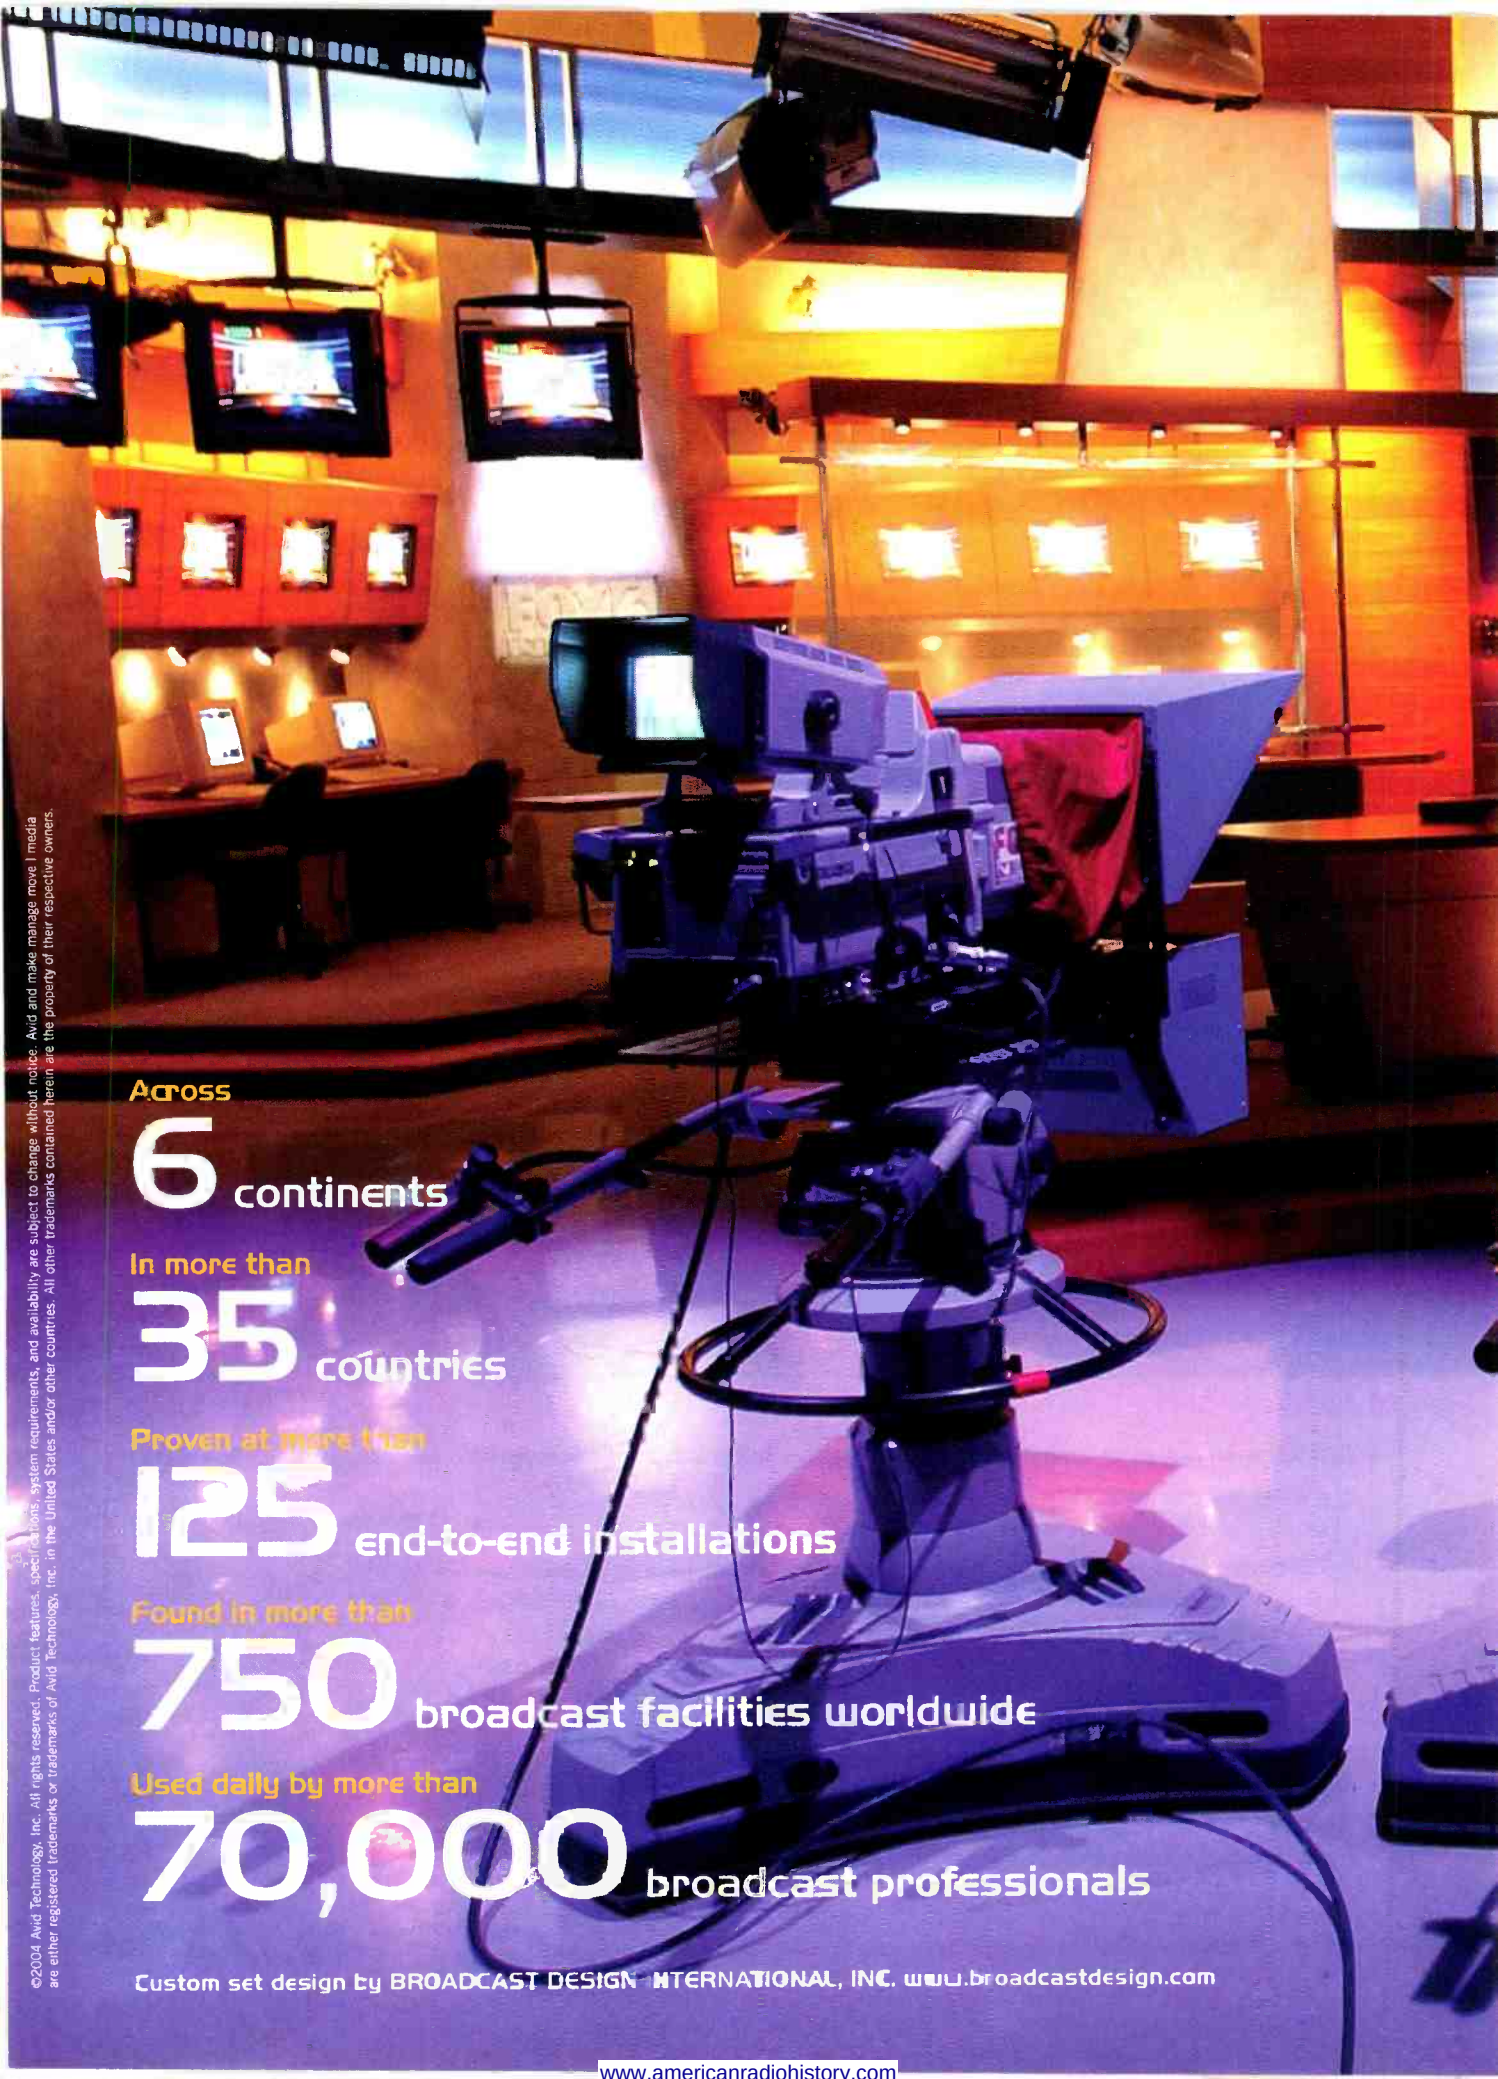

Across

6 continents

In more than

35 countries

Proven at more than

125 end-to-end installations

Found in more than

750 broadcast facilities worldwide

Used daily by more than

70,000 broadcast professionals

Custom set design by BROADCAST DESIGN INTERNATIONAL, INC. www.broadcastdesign.com

©2004 Avid Technology, Inc. All rights reserved. Product features, specifications, system requirements, and availability are subject to change without notice. Avid and make manage move | media are either registered trademarks or trademarks of Avid Technology, Inc. in the United States and/or other countries. All other trademarks contained herein are the property of their respective owners.



The numbers are in.

In an industry where numbers mean everything, Avid has delivered more all-digital, end-to-end news production systems than all of its competitors combined. Avid helps broadcasters improve the number that matters most – the bottom line.

Networks. Affiliates. Cable. Large, medium, and small markets. Around the world, more and more broadcasters are turning to Avid for a competitive advantage through integrated media asset management, editing, storage, and newsroom solutions.

- Designed to deliver true, real-time collaboration through seamless connectivity
- Integrated through an open, high-performance media network architecture
- Trusted by the people who make news happen
- Available today, engineered for tomorrow
- Find out more at www.avid.com/broadcast

make manage move | media™ **Avid.**

Broadcast Engineering

THE JOURNAL OF DIGITAL TELEVISION

FEATURES

46 Automation for multichannel broadcasting

By Jim Boston and Mark Brown

The multichannel broadcasting landscape could be radically different in a few years.

54 NAB Replay

By BE staff

Happier days are here again. Top products and detailed coverage from this year's NAB.

58 Pick Hits

By Don Keller

A panel of independent judges bestows awards on some of the best products displayed at NAB2004.

62 New tools



By BE staff

A comprehensive wrap-up by industry experts helps put the show in perspective.

62 Product jackpot

By BE staff

This year's lineup includes products for applications from acquisition to post production.

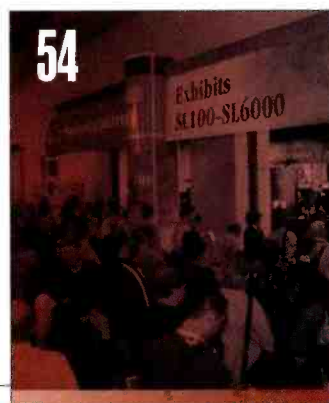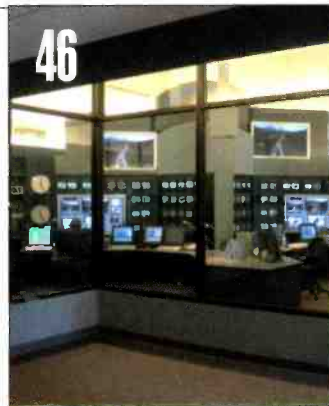

CONTENTS



ON THE COVER:

Each of the three HD studios in ESPN's new digital center has its own production control room equipped with a Grass Valley Kalypso HD switcher. Photo by Andy Washnik.

BEYOND THE HEADLINES

Download

14 Real convergence

FCC Update

20 The push for DTV conversion

DIGITAL HANDBOOK

Transition to Digital

22 Composite digital video

Computers and Networks

28 SAN and NAS: A practical guide

Production Clips

32 Audio consoles

(continued on page 8)





instant access



In our "get the news first...and faster" world, Panasonic's DVCPRO P2 Series provides the instant advantage, with no moving parts, no consumed media and no need for digitization prior to editing. P2 solutions offer low operating costs and seamlessly connect original-quality DVCPRO data to laptop editors, servers and IT media. Just what you'd expect from DVCPRO. To find out how Panasonic can improve your news operation, call 1-800-528-8601 or visit www.panasonic.com/p2

DVCPRO

Panasonic ideas for life

Broadcast Engineering

THE JOURNAL OF DIGITAL TELEVISION

SYSTEMS DESIGN & INTEGRATION

Systems Design Showcase

- 36 ESPN's "SportsCenter" begins HD production

Transmission & Distribution

- 42 Digital STLs



FreezeFrame

BROADCAST engineering



Laying claim to being the first true broadcast video server isn't easy. In fact, no less than 12 "video serverlike products" were first introduced at the same NAB. In what year were these 12 server products introduced? Correct entries will be eligible for a drawing of *Broadcast Engineering* T-shirts. Enter by e-mail, Title your entry "FreezeFrame-June" in the subject field and send it to: editor@primediabusiness.com. Correct answers received by Aug. 1, 2004, are eligible to win.

NEW PRODUCTS & REVIEWS

Technology in Transition



- 106 Format conversion

Applied Technology

- 108 4sight's HRM-1500

DEPARTMENTS

- 10 Editorial
12 Reader Feedback
109 Classifieds
113 Advertisers Index
114 EOM



► **High Definition.**
Higher Standards.
Highest Performance.

© 2004 Maxell Corporation of America



As hi-def takes over the field, one media company is prepared to exceed your needs. At Maxell, we set a higher standard. Thus, each and every Maxell hi-def product, from D-5 to HDCAM, incorporates the most advanced technologies and manufacturing techniques to deliver the highest performance possible. To learn more about Maxell Professional Media, call 800-533-2836 or visit www.maxell.com.



maxell
 Expanding Memory & Mobility ►


Recordable Media Data Storage Portable Energy Technological Partnerships



Hollywood obsoletes six million HDTV sets

Once you reach 50, your eyeballs see things in a new light — often, a fuzzy light. Now, with Hollywood's and the FCC's help, everything you see on your new HDTV set may get fuzzy too.

While the FCC recently prohibited cable and satellite providers from down-rezzing OTA broadcast programming, the commission has not been so kind regarding non-broadcast programming. This leaves open a viewer's disaster for high-def networks, such as HBO HD, Showtime HD and Cinemax HD.

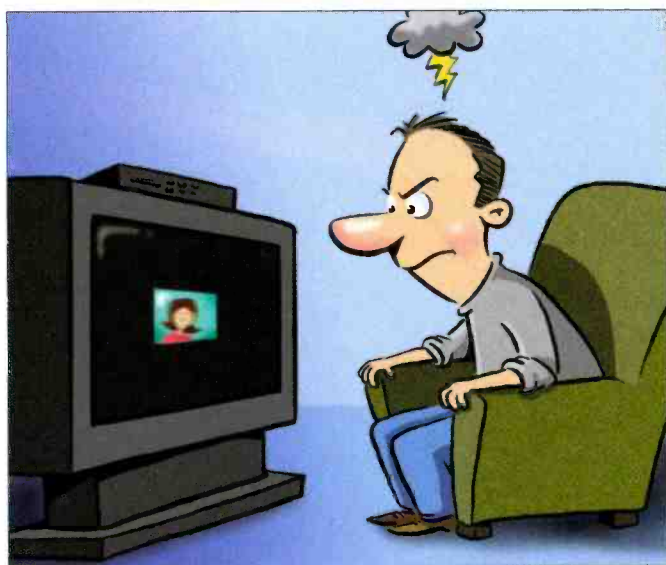

You see, Hollywood is threatening to withhold what it calls "high-value content" unless these and other networks down-rez their programming on analog interfaces. The threat came from retiring Motion Picture Association of America (MPAA) president Jack Valenti, "The perpetual availability of content over unprotected high-definition analog outputs is not an option," he said.

Hollywood claims that all those analog inputs on today's HDTV sets represent gateways for the illegal distribution of movies onto the Internet. The MPAA's goal is to force us early adopters to buy new TV sets with built-in DVI and HDCP interfaces to plug the so-called "analog hole." I say, "What hole?"

The facts are that MPAA and its minions have never submitted any evidence that any analog HD content has ever been transmitted over the Internet. Valenti and his lapdogs cannot produce one iota of evidence that there is or would ever be an analog hole allowing so-called high-value content to flow from those YPrPb jacks directly onto the Internet. Their argument of an analog hole is totally specious.

Somehow, I just don't believe that anyone is going to lock up his or her Internet connection for a couple of days to download the latest HD movie. And, no matter how fast broadband gets, 10- to 20Mb/s isn't going to happen during the life of today's HDTV sets.

Yes, I can already hear you WM9 and MPEG-4 advocates saying, "But, but ... new compression is just around the corner and someday it won't take such bandwidth to send these signals." My response is that, for consumers, those compression schemes are years — yes, years — away. By the time that WM9 or MPEG-4 are doing HD on your desktop, today's HDTV sets will have been long dead.

Today's six million HDTV-equipped homes represent the early adopters, like myself, who believed in HD. We put our money on the line when this entire industry and the FCC was pleading for someone to invest in HD. Well, we did invest in HDTV and effectively launched an entire new class of service, benefiting consumers, electronics manufacturers and broadcasters.

I call on Chairman Powell to marshal his fellow commissioners and protect the American consumer. Chairman, you asked the American public to believe in DTV, and the six million HDTV sets we bought prove that we did. We've supported the U.S. transition to DTV with our money, and we must not be penalized for that investment.

Protect American HDTV investment by prohibiting the down-rezzing of content on nonbroadcast cable and satellite channels, just as you've done for broadcaster signals. Americans deserve nothing less.

Bruce Dick
editorial director

Send comments to: • editor@primediabusiness.com • www.broadcastengineering.com

DENSITÉ SERIES

ADVANCED INTERFACING CONTROLLED OVER IP

Miranda



How smart can interfacing get?

You may be surprised.

Take a look at Miranda's Densité Series which offers advanced control over IP from the desktop.

From a highly adapted interface, you can see thumbnails of signal feeds, waveform and vectorscope displays, as well as full proc-amp controls.

And the range has just been expanded with 23 new cards to cover all the essential interfacing and distribution functions.


So if you're looking for more intelligent interfacing solutions, call Miranda.

Miranda Technologies

tel.: 514.333.1772 - ussales@miranda.com

WWW.MIRANDA.COM / DENSITE

www.americanradiohistory.com

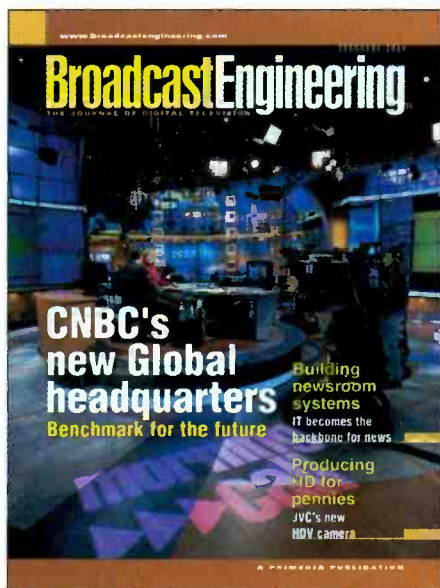

Measuring SDI

To the editor,

While reading your magazine, I was impressed with the high level of knowledge people such as Michael Robin have in regards to new technologies. I remember that EIA/TIA 250-C was clear on how to measure the video and audio signals after a long-haul or short-haul transmission path. Now that video compression techniques such as MPEG-2 are currently used to transmit the digital audio-visual signal from point A to point Z, the use of EIA/TIA 250-C is no longer valid. This is mainly because the interfaces are now bit-serial digital video and audio as per SMPTE 259M-C and SMPTE 272M. Does it make sense to measure the SDI signal at the output of the MPEG-2 decoder? Would the MPEG-2 decoder 'create' a brand-new SDI stream? How do we measure transmission-path problems at video level (SDI) over MPEG-2 networks? Is it only possible to check TR 101 290 at the DVB-ASI level? These questions have been around our facility for some time now, and nobody seems to know the answer.

RUBEN

Eduardo Gudis of Videotek responds:

It makes sense to measure SDI signals on the output of an MPEG decoder, but you should look at MPEG-2 encoding/decoding errors, such as macroblocking, frame dropping and audio-video lip-sync. The MPEG-2 decoder should in theory replicate what was fed into the MPEG-2 encoder at the source. But, because MPEG is a compression algorithm, that isn't always the case. Transmission-path problems can cause timing errors when MPEG-2 packets arrive and that causes PCR jitter. If too much PCR jitter is present at the decoder end, it may lose its ability to lock to the video/audio signals of a specific program present on the MPEG stream. At the DVB-ASI level, the TR 101 290 defines the important measurements, including PCR jitter.

Economic patriotism

Mr. McGoldrick,

Thank you for the editorial "Cutting Corners" in the February issue. I agree with you, and your article reminds me of an old saying, the gist of which is "penny-wise — pound-foolish." I also coined the rhetorical question, "Do you know how many people die each day because someone assumed something?"

Ironically, in this same issue is a quote from Glen Sakata, director of sales for Harmonic, which says in essence, "Why employ 20 people when automation can replace 18 of them?" While I do not advocate returning to the days of one tech for each piece of equipment the station owns, I like what one former presidential candidate said: "There needs to be an economic patriotism in this country. If you can still make a profit, keep your shareholders happy and save some jobs, more American companies ought to consider doing that." My prediction is that one day technology will

bring us to the point where master control and ingest operations will be farmed out to a company overseas that can hire techs for far less than the kingly sum of \$7 that most U.S. non-union stations pay.

CHARLIE FARR

Paul McGoldrick responds:

I love the idea of "economic patriotism"! Watching the export of technical jobs just to make a marginal difference to the bottom line is depressing. Although I'm sure you're right that master control could be run from somewhere like India, one would hope that owners will realize that the security of their operations is as important as continuity switching. One can imagine the FCC's reaction to hackers hijacking ABC.

I read an interview with Marc Andressen in which he said that the history of U.S. business is to replace jobs with new industries and opportunities. That has always happened, he said. He couldn't say what those new opportunities would be or how people could be trained for them. But it would be nice to think that he was right. **BE**

February FreezeFrame:

Q. Name the nonlinear AV workstation introduced by Panasonic at the 1995 NAB.

A. The Panasonic WJ-MX1000 Postbox

Winners:

Tim Costley
Guy St-Arnauld
Bobby Saggiu

Test your knowledge!

See the FreezeFrame question of the month on page 8 and enter to win a Broadcast Engineering T-shirt.

Send answers to bdick@primediabusiness.com

They make sense on so many levels.



Limitless possibilities.

Whether it's a handful of crosspoints or 10 million in a single installation, Grass Valley™ routers deliver the reliability, scalability, and multi-format capabilities that fit your facility best. This balanced approach has made Thomson the undisputed market leader in router technology.

For instance, our new Grass Valley Acappella™ utility router packs unmatched capabilities into a 1 RU frame. With three levels—one video and two audio—its advanced control panel functions streamline your workflows. And its built-in redundant power supplies provide peace of mind without taking up any extra rack space.

For mid-size applications, our Concerto™ Series routing matrix offers peerless performance. By offering a wide range of board format types and sizes, as well as two different frames, it makes your digital transition as smooth financially as it does technologically.

When you need the largest, most compact, and most easily serviceable routers available, our Trinx™ and Apex matrices lead the industry. And we have a full range of control systems for all our routers that are just as popular—and every bit as reliable.

For a better sense of everything Grass Valley routers can do for you, visit www.thomsongrassvalley.com/routers.

Real convergence

BY CRAIG BIRKMAIER

The annual NAB conference in Las Vegas is advertised as the world's largest electronic media show. To accommodate all of the new technologies that have been converging during the past decade to create and distribute electronic media, the NAB expanded the show to include the multimedia world.

While the NAB has been officially promoting convergence, for most of the past decade the multimedia world exhibits were segregated from the broadcasting exhibits and inconveniently located in the Sands Convention Center. Now that the Las Vegas Convention Center (LVCC) has expanded, the multimedia world exhibits have gradually been integrated into the NAB mainstream.

This past April, as I walked into the lower level of the LVCC South Hall — the hall that the NAB calls multimedia exhibits — I could not help but feel that the much-ballyhooed convergence was finally happening.

Apple and Avid dominated the entrance to the lower level of the south hall, much as they have come to dominate the new landscape of digital media. Farther into the hall you could find

Adobe and Discreet Logic. Together, these companies now command the markets for tools used to create TV, video and film. Thanks to convergence, the concept of digital motion imaging is being devoured just as the world of digital audio was a decade ago.

The myth of convergence

The classic myth of convergence is that the worlds of television and personal computing would become one, and that

will likely continue to be used primarily for the lean-back viewing experience.

The PC has traditionally been a device used up-close and interactively, by individuals. This has become known as the lean-forward viewing experience. Studies suggest that millions of people multitask and use their PCs while watching TV. Many people have equipped their PCs with TV tuners, but it is both easier and cheaper in most

Studies suggest that millions of people multitask and use their PCs while watching TV.

everyone would surf the Web on their TVs or watch TV on their PCs.

But the TV has traditionally been a device viewed passively at a distance. This has become known as the lean-back viewing experience. TVs, especially the big screens in the family room, are often viewed by groups of people. Interactivity has been limited to the remote control; efforts to make the TV viewing experience more interactive have largely been met with disappointment. This may change, but the big-screen TV in the family room

cases to put a TV in the same room with the PC. As the average screen size of a PC increases, however, it is becoming more practical to use this relatively expensive digital-media appliance as a PC, TV and stereo.

The classic definition of convergence misses an important point. With a myriad of choices in cheap consumer-electronics gear, consumers have become accustomed to buying purpose-built devices. People are more interested in having these devices share their media content, and consumers tend to choose appliances that are appropriate for the venues in which they will use them.

The reality of convergence

The unreality of convergence for the past decade has been due more to political concerns than technical limitations. We are experiencing a classic technology shift, and it is shaking the foundations of several media industries. These industries are converging around a new reality: Virtually all forms of media can be represented as bits.


In the legacy analog world, media and the appliances people used to



FRAME GRAB A look at the issues driving today's technology

Wi-Fi use climbs

Number of professionals using wireless Internet access is increasing

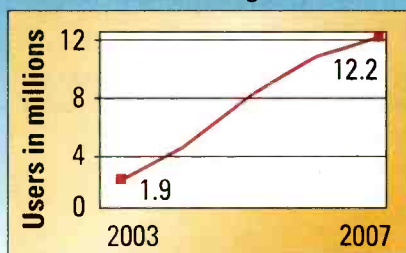

SOURCE: Gartner estimates and projections

www.3gartner.com

Scalable Performance.



The portable DVM 400

High performance and flexibility for MPEG2 transport stream analysis.

The new DVM family of MPEG 2 instruments lets you know exactly what's going on, with powerful analysis capabilities. It gives you:

- Real-time monitoring
- In-depth analysis
- Networkability (SNMP)
- Scalability up to 20 signals

It's also a very flexible family that lets you get the configuration you need, and then add to it as your needs grow. We even offer a portable version.

So don't spend time puzzling over your MPEG2 transport streams. Ask us about the DVM family – with the performance you need, and the scalability you've been looking for.



The DVM 100/120 monitoring system



The single/dual-stream DVM 50



consume them were tightly coupled. In the new digital world, media are files, and the ability to use these files is more dependent on software than the underlying hardware that executes the programs and algorithms. Over the past two decades, there has been a relentless progression as all things digital consume one medium after another. The typewriter gave way to the word processor and the artist's paste-up board gave way to desktop publishing. Audio was consumed next, and SD video was swallowed up by the end of the last decade. Now it is HD video's turn. This progression will soon take over the world of film as well.

The reality of convergence has more to do with the underlying technologies for creating, distributing and viewing all forms of digital media content than the classic definition implies. Figure 1 shows that the applications are not converging. Instead, the technologies that support these applications are converging.

The venerable CRT display is finally reaching its end of life. In the past year, major manufacturers of CRT displays have announced that they are shifting investment to next-generation display technologies, including LCD and plasma panels, and LCD, DLP and LCOS projection systems.

All of these displays have individually addressable pixels that create image rasters nearly free of the geometric distortions common with scanning CRT displays. All of these displays have the ability to present both Nyquist-filtered imagery (video, film and digital photos) and the unfiltered imagery common to many computing applications, including the ubiquitous Web browser.

This past December, these new display technologies began to outsell CRT-based direct-view and projection sets in the rapidly growing home theater/HDTV product segment. While cheap, CRT-based TVs still dominate the market, the era of the CRT is clearly drawing to a close. With it, one of the last barriers to real convergence is crumbling.

The increasing speed and/or storage capacity of cheap components used in the IT-industry continues to devour applications that place heavy demands on digital media, including high-resolution motion imaging. Compression-based desktop video systems soon gave way to

uncompressed video systems. And, as HD production became a priority, cheap IT technology became a solution.

A prime example of how this avalanche of bit-processing power is impacting the future of digital media production can be found in the Panasonic P2 product line introduced at NAB2003. Based on Panasonic's SD memory-card technology, P2 camcorders will capture images directly to memory cards or to cheap hard disks using an IEEE 1394

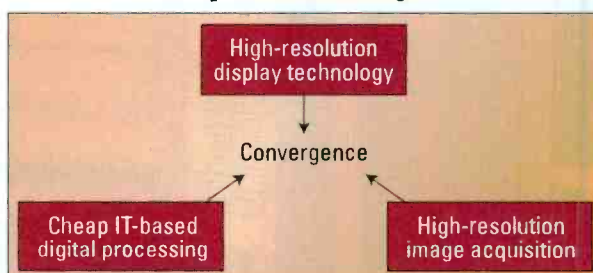


Figure 1. There are three important areas of technology that are facilitating the real convergence that is transforming the landscape of digital media. Perhaps the most important is high-resolution display technology. The most powerful force is cheap IT-based digital processing components. The most elusive is high-resolution image acquisition.

cable. The first SD P2 camcorder is now shipping, and Panasonic showed a mock-up of an HD P2 camcorder at NAB this year. Figure 2 on page 18 shows how these P2 products will be able to leverage the geometric progression in storage capacity over their useful life.

Award-Winning HD and SD Graphics Solutions



Real-time SD and/or HD CG



CMIXHD

Layering mixer with SD output and upconverted HD output

EMPOWER YOUR VISION

The Company
the Whole World
Watches®



www.chyron.com

The pressure to produce more with less has never been greater. On air devices are more complex and controlling the production can be a real challenge. OverDrive™ simplifies live production control with a simple and powerful user interface.

OverDrive™

OverDrive™ is a Windows based production control system. It drives all of the devices during a production, extending the reach of the technical director to include video servers, audio mixers, robotic cameras and more. This means that you can get a more sophisticated production on the air without increasing your staffing levels. Productions are more consistent and less staff training is required to execute a production.

Synergy Series Production Switchers

The key to OverDrive™ is the tight integration to the Ross Synergy Series production switcher family. The interfaces to audio mixers, video servers and robotic cameras are connected through Synergy enabling a tightly integrated production system. This also means that the Synergy production switcher has direct control over these devices without the OverDrive™ system present.

Production Control System



OverDrive™ Benefits

- **Sophisticated productions**
- **Consistent productions**
- **Fewer staff**
- **Less staff training**
- **"On-the-fly" changes**
- **Immediately air breaking events**
- **Optional newsroom link**

Live Production Made Easy



Cool Practical Technology™

tel. (613) 652-4886

email: solutions@rossvideo.com

www.rossvideo.com



The ability to acquire high-resolution imagery continues to be the most elusive barrier to convergence. This is largely due to the fact that the core technologies are not being driven by the same geometric progression that is influencing all things digital. Cameras are, by nature, analog; they capture photons, not bits. The CCD sensors used

in virtually all HD cameras today are analog devices that are nearing their practical limits in terms of resolution versus SNR performance. There are signs that the HD acquisition problem may be yielding to other technical innovations. Perhaps the most promising is a new generation of high-resolution CMOS image sensors that

overcome some of the limitations of CCDs. These sensors take advantage of many of the chip-level manufacturing techniques that drive the relentless progression in CPU- and memory-chip performance.

HD for everyone

Apple has been riding the IT-performance curve through its support for the compression codecs used in Panasonic's DVCPRO products. DV-25 and DV-50 software codecs were introduced over the past two years. At this year's NAB, the companies introduced the DVCPRO HD codec (100Mb/s), which can support Panasonic's 1080i and 720p Varicam products.

At the Panasonic press conference, vice president of marketing Stewart



NEXUS

Digital Audio Routing System

NEXUS is the integrated solution for digital audio routing: each 19" base device is a router, format converter and audio processor in one compact unit. Connected via glass fibre, they form decentralized networks of any desired size – with minimum cabling and maximum reliability. A unique concept that has won over users in hundreds of installations throughout the world.

- Large routing capacity and dynamic signal path circuit
- Delay-free signal processing
- Excellent audio quality through 28-bit TrueMatch converter
- Numerous special DPS functions
- Modules for all common audio formats available
- Programmable GPI contacts for signalization and external control
- Compact, light and extremely reliable in operation

WWW.AUDIOROUTING.DE

Industriegebiet See
D-96155 Buttenheim
Phone: +49 9545 440-0
Fax: +49 9545 440-333
sales@stagetec.com
www.stagetec.com

**SALZBRENNER
STAGETEC
MEDIAGROUP**

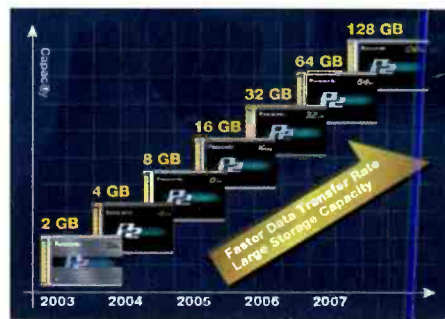


Figure 2. The progression in storage capacity for Panasonic's P2 storage cards is symbolic of the trends in CPU performance and hard-disk storage that are making the shift to HD affordable for everyone.

English plugged an Apple Powerbook into a Panasonic DLP projector and played a three-minute infomercial at full 720p resolution.

HD has been devoured. Soon, digital media professionals will look upon the soft, fuzzy images of interlaced SD video just as people looked at those jerky, post-age-stamp QuickTime movies a decade ago. HD is about to become the new currency of motion imaging. **BE**

Craig Birkmaier is a technology consultant at Pcube Labs, and he hosts and moderates the OpenDTV Forum.



Send questions and comments to:
cbirkmaier@primediabusiness.com

End separation anxiety

Congratulations on your latest audio-post creation. If only the delivery wasn't so complicated.

You know the drill. Generate separate multitrack audio tapes. Hand them off with the videotapes. Then wait—for sync hassles, editing-induced audio artifacts, and maybe even a *one-of-the-tapes-is-missing* call. Talk about audio-post-partum anxiety.

Fortunately, relief is at hand. Dolby® E lets you deliver up to eight channels of superb-sounding digital audio on just two tracks of a digital videotape, using any standard frame rate, even 24P.

With Dolby E, audio and video frames are perfectly aligned. That means no sync problems. No pops or clicks when editing. No fretting about separated tapes. Dolby E can also route eight-channel audio across stereo tie-lines—plus save you loads of server and storage space. How's that for an elegant solution?

Letting go of your creation might never be easy. But with Dolby E, at least you can let go of the worry.

www.dolby.com/DolbyE



Dolby E Delivery Now Specified by

NBC

FOX

PBS

Bravo

Discovery Channel

HBO

Showtime

Starz Encore

EchoStar's Dish Network

Astral Television

Bell ExpressVU

The Movie Network

SuperChannel

iN Demand

Cablevision

Dolby Laboratories, Inc.
100 Potrero Avenue
San Francisco, CA 94103-4813
Telephone 415-553-0200

Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. All other trademarks remain the property of their respective owners.
© 2004, Dolby Laboratories, Inc. 50455002/15346

The push for DTV conversion

BY HARRY C. MARTIN



Recent actions by the FCC and Congress may spur a speedier conversion to digital television service.

The Communications Act now requires that all broadcast stations convert to digital, and the spectrum presently occupied by NTSC TV channels 52 to 69 be returned to the FCC to be auctioned for use by other services. The deadline set by Congress for the completion of this conversion process is Dec. 31, 2006, or when 85 percent of the households in a television market are capable of receiving digital television service.

The Media Bureau's DTV Task Force proposed that the 85 percent penetration level be met by counting the delivery of digital service by cable and satellite services. The focus would not be on the actual coverage of digital OTA service, but on whether there is a digital signal in viewers' households, regardless of the delivery mechanism. Viewers would be considered in the 85 percent if they convert the incoming digital signal with a set-top box and retain their analog receivers.

Television broadcasters said that this plan would eliminate the incentive for consumers to purchase new digital sets. Moreover, because consumers would lose digital-quality signals when they were downconverted for delivery to analog television sets, programmers would lack the incentive to create new

digital programming. This conversion to digital could eliminate OTA service to the 15 percent of the population that does not have cable or satellite service, or a new digital television.

Congress is looking at different ways to encourage the conversion to digital, most recently in the context of the reauthorization of the Satellite Home Viewer Improvement Act. A draft of the legislation contains a proposal to permit satellite service providers to bring distant network signals into local markets to fill in where local broadcasters are not providing quality DTV service. The idea is that, because many digital television stations are operating at reduced power, the threat of the carriage of distant signals would give broadcasters incentive to build out their full digital facilities.

Broadcasters are blamed for the slow conversion to DTV. But, the commission has not resolved the issue of digital must-carry. And the FCC has yet to set final DTV tuner/receiver standards or settle critical copying issues.

2004 regulatory fees

The commission has released its Notice of Proposed Rulemaking on the assessment and collection of regulatory fees for fiscal year 2004. While the fees for some classes of licenses will actually be lower if the proposed 2004 fees are adopted, it should surprise no one that the ma-

jority of broadcast regulatory fees are proposed to go up for 2004. The proposed fees, which would be due for

Proposed FY2004 television station regulatory fees

VHF TV	\$
Markets 1 to 10	60,350
Markets 11 to 25	41,450
Markets 26 to 50	29,150
Markets 51 to 100	17,550
Remaining markets	4050
Construction permits	4650
UHF TV	\$
Markets 1 to 10	17,775
Markets 11 to 25	16,175
Markets 26 to 50	9300
Markets 51 to 100	5550
Remaining markets	1650
Construction permits	5675
Satellite television stations	\$
All markets	1050
Construction permits	515

Proposed FY2004 regulatory fees for miscellaneous broadcast-related authorizations

Low-power TV, TV/FM translators/boosters	385
Broadcast auxiliary	10
Earth stations	200

payment in September, are set out in the table.

The winners under the proposed fees are commercial UHF TV permittees. Regulatory fees for UHF permits will plummet by more than 30 percent (from \$8300 in 2003 to \$5675 in 2004). The losers will be commercial UHF licensees in markets 11 to 25, who are looking at an increase of more than 25 percent (from \$12,875 in 2003 to \$16,175) in 2004.

BE

Harry C. Martin is an attorney with Fletcher, Heald & Hildreth PLC, Arlington, VA.



Send questions and comments to:
harry_martin@primediabusiness.com

Dateline

August 1: Television stations in North Carolina and South Carolina must file their renewal applications, ownership reports and EEO program reports. Stations in Florida, Puerto Rico and the Virgin Islands must begin their pre-filing renewal announcements.



K2 IOT and K3 MSDC IOT's from *Eimac*

EASE OF USE

No IOT system is easier to tune and maintain than the Eimac K2 and K3 MSDC IOT amplifiers.

K2 tube replacement and maintenance can be handled by one person without removing the cavity assembly from the cabinet.

RELIABILITY

Oil-cooled K3 MSDC IOT

- no electrolysis with oil.
- minimal maintenance.
- low pressure, low flow rate operation.

K3 three stage MSDC design simplifies the power supply requirements.

- simplicity = reliability


Eimac IOT's have documented lifetimes of up to 70,000 hours or more.

EFFICIENCY

Eimac's Klystode IOT pioneered high efficiency UHF-TV power amplifiers.

The K2 continued this leadership with enhanced ease-of-use.

The K3 three stage MSDC IOT demonstrates efficiency of up to 58%.

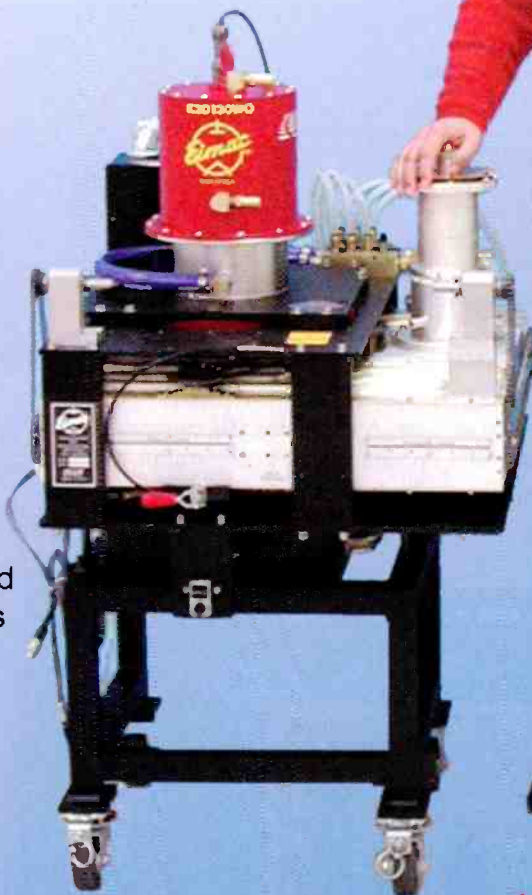

Eimac Division
301 Industrial Road
San Carlos, CA 94070

tel 650.592.1221

fax 650.592.9988

email.iot@cpil.com

www.eimac.com

ISO 9001:2000 Certified . Made in USA

Composite digital video

BY MICHAEL ROBIN

A long period of concept, product and electronic component development resulted in a large number of application-specific digital black boxes operating at incompatible sample rates, number of bits per sample and quantizing ranges. These products were developed to fulfill specific production needs and were designed for analog composite video interconnection compatible with the all-analog composite video production studios.

The composite digital video format constitutes a stepping stone toward the all-digital video teleproduction studio. In North America, there was an initial interest in composite digital videotape recorders. This had to do with the need to replace the obsolescent analog composite videotape recorders with digital videotape recorders featuring analog input/output ports.

Input signal	NTSC
Number of samples per total line	910
Number of samples per active digital line	768
Sampling frequency	$4f_{sc} = 14.32818\text{MHz}$
Sampling structure	Orthogonal
Sampling instant	+33°, +123°, +213°, +303°
Coding	Uniformly quantized
Quantizing resolution	8 or 10 bits per sample

Table 1. Summary of coding parameters for $4f_{sc}$ NTSC composite digital signals

A number of manufacturers developed such products identified as D2 (Sony and Ampex) and D3 (Panasonic) digital videotape record-

The sampling structure

The sampling frequency is equal to four times the subcarrier frequency or 14.3181MHz (14.32MHz nominal). The sampling clock is derived from the color burst of the analog signal. Figure 1 shows the sampling spectrum of $4f_{sc}$ NTSC.

There is a significant gap between 4.2MHz (the maximum nominal NTSC baseband frequency) and 7.16MHz (the Nyquist frequency). The standard does not specify the characteristics of the anti-aliasing and reconstruction filters. The manufacturer has the choice of developing complex and costly wideband brick-wall ripple-free filters, resulting in an extended frequency response, or moderate-cost 4.2MHz low-pass filters with a gradual roll-off.

As a result, various $4f_{sc}$ products have different analog bandwidths. Note that a digitally generated signal fed directly to a digital $4f_{sc}$ unit will have an equivalent analog bandwidth equal to $f_{sc}/2 = 7.16\text{MHz}$. Severe overshoot and ringing of the derived analog composite signal may result unless special precautions are taken to ensure that digital blanking edges

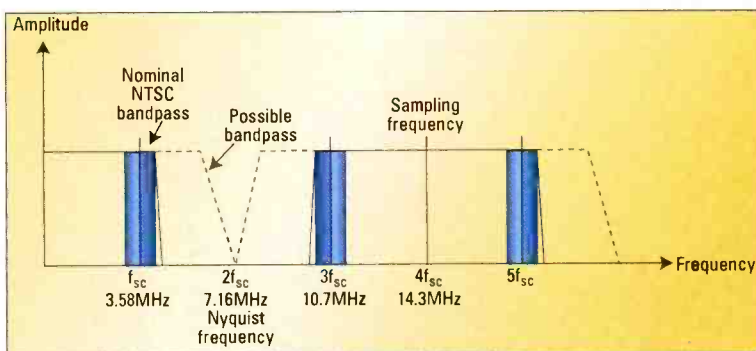


Figure 1. Spectrum of a $4f_{sc}$ -sampled NTSC signal


ers. A wide range of compatible composite digital video studio-type production equipment appeared on the market subsequently. The SMPTE

FRAME GRAB

A look at tomorrow's technology

Digital terrestrial TV set-top box market dropping

Value of DTT STBs will barely top \$500 million during 2006

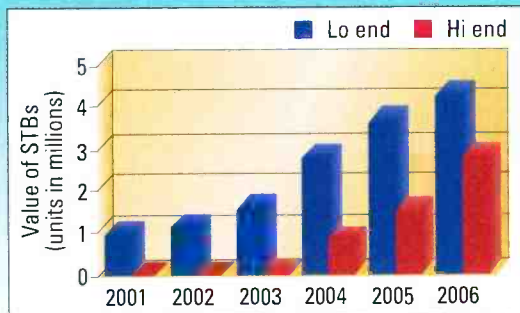

SOURCE: In-stat

www.instat.com

BRIDGE ENVIRONMENTS

COMPOSITE VIDEO
Y/C (S-VHS/Hi-8)
COMPONENT ANALOG
SDI
OPTIONAL DV

More than a SYNCHRONIZER

10-Bit Component Digital
Video Processor

Auto Switch Time Base Corrector

Multi-Mode Adaptive Comb
Filter Decoder

Bi-directional Analog/Digital
Video Transcoder

Graphics Framestore

Linear Keyer

Audio/Video Test Signal Generator

Auto-sensing PAL and NTSC

DPS-575: Spanning Signal Integration



One Digital Processing Synchronizer
for all those Analog and Digital signals
in your Integrated Content Environment.

Versatility between environments

Our DPS-575 Digital Processing Synchronizer "all-in-one system" is the industry's most unique frame synchronizer/TBC. With "anything in" — "anything out", it's ideal for bridging analog and digital video and audio signals.

Normal Mode - For conversion/synchronization of any signal in, any signal out mode of operation. The normal mode simultaneously converts one selected audio/video input format into all supported audio/video output formats.

Digi-Duplex Mode - Digi-Duplex provides bi-directional connectivity between an analog device and a digital device by enabling simultaneous transcoder and frame synchronizer operation.

Add Versatility to your Integrated Content Environment (ICE): www.leitch.com/dps575

Free Integrated Content Environment Poster: www.leitch.com/freeposter

Canada +1 (800) 387 0233
USA East +1 (800) 231 9673
USA West +1 (888) 843 7004
Latin America +1 (305) 512 0045



www.leitch.com

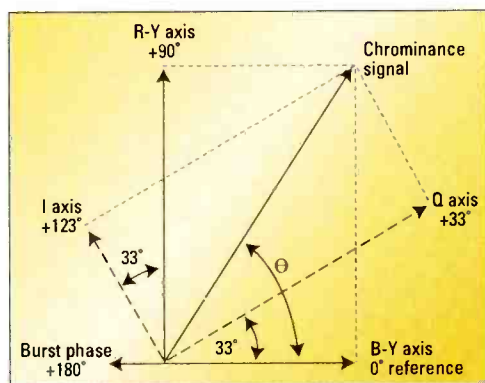


Figure 2. Phase diagram showing the relationship between the chrominance vector projections on the B-Y/R-Y axis system and the I/Q axis system

and rise times, compatible with the analog waveforms, are included as an integral part of the digital signal.

The SMPTE 244M standard was developed with reference to the original NTSC specifications that used I/Q encoding instead of B-Y/R-Y encoding, as is the current practice. Figure 2 shows that any chrominance vector can be represented by I/Q or B-Y/R-Y vectors. The original intent of the NTSC standard was to assign different bandwidths to the I signal (1.2MHz) and to the Q signal (0.6MHz), thus allowing for a better resolution for the orange visual information.

and rise times, compatible with the analog waveforms, are included as an integral part of the digital signal. The SMPTE 244M standard was developed with reference to the original NTSC specifications that used I/Q encoding instead of B-Y/R-Y encoding, as is the current practice. Figure 2 shows that any chrominance vector can be represented by I/Q or B-Y/R-Y vectors. The original intent of the NTSC standard was to assign different bandwidths to the I signal (1.2MHz) and to the Q signal (0.6MHz), thus allowing for a better resolution for the orange visual information.

As shown in Figure 3, the NTSC $4f_{sc}$ standard requires that the sampling instants coincide with peak positive and negative amplitudes of the I and Q subcarrier components. The upper part of the drawing shows that sampling instants provide an adequate $4f_{sc}$ representation of the B-Y/R-Y information.

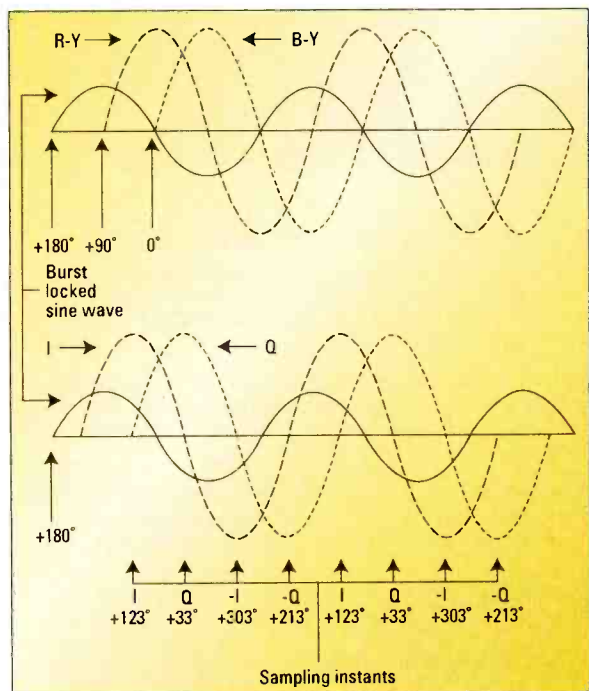


Figure 3. $4f_{sc}$ sampling instants of an NTSC composite analog signal

The I/Q-encoded NTSC signal can be decoded along the I/Q axis, with equal or unequal bandwidths, or the B-Y/R-Y axis with equal (equiband) bandwidths. Because the transmitter video frequency cutoff occurs at 4.2MHz, the wider-bandwidth I signal is transmitted with unequal lower (-1.2MHz) and upper (+0.6MHz) sidebands (vestigial upper sideband), unlike the

signal falls between samples 784 and 785. The first of the 910 samples represents the first sample of the digital active line and is designated sample 0 for the purpose of reference. The 910 samples per line are, therefore, numbered 0 to 909.

Figure 5 on page 26 details the digital horizontal blanking interval, showing the location of some significant samples. Note that unlike com-

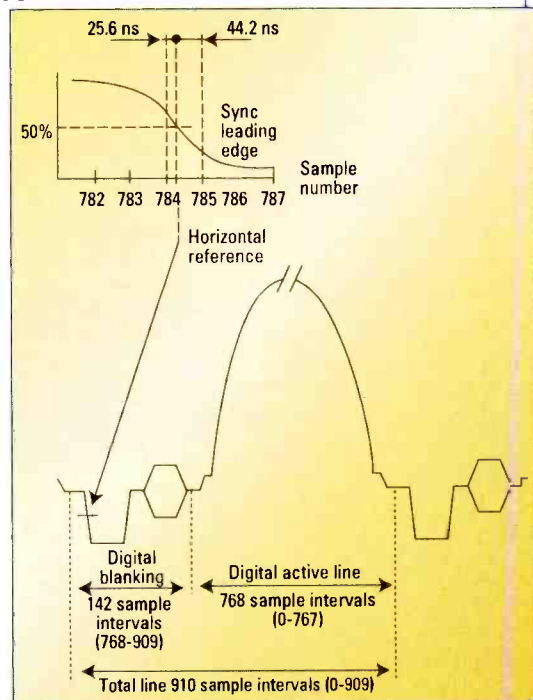


Figure 4. $4f_{sc}$ NTSC sample numbering and horizontal sync relationship

ponent digital video, where the horizontal digital blanking interval is not used — with the exception of two four-word timing reference signals (TRS) — the $4f_{sc}$ digital signal carries horizontal sync and subcarrier burst signals as well. The standard was designed with bit-parallel distribution in mind. Bit-serial signal distribution, as detailed in SMPTE 259M, requires the reorganization of the horizontal and vertical blanking intervals.

Figure 4 depicts the sample numbering for a nominal NTSC signal. The half amplitude point of the leading (falling) edge of the analog horizontal sync

Figure 6 on page 26 shows the location of the added five-word TRS (samples 790 to 794), as required by SMPTE 259M. This leaves space for 55 ancillary data words (samples 795 to 849), which could be used for

The Fastest Alternative in the World!

NEW EDITION



The new DV 15 Fluid Head is the perfect combination with any digital ENG camcorder. It is yet another example of Sachtlер's proven quality being used to support the new generation of cameras. And with its central locking for immediate leg release, the new Hot Pod CF is the fastest tripod in the world. Its maintenance-free pneumatic gas spring effortlessly lifts the camera over six feet high. So why wait? Optimize your equipment now. With Sachtlер!

www.sachtler.com

sachtler
corporation of america

53, North Main Street
Freeport, N.Y. 11520
Phone: (516) 867-4900
Fax: (516) 623-6844
email: sachtlerUS@aol.com

3316, West Victory Blvd. Burbank, CA 91505
Phone: (818) 845-4446



set your ideas in motion!

www.americanradiohistory.com

embedding four digital audio channels.

The quantizing range

Figure 7 shows the relationship between analog NTSC signal levels and eight-bit and 10-bit sample values of a 100/7.5/100/7.5 color bars signal. The 10-bit approach provides for 1024 digital levels (2^{10}) expressed in decimal numbers varying from 000 to 3FF. Digital levels 000, 001, 002 and 003 as well as 3FC, 3FD, 3FE and 3FF, are protected and not permitted in the

digital stream. This leaves 1016 digital levels, expressed in decimal numbers varying from four to 1019 or in hexadecimal numbers varying from 004 to 3FB, to represent the video signal.

The sync tip is assigned the value 16 decimal or 010 hexadecimal. The highest signal level, corresponding to yellow and cyan, is assigned the value of 972 decimal or 3CC hexadecimal. The standard provides for a small amount of bottom headroom (some call it foot-room), levels four to 16 decimal or 004

to 010 hexadecimal, and top headroom, levels 972 to 1019 decimal or 3CC to 3FB hexadecimal.

The total headroom is on the order of 1dB and allows for mis-adjusted or drifting analog input signal levels. This reduces the S/Q_{RMS} (signal-to-RMS quantizing error) ratio by the same amount. The theoretical S/Q_{RMS} of a $4f_{sc}$ product featuring analog in/out interfaces is 68.10dB for a 10-bit system and 56.06dB for an eight-bit system. This is considerably higher than any composite analog or component analog VTR.

Conclusion

In most cases, D2/D3 VTRs were used as drop-ins in an NTSC analog composite environment. Their performance figures were superior to older analog composite as well as analog component (BETA-CAM) VTRs, especially if parallel or serial digital (143Mb/s) interfaces were used.

The major handicap of composite digital video was the fact that $4f_{sc}$ could not be compressed using highly efficient contemporary transform coding methods typical of MPEG. Consequently, VTRs used a high recorded data bit rate, 127Mb/s, resulting in large videocassettes and no portable camera/VTR gear. The appearance on the market of competitively priced component digital video equipment has tilted the market toward the adoption of component digital video equipment.

BE

Michael Robin, a fellow of the SMPTE and former engineer with the Canadian Broadcasting Corp's engineering headquarters, is an independent broadcast consultant located in Montreal, Canada. He is co-author of *Digital Television Fundamentals*, published by McGraw-Hill, and translated into Chinese and Japanese.



Send questions and comments to:
michael_robin@primediabusiness.com

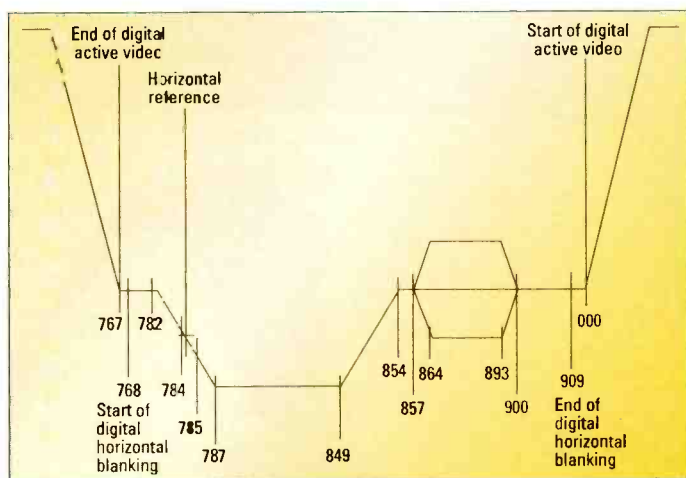


Figure 5. $4f_{sc}$ NTSC digital horizontal blanking interval showing the location of some significant samples

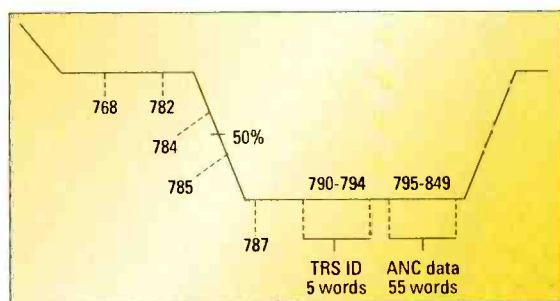


Figure 6. $4f_{sc}$ NTSC horizontal sync period details showing location of TRS-ID and optional ancillary data

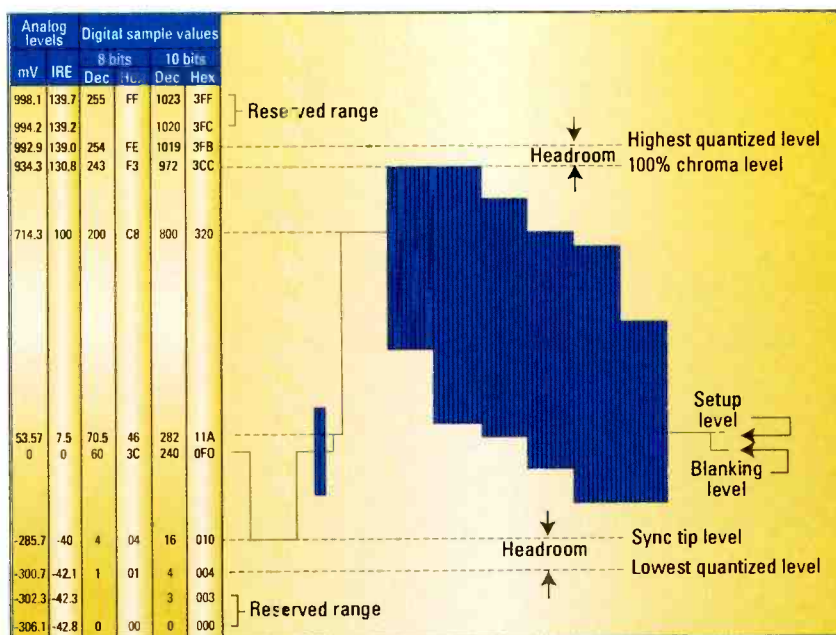


Figure 7. Relationship between analog signal levels and digital sample values



Aren't all Triax Camera Connectors the same?

No. ADC's are the most compatible and flexible.

ADC's New ProAx™ Triaxial Camera Connector is loaded with patented features that ensure the greatest performance, flexibility and compatibility with other vendors' connectors:

- ☐ MIL-Std 202 tested and qualified
- ☐ Gender reversible
- ☐ Field repairable center conductors
- ☐ Quickly reverse between US and four global formats

ADC's broad range of copper and fiber audio, video and data products are designed to deliver the highest performance and withstand the rigors of real world use. With ADC you'll get:

- ☐ Superior quality & performance
- ☐ Pre/Post-sale engineering and support
- ☐ Wide selection of cable sizes, tools & accessories
- ☐ Competitive pricing and longest product warranty



PERFORMANCE



ProAx™ Triaxial Camera Connectors



Call today for fast delivery!

For a free copy of ADC's 12th edition broadcast product catalog, call 1.800.366.3891 ext. 20000. Or visit adc.com/broadcast.

SAN and NAS:

A practical guide

BY BRAD GILMER



Storage-area networks (SANs) are composed of computers and remote storage devices. The computers are typically connected to the remote storage devices using SCSI over Fibre Channel (see Figure 1). Other implementations of SAN exist, but this is the most common. In a SAN, all the storage appears local, just as if the remote disk were directly connected to the computer and physically located inside the computer chassis.

Network-attached storage (NAS) devices appear to the user as a remote drive letter or are named remote storage device. Typically, the operating system employs a protocol such as Network File System (NFS) or Common Internet File System (CIFS) to discover, log in, and transfer content to and from a storage device. NFS and CIFS both communicate over

possible benefits of SAN include access to large amounts of data; sharing data among different applications on different computers; real-time or near-real-time access to data updates; legacy support for SCSI devices; fast speeds; and avoidance of network congestion common with Ethernet.

Possible benefits of NAS include relatively simple user configuration; compatibility with existing username/password access systems; compatibility with legacy networking and server-sharing systems.

In many cases, either scheme can now meet all these needs. But, in earlier implementations, the distinction between SAN and NAS was useful.

For initial installation and configuration, SAN usually requires some specialized knowledge of network hardware, such as how to install the appropriate SCSI drivers and Fibre Channel card. You should also know how to configure your Fibre Channel network properly. Once the installation and configuration are complete, access, administration and authentication are all handled in the background. Access to the knowledge needed to build a SAN system is usually not a problem given that most SAN installations are part of a larger system involving a vendor that can assist in the initial setup.

NAS typically does not require specialized hardware knowledge, although familiarity with Ethernet is a plus. However, for a system administrator, getting all the users' computers to recognize a NAS through different operating systems and different versions of the same operating system can be a real challenge. Installing a NAS can be as simple as unpacking the device, plugging it in and attaching a network cable. Vendors have done an

excellent job of programming these devices so that when they first power up, they recognize their operating environment and do a large amount of configuration themselves. Ninety-five percent of the time these devices work straight out of the box. That said, with a moderately complex network you should expect some challenges. Networks that could cause problems include ones that use manually assigned IP addresses, have internal firewalls, or implement complex routing based upon different protocols. For a more complex network, you might be better off purchasing a higher-end NAS system from a well-known manufacturer. It will probably provide a "smarter" NAS box that is more likely to work in your environment. In addition, such systems typically come with better product support. With a complicated network, you may need it.

Be particularly aware of where you plug the NAS system into the network. While you can plug a NAS box into any Ethernet connection, it is not wise to do so. The NAS should be connected at a point in the network you are sure will have sufficient bandwidth to support the traffic the NAS will generate. Example: If you connect the NAS box to a \$78, 10-port Ethernet switch, it may not work very well (see Table 1 on page 30). Low-cost Ethernet switches do not have sufficient backbone capacity to provide full bandwidth to all ports at the same time. A 100Base-T Ethernet switch might have a throughput of only 200Mb/s. Once you subtract the overhead, the actual available throughput is somewhere around 130Mb/s. If the load is shared among the 10 ports, each port has only about 13Mb/s available. NAS performance will suffer if it is limited to 13Mb/s. On the other hand, if


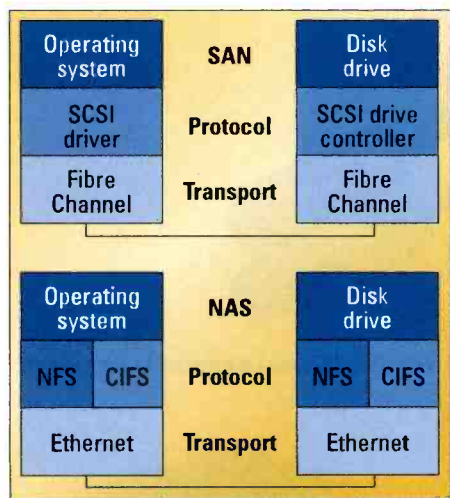


Figure 1. SAN and NAS use different protocols and transports.

Ethernet. The user typically enters a username and password, and then is granted access to a particular device.

The SAN and NAS storage schemes evolved to meet different needs. Some

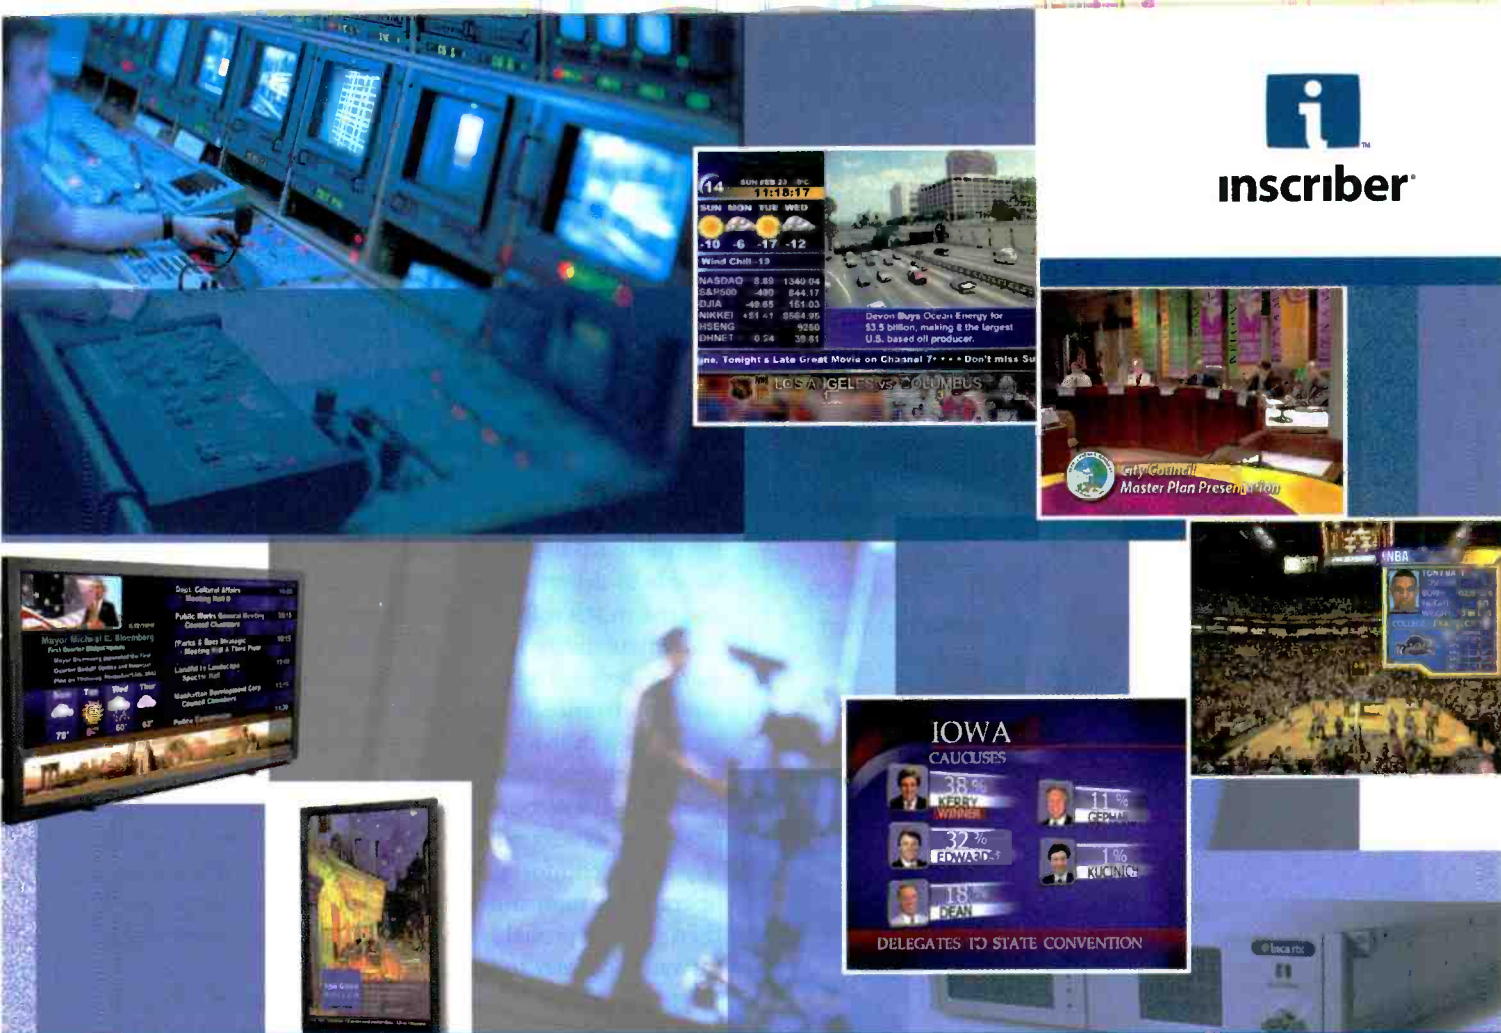

We Don't Just Think About the Future of Broadcasting, We Are the Future of Broadcasting.

- character generators •
- newsroom automation •
- digital signage •
- HDTV solutions •
- master control branding •
- video servers •
- real-time 2D/3D graphics •

For almost 20 years, Inscriber has been a driving force in the television broadcasting industry and has established a worldwide customer base of over 200,000 installations. Inscriber's longstanding reputation for providing high quality, innovative products with exceptional service and the ability to adapt to a changing market have been the power behind Inscriber's success.

Inscriber is the future of broadcasting. Our Inca products for broadcast and post production have set a new standard in on-air graphics capabilities. Based on breakthrough technology developed by Inscriber, multi-layer graphics, effects and video playback are achieved on a single channel. This is why innovative broadcasters like CBC/Radio-Canada have selected Inscriber as their national supplier of character generator equipment.

InfoCaster, the digital signage solution for the next-generation of broadcasting, combines the same quality graphics and ease of use as our traditional broadcast products with the advanced network management needs of this dynamic field.

With these and other groundbreaking products, it is easy to see why customers like ABC, NBC, CNN, CBC, BBC and Rogers Sportsnet trust Inscriber for their broadcast graphics solutions.

See the future of broadcasting at www.inscriber.com, www.infocaster.tv

North & South American Sales—26 Peoples Street, Waterloo, Ontario, Canada N2J 3C4 Toll-free: +1 800 363 3400 Tel: +1 519 570 9111 Fax: +1 519 570 9140 European Sales—Zuidstraat 72, 1431 EE Asdmeer, The Netherlands Tel: +31 297 280930 Fax: +31 297 280939 Asia-Pacific Sales—Level 9, AIG Building 1-1-3 Marunouchi, Chiyoda Ku, Tokyo 100-0005, Japan Tel: +81 3 5288 5237 Fax: +81 3 5288 5353 Inscriber is a registered trademark and Inca and InfoCaster are trademarks of Inscriber Technology Corporation. Other product names mentioned may be registered trademarks or trademarks of their respective companies. Specifications subject to change without notice.

40x11 ExtremeTele

“We took a close look at lenses from the leading suppliers in the industry and wound up purchasing Thales Angenieux's lenses, including their



Bartha Visual, Inc.
Columbus, OH

40 X 11 Extreme Tele Lenses. The Thales Angenieux lenses deliver the performance, size, and features that

we want – they're real clean and very bright.”

said Kevin Conley,
Technical Director,
Bartha Visual, Inc.



40 x 11AIF.HR Extreme Tele
40 x 11AIF.HD Extreme Tele
40 x 15AIF.HR Extreme Tele
40 x 15AIF.HD Extreme Tele

“One of our technicians swapped a lens normally used with an Angenieux lens without telling the client. The technical director wanted to know who turned on the lights because the image was so bright. Angenieux lenses were a great purchase for Bartha Visual and I swear by their performance,”

concluded Mr. Conley.

angenieux

THALES

For more information call 973-812-3858,
e-mail angenieux@tccus.com or visit www.angenieux.com

Computers & Networks

Type of connection	Total backbone bandwidth	Average bandwidth per port
10-port, 100Base-T Ethernet switch	200Mb/s	13Mb/s
Nonblocking 10-port 100Base-T Ethernet switch	1Gb/s	70Mb/s

Table 1. Connecting a NAS server to an inexpensive Ethernet switch may severely limit its performance.

you connect the NAS device to a nonblocking Ethernet switch, which can deliver 100Mb/s (70Mbit/s after subtracting overhead) to all ports simultaneously, then the NAS will be able to deliver data at its maximum performance limit, and the switch will not limit the speed.


Maintainability is a key factor in selecting any shared storage device. The choice between SAN and NAS is a matter of preference. As a general rule, you maintain SAN systems through the SAN device's operating system. Maintenance tools tend to be powerful and reasonably well documented, but may be command-line-based. Some SAN vendors have developed nice GUI-based maintenance tools. If you are comfortable with the command line of your operating system and don't mind getting under the hood, then you will probably find that SAN systems are straightforward and easy to maintain.

Typically, you maintain NAS systems through a Web interface. NAS systems tend to be relatively simple to maintain unless you are using them on a complex network. While NAS maintenance interfaces are generally complete, occasionally I have found that there were things I could do on a SAN that I could not do on a NAS. So the ultimate choice is yours. SAN and NAS have both matured significantly over the past few years. Both provide users with a way to access and share content, but the two use fundamentally different approaches to facilitating access to shared storage.

Many excellent tutorials are available on SAN and NAS. Just do an Internet search on "SAN or NAS tutorial." If you need information on their implementation, search for "SAN or NAS how to." These articles give practical information on installing and configuring these devices.

BE

Brad Gilmer is executive director of the AAF Association and the Video Services Forum. He is also editor in chief of the "File Interchange Handbook."



To order Brad Gilmer's book, "File Interchange Handbook for Images, Audio and Metadata," from Focal Press, visit www.focalpress.com or call 800-545-2522. The book is also available from most major booksellers.




Send questions and comments to: brad_gilmer@primediabusiness.com

Keeping On-Air Transmissions

LIVE

With Active Power's Battery-Free Energy Solutions

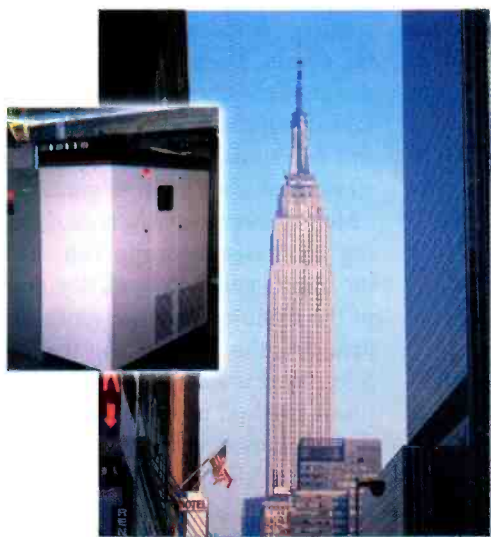

No Place for Batteries here...
Telemundo's multiple transmitters at the top of the Empire State Building are protected by Active Power's CleanSource technology.



Dead air is no longer a problem when Active Power's innovative CleanSource® Energy Storage systems are protecting your broadcast networks, transmitters and microwave uplinks.

Today, having a generator for back-up power is not enough to keep your operations on-line. When a power interruption hits, crucial unprotected seconds mean broadcast interruptions and potential dead air before the facility's generator kicks in.

CleanSource from Active Power is the ideal solution to protect against power outages and damaging voltage fluctuations. With power ratings from 65 kVA to 3600 kVA, the battery-free CleanSource Flywheel UPS meets the quality demands of today's broadcasting and transmitting facilities and eliminates the need for bulky, high maintenance battery-based systems.

Visit our website at www.activepower.com/a1130 to learn why major U.S. and international television networks depend on Active Power's AC and DC solutions to keep broadcast stations on-line and transmissions live.

FROST & SULLIVAN

Market Engineering Award Recipient
Product Line Strategy 2003



Active Power®

www.activepower.com/a1130
email: a1130@activepower.com
Toll-Free: 1-877-FLYWHEEL

Audio consoles

BY GARY ESKOW

Manufacturers of broadcast consoles are helping engineers who need to simultaneously deliver 5.1 and stereo audio by incorporating fold-down capability, single fader control of multiple audio channels and increased monitoring into new boards.



Both the Wheatstone D-9 (top) and Solid State Logic C100 5.1 feature metering and panning as part of their surround package.

Solid State Logic's (SSL) C100 digital broadcast console incorporates monitoring-insert features that help the engineer keep track of how audio will be received in home environments that are equipped with multichannel, stereo and mono playback systems. In an ideal world — the one that music engineers often get to live in — time is allocated to the creation of separate stereo and 5.1 mixes, but this is obviously impossible in live work. The down-mixing monitoring capabilities of the C100, which allow for instant switching between the two, offer a working compromise.

Wheatstone's D-5.1 and D-9 boards also offer automatic 5.1 to stereo down-mixing, as does the Euphonix System 5 console. Many of the new features on Calrec's Alpha, Sigma and Zeta 100 consoles that were shown at NAB have been custom-designed for NBC, which will use two Alpha and two Zeta

boards in their broadcasts of the 2004 Olympic Games in Athens, Greece. All Calrec consoles incorporate both stereo and mono down-mixing capabilities.

Keeping track of six channels of audio can be difficult in real-time applications, and having the ability to

control the

volume of

all chan-

nels from a


single fader

can be critically im-

portant. Since its launch in 2003, the SSL C100 console has incorporated this feature. The C100 also lets the engineer break out and rebalance the channels that contribute to the LCRSSSu mix with a single button push. All Wheatstone boards have a similar capability, and the engineer can define all sources as either mono, stereo or 5.1 in origin.

AMS Neve digital consoles have had the ability to control multiple input and output channels from a single fader for several years. But Neve believes that many broadcast applications will remain two-channel for the years to come. It says forcing 5.1 technology onto these customers would be unreasonable.

Calrec's market includes few users

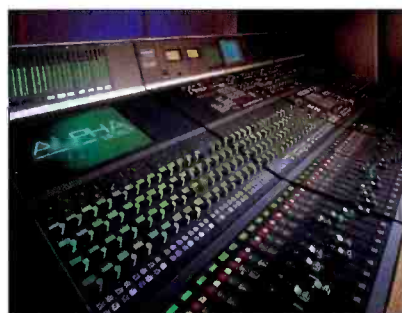

All Calrec consoles incorporate both stereo and mono down-mixing capabilities. Shown here is the Calrec Alpha 100.

who are broadcasting in 5.1 at this time. However, the company recognizes that some of its base will require this functionality in the near future, particularly those broadcasting sporting events. Essentially 5.1-capable by design, Calrec will be introducing 5.1 fold-down channels later in 2004, and this functionality will be available to all existing users as an upgrade.

Multichannel metering is also becoming increasingly important as 5.1 broadcasts gain in popularity, and all of the manufacturers we spoke to are including this capability in their consoles. Neve is moving to a more simplistic method of signal routing, and its boards now offer graphical representations to make it easier to keep track of multiple audio channels.


Both the Wheatstone D-5.1 and D-9 have dedicated 5.1 buses, 5.1 metering and 5.1 panning, and both boards feature 5.1 panning displays. SSL's C100 also features 5.1 metering and panning as part of its surround package. Calrec's bar graph metering provides surround metering to its customers, who can also purchase third-party jellyfish displays from outside vendors, such as DK-Audio and RTW.

Networking multiple control surfaces together is becoming a more prominent aspect of broadcast work. Longer runs — once looked upon with great suspicion — are proving reliable, allowing live boards to communicate with multiple on-premise audio post rooms.

Euphonix recently announced the release of two different models of its System 5 broadcast console. The System 5-B now includes the same bus structure and features as the Max Air, supporting 96 channels, 24 mix buses, 24 groups/clean feeds and 16 IFB/aux sends from a single DSP Core. The new 2004 System 5-B also includes an N-1



Go further.
**Expand your coverage and
capture new audiences.**

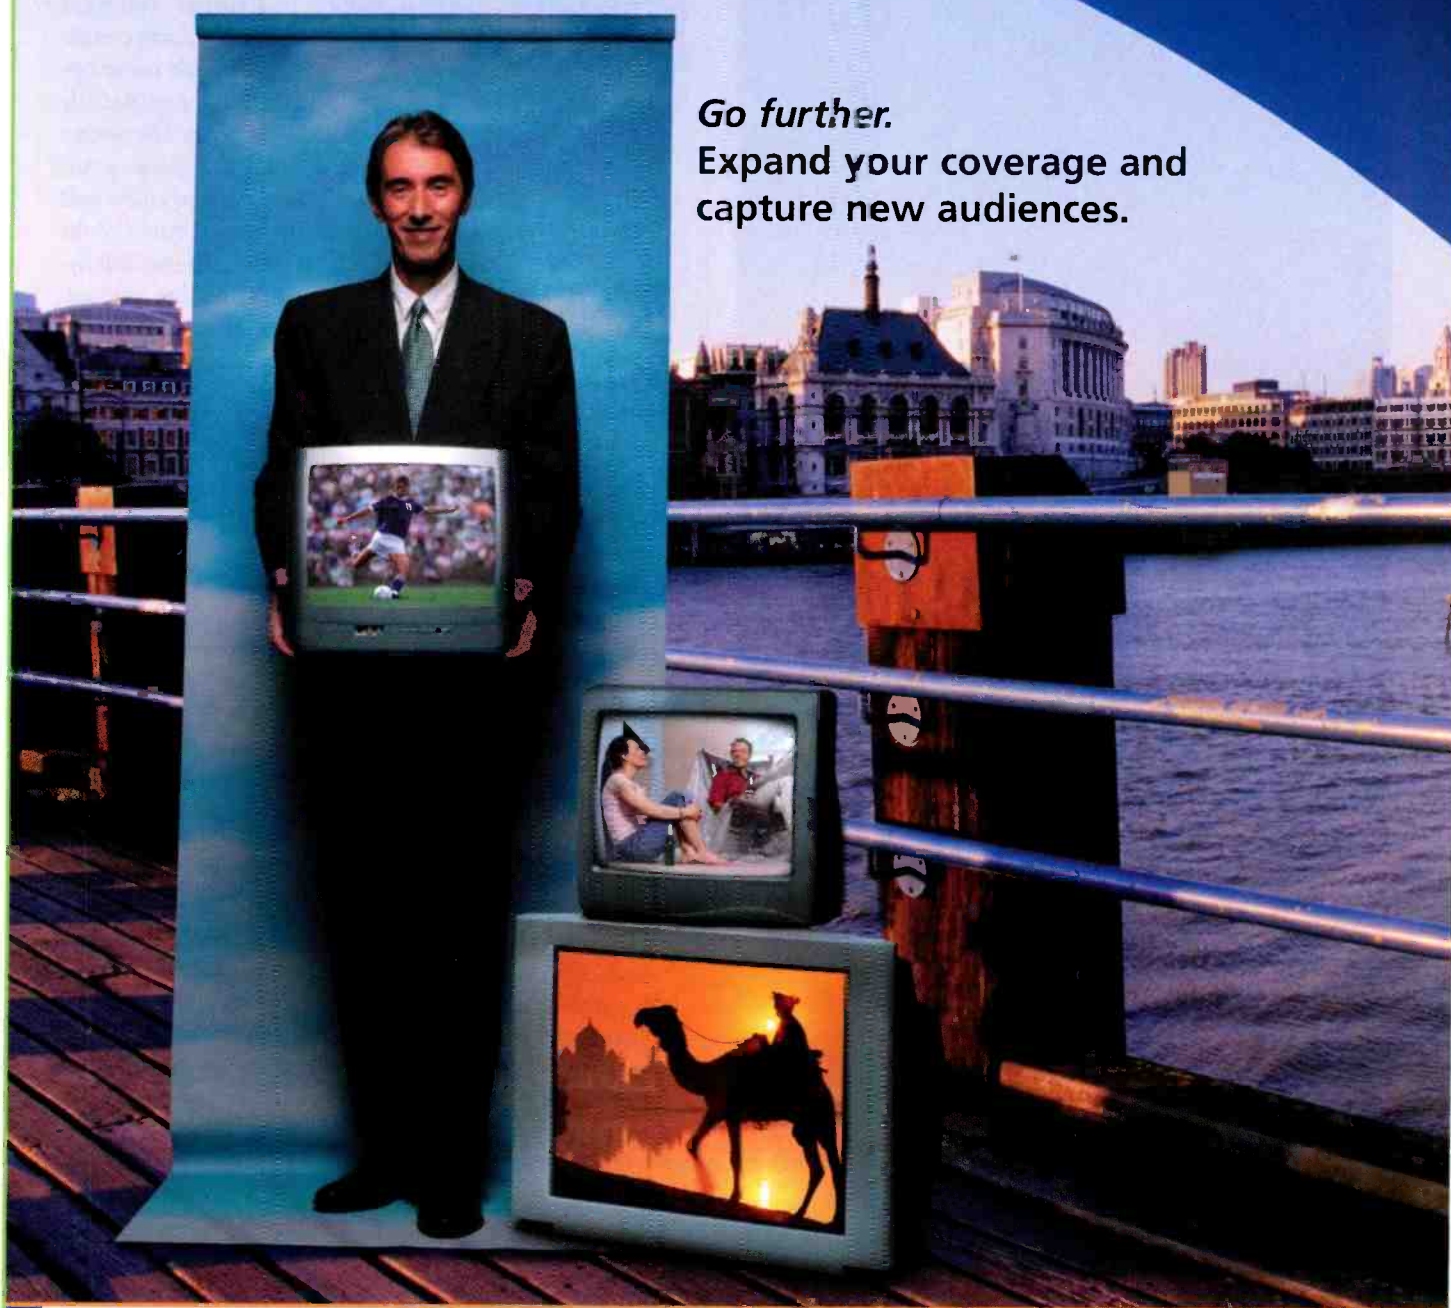

Video Solutions: *Distribute content to new viewers and new markets, opening up new opportunities the world over.*

Delivering content has never been easier. With Intelsat's Video Solutions, you can grow your audience by distributing programming anywhere in the world. Our state-of-the-art network gives you the flexibility and reliability you need to access new markets and new audiences. After all, Intelsat has been creating global content delivery solutions for broadcasters for 40 years. So whether you're distributing world news, cable feeds or DTH programming, Intelsat can help.

Go further. Connect with us at +1-202-944-8545
or email videosolutions@intelsat.com

www.intelsat.com

building on **40** years of leadership

 **Intelsat.**
inspiring connections

just add water...



Expanding on e2v's current
broad ranges of IOTs and
Klystrons. Innovation, power unleashed.

Energy saving collector IOTs (ESCIOT®s)

Proven water
cooled designs

Increased efficiency
up to 60% in 5
stage designs

30kW average
digital power

60kW analog power

Plug-in style for ease
of maintenance



e2v

e2v technologies

e2v technologies inc. USA
Tel: 1-914-592-6050
Email: enquiries@e2vtechnologies-na.com
<http://comms.e2vtechnologies.com>

Production Clips



The System 5-B from Euphonix includes an N-1 mix-minus feed with individual talkback from each strip, making the console and Max Air much more operationally compatible.

mix-minus feed with individual talkback from each strip, making it much more operationally compatible

with the Max Air. The System 5-BP is targeted at stations that require both on-air and audio post capabilities in the same console, so the

system includes full dynamic mixing automation and support for more than 300 audio channels.

Wheatstone's D-5.1 and D-9 surfaces also

can be networked together, with multiple boards sharing both input and output resources. Console manufacturers have come to understand the need for flexibility in routing and busing architecture. The D-5.1 and D-9 boards can, for example, operate independently and interoperate for larger productions, with output buses of one control surface appearing as input sources to the other control surface.

AMS Neve consoles use a computer — the Encore PC — to manage and store console configuration and automation data. Console settings can be transferred across a network to and from other consoles or to a PC for offline management, and surface configurations and automation settings can be created or adjusted offline.

Neve extends its networking capabilities by the use of its modular I/O system (MIOS), which introduces bidirectional communication to Neve systems. Remote control mic amps in multiple studios can be routed between consoles on demand. Cable runs of up to two kilometers are now routine, allowing physically removed studios to be networked on demand. MIOS circuits are based on Neve's classic mic pre, and signals may be passed at resolutions up to 24-bit and 96kHz.


SSL also sees the inevitable move into wider plant routing schemes. The development of router protocol integration into both the C100 and C200 is evidence of the company's belief that broadcast applications will require this kind of interoperability.

Calrec's new Hydra audio network lets users gang mic pre-amp and I/O resources throughout their range of digital consoles. Hydra is built on Gigabit Ethernet technology to provide a high bandwidth. Connections can be made with fiber (MTRJ) or copper (RJ45). The connection between the digital I/O rack and the Gigabit Interface Unit allows up to 128 bidirectional channels.

BE

Gary Eskow is a composer and journalist who lives in New Jersey. He has held a number of editorial positions in the field of audio journalism and is currently a contributing editor at Mix magazine.

EXTREME *Definition*

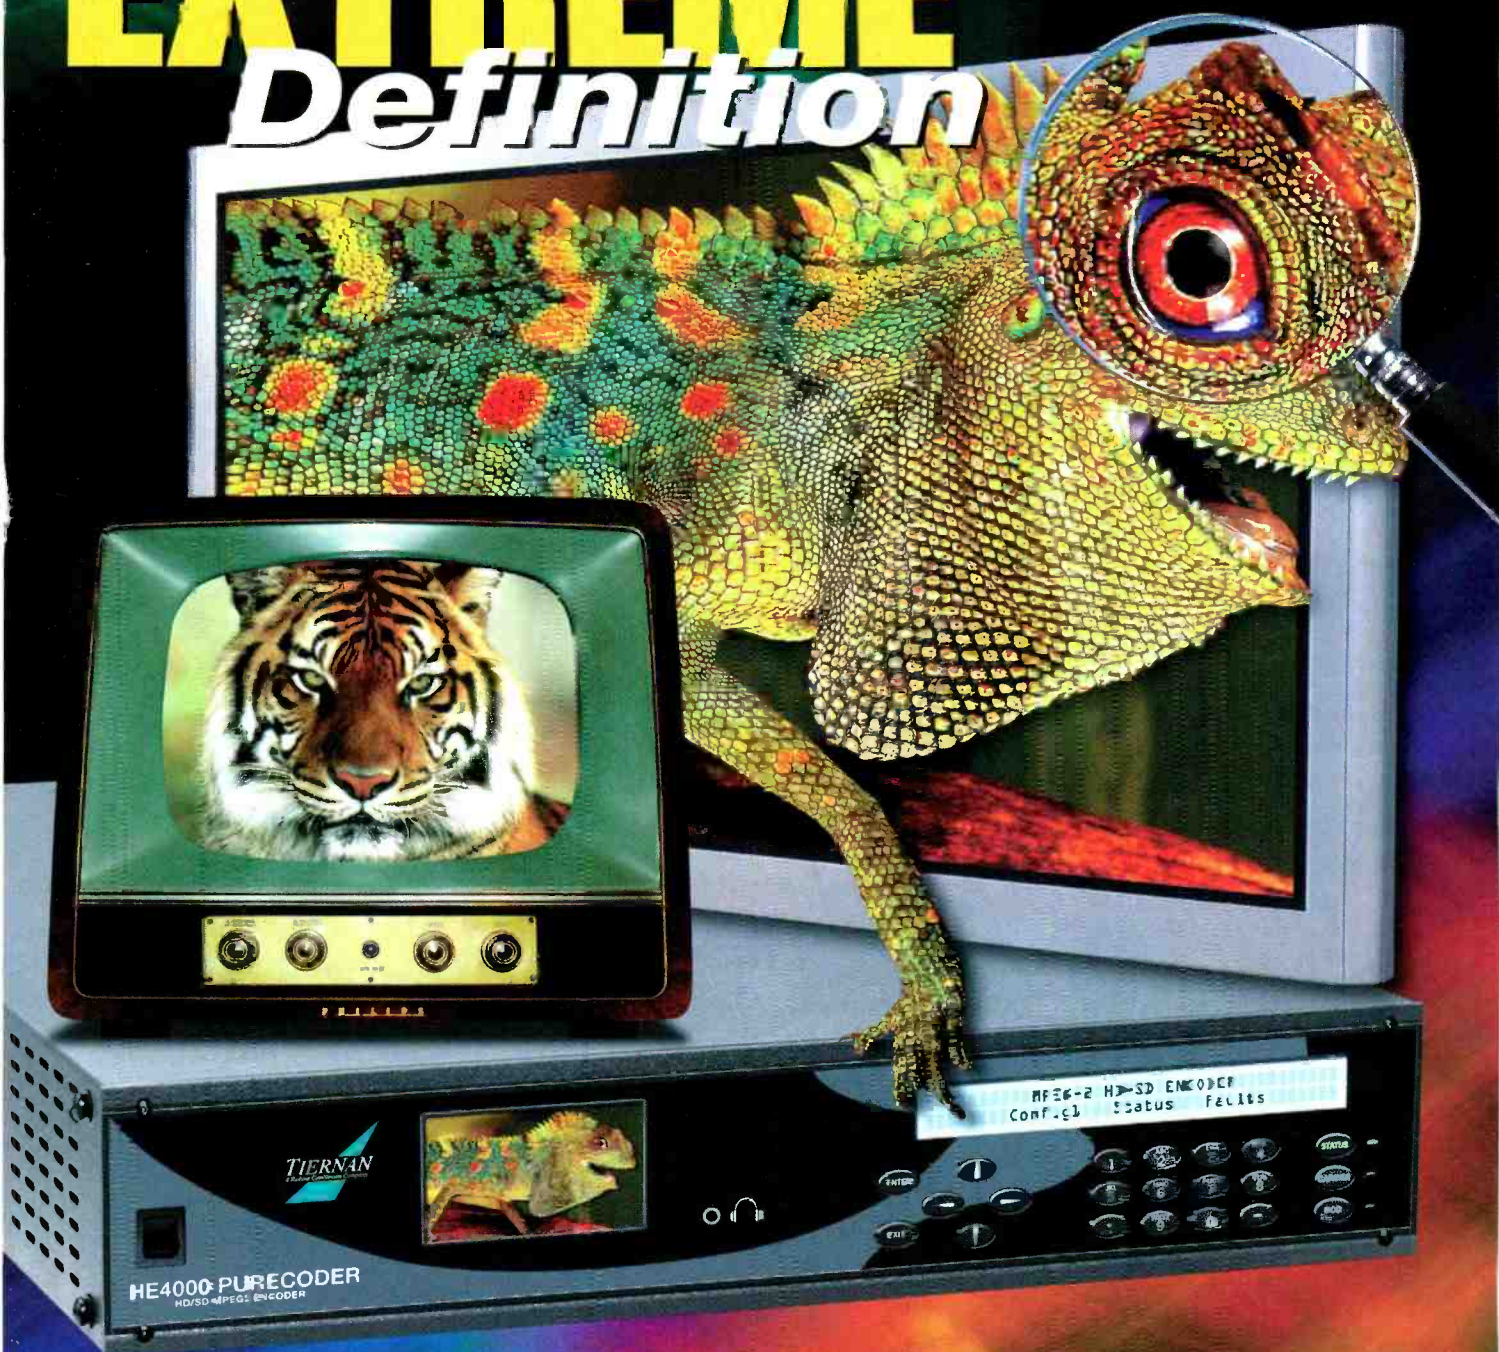

HE4000: HD AND SD Encoder

HD and SD Encoding Simultaneously

Front Panel Monitor

Advanced "PUREPEG" Technology

- Enhanced Low Bit Rate Performance
- Absolute Finest Picture Quality

Satellite and Terrestrial Interfaces

1 MB/s to 160 MB/s

TIERNAN
A Radtype Communications Company

Phoenix 602-437-9620
San Diego: 358-458-1800
JK: 44-1420-540233
America: 858-458-1800
Singapore: 65-6225-4016
Beijing: 86-0-35831975
www.radtype.com
www.tiernan.com

SYSTEMS
DESIGN
SHOWCASE



4:15:00

00-00-00





ESPN's new digital center boasts three HD studios, each with its own production control room equipped with a Thomson Grass Valley Kalypso HD switcher. Photos courtesy Thomson Grass Valley. Photos by Andy Washnik.

ESPN's "SportsCenter" begins HD production

By Michael Grotticelli

The June 7 premiere of ESPN's "SportsCenter" in pristine widescreen HD with multichannel AES audio was made possible by a new signal distribution infrastructure and a comprehensive collection of multiformat broadcast equipment. The

Signal distribution

To manage the network's production workflow, the project design team combined multiple racks of Grass Valley Trinix routing switchers from Thomson (configured as a 1024x512 I/O matrix for HD video

Most of ESPN's HDTV operations will be moved to the digital center in January 2005.

telecast was also the first step in an operational move to a new digital center. The 120,000-square-foot, all-digital HD facility is located in Bristol, CT, directly behind the network's existing production and post-production headquarters. Not only is the new HD version of "SportsCenter" originating from the new building, most of ESPN's HDTV operations will be moved to the digital center in January 2005.

signals), with a similarly dense Grass Valley Apex router to handle all incoming audio sources. The Trinix router can handle both SD and HD video signals in the same frame, and allows the network to execute frame-accurate, on-demand switching on a large number of crosspoints simultaneously. Router control is handled by an Encore facility control system from Thomson.

All of the routing switchers are monitored and controlled via SNMP, as well as HTTP, for Web-based content. This support allows a routing switcher's status to be checked by remote. To support its signal distribution paths, ESPN installed Miranda Densité control probes and several hundred Grass Valley Kameleon 16-channel output DAs. These route digital audio and video signals to the Trinix and Apex routers and throughout the building.

Moving content from tape to servers

In the new digital center, each of six equipment rooms and seven production control rooms operate independently, although they're completely networked together, should engineers



A Thomson Grass Valley Trinix digital routing switcher lets ESPN frame-accurately switch a large number of crosspoints simultaneously.

need to combine resources.

The digital center's massive signal routing architecture supports 19 nonlinear edit rooms, four master control suites (with expansion to 10 planned), and a large sports-content ingest screening facility. Signal paths can also be changed quickly to accommodate new channels and future internal growth.



The Grass Valley Encore facility control system from Thomson features tight integration with automation and UM systems.

The ingest area of the existing facility employed 32 PC workstations to log more than 220 hours of game footage, and record, individually screen and archive it to Betacam videotape each day. In the new building, this process is handled by 50 ingest workstations and about 35 VTRs networked to a series of nonlinear editing systems and video servers with several terabytes of storage.

Editing, file sharing and playback is handled by networked systems from BBC Technology (Colledia) and Quantel (generationQ). The Colledia software has a built-in application for screening the daily incoming video and was developed for ESPN to help quickly identify and retrieve clips. This has dramatically streamlined the video workflow and asset management at the

network (in both the old and new buildings) by fostering collaboration between production departments and individual employees.

The new digital center also features a large complement of Quantel editing and server equipment. When it's completed, there will be 19 QEdit Pro (five more will be in the old building) and eQ systems tied to 68 sQ servers to move data on and off the SAN, which currently has a storage capacity of more than 360TB.

A series of SeaChange International broadcast servers serves as a set of proxy SANs that can be accessed anywhere in the building and from outside the facility with a security code.

System redundancy is handled by effectively running two independent power sources to each key device in the building.

Master control

The design team is still evaluating systems, but has installed automation systems from Pro-Bel to handle the initial load and is considering several IBIS master control switchers. Signals are routed through this area, where logos and channel bugs are inserted into the transport stream before going to air.

HD studio production

The second major goal for the facility



The Grass Valley Apex router from Thomson offers a high-density matrix for large-scale infrastructures.

was to provide the network with more studio space. The digital center boasts three HD studios (9000, 5000 and 3400 square feet) that will be home to all Bristol-based studio shows, beginning with "SportsCenter." To shoot in its preferred digital format, widescreen 720p, ESPN will use 16 Grass Valley LDK 6000 mk II multifunction cameras. Evertz transmitters and receivers and SumiToMo multimode fiber gear interconnect the seven studios via 1000 fiber-optic circuits.

Each studio has its own production control room equipped with a Grass Valley Kalypso. A set of Calrec Alpha

Design team

ESPN:

Bill Lamb, VP, systems engineering
Kevin Stolworthy, VP, production ops
Jim Servies, VP, tech. planning
Jackie Bracco, VP, facilities planning/ops
Ted Szyplski, dir., engineering special projects
Mitch Rymanowski, sr. coordinating dir., production ops
Rob Hunter, dir., new media tech
Robert "Biff" Longfield, mgr., planning/construction
John Cistulli, mgr., plant engineering

Architects:

HLW International
Facilities Engineering Associates

System integrators:

National TeleConsultants (NTC)
Doyle Technology Consultants
The Systems Group

On-Air With Max Air

Digital Audio For Broadcast



Reliable

Powerful

Affordable

Easy to Learn and Use

Packed with Features

Max Air at KRON
Local News Studio
San Francisco

Max Air
Large Format Console Technology
Mix Foundation TEC Awards Nominee



Be Sure

www.euphonix.com

Euphonix
digital emotion

©2003 Euphonix, Inc. All rights reserved • 220 Portage Avenue • Palo Alto, CA 94306 • Phone: (650) 855-0400 • Fax: (650) 855-0410
Audio Engineering Society Convention • Booth 826 • Dec 10th - Oct 13th • Jacob K. Javits Convention Center, NY

100 and Sigma 100 consoles outfit each audio room, connected to an ENCO audio clip server, while an RTS/Telex ADAM intercom system ties all of the operational seats together from a communication perspective. Pro-Bel and Miranda supplied the master control switchers



Thomson's Grass Valley LDK 6000 mk II Worldcam camera system captures progressive HD images natively, in multiple formats and frame rates.

and automated playout devices (for lower-third crawls).

At the center of it all

As the network continues to expand its reach throughout the world, the

digital facility will remain at the center of it all.

BE

Michael Grotticelli regularly reports on the professional video and broadcast technology industry.

Equipment list

Thomson Grass Valley
NewsEdit edit systems
Kalypso HD video production center
Trinix and Apex routing switchers
Kameleon DAs
Quantel
sQ servers
eQ and Qedit Pro editors
BBC Technology Colledia for sports
Evertz
MVP display processors
fiber-optic gear
Christie Digital
GraphXMASTER CS70 70-inch rear display cubes
FP40 40-inch LCD flat-panel displays
Calrec Sigma 100 and Alpha 100 audio consoles
RTS/Telex ADAM intercom system
Stagetec MADI microphone distribution system
SeaChange broadcast servers
IBIS
ServerLoad
SportServerPlay
Pro-Bel
Master control switchers
Automation systems

Ready to ride with HD?



800.251.4224
530.274.2048
Grass Valley, California
www.aja.com



Full 10-bit broadcast quality

RH10UC—SDI to HD-SDI upconverter with motion adaptation and genlock

RH10UDC—SDI/HD-SDI universal up, down, and cross converter, plus SD/HD framesync

RH10MD—HD-SDI to SDI downconverter and HD distribution amplifier

RH10DA—1x8 reclocking DA for SDI and HD-SDI, auto-input selection

HD10C2—SDI/HD-SDI dual rate D/A mini-converter

HD10CDL—Dual link D/A mini-converter

Mysteries of HD Color Space



DL-850HD



SOLVED...with the Award-Winning DL-850HD Legalizer from Videotek!

Videotek unravels the mystery of high definition color space with the powerful new DL-850HD High Definition Serial Digital Legalizer. The intuitive design of the DL-850HD simplifies the complex task of conforming your program content to broadcast specifications and takes the guesswork out of legalizing HD-SDI signals. The DL-850HD continues the tradition of Videotek's legalization products by offering direct access operation, front panel status LEDs, and straight-forward system menu navigation. With vector and encoded soft limits, and optional HD-SDI gamut monitoring output (DL-Opt. GMO), the DL-850HD is at home in any broadcast or post-production facility.

Product Highlights:

- Conforms HD to Encoded, SD and RGB Specifications
- Instantaneous Pixel by Pixel Correction
- Fully Adjustable HD & SD Clip Levels
- HD-SDI Gamut Monitoring Output Option
- 20 User Presets
- CRC Monitoring with Error Indication, Recalculation and Insertion
- Adjustable Alarm Mask
- Ethernet, Web Server and GPI Control
- Front-Panel Cable EQ Notification
- HD-SDI Outputs with Bypass

For more than 30 years, VIDEOTEK has led the broadcast industry with innovative, high performance products. In today's digital world, Videotek continues to set the standard for legalization, color correction and processing amplifiers. To learn more about our solutions, visit our web site at: www.videotek.com or call: 800-800-5719 and speak with one of our sales engineers.

Call our product specialist today!



VIDEOTEK®
A Zero Defects Company

Toll Free: 800-800-5719 • Direct: 610-327-2292 • www.videotek.com



Digital STLs

BY DON MARKLEY

Let's look at the problem of getting the signal from the studio to the transmitter. Like most things in television, it sounds like a simple, little task. It isn't.

Join the band

Most stations prefer to use the 7GHz auxiliary broadcast band for the STL. These paths are less fussy than those at 12GHz or higher, because the equipment is a bit easier to troubleshoot and dish alignment is simple. Also, the channels in that band are nice, big 25MHz channels. So manufacturers have designed systems to squeeze both the analog and digital television signals into one microwave channel, along with data, with mixed results.

The system *du jour* is a 16QAM system with an 8-VSB modulator. This appears to provide the most dependable service. The digital side of these systems transports the ATSC 19.39Mb/s

datastream along with at least a T1, two RS-232 channels and some additional logic circuits. The analog side provides a channel for standard video with several FM audio subcarriers.

Separate and unequal

The scheme usually includes separate power supplies and amplifiers for the two channels. At some future date, when analog video goes away, the facility can change that channel to a second digital channel with just the purchase of a bunch of electronics. Sounds good. And it is — for the most part.

signals. Separate antennas can avoid a lot of loss in the combining/splitting/filtering system, resulting in a better fade margin for the same antenna size. Equipment for that simpler function is readily available for those locations where its use is feasible. Where band occupancy won't allow such single-channel equipment, the dual systems may be necessary.

Togetherhness

Another scheme is to combine all the signals, NTSC, ATSC, logic, audio, etc. into one big digital datastream, then use

There is a large school of thought that recommends using a separate link for analog and digital signals.

There is a large school of thought that recommends using a separate link — completely separate transmitters and receivers — for analog and digital

one of the big digital-microwave systems to carry the signal to the transmitter site. There, the signals are decoded as necessary to feed the separate transmitters. It works, but it is a bit expensive. And it's certainly too complex for most station staff members. So, back to the simpler world of broadcast STL systems.


Using a combined system isn't necessarily bad, as long as you do the right calculations. First, base the numbers for transmitter power output and receiver threshold on the actual input/output connectors of the equipment, not on the whole system. When joining the two systems into a common antenna, the dual-stream system adds loss in a combiner. There is another loss at the receiving end when the signal splits for the two receivers. If hot standby is involved, split the signals again at the receive site. You have to include those losses in the overall path loss or the fade margin isn't going to be what you expected.

FRAME GRAB

A look at the consumer side of DTV

Total HDTV awareness by viewer type

HDTV awareness is high among broadband users

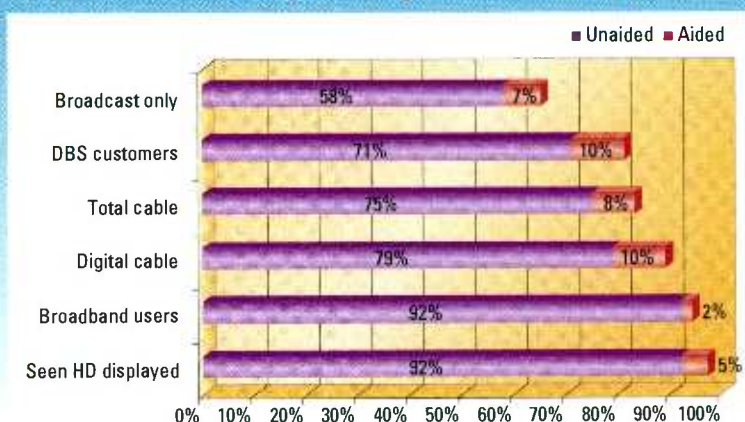

SOURCE: Consumer Electronics Association

www.ce.org



The Most Versatile IOT Transmitter Available



Axcera's Visionary transmitters lead the industry in versatility. These amazing transmitters offer broadcasters the choice of single- or multi-collector IOT amplifiers from various manufacturers with air, oil, water, or water/glycol cooling for analog or digital operation, all in the same transmitter design. And to protect your investment into the future, systems can be configured for easy field conversion between analog and digital operation and between various tube technologies with near 100% re-use. Industry leading technology and the ability to choose - from Axcera, the RF experts.



t: 724.873.8100 f: 724.873.8105 www.axcera.com/be info@axcera.com

the **rf** experts

loss or the fade margin isn't going to be what you expected.

Drive a hard bargain

This is a new technology and, as with most new technologies, it has its share of problems. So, when purchasing such equipment, be a tough negotiator. First, don't pay that last payment until the system is operating — properly. And the warranty shouldn't start until then, either. The manufacturer might not prefer such terms, but they will deal.

Reliability

When calculating the reliability of the system, the old numbers still ap-

ply. A good reliability rate would still be 99.999 percent (the classic five nines) for an STL system. A design fade margin of 40dB is still desirable.

A good reliability rate would still be 99.999 percent (the classic five nines) for an STL system.

The output power is somewhat lower for the digital systems. It's basically the same power amplifier, but the tuning

is a bit different. Actually, the amplifiers must have a wider flat bandwidth for the digital signal. If the bandwidth goes up, the overall gain will usually go down (remember the old gain-bandwidth product?). At the same time, the receiver sensitivity is not quite as good as analog systems (again, the same bandwidth considerations). The result of all these issues is that the path loss should be a bit less than for a simple analog system. Usually, you can accomplish this by increasing the dish size, if possible. If all else fails, space diversity may be necessary. That can pick up several dB, resulting in the desired fade margin.

The short version

In short, the technology here is a bit different, as are all things digital. Some of the early channel-sharing systems

network
the innovator



VIKINX®

World leading compact router program

- All signal formats (Broadcast, Telecom and Multimedia)
- 16x2, 8x8, 16x16, 32x32, 64x64
- Modular Router 32x32 to 128x128
- Special RGBHV Multimedia Routers
- THOR Router Management System
- Advanced Control Panels
- All 3rd party interfaces

Network Electronics US Inc • 11075 South State Street Ste27 • Salt Lake City UT 84070 • Phone: (800) 420-5909 • Fax: (800) 420-5911

www.network-electronics.com/US



WTVP/WTVP-DT Peoria, IL uses a combined STL system for the NTSC and DTV signals. The hot standby system employs two MRC Twinstream radios. Photo courtesy D.L. Markley & Associates.

were terrible. But that seems to be straightened out. Still, watch your back when dealing with any of these systems. A good fade margin with high reliability is still a must, whether you're dealing with analog or digital signals. **BE**

Don Markley is president of D.L. Markley and Associates, Peoria, IL.



Send questions and comments to:
don_markley@primediabusiness.com

SONY

Uncompromising Innovation.

Vegas® software for video and audio production is now considered the standard to which other non-linear editing products are held. The Vegas+DVD Production Suite – which includes Sony® Vegas 5 and DVD Architect™ 2 software – provides an unmatched, innovative set of professional production tools.

Sony's Vegas 5 software redefines workflow by providing an all-in-one real-time solution for editing, multi-track recording, compositing, titling, scoring and encoding. Its customizable interface allows users to accomplish a wider range of complex production requirements. Whether you're off-lining 24p HDCAM proxy files or finishing your project in DV, Vegas software delivers the ultimate in flexibility.

Sony's DVD Architect 2 software delivers a complete, professional set of DVD production tools that lets you develop dynamic menu-based DVDs with subtitles, alternate audio tracks, end actions and more.

Created through imagination driven by uncompromising innovation. No other media production suite is like it.

The Vegas+DVD Production Suite raises the bar with these new features:


New in Vegas 5:

- 3D motion and compositing
- Keyframable bezier masking
- Control surface support
- Envelope automation recording
- Auto-input record monitoring
- Film-style 5.1 surround panning
- Real-time A/V event reverse
- Media subclip creation
- Customizable keyboard mapping
- Networked rendering
- And much more

New in DVD Architect 2:

- End actions
- Multiple audio tracks
- Subtitle support
- 24p DVD encoding
- Elementary stream import
- Project overview window
- Real-time external monitor previews
- And much more

Uncompromising innovation for your unconventional creations.

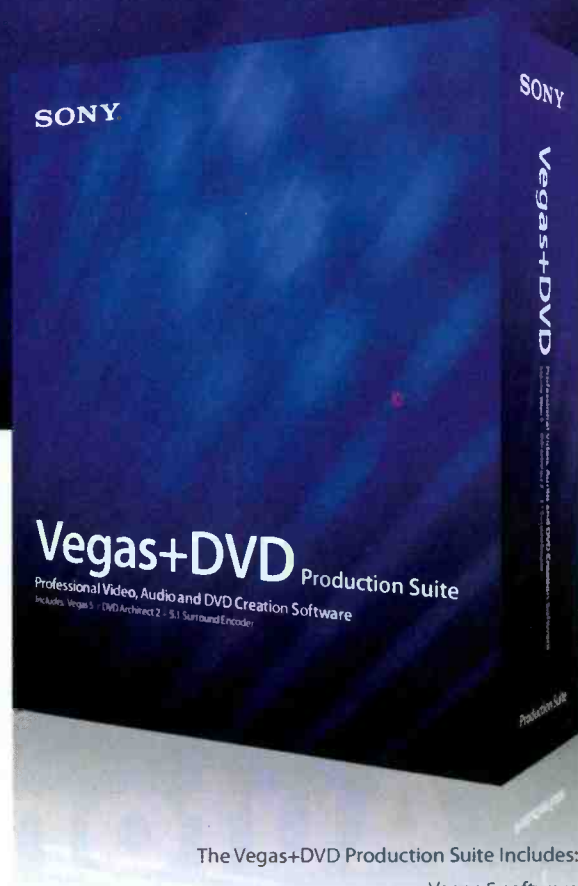


The Vegas+DVD Production Suite Includes:

- Vegas 5 software
- DVD Architect 2 software
- Dolby® Digital AC-3 encoder

Also introducing the Sony Pictures Sound Effects™ Series, a comprehensive, dynamic, five-volume collection of sound effects from the Sony Pictures studio archives.



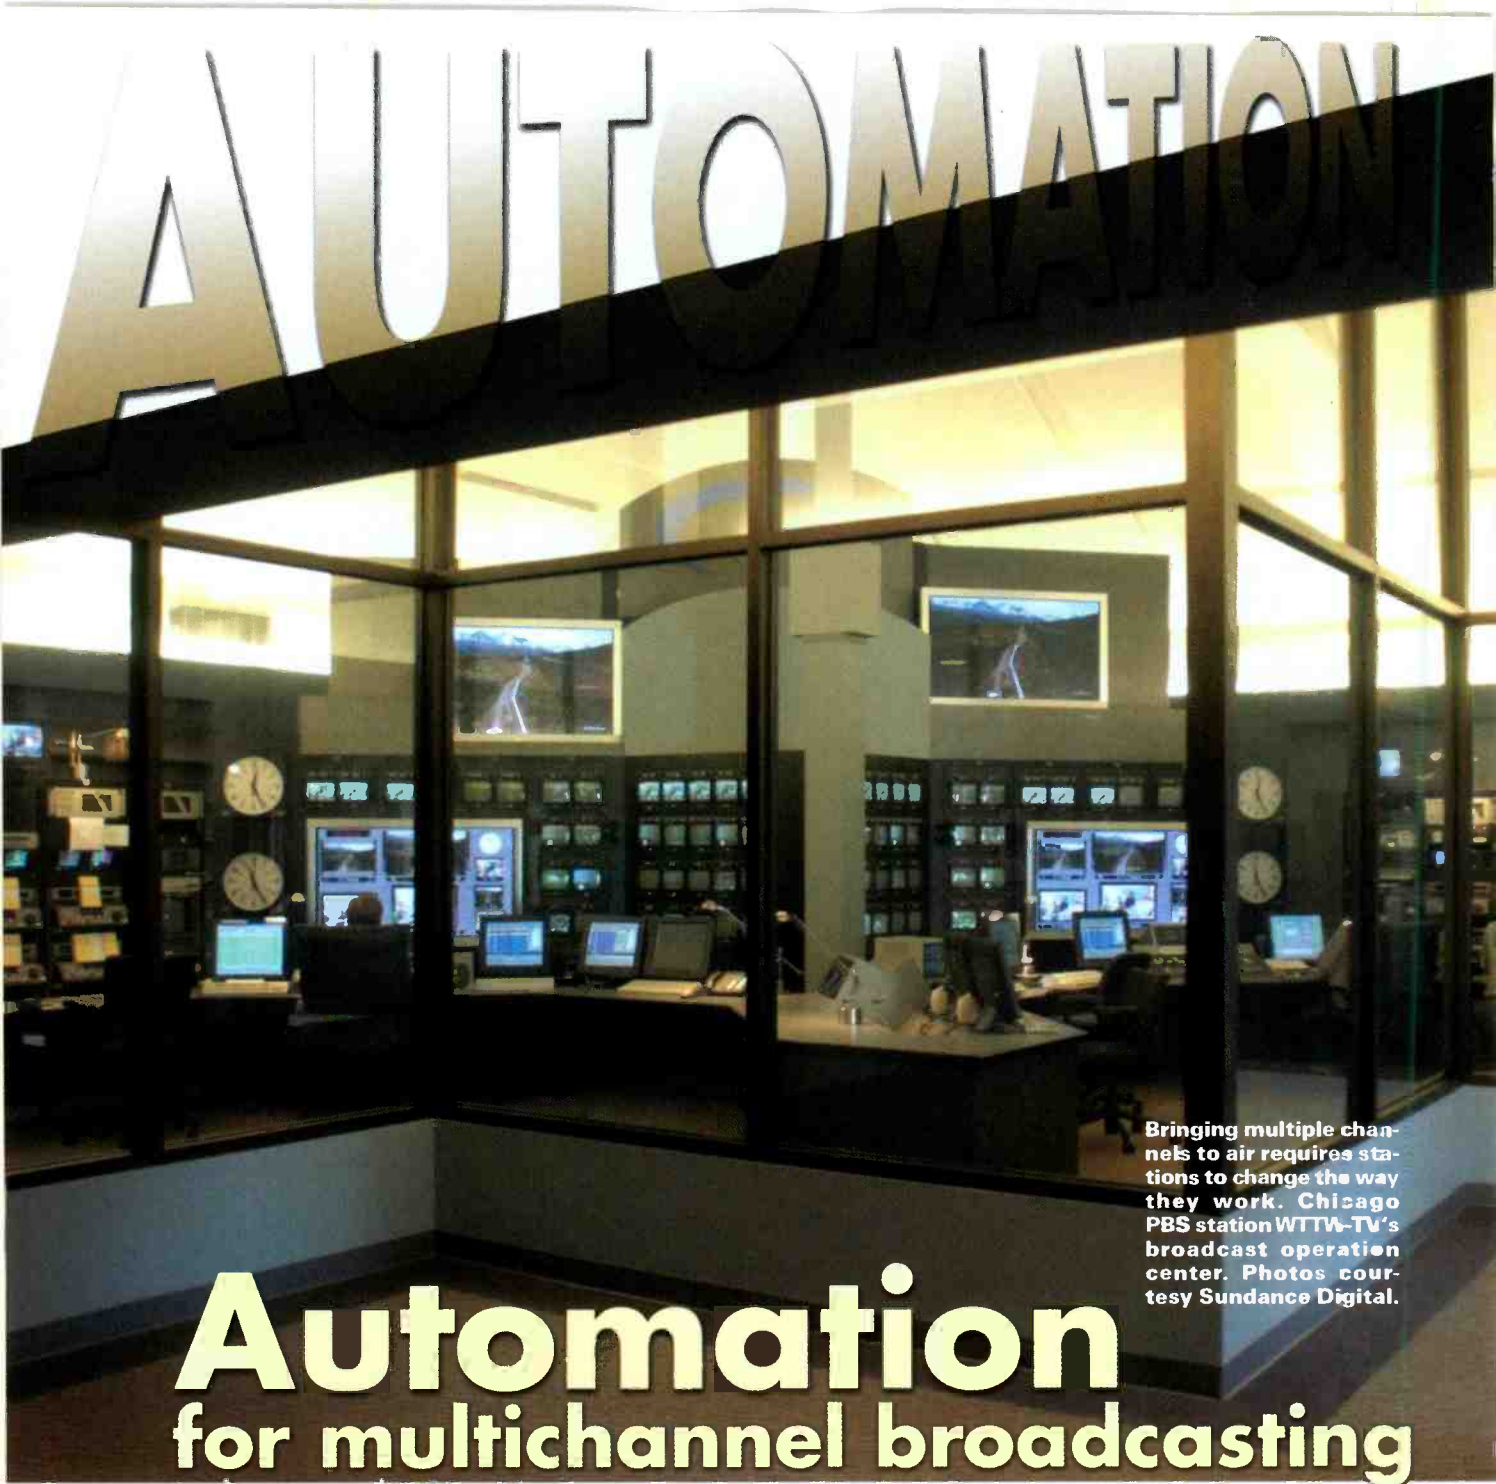

Bringing multiple channels to air requires stations to change the way they work. Chicago PBS station WTTW-TV's broadcast operation center. Photos courtesy Sundance Digital.

Automation for multichannel broadcasting

By Jim Boston and Mark Brown

A new broadcast facility should, in theory, be engineered and implemented based on a business plan and capital budget passed down from upper management. The problem today is that no solid future business plan exists for most broadcasters. The current broadcast business environment is unsustainable over the long haul — new revenue streams will be a necessity. It is becoming evident that stations will need to produce multiple real-time

and non-real-time program streams.

If multichannel is the future, then the way business is conducted must change. The requirements for multichannel operations are radically different than those for traditional single-

same number and level of personnel. Current automated operations are typically governed by plant workflow and organized by a software layer presiding over hardware functions. Automation has evolved along the same

If multichannel is the future, then the way business is conducted must change.

service operations. The challenge is to support the additional services with the

timeline as digital video, starting with separate stand-alone islands and grow-

UTAH-400

It Just Keeps Getting Better...and Better

The UTAH-400 High-Density Digital Routing Switcher, already the world's most advanced switcher, now offers even more:



Automatic crosspoint redundancy in all matrix sizes UTAH-400

The UTAH-400 allows you to protect your critical signal paths against interruption with *AUTOMATIC* internal redundancy.

Three Frame Sizes -- 64x64, 144x144, and 288x288

You can use the UTAH-400 for any digital router application from the smallest utility router to the largest central matrix.

In any size, all UTAH-400 systems offer the same set of world-class features -- and the industry's lowest prices:

- Full time Input / Output Signal Monitoring
- Reduced Power Consumption and Rack Space Requirements
- SD/HD Compatibility

**US UTAH
SCIENTIFIC**

New Directions in Digital Switching

4750 Wiley Post Way, Suite 50 Salt Lake City, UT 84116 USA
Ph: 801.575.8301 • Fax: 801.537.3099 • Email: sales@utahscientific.com



ing into a contiguous control layer. Media are increasingly being treated as object modules by client applications that control, manage and use data. Drilling down to basics, auto-

offering applications that will build and play out a secondary news channel with little care and feeding by humans. Hopefully, creative broadcasters will discover other programming

Automation must be flexible enough to migrate to new business models as they evolve.

mation aggregates all scheduling information for allocated resources and ensures that media and associated metadata are available when and where they are needed. The basic automation applications include ingest, conforming, media management, playout and, potentially, archiving. Automation systems will need to be able to handle these functions for more services in the future, while decreasing the ratio of operators to program channels.

Automation must be flexible enough to migrate to new business models as they evolve. It must also manage essence and its associated metadata, as well as track rights management across multiple outlets.

Multichannel applications

It's quite possible that, in the future, workflow will be geared for content management, rather than program-channel management, as is the case today. Most broadcasters will likely continue to use one real-time stream to carry live and network-pass-through content. Other content will increasingly be configured as files that are played out under automation control with little human intervention (aside from the creation of policies). The most talked-about repurposing of content today is an automated newsreel. A number of vendors are now


opportunities for DTV's additional channels, as most markets won't support multiple local newsreels.

Multichannel automation's ability to push tasks farther from traditional operating positions also makes it possible to share labor across multiple facilities. Stations in different markets airing the same programming don't each need to conform the show. Media can be delivered to each station by distribution groups such as Pathfire or DG Systems, or by a broadcaster's own distribution system. Each station can then

Workflow changes

Multichannel presents a considerable change in what operators do and the tools they require. Operators in an automated multichannel environment tend to react to systemic problems and faults, rather than actively switching between sources. In multichannel operations, they need to react to alarms and problems in one program log that may ripple across to other logs. In fact, monitoring the health of multiple programs can consume a fair amount of the operator's time. Bringing more channels online reduces the ratio of operators to channels, thus lowering the cost of additional service deployment.

Application processes controlling the hardware in a multichannel environment need to be more collaborative and cohesive. Automation, typically driven by traffic, must control ATSC encoder/muxing elements

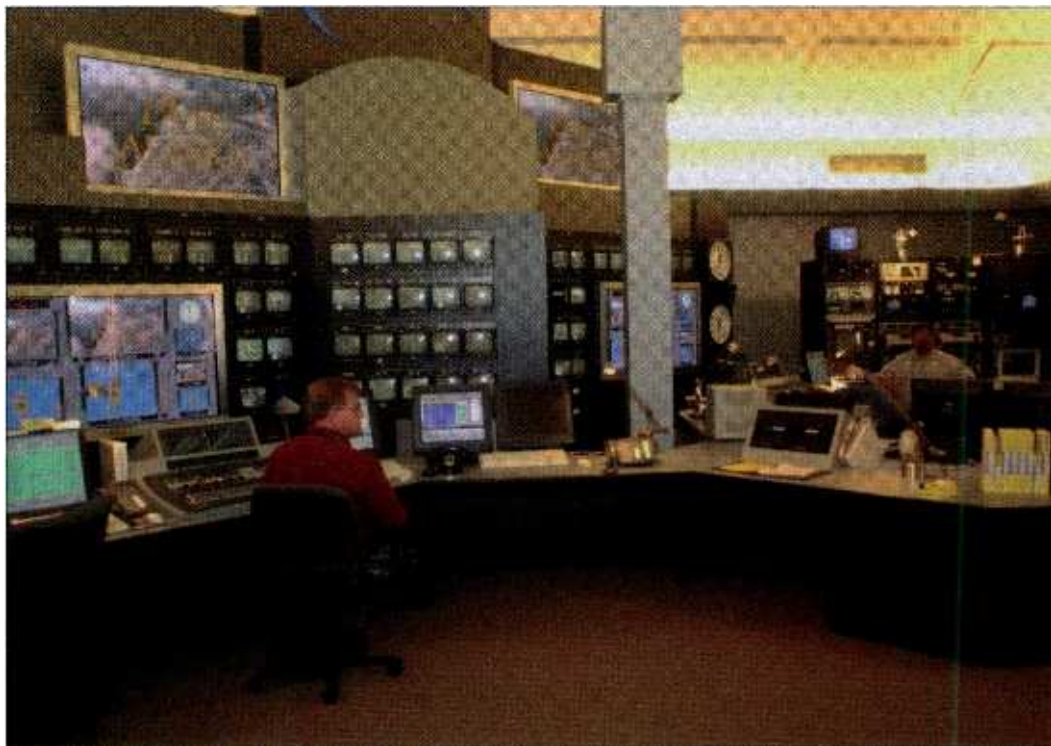

WTTW uses a Sundance Digital FastBreak Automation system to bring multiple channels to air. Broadcast operations technicians Dennis Raymond and Barry Blue in the station's BOC.

add its own metadata, and programming will be ready for playout without additional media preparation.

to change their service profiles. Also, multiple traffic logs and dynamic PSIP tables must be kept in coordi-

ANTON BAUER® OR IDX!

ONLY THE AZDEN 1000 SERIES UHF RECEIVER IS DESIGNED AS AN INTEGRATED PACKAGE!

The Azden 1000 Receiver can be purchased integrated into the Anton Bauer® "Gold Mount" (1000URX/AB), or the IDX "V" Mount (1000UDX/VM) for use with any V-Mount battery system, for easy and secure mounting to your camera. Designed specifically for broadcast ENG, the 1000 is a true diversity system with 2 complete front ends, and offers 121 user-selectable UHF channels in the 723-735MHz range.

Here's what Buck McNeely, of the TV Show "THE OUTDOORSMAN WITH BUCK MCNEELY" has to say about the 1000:

"My choice of wireless microphones is the AZDEN 1000 series. I can mount up to 2 receivers in line between the camera body and the battery on the gold mount adapter and it's powered by the attached battery with little noticeable extra drain. We have hundreds of channel options and appreciate the clear reception and range these Azden units deliver."



Craig Caples of Caples Productions in Las Vegas says

"When shooting at the Las Vegas Motor Speedway and televising UNLV games at Sam Boyd Stadium we use the Azden 1000 series, the Anton Bauer® unit and both the 1000BT backpack and 1000XT plug-in transmitter. We've used it for about 2 years in almost every condition and environment, getting a strong clear signal, without any problems, including on the ski slopes of Utah. Caples Productions is proud to use Azden."



Azden has been selected by both Ikegami and Panasonic for their "Slot-In" cameras (model 1000URX-Si).

For complete features and specifications visit our website: www.azdencorp.com.



P.O. Box 10, Franklin Square, NY 11010 • (516) 328-7500 • FAX: (516) 328-7506
E-Mail - azdenus@azdencorp.com



Backpack transmitter (1000BT) with reduced current-drain for improved battery life, is available with Azden EX-503H, Sony ECM-44H.



Plug-in XLR transmitter (1000XT) works with dynamic mics.



nation so that programming matches the PSIP information. This coordination can become cumbersome with certain types of live programming, such as sporting events that don't run their scheduled length.

Middleware

Automation control is spreading as

more hardware is brought under its umbrella — facilitated by an increasing amount of middleware. Automation systems have long relied on middleware to implement SQL protocol for database access, remote procedure calls via CORBA, and Microsoft's COM technologies through ActiveX controls for applica-

tion collaboration and client/server processes. Now, technologies such as Microsoft's .NET are enabling Web services to become tools in the control and operation of the facility. XML now allows the sharing of information between subsystems that need to work together to implement the desired workflow, as long as they subsystems agree on consistent information tags. Many newsroom systems use Media Object Server (MOS) protocol, which is formed using XML. Other Internet-based protocols, such as Web Services Description Language (WSDL) and Simple Object Access Protocol (SOAP) are used for spreading control though the Web.

The Next BIG THING from *Sundance Digital* The Big Idea

Titan was designed to make automating high channel count and central casting facilities easy and affordable.

The Big Easy

Titan's distributed architecture means it can control more channels than the FCC will ever let you own!

The Big Payoff

Consolidated tasks, less overhead, and fewer mistakes mean higher profits!

OK, OK! WE GET IT, IT'S BIG!
DID THEY HAVE TO MAKE THE LOGO
OUT OF STONE TO PROVE IT?!?

**SUNDANCE
DIGITAL**
10th Anniversary

Sundance Digital, Inc. 972-444-8442 www.SundanceDigital.com

**Automation control is
spreading as more
hardware is brought
under its umbrella.**

In fact, one of the goals of SOAP is to encapsulate remote procedure calls using the extensibility and flexibility of XML. At least one automation vendor uses SOAP as part of its bag of tricks. An important recent development that relies on XML is the Programming Metadata Communication Protocol (PMCP). This ATSC candidate standard will allow for greater interaction between a broadcaster's PSIP system and other system applications, such as automation and traffic. Ultimately, an automation system implementing PMCP will be able to support a more dynamic environment, allowing program changes to be made more easily and efficiently.

Another technology that is being incorporated in the automation arena is Simple Network Management Protocol (SNMP). SNMP is used in the computer networking and telco industries to get information from devices and to change the values of configuration parameters as required.

TRIGGER HAPPY

VIDEO CAMERA REMOTE CONTROLS

THE MANFROTTO SERIES OF REMOTE CONTROLS NOW COME IN THREE VERSIONS WITH A VARIETY OF FUNCTIONS TO MEET YOUR BASIC TO MOST ADVANCED NEEDS ON ANY LANC ENABLED SONY & CANON CAMERA OR PANASONIC DVX100 (OR DVC80) CAMERAS.



INCORPORATED TELESCOPIC PAN BAR FOR COMFORT, EASE OF USE AND FLEXIBILITY.

521 SERIES



BASIC UNIVERSAL REMOTE
(Canon, Sony & Panasonic)

522 SERIES



PROFESSIONAL REMOTE
(Canon, Sony & Panasonic)

523 SERIES



PRO UNIVERSAL REMOTE
(Canon & Sony)



MANFROTTO'S PROFESSIONAL "WHEEL" ZOOM GIVES YOU FINER ADJUSTMENT AND SMOOTHER MOVEMENT.



CAMERA CONTROLS TAILORED TO DIFFERENT CAMERAS: SONY, CANON AND PANASONIC.



For a device to participate in an SNMP network, it needs to be able to host a software database called a management information base (MIB), which responds to messages from an SNMP manager and notifies the manager when predetermined events occur. This technology will become much more important as multichannel operations staffs become monitors of systems (both locally and remotely, as in the case of multicasting) and are tasked with responding to developing problems and failures.

A changing landscape

Today, automation systems must manage content and build program streams, relying on human intervention mainly media is missing. Multichannel operations will require a control layer that encompasses more processes and aspires to be much more



At CourtTV, automation systems lessen the amount of human intervention needed to move content. Photo by Andy Washnik.

than simply a machine- and device-control system. New multichannel automation systems will need to provide control over more process than most systems currently support. Automatic construction of secondary program offerings will be desirable. Non-real-time offerings could become common fare

with Windows Media 9 and MPEG-4 support in future generations of set-top boxes.

It should be noted that the ATSC is currently evaluating new encoding technologies for providing these advanced services. Programming could be delivered through datacasting or IP, with embedded metadata instructing use and context of the media for reassembly at the receiver. The television broadcasting landscape could be radically

different in a few years: The control layer in place to orchestrate programs and associated services should be radically different also.

BE

Jim Boston is an industry consultant based on the West Coast, and Mark Brown is CTO of SignaSys.

NAB HIT PRODUCT HD from Marshall Electronics

The World's Most Affordable Portable HD Monitor

HD/SD/Analog/Digital Included

Introducing the world's most affordable portable 6.5-inch Wide Screen HD monitor.

The V-R65-HD is compact and lightweight, can be camera mounted and accepts any type of HDSDI/SDI or Analog HD/SD signal.

HD/SD Screen Formats	Signal Formats
• 1080-60/50i	• HDSDI (Digital)
• 720P-24/25/30/60	• SDI (Digital)
• PAL or NTSC	• Y-Pb-Pr (Analog)
• 480P-24/25/30/60	• RGB/RGBHV (Analog)
• 1080 30/24/25P	• Composite (Analog)
	• XGA

- Operates on 12-17 Volt D.C.
- Bright-380 nit High Resolution Display
- 6 Frame marker overlays
- Zoom for focus function
- Monochrome function
- Direct access for all adjustments
- Three LED tally
- 110-220V power supply included
- Optional Battery Pack



\$3799

We offer over 50 models of LCD monitors designed to meet virtually any application

The World's Lightest Wide Screen 17" HD Monitor

with Universal Input feature



Occupying only 6 SRU and weighing just 12 pounds, the V-R17P-HD features a 17" High Resolution LCD Display and includes our universal input configuration.

- Accepts all HDSDI/SDI and analog HD/SD signals
- Direct access for all adjustments
- CRT style 170° viewing angles
- XGA with automatic scaling
- 6 Frame marker overlays
- Three LED tally
- Zoom for focus function
- Rackmount or Desktop Configurations
- Monochrome function
- 110-220V power supply included

HD/SD Screen Formats	Signal Format
• 525-(NTSC) 59.94i, 60i	• HDSDI (Digital)
• 625 (PAL) 50i	• SDI (Digital)
• 640 x 480-59.94i, 60i,	• Y-Pb-Pr (Analog)
30P, 29.97P, 59.94P, 60P	• RGB/RGBHV (Analog)
• 640 x 575-50i, 25P, 50P	• Composite (Analog)
• 1280 x 720-23.97P, 24P, 25P,	• Y/C-S-Video (Analog)
29.97P, 30P, 59.96P, 60P	• XGA
• 1920 x 1080 - 23.97P,	
24P, 25P, 29.97P, 30P,	
50i, 59.94i, 60i	

Marshall Tel.: 800-800-6608 • Fax: 310-333-0688

LCDRACKS.COM

**"OUR GEAR WOULDN'T
MAKE IT TO THE
ENDS OF THE EARTH
WITHOUT
ANTON/BAUER."**

Wes Skiles
Karst Productions Inc.,
High Springs, Florida, U.S.A.



Wes Skiles would know.

Karst Productions specializes in hi-definition production in the most unique and exciting locations on the planet. Their work appears regularly on the BBC, Discovery Channel, PBS, A&E, and National Geographic.



Wes and his team have filmed volcanoes, caves, underground rivers, jungles, deserts and the ocean floor to film the largest iceberg in recorded history was as challenging in its production as its images were stunning.

Karst's latest project was an exploration of the underground rivers of Florida for PBS. Diving great distances through narrow passages while being tracked from above, the team charted the detailed path water takes to reach local springs. Their Sony HDW-900/3 cameras were equipped with HyTRON 120 and Duracell 90 batteries both above and below the water in special waterproof housings.

"Our specialty is utilizing cutting edge technology to capture the experience of exploration while expanding the understanding of our planet," says Wes. "I made my reputation filming some of earth's most extreme environments. That's why I use Anton/Bauer batteries for my shoots - they're tough, reliable and versatile. Confidence in your team and your equipment is a must."

antonbauer

**THE POWER BEHIND THE BEST CAMERAS
CAPTURING THE BEST IMAGES IN THE WORLD.™**

ANTON/BAUER, INC. • 4 PROGRESS DRIVE, SHELTON, CONNECTICUT 06484 USA • (203) 929-1100 • FAX (203) 925-4988 • WWW.ANTONBAUER.COM

NAB REPLAY

Continuing coverage
of today's technology

NAB research 56

Broadcast Engineering writers and support staff cover the convention.

Pick Hits 58

The top 40 new products from this year's show — selected by readers like you.

Product jackpot 62

The first installment of products on display at the show — see the NAB Special Report for more!



New Tools..... 62

Broadcast Engineering's writers and consultants recap notable products and trends from NAB.

62 Digital audio
BY TOM PATRICK MCAULIFFE

90 Digital acquisition
BY CRAIG BIRKMAIER

100 Storage
BY C. JASON MANCEBO

66 Automation
BY JIM BOSTON

94 NLEs at NAB
BY BOB TURNER

102 Streaming media
BY TOM PATRICK MCAULIFFE

79 Cameras
BY DAN STARK

96 RF at NAB2004
BY DON MARKLEY

**104 Monitoring, test
and measurement**
BY PHILIP J. CIANCI

**84 Compression products
at NAB2004**
BY STEVEN M. BLUMENFELD

98 Routing switchers
BY JOHN LUFF

Everyone's an expert at NAB

The 2004 NAB convention was, by most standards, the best in years. Believing that the spring show would be good, *Broadcast Engineering* contracted for a range of writers and support staff to cover the convention. Some of the experts and engineers we hired are regular writers for this magazine, others are those with previous experience in reviewing technology for *Broadcast Engineering*.

This special NAB Replay package of coverage encompasses several hundred booth and staff visits during the show, hundreds of new product releases and more man-hours that I can calculate. One result is that we've ended up with way more content than space to present it here.

Web exclusive. Because space constraints made it necessary to limit what we could present from our writers, what you see here is just a good start. But wait, there's more.

We've repackaged each reporter's copy in its full length for Web presentation. To see the full-length articles, just go to the magazine Web site, www.broadcastengineering.com. I'd like to thank our reporters and judges for all their hard work (see the list at the end of this article).

Meanwhile, don't miss this year's Pick Hits. The top 40 products and technologies shown at this year's show — all selected by readers like you.

In addition, we've got hundreds of new products just a page turn away,

so what are you waiting for? Read on!

NAB Replay contributors and judges

Craig Birkmaier
Steven Blumenfeld
Jim Boston
Philip J. Cianci
David Danto
Tim Davis
John Luff
C. Jason Mancebo
Don Markley
Tom Patrick McAuliffe
Brian Murray
Garry M. Paxinos
Dan Stark
Bob Turner
Richard Wood

GET CONNECTED

WITH OUR COMPLETE LINE OF SIGNAL MANAGEMENT SYSTEMS

Regardless of whether your facility is large or small, new or old, digital or analog, we can provide a signal management system to address your current and your future needs. High performance routing switchers from 16x16 to 2048x2048, cost effective multi channel master control switchers, and flexible control systems that seamlessly integrate it all. Get connected and stay connected with NVISION.



Large Video and Audio Routers



Flexible Router Control Systems



Compact Multi Format Routers



Multi Channel Master Control

NVISION[®]

Masters in Digital Audio, Pioneers in HDTV



www.nvision1.com

Frezzi[®]

ENERGY SYSTEMS

**The World Standard for Craftsmanship
in Portable Power and Lighting**



**Frezzi 200W HMI
Super-Sun Sun**



**2000 Emmy
Award Winner**



**Frezzi Light Kit
Model MFKIC-XL1**



**Frezzi Dimmer Mini-F ■
& Camera powered by
BP-14-EG Hi-Energy Battery**



**Frezzi's Micro-Fills
Dimmer / on-off HMI's**



**Frezzi HMI Mini-Sun Guns
15W, 25W & 50W**



**Frezzi M210CA Advanced
Battery Management System**

***Frezzi's award
winning
performance,
for all your
Power & Lighting needs***



**Frezzi Energy Systems
5 Valley Street
Hawthorne, NJ 07506 USA
Tel: 973-427-1160 Fax: 973-427-0934
<http://www.frezzi.com>**

*Frezzi products are used by virtually
every major network, cable news / sports
channels and professional's
worldwide for ENG/EFP.*

*Image quality perfection begins with
Frezzi Power & Lighting*

NAB2004 PICK HITS

By Don Keller

(alphabetically by manufacturer)

Apple Final Cut Pro HD NLE software

408-996-1010; www.apple.com

Apple's newest version of its Emmy-award-winning editing software plants a step firmly in the high-definition realm and ably straddles the gap between HD and SD; captures DVCPRO HD footage directly over an IEEE 1394 (FireWire) connector; supports several HD and SD formats.



Electronic Visuals

PenPalHD signal generator

+44 1483 771663; www.electronic-visuals.com

This mighty midget is a pen-sized HD test-signal generator that generates serial digital signals in 18 formats in 1080i, 1080p, 1080sF, 1035i and 720p; 26 video test patterns; four stereo pairs of AES embedded audio; operates from battery or mains power.



Barco iPresent video monitor wall

+32 56 368211; www.barcocontrolrooms.com




Create a large, bright, high-quality, on-stage video wall using an array of several rear-projection modules; hardware controller supports dynamic moving, scaling and cropping of image windows; iPresent software supports smooth image transitions between modules and provides several graphical effects.

Belden Brilliance DigiTruck 179DT coaxial cable

847-590-1110; www.belden.com

This lightweight, compact coaxial cable is specifically designed for mobile television broadcast trucks where equipment load weight is a prime concern and space is scarce; weighs 60 percent less and requires up to 40 percent less space than standard mini-RG-59/U cable.



Canopus EDIUS HD NLE package

408-954-4500; www.canopus.com



This real-time HD NLE combines the company's HDRX-E1 HD-SDI input/output card, its HD software codec and its EDIUS Pro software to create a professional editing and content-creation solution; supports recording and playback to HD-D5, HDCAM and DVCPRO HD VTRs.

Chyron HyperX CG

631-845-2000; www.chyron.com

A high-speed bus architecture and advanced 3-D rendering engine give this HD/SD CG exceptional power and performance; can be configured as SD- or HD-only CG, or can output SD and HD simultaneously; can output real-time HD for sports or entertainment environments.



Exavio ExaMax MS platform

408-213-5500; www.exavio.com



This solid-state server acts independently of any attached online disk storage, allowing storage networks to scale throughput in real time, support multiseat uncompressed HD production, and link and share different files across dissimilar operating platforms without slowing down the network.

Horita Pocket PA wireless logging system

949-489-0240; www.horita.com

This system combines an off-the-shelf pocket PC with built-in Bluetooth wireless technology with the company's PDA-LOG program and its LTC-BLUETOOTH wireless transmitter; wirelessly allows the PA to capture time-code numbers and jot down notes associated with those codes.



Hughes SPACEWAY satellite system

301-428-5500; www.hns.com



This new broadband IP platform employs digital processing, packet switching and spot-beam technology, and offers peer-to-peer communications and on-demand bandwidth; allows SNG field crews continual access to voice and data applications independent of video transmission.

Jadoo NAB^{II} fuel cell

888-523-6648; www.jadoopower.com

If George Jetson were a videographer, this is what he'd use to power his camera; two-pound, hydrogen-fuel cartridge weighs about one-third as much as a standard battery brick, yet lasts three times longer; system consists of a power converter, a fuel cartridge and a refill station.



PICK HIT
BroadcastEngineering
2004

JVC DM-JV600 HD MPEG-2 encoder

973-317-5000; www.jvc.com/pro

This new encoder reduces a station's HD microwave- and satellite-link payloads to existing SD levels; allows broadcasters with remote facilities to perform HD ENG and EFP with their existing news vans and helicopters, and go straight to air with HD.



Modulus Video AVE-HD encoder

408-245-2150; www.modulusvideo.com

This encoder takes advantage of the new MPEG-4-AVC video compression standard, compressing HD signals up to full 1920x1080 resolution at 60i and encapsulating them in an MPEG-2 transport stream; can carry two to three times more channels over the same carrier.



JVC KH-F870U HD CMOS camera

973-317-5000; www.jvc.com/pro



JVC's newest box-style camera uses three 2/3-inch CMOS imaging chips and is switchable between 1900x1080i and 720p/60 HD video; the CMOS chips reduce power consumption to about one-fifth that of a comparable CCD-based HD camera; CMOS chips also avoid skew lag.

NuComm CamPac camera transmitter

908-852-3700; www.nucomm.com



This miniature transmitter mounts on professional cameras using a standard Anton/Bauer battery clip or Sony V clip; uses MPEG-2 encoding and COFDM to transmit the camera's audio and video signals over 2- and 6/7GHz channels; power consumption is 12W.

Leitch Digital Turnaround Processor

800-231-9673; www.leitch.com

This MPEG-2 stream manipulation device allows broadcasters to overlay graphics/logos on precompressed HD and SD streams; allows remotely encoded DTV signal to be localized with such applications as logo overlays, time/temperature, stock information, and local weather and news.



Panasonic AJ-HD1200A DVCPRO HD VTR

800-528-8601; www.panasonic.com

This portable AC/DC-powered deck is designed for HD studio/field production and nonlinear editing; offers an IEEE 1394 interface operating at 100Mb/s for HD video streams; plays all SD DVCPRO formats as well as DVCPRO HD and can downconvert HD to SD.



Leitch Velocity HD NLE system

800-231-9673; www.leitch.com



This HD NLE system comprises the company's new Altitude PC card and an enhanced version of its Velocity software; the system features full-quality HD playback of two video streams, two dynamic graphic streams, and dual-stream, real-time HD transitions and effects.

Panasonic AJ-SD93 SD feeder VTR

800-528-8601; www.panasonic.com




This multiformat, SD digital VTR has an IEEE 1394 interface to facilitate 4:2:2 video transfers to nonlinear editing systems; records up to 184 minutes of DVCPRO video or 92 minutes of DVCPRO50; plays back DV and DVCAM tapes.

Miranda XVP 801i HD/SD universal processor

514-333-1772; www.miranda.com

This interface card offers high-quality up-, down- and crossconversion, providing relief from multiple SD and HD formats; also offers HD/SD signal processing, frame synchronization and 16-channel audio processing; accepts and simultaneously outputs SD and HD.



Pinnacle Liquid HD NLE software

650-526-1600; www.pinnaclesys.com

Pinnacle's newest version of its Liquid NLE software now supports real-time, multistream HD editing; offers users the option to work with the bandwidth-efficient HDV format, low-bandwidth Pinnacle HD Elite or uncompressed HD SDI, all on standard PC workstations.



NAB2004 PICK HITS

Quantel QEdit Pro NLE software

+44 1635 48222; www.quantel.com



This news/sports editing software package is designed to run on a standard PC and dramatically lowers the cost per seat of editing; performs wipes and dissolves; Version 2 features sophisticated custom transitions; provides direct local ingest into the workstation.

Ross Video OverDrive production control system

613-652-4886; www.rossvideo.com

This control and automation software allows one person to perform the production functions of three or more staff; interfaces with and drives selected switchers, robotic cameras, VTRs, CGs and other devices; GUI lets user build rundowns and events and allows manual intervention.



Sencore DTU 225-SX USB-to-ASI adaptor

800-736-2673; www.sencore.com




This portable adaptor allows user to record, monitor and analyze an MPEG-2 transport stream through a laptop PC; high-speed input can be used for both DVB/ASI and SDI signals; operates directly from USB port without additional power supply.

Shining Technology CitiDISK DV portable DV-capture device

714-761-9598; www.shining.com

This portable, self-powered hard drive connects to a DV source through its firewire connector and captures and stores the video in a choice of file formats (.mov, .avi, .dv, etc.); eliminates time-consuming step of transferring DV footage into a NLE system.



Snell & Wilcox Comet open standards ingest system

+44 20 8917 4330; www.snellwilcox.com




Comet takes advantage of open data-exchange standards such as the MXF SMPTE RP-210 metadata dictionary as well as the latest AAF edit protocol, allowing the broadcaster to create multivendor systems with complete interoperability; intuitive user interface allows simple and robust operation.

Snell & Wilcox MXF Express software development kit

+44 20 8917 4330; www.snellwilcox.com

MXF Express is a free, comprehensive software development kit that supports OP1a, OP-Atom, MPEG, DV, BWAV and AES profiles; includes C++ libraries to add MXF awareness to products, Directshow filters to help create MXF players and writers, and sample MXF files.



Sony Anycast Station portable live-production studio

800-686-7669; www.sony.com/professional

This live-content-creation system, roughly the size of a laptop carrying case, combines a six-input video switcher, a six-channel audio mixer, an F/X generator, a preview/program video monitor, a pan/tilt/zoom remote control for Sony VISCA robotic cameras, an RGB output, and an encoder and server.



Sony HDW-S280 HDCAM VTR

800-686-7669; www.sony.com/professional

This compact, 12-pound, half-rack-space HDCAM VTR can switch between 1080i/59.94 and 1080i/50; built-in downconverter allows it to play back Betacam SX, Betacam SP and standard Betacam; control panel includes LCD monitor; can be powered by AC as well as 12VDC battery power.

Sony Vegas 5.0 NLE software

800-686-7669;
www.sony.com/professional



Sony's latest version of Vegas includes 3-D track motion and compositing, key-frameable Bezier masks, network rendering, transition-progress envelopes, subtitle/text export to DVD Architect software, Flash .swf import, and much more.

TANDBERG Television Intelligent Compression Engine (ICE) encoder card

407-380-7055;
www.tandbergtv.com

The ICE card, which is included in the company's EN5930 encoder and can be used in the EN5710, allows encoders to perform MPEG-4 part 10 or Windows Media 9 Series video encoding; users can switch between these two codecs with a simple software change.



TDK Blue Laser Disc for XDCAM

516-535-2818; www.tdk.com



TDK's foray into XDCAM media may help drive down the cost of these optical discs; the company's 23.3GB discs accommodate the 405nm laser wavelength and high-numerical-aperture (0.85) lenses used in Sony's Professional Optical Disc (XDCAM) camcorders and decks.

Tektronix WFMNLE waveform-monitoring software for Avid NLE

800-835-9433; www.tektronix.com

This software plug-in allows users to monitor the video quality of Avid Media Composer Adrenaline, Avid Xpress Pro, Media Composer and Symphony nonlinear editing and finishing systems; a nonintrusive tool to verify signal and picture quality.



Telecast Fiber Systems Mamba fiber-optic patchbays and converters

508-754-4858; www.telecast-fiber.com



Originally developed to help mobile production trucks save cable weight and congestion, this family of fiber-optic patchbays and converters has grown into a complete facility solution; especially useful for HD facilities that require the high bandwidth provided by optical cable and infrastructure.

Thales ADAPT IV exciter

413-998-1100; www.thales-bm.com

This exciter provides linear and nonlinear correction capabilities in a small, powerful hardware platform; combines key features of the company's previous exciters, such as Digital Adaptive Precorrection, with an improved local user interface and enhanced correction capabilities.



Thomson Grass Valley Triax repeater

415-558-0200; www.thomsongrassvalley.com



This repeater/line amplifier increases the maximum distance you can send SD and HD camera signals over triax cable from 3300 feet (1000 meters) up to 6600 feet (2000 meters), effectively doubling the maximum usable cable length with no significant loss of signal quality.

Thomson Grass Valley LDK 6200 HD Super SloMo camera

415-558-0200; www.thomsongrassvalley.com



This camera brings slow motion to HD by providing replays and super-slow-motion effects in native HD formats; supports switchable, multi-format and multi-frame-rate capabilities, including native image capture in 1080i and 720p formats; uses 12-bit A/D conversion.

Triveni Digital and Terayon Communication Systems ANDES-HD distribution system

609-716-3500; www.3veni.com

408-235-5500; www.terayon.com

The Advanced Network Distribution Enhancement System is a highly integrated, multifunctional HDTV broadcast distribution system that enables networks and affiliates to switch seamlessly between national and local digital feeds and brand programming with logos and program-guide data.



Videotek DL-850HD serial digital legalizer

610-327-2292; www.videotek.com




This device brings color correction, signal equalization and legalization to the HD realm; its auto-format-detect input accepts most SMPTE 292M formats and outputs in the same format; legalizes HD SDI to HD/SD color space and/or encoded (NTSC or PAL) composite color space.

VTG NetCAD design tool


800-325-0266; www.vtgcop.com

This is a free, online, end-to-end design and pricing tool for clients who need audio and video interfacing and cable equipment for their custom installations; it uses a drag-and-drop interface to link the client to a complete library of all the products offered by VTG's two daughter companies.



Wohler MON8-1 LCD monitor array

888-596-4537; www.wohler.com



This 1RU array contains a row of eight 1.8-inch LCD monitors, ideal for quick confidence checks of multiple channels. Each monitor has one composite video input and one composite loopthrough output connector; NTSC and PAL auto-sensing; internal AC power transformer.



P2 STUDIO RECORDER

Panasonic AJ-SPD850

201-392-4127;

www.panasonic.com/broadcast

Real-time baseband video/audio recording and editing; five 4GB P2 card slots provide 80 minutes of recording in 25Mb/s DVCPRO or 40 minutes in 50Mb/s DVCPRO50; shuttle at 100x speed in forward, reverse, fast forward and fast rewind with full-color images. ■

QUARTZ-TUNGSTEN DIMMER LIGHT

Frezzi MFIC-PTS

800-345-1030; www.frezzi.com

Fifty percent increase in output; advanced pulse width modulator conserves power and minimizes color change; advanced noise filtering; new fuseless reverse polarity protection and robust potentiometer. ■

LIGHTWEIGHT CAMCORDER

Panasonic AJ-SDC615

201-392-4127;

www.panasonic.com/broadcast

16:9/4:3 switchable; IEEE 1394 interface and three 520,000-pixel, 2/3-inch CCDs; transfers digital component video to a laptop NLE in the field; sensitivity of F13 at 2000 lux; low-light shooting down to 0.1 lux; 12-bit A/D DSP circuitry; records up to 66 minutes. ■



SLO-MO EFFECTS

Quantel eQ/ARRI Tornado

212-944-6820; www.quantel.com

Using NAC fxCam digital HD camera capturing images at 1000fps, new eQ software provides high-speed digital image capture for ultra-slo-mo shots; HD-RGB or existing HD-YUV signal handling. ■

MPEG TRANSMISSION

Axon MStream

408-450-7973; www.axon.tv

Provides high-quality video transmission over digital networks; real-time video streaming and non-real-time store-and-forward applications over IP, standard T1 or E1 telephone circuits, or ATM networks. ■

New Tools

Digital audio

BY TOM PATRICK MCAULIFFE

From portable digital recorders and surround sound for video to DVD-audio, new mics, digital audio mixers and other audio tools, this year's show had it all. Approximately 500 audio companies had their new and established tools ready for all to see. NAB claimed that attendance was higher than last year, and the aisles seemed barren. But this year's show seemed even more ho-hum than last year. With the economy still in a slump and new digital technology for television coming over the hill, more than one vendor indicated they thought attendees were waiting to upgrade audio because of bigger issues (although none wanted to go on the record). That may be, but more American consumers are hooking up their TVs and VCRs to stereos and surround systems than ever before.

Broadcasters' attitudes are peculiar. Consumer demand for better audio has never been higher. The 5.1 surround-sound units are among the most popular home additions, according to the Consumer Electronics Association. Consumers are favoring 5.1 audio playback systems even more than HDTV, so making sure programming content is surround-ready seems like a safe bet. It was a bit perplexing then to learn that both exhibitors and attendees agreed that purchasing plans did not include audio this year. Perhaps with the digital transition upon us, broadcasters have put audio on the back burner.

Be that as it may, there were lots of new products (and refinements of existing technologies, such as MXF and MPEG-4) for audio at this year's show. There were also lots of educational opportunities. For example, in three seminars, audio expert John Travis showed attendees how to use Digidesign's

ProTools software for advanced dialogue- and ambience-sound editing, noise reduction, and 5.1/7.1 surround sound. There was also a new "Sound Operators Workshop" area, where anyone could take dry audio sources and learn proper EQ and mixing techniques from on-hand experts.

All the educational opportunities were almost enough to make one forget that the NAB gear-fest is where broadcasters come to try out and purchase new equipment. Space doesn't allow us to cover all of the new products being shown, but here are some representative highlights.


SRS showed a 6.1-channel matrix surround encoder for Digidesign's



At this year's NAB, broadcasters seemed to have put audio on the back burner, but consumer demand for better audio is higher than ever.

new 6.4 ProTools software, allowing users to not only encode up to 6.1 channels of audio, but also to precisely monitor what the audience will hear through a real-time decoder built into the software.

One of the most interesting displays was put on by Dolby Laboratories. It showcased its new Dolby Digital Plus technology, which is part of the Enhanced AC-3 standard. Expanding Dolby's noise reduction capability, the new standard is designed to meet the

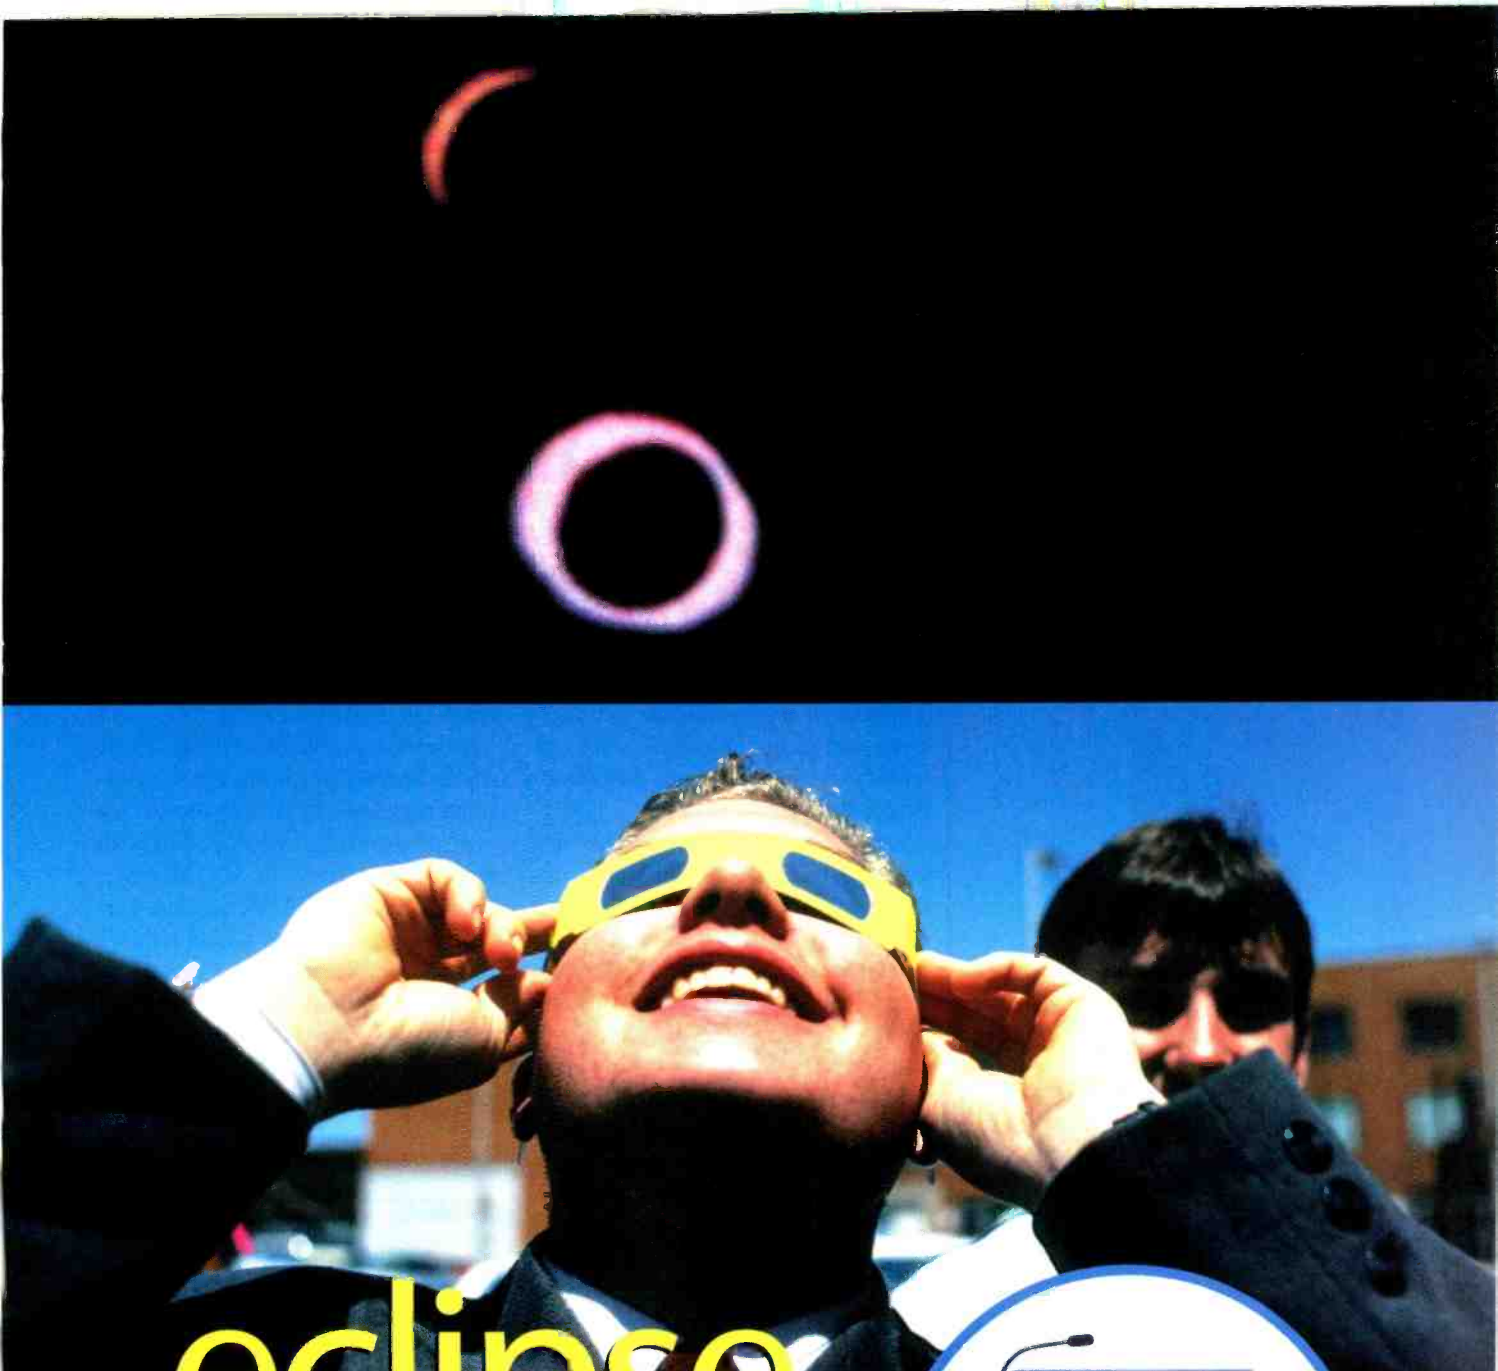

eclipse

**A new generation of intercoms that
just made your life a whole lot easier!**

Introducing the advanced digital matrix intercom
that offers up to 208 communications ports in 6RU —
the highest port density of any existing system — PLUS
intelligent linking; expandable system architecture;
modular, configurable stations; and powerful, transparent interfacing.



www.clearcom.com



Clear-Com
COMMUNICATION SYSTEMS

PRODUCT JACKPOT



CHARACTER GENERATOR

Inscriber Inca titleOne

800-363-3400; www.inscriber.com

Provides render-free 2-D effects, including page-wipes, pushes, dissolves, rolls and crawls; includes serial digital key and fill I/O with bypass and analog preview; supports MOS protocol and integration with ENPS and iNews. ■



ENG TRIPOD

Miller SOLO VJ

973-857-8300; +44 1243 555 255;

www.millertripods.com

100mm tripod is designed for 10- to 40-pound camcorders, with 74-inch maximum height; three-position leg angle locks take it down to 8.7 inches and eliminate the need for a ground spreader; tubes do not rotate when tightened, so users don't have to tighten from the top down. ■

New Tools

four main qualifications of a next-generation broadcast audio codec: spectrum efficiency, cost savings, backward compatibility, and compatibility with future audio and video formats. Ac-

rack-mounted audio monitor and converter with dual SDI inputs and standard BNC connections. It can accept either HD-SDI or SD-SDI. This unit isn't just an audio monitor; it

The American viewing public will no longer sit still for poor audio.

cording to the company, the technology is less complex and requires fewer changes to the existing broadcast infrastructure than other codecs, making it more economical. As usual, Dolby offered numerous other new-technology demonstrations as well.

Sound Devices came to NAB2004 with a broad line of field audio production mixers, line amps, recorders and accessories. The new 722 and 744T portable audio recorders showcased file-based audio acquisition recording to two recording media: a hard drive and/or a Compact Flash card. Meanwhile, the 302 field mixer's light weight, extensive control and good audio performance was a hit, especially with the ENG crowd.

Wohler Technologies showed its new AMP2-S8MDA, a multichannel

also provides powerful demuxing capabilities with eight channels of analog, as well as AES audio out directly from the dual SDI inputs.

For audio professionals who didn't make the show, NAB was a missed opportunity. 2004 is turning out to be a year of significant change, both for audio production and TV. Not only is the transition to DTV accelerating, the change to digital audio acquisition is complete, and the American viewing public will no longer sit still for poor audio. From educational seminars and expert panel discussions to the latest in production and TV audio products, digital audio has never sounded better. BE

Tom Patrick McAuliffe is a journalist, entertainer and a contributing writer with Video Systems magazine.

LCD Scope...

NEW

World's First!



HD/SDI
SD/SDI
Patents Apply

HD and SD waveform, vectors and audio monitoring using proprietary and Patented processing.

A CRT replacement technology product!

IT'S ALL YOU EVER WANTED!

Covers ALL HD, SD, SDI standards, CAV, Composite and YC, with embedded and analog audio included. SDI, DV and analog units available.

Made to measure. Irresistibly priced.

You can Exceed your Expectations


TEL: (949) 916-1070 TOLLFREE: 866-4-HAMLET E-Mail: sales@hamlet.us.com
Web site: www.hamlet.us.com

UK Tel: +44 (0) 1494 729 728 Freephone (UK): 0500 625 525 E-Mail: sales@hamlet.co.uk
Web site: www.hamlet.co.uk

HAMLET
EXCELLENCE IN VISION

A Simple Solution For Wardrobe Malfunctions

*HD/SD Audio
Video Delay*

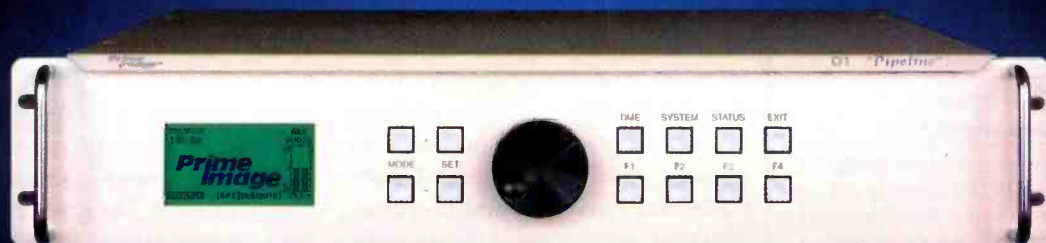

The D1 Pipeline Delay

Live broadcasts are full of surprises. Some are welcomed, some aren't. Put an end to the unwanted shocking language, actions and wardrobe malfunctions that can plague some live events with Prime Image's popular Pipeline delay device.

With Pipeline, delaying audio and video for up to 10 seconds is as easy as pushing a button. Delaying everything for as long as an additional 20 seconds is also an option.

The D1 Pipeline is Prime Image's popular Pipeline audio/video delay device, but with a serial digital interface. D1 Pipeline features 10-bit video processing with a primary as well as an auxiliary/alternate video input. Audio processing is 24-bit, with four channels in and out; select AES/EBU, digital or analog. Four auxiliary/alternate audio channels (also AES/EBU, digital analog) can be switched with, or independent of, auxiliary video.

All that, in a rack-mounted unit just 2U high.

D1 Pipeline. It's about time — delaying it, utilizing the latest video technology.

*HD/SD Standards
Converters*

*HD/SD
Time Machine*

HD/SD Trimmer

*HD/SD Time Base
Correctors/
Synchronizers*

**Prime
Image®**

The Digital Video People

Tel (408) 867-6519 • Fax (408) 926-7294
www.primeimageinc.com

HD SERVER ENHANCEMENTS

Omneon SPECTRUM

408-585-5000;

www.omneon.com

Supports multiple HD formats, including DVCPRO HD, HD MPEG and HDCAM; scalable open architecture design allows addition of storage channels. ■



COMPRESSION PLATFORM

Scopus UE-9000 encoder

609-987-8090; www.scopus.net

Provides upgradeable modules for MPEG-2 to MPEG-4 or WM9; provides 50 percent improvement in bit rate; supported by Scopus IVN system architecture. ■



HD CLIP SERVER

Chyron Clyps HD

631-845-2000; www.chyron.com

Graphics environment features built-in keyer and up to 1.3TB of storage equaling 180 minutes of lower-third animations or 60 minutes of full-frame video; features include loop, pause, hold last frame, go to black, cue and hold first frame; three stereo AES/EBU digital audio I/O. ■

SURROUND SOUND SYSTEM

Harris NeuStar DTV

513-459-3400; www.broadcast.harris.com

Transports audio over the existing stereo backbone and automatically converts it to surround sound at the receiver; system uses proprietary Neural technology to reduce artifacts in compressed data formats, allowing bandwidth savings of up to 30 percent. ■



HD PREPROCESSOR

Snell & Wilcox Prefix-HD

800-827-4544; www.snellwilcox.com

Multistandard HD compression preprocessor; reduces noise-related artifacts in HD video, including film grain and video noise; offers linear filtering, color gamut legalizer and 4:4:4 internal processing; supports AES, AC-3 and Dolby E audio; provides advanced metadata handling and insertion, including flagging cuts and 3:2 cadences. ■

New Tools

Automation

BY JIM BOSTON

This year's NAB demonstrated that a number of trends would continue developing well into the future. HD and the need to develop new business models for the future are leading broadcasters to rethink how they do business. New business models usually mean new workflows and processes. This puts automation at the epicenter of change in terrestrial broadcasting.

A common theme in automation this year was commoditization. You can expect to see the cost of automation systems drop. Vendors report fewer requests for product demonstrations, but more for workflow discussions. Broadcasters view automation no longer as a suite of software applications that automates a few tedious tasks, but rather as a system that streamlines the workflow process. Automation is shifting from device control to managing content storage and playout. Indeed, a number of vendors now combine automation and video-server functionality in a single system. More devices can now be controlled through LANs, and IP to serial conversion boxes is becoming more widely available to serve legacy devices. These factors are allowing MPEG encoding and decoding to take the place of real estate that used to be used for the serial ports.

Today, broadcasters have a growing need for and interest in tight asset management. Customers and vendors now view asset management as an inherent aspect of an automation system. The automation system only touches the assets throughout the process, so it is logical that it should handle asset management.

As the tentacles of automation reach further across the entire broadcast enterprise, automation systems are talking an ever-broader array of pro-

ocols and using more IT tools. Today's automation topology generally consists of an application layer that interfaces to client stations and external systems that sit above it. The application layer then communicates to a data- and device-control layer below it. Interfaces to external systems not traditionally controlled are tending toward open-standards-based approaches, such as Web services, SOAP, XML, MOS (protocol using XML) and SNMP. A number of vendors point to the Microsoft .Net framework as a good development tool. These methods enable rapid API development and easy extension as needs change. Most software development tools include SDKs that can be used to support rapid development.


Over the years, automation vendors have offered systems running on real-time OS kernels outside the Microsoft and Unix realms. Today, there are systems available running Linux and at least one vendor with a system running on its own proprietary OS.



Vendors at NAB reported fewer requests for product demonstrations, but more for workflow discussions at their booths.

18X

Everyone's waiting to see it.

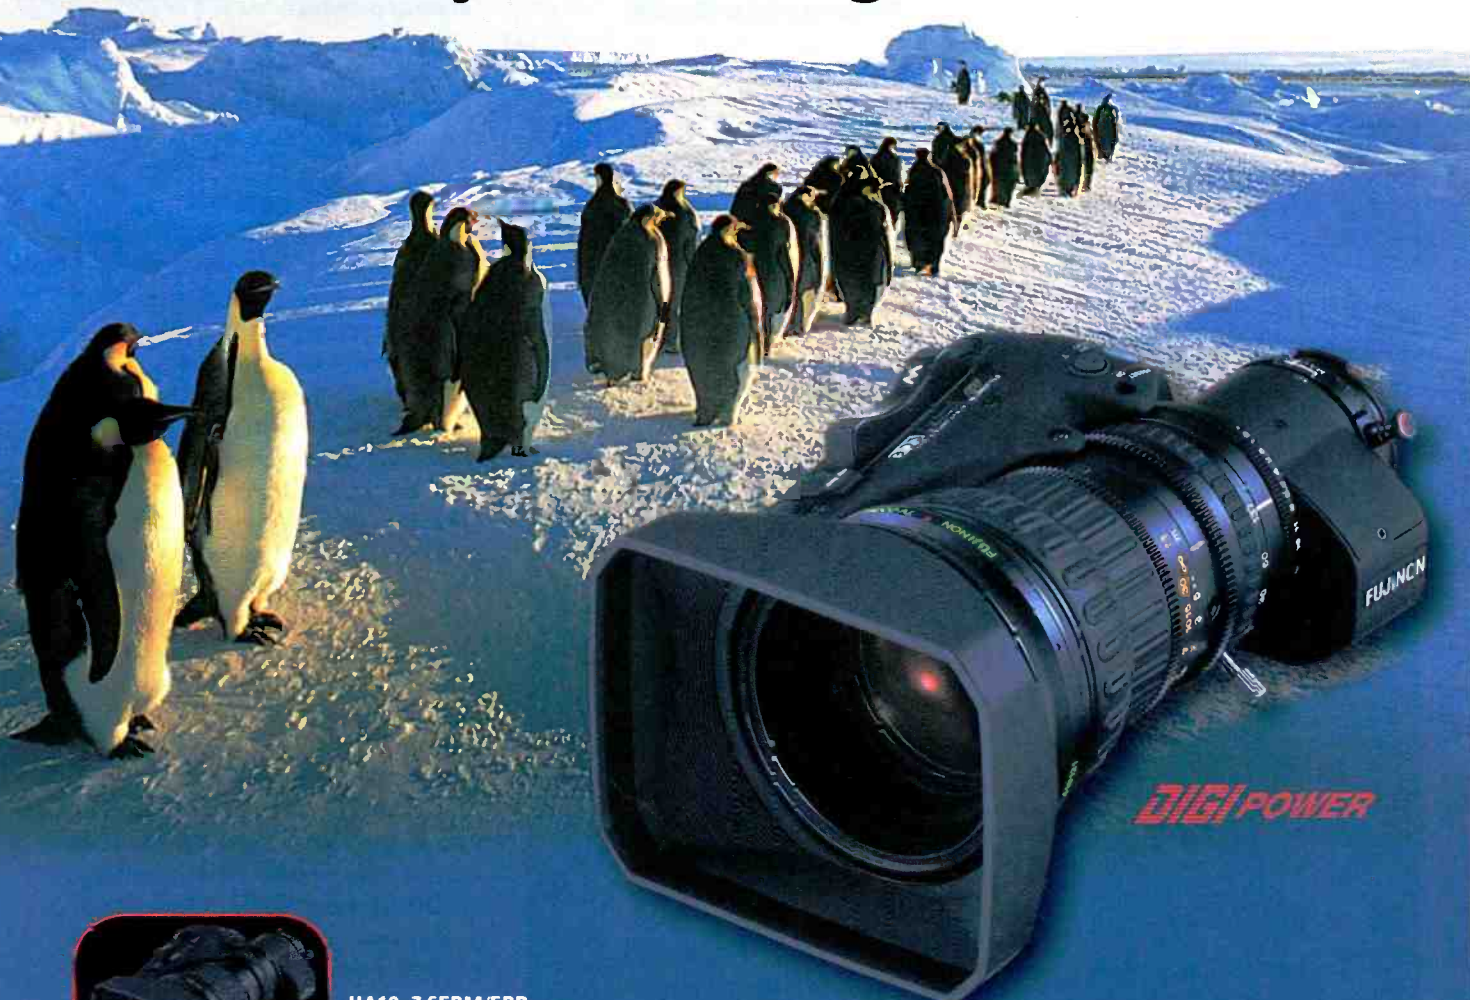

DIGIPOWER



HA18x7.EERM/ERD
High Definition



A18x7.6EFM/ERD
Standard Definition



HAs18x7.6BMD
Motor Drive

Features vary with model.

ONLY FROM FUJINON!

- 18X Standard Zoom Range
- Longest and Widest Standard Lens
- DigiPower Servo
- User-Programmable Functions
- Remote Control

FUJINON

Broadcast and Communications Products Division

FUJINON INC. 10 High Point Dr., Wayne, NJ 07470-7434 Phone: (973) 633-5300, FAX: (973) 633-5216
FUJI PHOTO OPTICAL CO., LTD. 1-324 Uetake, Atsuta-Ku, Saitama City, Saitama 331-9624 Japan Phone: 81-48-668-2152

www.fujinon.com

PRODUCT JACKPOT

PROGRAM RECEIVER

Scientific-Atlanta PowerVu D9850
770-236-5000; www.sciatl.com

Provides digital transmission for cable headends; 1RU height; 10Mb/s standard and 50Mb/s optional data output with Ethernet port; supports IP services; downloads files to servers; SDI output with embedded audio; ASI input for remote unlink monitoring. ■

Automation at NAB2004

Archive interfaces

Blueline Technology unveiled

New Tools

JustArchive, an interface between automation and DVD or tape archive. It runs on Unix, Linux or Windows operating systems.

Crispin introduced Near-line Archive, which allows users to extend the storage of their video servers using inexpensive disk arrays.

Asset management

Crispin has unveiled AssetBase, which provides catch-server management. This Web-enabled application allows catch servers to be treated as video servers in their system.

Sundance showed an upgraded version of Seeker that runs on Microsoft SQL. It automatically creates an indexed proxy anytime any other application touches a video asset.

Encoda introduced Broadcast Master, which integrates traffic and automation layers under a single system, combining customer-relationship-management, sales and asset-management tools.

Centralcasting

Florical introduced MediaTrans Plus, which provides an economical delivery of video/audio signals between locations using MPEG-4 technology.

Sundance introduced Sentinel, an SNMP monitoring package.

Device servers

Digital Transaction Group, the former engineering and support team from Odetics Broadcast, introduced AIRO XDS, a device-control server that controls up to 64 devices and can scale up to any number of channels and devices with an unlimited number of devices per device pool. The XDS server manages the devices, resources, state and history.

Ingest

Harris Digital Ingest now allows the ingest of media and metadata of Pathfire syndication and promotional

Zandar

TECHNOLOGIES

THINK MULTIVIEWER, THINK ZANDAR

Zandar offer a wide range of proven MultiViewer solutions, with numerous input formats, output display resolutions, and control options.

Think Zandar for:

- Command & Control
- Master Control Rooms
- Broadcast multi-video & audio monitoring
- AV Presentations
- Video-conferencing
- Mosaic & Interactive Channels
- Security & Surveillance



IRELAND:
TrioTech House, Abbey Road,
Deansgrange, Co. Dublin, Ireland.
Tel: +353 1 280 8945
Fax: +353 1 280 8956
E-mail: sales@zandar.com

USA:
1970 E. Osceola Parkway, No. 330,
Kissimmee, FL 34743, USA.
Tel: 321 937 0457
Fax: 321 939 0458
E-mail: advancedms@msn.com

www.zandar.com

**Visit Us at InfoComm, June 9-11, Booth #3795
or
Broadcast Asia, June 15-18, Booth #2G2-7**



total commitment



to broadcast

Different applications require different solutions. Most manufacturers' limited awareness of this fact just creates problems.

Calrec solves them.

Whatever your requirements, Calrec have a solution available right now.

Specialists in broadcast console design for over 30 years, Calrec provide all the broadcast features your programme needs, now and in the future.

Calrec's unique family of digital production consoles all share the same high levels of resilience, all have hot-swappable cards and panels and all operate independently of the on-board PC.

In short, all Calrec consoles share the same comprehensive broadcast specifications essential for live to air production. It's no wonder they have the finest reputation for quality and reliability.

Calrec, Total commitment, total solution.

Calrec Digital Broadcast Console Users:

- Clear Channel
- CNBC
- KJRH Ch 2 Tulsa
- KN5D-TV Ch 39 San Diego
- KXAS-TV Ch 41 Dallas
- KXTX-TV Ch 39 Dallas
- Maryland Public Television
- NBC Olympics
- NBC Television Network
- NEP Supershooters, Inc.
- Trio Video
- Univision Network
- WTVJ Ch 6 Florida
- WWTM-TV Ch.13 Birmingham
- WXYZ Ch 7 Detroit

- Powerful, flexible feature set to meet all programme needs
- Embedded control system allowing for power-up and operation without the PC

- Automatic redundant DSP control processor and PSU systems
- High input headroom, excellent audio performance

- Hot-swap cards and modules throughout – ALL cards and panels are removable and insertable under power
- Full system reboot in less than 20 seconds

CALREC AUDIO LTD, NUTTELOUGH MILL, HEBDEN BRIDGE, WEST YORKSHIRE, HX7 8EZ, UK TEL: 01144 1422 842159 EMAIL: enquiries@calrec.com WEB: www.calrec.com

South and Mid West States - TEL: (615) 871 0094 EMAIL: erijc@redwoodweb.com

North East States and Canada - TEL: (212) 586 7376 EMAIL: dsimon@studioconsultants.com

Western States - TEL: (818) 841 3000 EMAIL: jschallier@audiospec.com

PRODUCT JACKPOT



HD CROSSCONVERTER

Evertz 7710XC-HD

905-335-3700; www.evertz.com

Uses 10-bit processing, one reclocked HD serial output and two reformatted HD serial digital outputs; accepts two groups of SMPTE 292M embedded audio signals and re-embeds them into the output HD video; fully SMPTE 292M compliant; full proc control, including color correction, black level, luma level, chroma level and optional audio level. ■

AUDIO ANALYZER

Rohde & Schwarz UVP

888-837-8772; www.rsa.rohde-schwarz.com

Digital audio interfaces up to a 192kHz sampling rate; features expanded measurement bandwidths; can perform several measurement functions simultaneously. ■

New Tools

content. The Invenio Starter Pack allows users to create and store proxies of WM9 content ingested into broadcast servers.

Sundance has also introduced a product that manages the transfer of new media out of Pathfire's cache server to other servers.

Last-minute changes

Crispin's PSIP software and Linx Electronics' TVLinx can communicate with one another, allowing real-time updating of PSIP tables based on last-minute changes at master control.

Floral announced Automated Join In Progress, which automatically calculates the necessary timelines for a join-in-progress to a program following a live event that runs long. Operators can drag and drop commercials to

be aired into the schedule, and the application automatically recalculates the timelines to compensate by reducing program content to be aired.


Pro-Bel introduced Morpheus Velocity. Velocity is a client application of the Morpheus automation backbone that was introduced last year at IBC. Velocity allows breaks in live events to be changed by drag-and-drop operations at the last second.

Logging

Floral introduced AirLogger, which automates off-air logging and review by automatically creating off-air recordings on long-term storage media.

Media prep

Sundance introduced a revamped version of its Media Prep input mod-

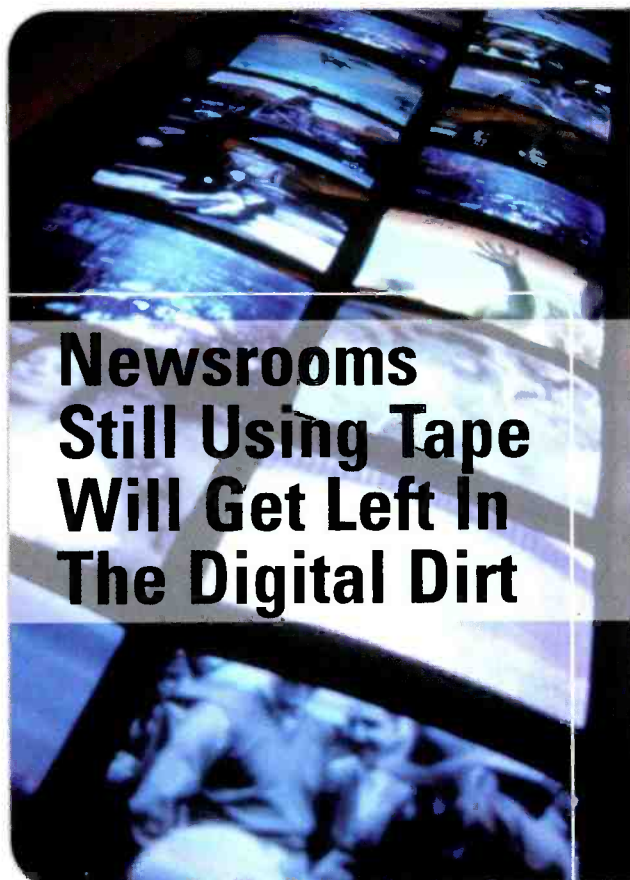

**Newsrooms
Still Using Tape
Will Get Left In
The Digital Dirt**

**New Open-Architecture
Design Provides First
Affordable, All Digital
Tapeless Newsroom**



Ingest

- Full-Featured Ingest/Edit/Playback End-to-End Solution

- Instant Access to Hundreds of Hours of DV and MPEG Networked Storage

Edit

- Automated Ingest of SAT Feeds and Faster than Real-Time Batch Digitizing

Produce

- Low-Resolution, Frame Accurate Proxy Editing Running Inside Newsroom Automation Software

Playback

- DV Studio Pro Editor with Real-Time Effects and No Transcoding
- Fully MOS and VDCP Compliant for Broadcast Environments



VIDEO
TECHNICS
INC.

CIPRICO
Accelerating the Digital Media Workflow™

magix
Digital Video Solutions™

Adobe

www.newsflow.tv

Teeing Up For Perfect Audio



Standing from left:
Steve Specht (Audio Operator),
Chuck Jones (Maintenance Engineer),
Jim McCabe (Audio Operator).
Seated: Dermick Beauregard (Audio Operator).

Performance shines as The Golf Channel chooses the SSL C100 Digital Broadcast Console

"It's the inherent design functionality that makes the SSL C100 the console of choice for The Golf Channel," states VP of Network Operations Andy Murphy. "The maximizing of console power in a compact space, while retaining the intuitive logic of one-knob-one-function control operation in a console with multiple layers is truly remarkable. Combine this engineering feat with SSL's great reputation for quality build, excellent service and great sound, and you have a product that is perfect for the live-to-tape and live-to-air programs we produce."

C100 delivers 'Next Generation' Digital Broadcast Features

- Secure operation with Self-Healing and Redundant features • Future-proof investment (surround capable for HDTV)
- Dedicated broadcast design that is simple and powerful • Network integration as standard
- Cost-effective, scalable design to fit a wide range of budgets



C100

Solid State Logic

BROADCAST AUDIO TECHNOLOGY

Begbroke, Oxford OX5 1RU, England. Tel: +44 (0)1865 842300 Fax: +44 (0)1865 842118 Email: sales@solid-state-logic.com Web: www.ssl-broadcast.com

NEW YORK
Tel: +1 (212) 315 1111

LOS ANGELES
Tel: +1 (323) 463 4444

TOKYO
Tel: +81 (0)3 5474 1144

PARIS
Tel: +33 (0)1 3460 4666

MILAN
Tel: +39 039 2328 094

PRODUCT JACKPOT



MULTIFORMAT SERVER

Thomson Grass Valley PVS 3500

800-547-8949; www.thomsongrassvalley.com

Plays out SD/HD from same server frame and same timeline; Fibre Channel and gigabit Ethernet connectivity; supports file-streaming protocols MXF and SMPTE 360; automatic conversions of MPEG SD to HD and MPEG HD to SD; aspect ratio transformation available during conversion. ■

VIDEO ARCHIVE

IBIS Sprintx ServerArchive

+44 1458 280 208; www.ibis.tv

For IBIS newsroom automation applications; provides common UI to control archiving video clips from server; supports VTR, DVD, MCM or data tape; manual or automatic process available. ■



New Tools

ule for Titan and FastBreak systems.

Florical announced that MediaTimer Desktop, which uses MPEG-4 technology to allow desktop viewing, now has the ability to designate in-and-out points for logo bugs, animated promotions and audio overs within programs. The application imports this information into the on-air schedule in the form of secondary events.

Multichannel

Harris introduced Broadcast Presentation Manager, which is part of the Harris Resource Suite, to manage scheduling, resources and playout of media content on multiple channels.

Sundance rolled out News Recorder, a product that automates content segmentation during live recording.


Crispin's RapidPlayX offers a simplified view of all channels running in the facility. At a glance, it shows the current state of each channel and warns the operator if attention is needed. Crispin also rolled out NewsPlayX Newswheel, which uses an MOS interface and allows stations to add a 24-hour newswheel without the need for an operator.

OmniBus unveiled its TX>Play automation system, which is able to control up to 12 channels and is based on the company's G3 technology.

MicroFirst Engineering introduced its Digital Automation System (DAS) multichannel automation system. DAS provides capacity for up to 16 separate, user-configurable event lists. Each can hold up to 1000 events.

SYNAPSE: HD/SD

When it comes to digital infrastructure:
choose from our growing
family of over 90 hot swappable cards.

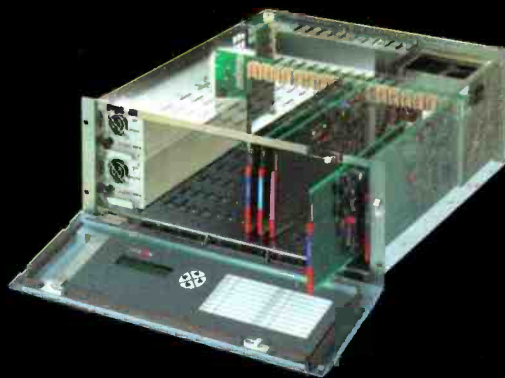

www.axon.tv E-mail: info-usa@axon.tv, PHONE: (408) 450-7973

AXON
Digital Design

DUAL MODE

not only analogue
not only digital

digital  analogue



Screen Service
ITALIA

SCREEN SERVICE ITALIA Srl
Via G. Di Vittorio, 17 - 25125 Brescia - Italy
Tel. +39 030 3582225 Fax +39 030 3582226
www.screen.it e-mail: info@screen.it

A single equipment allows transmitting digital (DVB-T or ATSC) or analogue signals digitally generated and of extreme high quality. The commutation between analogue and digital mode can be local or by any remote control system or by a command inserted into the Transport Stream.



DBT 100U (DVB-T)
DTT 100U (ATSC)



- Dual ASI input with statistical analysis and automatic switching
- PCR re-stamping
- Control of the crest factor
- Integrated SFN adaptor
- Management of the "null packets"
- Integrated test modes
- Integrated offset at steps of 1 Hz

PRODUCT JACKPOT

MPEG TS SERVER

Leitch NEX10 NX4000MTS
800-387-0233; www.leitch.com

Supports multiple SD/HD compression formats; ASI interface; records up to four separate programs within a multiprogram transport stream; allows timing of the content for seamless splicing and playback. ■



HD TAPE

Maxell HD-TV
800-533-2836; www.maxell.com

Family of videocassettes, includes DVCPRO HD, HDCAM and D-5 tape; uses Ceramic Armor metal particles and a durable binder system providing high output, low noise and low error rate; coercivity of 2350Oe and retentivity of 3800BR; tapes available in 33-, 64- and 126-minute lengths. ■

Also introduced at NAB was the MicroFirst MPS-9810, which is an intelligent auto/manual multipoint A/B switch that enables redundant automation processors.

A first-time exhibitor at this year's show was Pebble Beach, which demonstrated three products. Anemone can handle up to four channels and is intended for small operations. Neptune is intended for larger systems and facilitates proxy browsing. Periscope is a client application that displays multiple playlists much as a program guide would.

Server control

A few companies have introduced integrated automation and video-server packages in the same technology. Matco is one of those. Although its integrated

New Tools

automation system has not changed, the underlying hardware is evolving and the delineation between the control layer and the underlying media continues to blur. Fission is another company that offers the control layer over SAN- or NAS-based computer technology.

Blueline Technology introduced its JustClips software package, which offers clip playback from any video server and gives manual control to the server. It runs on Windows, Linux and Unix platforms.

DNF unveiled boxes that fall under their Flex Control Network. They allow playout to control servers and other devices. Server control currently is under Odetics RS-422 now, but it will soon extend to the VDCP protocol. **BE**

Jim Boston is a West Coast consultant.




Holds color in captivity.

Introducing the new 8.4" diagonal ERG HDM-EV80D HD monitor with extremely accurate color. Its HD innovations include four inputs and one output, which allow it to be used with multiple cameras. The monitor's DC output and cost effectiveness make it ideal for rack mounting while its compact, rugged design and low power consumption make it perfect for location shooting. No matter how you use it, the monitor will capture your imagination. For more information about the HDM-EV80D, call or visit our website: erg-ventures.com, contact@erg-ventures.com, U.S.: +1-949-263-1630, Japan: +81-3-3760-8176

ERG HD Monitors

What can you REALLY do with

19.39 Mbps?

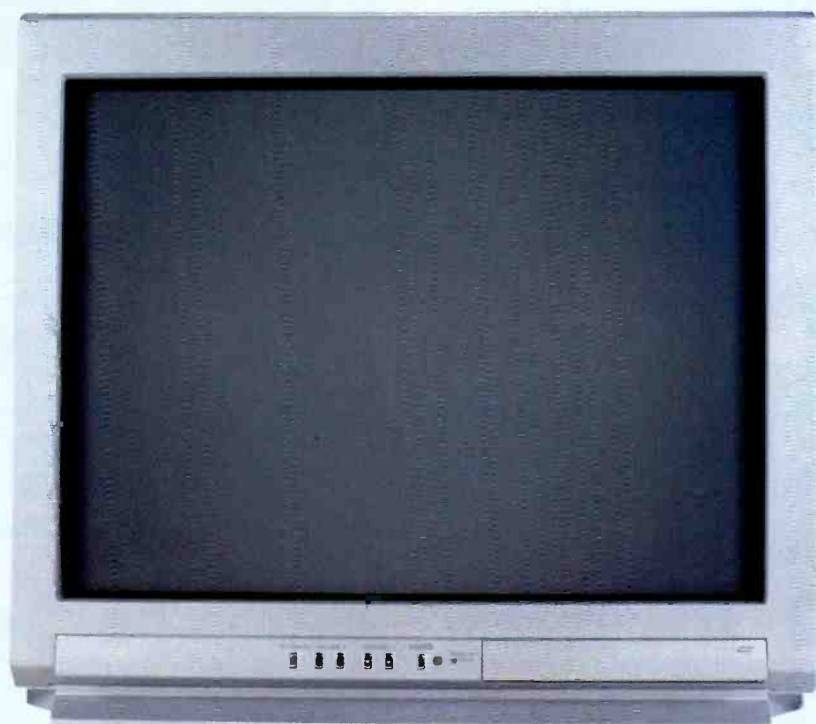

Call us or visit harmonicinc.com/broadcast for more information.



Harmonic


A lot. And, you can make changes

06:21:42.04

NETWORK



WEATHER / TRAFFIC



KIDS ENTERTAINMENT



EDUCATION



PAID PROGRAMMING



LOCAL ACCESS



13:47:00.11

NETWORK



KIDS ENTERTAINMENT



EDUCATION



from time to time.



20:35:07.29

NETWORK



01:18:44.15

SYNDICATED PROGRAMMING



EDUCATION



PAID PROGRAMMING



Deliver More Content with the Best Picture Quality at Your Bit-Rate.



DiviCom® MV 100

- Highest performing standard definition (SD) encoder in the industry delivers beautiful digital video at ultra low bit-rates.
- Advanced noise reduction technology improves picture quality and further reduces bit-rate.
- Platform for the future supporting MPEG-2 as well as MPEG-4/AVC and Windows Media 9 (VC9).



DiviCom MV 450

- Flexible, low bit-rate, high definition (HD) digital video encoder delivers an exceptional HD experience.
- Provides standards-based HD digital program insertion (DPI).
- Supports up to two Dolby E passthroughs and 4:2:2.




DiviTrackXE™

- Third generation closed-loop statistical multiplexer maximizes channel carrying capacity while preserving picture quality.
- Supports a mix of SD and HD VBR and CBR encoders along with data in the same pool.
- Offers a variety of input/output options to integrate with virtually any environment.



Broadcast Network Gateway™ (BNG)

- Gigabit Ethernet output enables efficient IP-based transport of HD and SD digital video to carrier headends.

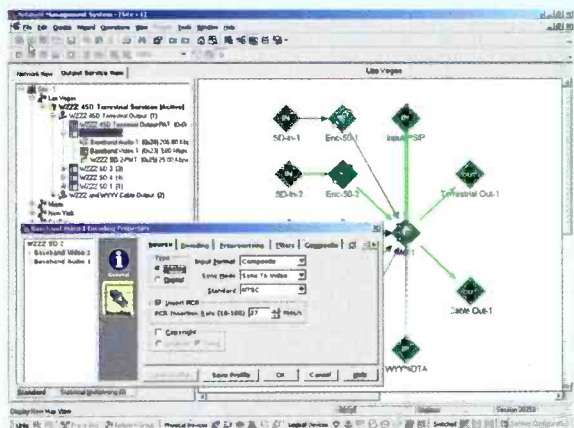

NMX Digital Service Manager™

- Manages video infrastructure as a series of services rather than discrete hardware and software components.
- Enables seamless change in system mode according to time-of-day and day-of-week.
- Interfaces with third party conditional access, PSI/SI and automation systems.
- Supports a wide range of redundancy designs and automatically reprovisions the infrastructure, ensuring the highest levels of service reliability and availability.
- Permits centralized and distributed service management.



Cameras

BY DAN STARK

NAB this year offered several additions to evolving technologies, especially CMOS camera sensors and solid-state recording. One attractive capability of CMOS is its ability to switch between various video formats to provide different native resolutions.

Tape-based camcorders have been the norm in the industry, while disc-based cameras have started to make an impact with hard-drive and optical variants. This year, Panasonic showed working prototypes of their P2 technology. P2 technology provides more reliability with fewer maintenance costs because there are no moving

IT sensors, each with 520,000-pixel resolution.

Panasonic also introduced the AJ-SDC905 DVCPRO50 and the AJ-SDC615 camcorders, which offer firewire capabilities. Both cameras use 520,000-pixel CCDs, are switchable between 16:9 and 4:3, have a sensitivity of F13 at 2000 lux and use 12-bit A/D. The AK-HC900 was introduced with variframe/cinematic options. The 900 series camera with the AJ-RC905 CCU and AJ-CA905 camera adapter had 26-pin camera control



Tape-based camcorders have been the norm in the industry, while disc-based cameras have started to make an impact with hard-drive and optical variants.

parts in the camcorder. P2 camcorders record video on a series of PCMCIA RAM cards. These cards can then be inserted into a PCMCIA slot on a computer or in Panasonic's P2 studio deck. The video is then available for playback or editing without any capture process. P2 cards offer 100,000 rewrite cycles with immunity to severe shock and vibration.

The P2 studio deck includes a DVD-R drive for archive or restore. A P2 card drive is also available to attach five P2 cards to a computer. Current cards offer 4GB capacity with 16 minutes of DVCPRO25 recording.

The P2 camcorder, AJ-SPX800, has five slots for P2 cards, allowing continuous recording onto all five cards in a sequence. Cards can be hot swapped, which essentially allows for continuous recording. The camcorder can record in 24p, 30p and 60i using three 2/3-inch

functions added.

Clarity Image showed a vari-speed controller for the AJ-HD27F Varicam. It offers smooth, real-time frame rate changes with user-defined custom ramps that can be stored on SD memory cards.

Sony introduced the HDC-X300 compact HD camera. Based on new 1/2-inch, 1.5-megapixel HD CCDs, it offers 1440x1080 effective pixels with a low, -120dB smear level and a signal-to-noise ratio of 54dB. It can be used as an HD POV camera for a variety of HD applications, including studio, HD security and analysis. A slow shutter mode allows the CCD to operate from two to 64 frames. Coupled with 48dB gain, it features a minimum illumination of 0.003 lux, and it supports several frame rates, including 23.976PsF/25PsF/29.97PsF progressive and 50i/59.94i. Output signals include HD SDI



HD CHARACTER GENERATOR

Miranda Oxtel Imagestore

973-683-0800; www.miranda.com

Interfaces to automation for branding graphics, clock insertion, lower-third text crawls; operators can build on-air graphics from a desktop gallery; two layers of animation/still insertion from internal storage. ■

AUDIO CODEC

Dolby Digital Plus

415-558-0200; www.dolby.com

Expands capability of Dolby Digital; backward compatible with Dolby Digital 5.1; increased efficiency, less complex and more cost efficient; currently an ATSC candidate standard for Enhanced AC-3. ■



HDV PLAYER/RECORDER

JVC JY-VH1

973-317-5000; www.jvc.com

Records and plays HDV; features a 3.5-inch LCD monitor and digital iLink interface for NLE and dubbing systems; component for multiformat playback and an SD memory card slot for capturing still from tape. ■

VIDEO CAPTURE AND EDITING CARD

Aurora Pipe HD

586-726-5320; www.auroravideosys.com

Works in either HD or SD; connects to most A/V devices; offers 10-bit I/O; can monitor video via composite, S-video or component analog outputs; genlock input provided; outputs two channels of 24-bit, 48kHz analog audio for monitoring. ■

BROADCAST MONITORING SYSTEM

Encoda VeriStream

303-237-4000; www.encodasystems.com

Identifies and corrects failures and errors in transport streams over an entire network, and specific channels, through all stages of transmission; multichannel and centralized controlled environments supported. ■

PRODUCT JACKPOT



VISUAL WORKSTATION

Silicon Graphics Tezro
800-800-7441; www.sgi.com

Workstation platform accommodates up to four 700MHz MIPS RISC processors with 4MB L2 cache; supports seven PCI-X slots; internal DVD-ROM and external drives; 48-bit RGBA with 16-bit Z buffer capability; includes support for HD, dual-channel and dual-head display options; DmediaPro options with support for dual streams of HD 10-bit 4:4:4:4 RGBA video. ■

HD EDITING SYSTEM

Avid DS Nitris 7.5
978-640-6789; www.avid.com

Real-time finishing system for SD, HD and digital intermediates 2K/4K; provides 10-bit HD encoding; fully compatible with the Media Composer Adrenaline system; operates in 4:2:2 color space; available in three user-selectable bandwidth configurations: 220Mb/s for 10-bit and eight-bit video; eight-bit configuration at 145Mb/s for 720p and 1080p/i HD resolutions; supports MXF. ■

VIDEO SERVER

SeaChange BMC 60000
978-897-0100; www.schange.com

Supports up to eight MPEG-2/IMX codecs operating at up to 62Mb/s per codec, four MPEG transport I/O cards, or three HD decoders; can combine up to seven I/O cards for up to 56 channels of 50Mb/s IMX I/O and more than 1600 hours of storage using 300GB SCSI drives. ■



DISK RECORDER

DVS Pronto2K
818-846-3600; www.dvs.de

Uncompressed real-time recording for SD to 2K; stores video data directly as BMP, YUV, TIFF, TGA, Cineon or DPX; audio stored as AIFF and WAV files; formats and resolutions handled include NTSC and PAL, 720p, 1080i, and film (2048x1556) in RGB 10-bit at data transfer rates of up to 306MB/s. ■

New Tools

and analog component signals. The HDW-730S is a reduced-feature version of the HDW-730. A more cost-effective 1920x1080 interlaced camera, its price is comparable to high-end SD camcorders. It offers HD SDI output standard and interfaces to most Sony optional products.

The Sony BRC-300 is a three-chip, robotic, pan/tilt camera in a small footprint with three high-performance 1/4.7-inch advanced HAD CCDs. A 12x auto focus lens is provided, and the camera has an additional 4x digital zoom, allowing a combined 48x zoom. Optional cards offer component analog or digital outputs.

The BVP-E30/E30WS camera uses Power HAD EX CCDs and new 14-bit A/D conversion. It operates in progressive or interlaced modes and offers sensitivity of F11 at 2000 lux with an S/N ratio of 66dB. Slow-shutter mode allows CCD exposure down to 7fps with 42dB of gain. The camera features a minimum illumination of 0.035 lux. The E30 interfaces to existing Sony CCU and VTR models, including the WLL-55 wireless camera system. The system converts the camera's signals into an MPEG-2 bitstream for transmission over the 2.4GHz band, does not require any licensing and is compatible with many Sony cameras.

Hitachi introduced the Z2500 camera, based on 2/3-inch IT sensors with 900 lines of resolution and a 65dB signal-to-noise ratio. The HVD15 box camera has three 1/2-inch IT sensors, a bayonet lens mount and SDI output, and features 900 TV lines of resolution at 64dB. Hitachi also featured the SK31B and SK31C HD camera backs. The B version has a fiber-optic cable from the camera back to the CCU, and the C version is a multicore system.

JVC unveiled a prototype three-chip HD camera recording to HDV format DV media. The camera will use 2/3-inch CMOS imagers with a native resolution of 1920x1080 pixels. The

camera will be capable of both SD and HD recording, including 24p. JVC also introduced the KY-F650 and KY-F550 box cameras based on 1/2- and 1/3-inch CCDs. They offer 850 lines and 800 lines, respectively, and both cameras have an SNR of 62dB.

The KH-F87U HD CMOS-sensor box camera features three 2/3-inch



NAB attendees saw many unique exhibits and were introduced to new camera technologies.

CMOS sensors, 12-bit A/D converters and a 54dB signal-to-noise ratio. The camera operates at either 1080i or 720p natively with a dynamic range of 68dB and has two HD SDI outputs.

Ikegami introduced the HDK-725P and HDK-75EX handheld HD cameras. The HDK-725p is native 720/60p and the HDK-75EX 1080 at 60i. The 75EX offers an integrated fiber adapter. Both are cost-effective cameras. Ikegami's HDL-40C CMOS camera is based on two-million-pixel CMOS sensors operating natively in 720p, 1080i and 1080/24p formats. They are designed for a variety of applications, and one version offers slow motion. The company also showed a prototype of the HDK-79EC CMOS camera.

The company's TA-79HD series is an improved HD triax/fiber camera back and CCU. This series can switch between fiber and triax cabling.

In the interesting technology department, Ikegami's HDK-79NAR has a rotating optical block that allows an operator to spin the picture without

80 years in the making



Now ahead of its time

Colledia™ integrates vendor technology across the entire production workflow and enterprise. Now and into the future. Colledia™ is currently supporting ESPN's digital conversion. Ready to be your media creation and broadcast management solution.

Make. Work. **Flow.**

BBC Technology

US: 1 888 222 3820; UK: + 44 20 7765 4748
e-mail: bbctechnology-sales@bbc.co.uk
www.bbctechnology.com

PRODUCT JACKPOT

MASTER CONTROL EFFECTS AND GRAPHICS

Utah Scientific SqueezeMAX

801-575-8801 ; www.utahscientific.com

Versatile dual-channel video effects with built-in graphics display capabilities; for on-air squeezeback effects, logo insertion and other channel branding operations; available for stand-alone use or integrated with the company's MC-2020. ■

having to rotate the camera. It has a feature that allows the operator to hold the image block level — regardless of the camera's angle. Ikegami offered the SD HK-399PW, which incorporates

New Tools

14-bit A/D converters with a 68dB signal-to-noise ratio. The Editcam system was shown with the DNS-33W.


Thomson Grass Valley announced the LDK 6200 HD Super Slow Mo digital camera, providing 120fps in 1080i. It uses a DPM sensor and an EVS disc recorder. It is slated for use in the 2004 Olympic Games in Athens, Greece. Thomson's new SD cameras included the LDK 500 and LDK 300. The LDK 500 is based on the popular, remote-controllable LDK 200 camera head, which offers 14-bit A/D conversion, and optical and digital filters. It has a configurable processor, second-order color correction, a frame store and vertical shift for locking the camera to computer monitors. The LDK 500 is available in DPM, FT, IT and ITW versions. The LDK 300 is replacing the 100 and 200 series cameras.

Also new for Thomson Grass Valley was its Triax Repeater, offering HD transmission up to 2000 meters with 14mm triax. The C2IP camera-control system can accommodate up to 99 LKD series cameras over Ethernet via TCP/IP, compatible with all series 9000 control systems.

Dalsa announced that it is targeting its Origin CCD camera, offering 4K image size, for commercial rental availability by Nov. 1. ARRI also displayed updates to its D-20 project camera released at IBC2003. It features a single, six-megapixel CMOS sensor that has an image area comparable to a 35mm full-aperture film frame, accommodating 35mm cine-lenses.

This year's NAB highlighted some emerging and existing technologies. Next year's NAB promises to bring this year's ideas and concepts to market in production models. Practical cameras with CMOS sensors and non-tape-based camcorders will be the technology to watch. **BE**

Dan Stark is president of Stark Raving Solutions.

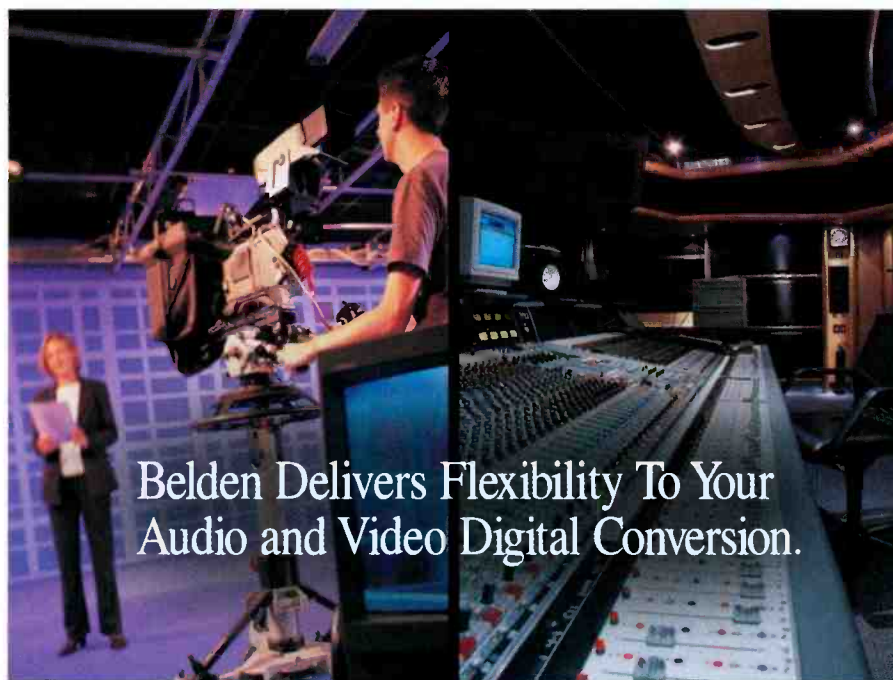

Belden Delivers Flexibility To Your Audio and Video Digital Conversion.

Analogue, Digital or Data — More Broadcast Engineers Choose Belden Than Any Other Brand of Cabling Products.

Why? Because broadcast engineers know that Belden has an extensive line-up of digital cabling products — including data cables — and the quality to match.

Whether you're installing cable in a television or radio studio, a video post-production facility, an indoor or outdoor sports arena, a film production studio, a church, a government chamber, or an entertainment venue — any area where a high quality signal is important — Belden has the digital cable to meet your needs.


To make your selection process easier, we're offering a 3rd Edition of our "Digital Studio Cable Guide." This Guide will help your understanding of digital cables, SDI and AES/EBU specifications, HD Radio concerns, key electrical/distance parameters, and why Installable Performance™ is important to cable performance.

Look to the leader. Call 1-800-BELDEN-4 and get a free copy of the definitive "Digital Studio Cable Guide." Or download a copy from Belden's Web site at: www.belden.com/tb65.pdf.

Belden

Performance Delivers The Future

©2003 Belden Inc.



BRILLIANCE

visit the
world
of content
creation • management • delivery

**40k+ attendees from Europe
and 120 countries worldwide**

**1,000 exhibitors including all
the key technology suppliers**

**The world's best electronic
media conference**

**Exhibition 10 - 14 September
Conference 9 - 13 September
RAI Amsterdam**

www.ibc.org

A/V SYNCHRONIZER

Fortel DTV FS-516

800-530-5542; www.fortelDTV.com

Transcode, synchronize and process a variety of source types: NTSC, PAL or SDI with analog, AES, embedded or Dolby audio; create SDI with embedded or AES audio out. ■

HD SIGNAL ERROR HEADROOM METER

4sight HRM-1500

408-559-0255; www.4sightproducts.com

Portable handheld device that quickly displays the spectral health of an HD signal; has an easy-to-read LED gauge; LCD display gives detailed energy readings on the total spectrum, fundamental and harmonic bands. ■




AUDIO NETWORKING SYSTEM

Calrec Hydra

+44 1422 842159; www.calrec.com

Provides a network for the sharing of I/O resources and control data between Calrec digital mixing consoles; Gigabit Ethernet fabric; features high bandwidth and a scalable, flexible architecture; includes remote I/O units with up to 96 analog or digital inputs or outputs; units may be connected onto the same network. ■



HD/SD MULTIFORMAT ROUTER

Quartz Xenon

888-638-8745; www.quartzus.com

Available in two frame sizes; has signal processing technology modules on input and output cards; features optional dual internal controllers for deterministic switching; dual hot-swappable fans and power supplies; all active modules may be hot swapped from the front of the frame. ■

CONSOLE

Wheatstone Bridge Router

252-638-7000; www.wheatstone.com

Design consists of 7-inch rack-mount digital routing cages; handles 512 simultaneous audio channels on its backplane; features bidirectional fiber-optic or CAT-5 interlocation connectivity, all-digital domain AES switching, analog/digital I/O, and serial control and display with Wheatstone consoles. ■

New Tools

Compression products at NAB2004

BY STEVEN M. BLUMENFELD

At this year's NAB show, there were companies, big and small, showing off tools of the trade using compression.

MPEG is clearly the standard of choice for digital video. Whatever the MPEG incarnation, the digital video world is MPEG. Now, with the ratification of the MPEG-4 standard, a new, scalable coding technique has hit the market. MPEG-4 AVC represents a major improvement in compression technology from MPEG-2 and has been approved for adoption as a mandatory codec for the new HD DVD specification. MPEG-4 AVC and MPEG-4 AAF HE (another standard based on the same compression techniques) were evident in products all over the NAB floor.

KDDI R&D Laboratories

KDDI introduced several interesting H.264/MPEG-4 AVC products for the professional and prosumer markets.

MP-Factory is a software development kit for MPEG-1-, 2- and -4, and

is bundled with JVC's consumer high-definition camcorder, the GR-HD1, and with its professional high-definition camcorder, the JY-HD10. The program provides nearly lossless, frame-accurate, MPEG-4/MPEG-2/HDV editing. It features logo insertion, scene indexing, a variety of media-conversion capabilities and a software-based HDTV player with a jog/shuttle controller.

Another interesting product from KDDI is the Highlight Creator automatic summarization software. Based on content-analysis technology, it summarizes input video in two forms, skimming and highlights, and converts summarized video into various formats for streaming and mobile use. Skimming is an outline version of the original content with preferred duration, while highlights is a



Everywhere on the floor were companies, big and small, showing off tools of the trade using compression.

MPEG-4 AVC featuring real-time encoding/decoding/transcoding, frame-accurate editing, audio/video bit-rate conversion and content-based audio/video indexing. The functional APIs are available on multiple operating systems.

MPEG Edit Studio Pro is a nonlinear MPEG-4, HDTV MPEG-2, and high-definition video (HDV) editing tool. The LE version of this program

series of exciting events. Highlight Creator supports MPEG-7-based metadata description.

Interestingly, KDDI also had a JPEG2000 hardware HDTV codec, the DHS-2000, which enables low-delay, high-quality transmission (50- to 100Mb/s) of HDTV programs.

Envivio

Envivio introduced the 4Forum Lite,

Get
knockout
results

with the New Vector 900 and 450

An impressive performer with exceptional control

For the perfect balance of durability, stability and control, the Vector 450 and 900 partnered with the new HDT1/2 weighs in as the all time OB winner

✓ Robust ✓ $\pm 90^\circ$ tilt ✓ Compact

Call Sales Toll free on: 1 888 2 VINTEN

Vector
900

Vinten
www.vintenvector.com

PRODUCT JACKPOT

CARDIOID LAVALIER MICROPHONE

Audio-Technica AT898

330-688-3752; www.audio-technica.com

Subminiature cardioid condenser microphone offers high-quality, low-profile operation for lecturers, stage and TV talent, and houses of worship; 5mm diameter; operates on battery or phantom power. ■



DIGITAL MATRIX INTERCOM

Telex Cronus

952-884-4051; www.telex.com

32-port in 2RU; a maximum of four units can be linked to form a single 128-port matrix; allows two, three or four matrices to be combined by adding coaxial cable; USB ports for programming available on front and rear panels; fully compatible with all existing RTS matrix products; able to connect via an interface card to existing ADAM matrices. ■

an MPEG-4 webcasting system. This small, portable appliance enables a networked conference room to broadcast live and on-demand MPEG-4 presentations with synchronized video and the presenter's PC screen over IP networks. 4Forum Lite uses MPEG-4 to deliver interactive and synchronized webcasts with a subsecond latency and can scale delivery to thousands of viewers. Just plug the VGA cable into your laptop and you can be broadcast in seconds.

Another Envivio product, 4Front MPEG-4 IPTV, is middleware for network operators. It creates a client-user interface and fills it with metadata and business rules defined by the network operator. 4Front allows a network operator to offer a complete set of digital TV services.

New Tools

DG2L Technologies

DG2L Technologies boasts that its DG2L Neuron, with multinet and HDTV MPEG-4 capabilities, can deliver high-definition and standard-definition interactive broadcast and IP streams over DVB-S, DVB-C, DVB-T and IP networks. The Neuron STB also offers advanced digital services, including video on demand (VOD), pay per view (PPV), personal video recording (PVR) and MPEG-4 systems layer interactive program guides.

SkyStream

SkyStream Networks showed the real-time, broadcast-quality MPEG-4 AVC encoding capability of its Mediaplex-20 video-delivery platform. The delivery platform offers reliable IP video delivery with forward error

CONFUSED ABOUT WHICH ROUTE TO TAKE?

PROBLEM SOLVED




It's hard to know what your future routing needs will be, but whichever direction you choose, SIRIUS can take you there.

- Built-in analog & digital conversion for audio & video signals
- Mix & match different formats in the same chassis including HD
- Modular architecture for up to 256 x 256 in blocks of 8



Master Control Signal Management Automation

www.pro-bel.com



USA +1 631 549 5159 UK +44 (0) 1189 866 123 France +33 (0) 1 45 18 39 80 Asia +852 2850 8383

US/Canada Edition

Broadcast Engineering®

A PRIMEDIA Publication

e-newsletters



As the television industry continues to redefine itself, **Broadcast Engineering** is there. Only **Broadcast Engineering's** e-newsletters deliver the crucial television industry updates you depend on to make informed decisions.

An instantaneous and accurate resource, our e-newsletters offer the latest FCC updates, technical industry news, product news and new product highlights.

http://broadcastengineering.com/subscribe_now/index.htm
Subscribe to *Beyond the Headlines* and *RF Update* today

redefining television

PRODUCT JACKPOT

MULTICHANNEL AUDIO MONITORING SYSTEM

Genelec 1029.LSE Powerpak
508-652-0900; www.genelecusa.com

Consists of five 1029A two-way, bi-amplified active monitors, one 7060A LSE series active subwoofer and an acousti/tape frequency/wavelength measuring tape; includes a setup guide for accurate speaker placement, wiring and fine-tuning. ■

PROGRAM-INSERTION MONITORING SOFTWARE

Pixelmetrix DPI Auditor
954-472-5445; +65 6547 4935;
www.pixelmetrix.com

Allows broadcasters to monitor and audit the accuracy of digital program insertion; built-in function for the DVStation and DPI Auditor; separate DPI analysis application with enhanced features. ■



DIGITAL MEDIA DELIVERY SOLUTION

Telestream ClipMail Pro
877-257-6245;
www.telestream.net

Transmits MPEG signal to Telestream appliances or FTP servers anywhere; choose the transmission speed and video quality desired; send and receive approval to master quality video; deliver over any global IP network connection. ■

INTEGRATED MEDIA PLATFORM

HP Digital Media Platform
650-857-1501; www.hp.com

Simplifies and reduces the cost of content production, distribution and consumption; links production and post-production processes in a workflow-based system; enables shared use of a common set of media assets for rendering, editing, workflow, archiving and restoration. ■

PLUG-INS

VDS Synapse
631-249-4399;
www.videodesignsoftware.com

Features three new plug-in bundles for Quantel's generationQ range; supports After Effects plug-ins within the Quantel user interface. ■

correction (FEC), transrating and video-stream replication to different platforms simultaneously, along with bandwidth-rate reduction and MPEG-2 and MPEG-4 encoding and transcoding, all in the same high-density, multichannel chassis.

Ahead Software

Now, even Ahead Software has jumped into the compression fray with an update to Nero Digital, claiming to take AVC and AAC to a level of performance not previously seen in any MPEG-4 audio and video compression technology. The company's AAC developers have created optimizations to Nero Digital's HE AAC core codec that includes a downsampled HE AAC mode to provide higher-quality playback for AAC devices.

Apple

Apple showed an updated QuickTime that incorporates an HD

New Tools

Media Video 9 Series and Windows Media DRM.

U.S. Digital Television will use the technology to deliver 12 channels in SD.

Vistacast and WBT Systems will encode curricula in the format for datacasting to distance-learning students.

Harmonic showed the DiviCom MV 100 encoding platform running the Windows Media Video 9 Advanced Profile (4:2:0, eight-bit), producing SD digital video for IPTV applications.

Pathfire announced that it is adopting the technology for use in its new Point-to-Point newsgathering system.

Stradis announced that it is also adopting the technology and will support it on all its future video decoding and encoding products.

TANDBERG Television demonstrated the EN5920 real-time hardware encoder, the only dedicated hardware encoding platform for Windows Media 9 Ad-

Microsoft was wooing media moguls with Windows Media 9 HD.

AVC video codec. The newest QuickTime AVC codec is scalable, allowing content creators to write their content for 3G phones, HD, and everything in between. At the show, there were announcements and demonstrations of AVC everywhere except in the Microsoft booth because Microsoft has its own proprietary format.

Other players

Microsoft was wooing media moguls with Windows Media 9 HD, mainly announcing integration partners for WM9.

Rainbow DBS' satellite service, VOOM, will use Windows Media 9 as one of the compression technologies to expand its available satellite capacity for HD offerings.

Akimbo Systems will launch an Internet VOD service using Windows

vanced Profile that is currently shipping.

Digital Rapids demonstrated a real-time, software-based, WMV HD encoder featuring a multiformat HD capture card, extensive A/V preprocessing capability and Stream Pro encoding.

Inlet Technologies demonstrated HD Workbench, an application that streamlines professional encoding from AVI, MPEG-2 and other formats into high-quality, WMV HD content. Other features include batch-mode encoding, StreamRepair for reliable two-pass encoding, and controls for frame-accurate encoding from a file or tape.

Again, as in the past, compression is playing a large part in the digital revolution. But, this year, it is hidden behind a cloak of great products. **BE**

Steven M. Blumenfeld is president of StudioBroadcast.com

Multi Bit Rate is Ready

SDI, 1080i, 720p, 24p...whatever the format, FOR-A is there.

HD/SD Multi Bit Rate products line-up



Digital Video Switcher **1M/E HANABI**

More compact but yet maintaining the same know-how of the HANABI 2M/E model, the new 1M/E HANABI offers two types of control panels for live and edit applications.



Routing Switcher **RS-HD Series**

It provides dependable and versatile signal routing support for HD-SDI or SD video-based systems. Easily control routing setup and switchers via RS-HUL series remote control units.



Frame Synchronizer **UFH-70FS**

New frame synchronizer module for HD/Universal Frames is capable for the synchronization for HD-SDI or SDI signals. Conveniently installed into the various UFR frames depending on the system requirements.



Character Generator **3D-VWS**

This is an advanced and versatile character generator with still store capability. Fine choice multi use was implemented by adopting OpenGL technology.



RCG Solution / Virtual Studio System **digiStorm**

Joint development of FOR-A and Brainstorm Multimedia. It is compatible with wide range of virtual studios and real-time computer graphics.



Digital Color Corrector **DCC-70HS**

Compact digital color corrector offers superior 4-bit, 4x4x4 component signal processing circuitry and the ability to control Black, White and Gamma (RGB) levels individually or as a group.



Digital Super Keyer **DSK-70HS**

Compact and lightweight multi-format digital super keyer supports both HD and SD signal formats using one line input channel and one title input channel.



Video Stabilizer **IVS-700HS**

Uses a moving image processor to electrically correct the image shaking occurring in cameras. It can correct just the unintentional unsteadiness, while maintaining the panning or tilt movements of the camera.

And More...

FOR-A Company Limited/Head Office: 3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan
USA/FOR-A Corporation of America: 11125 Knott Ave. Cypress, CA 90630, USA
CANADA/FOR-A Corporation of Canada: 425 Queen St. W. #210, Toronto, Ontario M5V 2A5, Canada

Tel: +81 (0)3-3446-3936 Fax: +81 (0)3-3446-1470
Tel: +1 714-894-3311 Fax: +1 714-894-5399
Tel: +1 416-977-0343 Fax: +1 416-977-0657

PRODUCT JACKPOT

UHF BROADCAST ANTENNA

Radio Frequency Systems
Superturnstile UHF antenna
203-630-3311; www.rfsworld.com

Ultra-slim and lightweight super-turnstile UHF broadcast antenna supports the entire U.S. and European UHF bands; ideal for low and medium broadcast applications; low drag profile underpins the antenna's high wind-speed rating and low wind-load characteristics; horizontal polarization; base flange mount; 4, 8, 12, 16 lambda configurations. ■



MATRIX PLATFORM

Riedel Artist S
818-563-4100; www.riedel.net

Provides a decentralized infrastructure for broadcast-quality live audio and talkback applications via a unique fiber-based network backbone; able to create elaborate systems; ensures reliability via its redundant dual fiber ring; ranges in size from 8x8 up to 512x512. ■



VIDEO SERVER OPTIONS

360 Systems Image Server 2000
818-991-0360; www.360systems.com

Graphics and DV option provides for rapid import of files over Ethernet from graphics programs and format editors; enables ganged playout of key and fill; offers mixed-format playout including MPEG and DV video clips, full-screen graphics, and graphics with a key and animations; option can be ordered with new Image Server 2000s or installed in existing units. ■

MULTIFUNCTION PROCESSING MODULE

Teranex XM
407-858-6000; www.teranex.com

Gives broadcast, cable and satellite providers the ability to perform format up/downconversion of source feeds to support a customer's format infrastructure; addresses high-density traffic areas; fits in Thomson Grass Valley Kameleon modular chassis; suitable for advanced video and image-processing applications. ■

New Tools

Digital acquisition

BY CRAIG BIRKMAIER

NAB2004 may well be remembered as the turning point for interoperability. It set the stage for a new digital workflow based on the processing of digital media files containing both the essence media and the metadata that describe these media and the ways in which other applications can use the media. The benefits of this approach were visible

to develop software codecs that would allow DVCPRO audio/video files to be processed using affordable desktop and notebook computers. The DV-25 and DV-50 codecs allowed Apple to validate the concept that software like Final Cut Pro can be used to handle editing and compositing tasks without additional expensive hardware. At this year's show, the companies introduced the

The era of proprietary tape-based video formats is drawing to a past-due close.

everywhere at NAB, suggesting that the era of proprietary tape-based video formats, with the costs and constraints they impose, is drawing to a past-due close.

At NAB2004, Sony delivered a full-bandwidth HDCAM studio/field recording system, which will compete with the Panasonic D-5 format. The SRW-5000 is a full-bandwidth HD VTR that does not use prefiltering or resampling. Based on the MPEG-4 Studio Profile compression algorithm, the system can write 440Mb/s to tape at 10-bit resolution. It can record all 1080-line frame rates, as well as native 720p at 60Hz.

Sony also unveiled a prototype three-chip HDV camcorder that records HD imagery using long-GOP MPEG-2 at 25Mb/s. But the future for the HDV format remains clouded. The need for a highly compressed tape-based HD acquisition system is questionable, given the trend toward acquiring less-compressed, high-resolution images direct to hard disk or solid-state memory.

A partnership with impact

Several years ago, Apple and Panasonic announced their intention

DVCPRO HD codec, which enables users to realistically work with and deliver HD using affordable off-the-shelf components from the information-technology industry.

Apple and Panasonic have set the stage for the real HD revolution. But they are leveraging the existing tape-based infrastructure for the moment, while Panasonic puts the finishing touches on P2, its SD memory-based acquisition gear.

To fill the gap, Panasonic introduced a new studio/portable DVCPRO deck that supports the entire range of DVCPRO codecs, from DV-25 to DVCPRO HD. The AJ-HD1200A is the company's first recorder to offer an IEEE 1394 interface operating at 100Mb/s data rate with DV high-definition video streams. Equipped with the 1394 interface, this deck will sell for about \$30,000, within the price range of many independent producers. This will allow them to rent HD acquisition gear and finish their HD projects using the same tools they now use for SD production.

Roll your own

Across the aisle, Avid was proving that Panasonic and Apple do not have


Signal Acquisition Solution | SERIES

For incoming satellite feeds, ingest areas and remote trucks

Video Processing Frame Syncs:

- ▲ 7500 - HD SDI I/O
- ▲ 8400 - SD SDI I/O
- ▲ 8500 - SD SDI and Analog I/O

The Signal Acquisition Solution series works for you in SD and HD, supporting digital and analog signals. And for handling embedded audio, AES or analog audio, there are options for 4 or 8 channel audio processing.

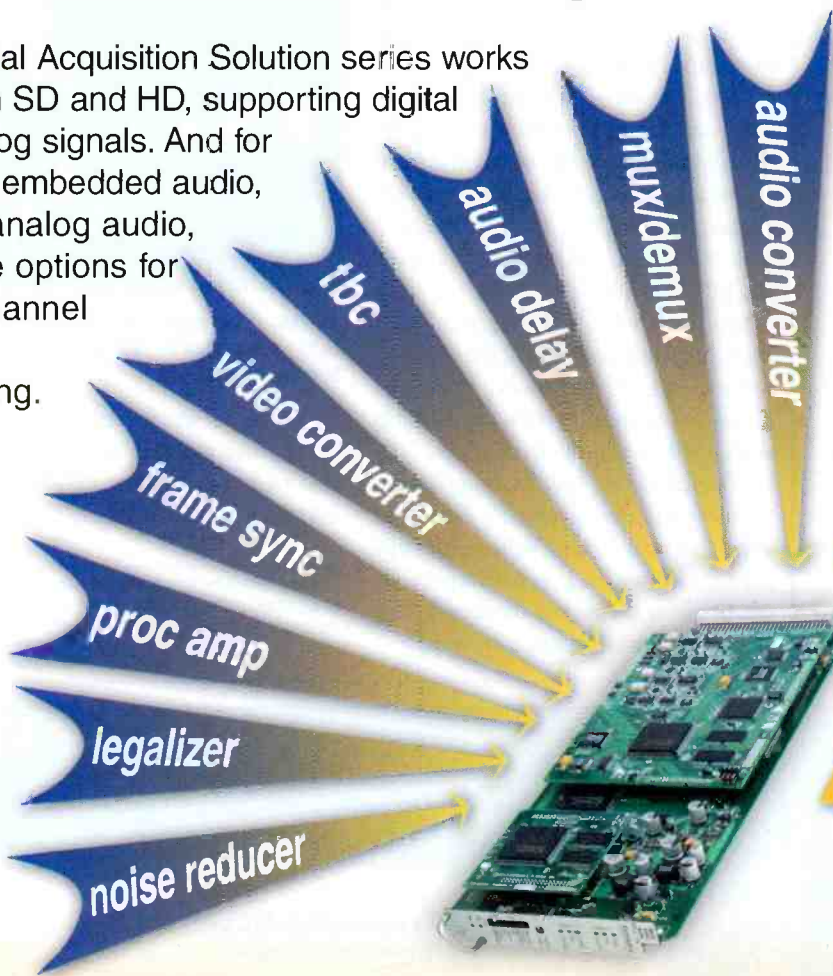


These modules cleanly accept hot switched digital inputs and if there is a loss of input, the module will freeze or go to black.

The new Express Panel gives you control over all module parameters and has dedicated knobs for proc adjustments.



New Express Control Panel

AVENUETM
Signal
Integration
System

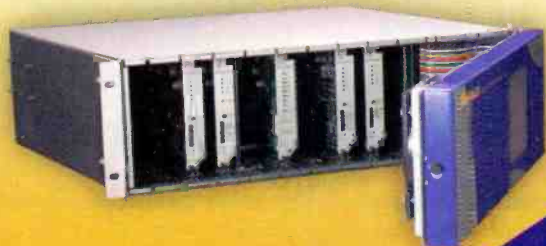

ENSEMBLE
DESIGNS

Tel +1 530.478.1830 ▲ Fax +1 530.478.1832

www.ensembledesigns.com

info@endes.com

PO Box 993 Grass Valley CA 95945 USA

PRODUCT JACKPOT



HD ROUTER

Network Electronics Flashlink

800-420-5909;

www.network-electronics.com

Provides signal processing and signal distribution; features N-Box, new housing that offers a modular and flexible solution for applications where space is limited or only card is needed; four N-Boxes can be mounted on a 1RU shelf. ■



BROADCAST CONSOLE

Harrison TVD SL

615-641-7200; www.harrisonconsoles.com

Offers 44 or 60 total motorized, touch-sensitive faders; streamlined layout allows for 33mm fader spacing while offering an eight-character channel display; instant reset-snapshot recall automation of all functions; stereo and 5.1 monitoring, routing, and panning; 16 auxiliary sends. ■


a monopoly on HD innovation. Avid's DNxHD compression system operates in 4:2:2 color space and is available in three user-selectable bandwidth configurations: 220Mb/s configurations for both 10-bit and eight-bit video, and an eight-bit configuration requiring only 145Mb/s. The technology supports 720p at 60fps and 1080p/i HD resolutions at 30-, 25- and 24fps.

Avid is publishing the DNxHD algorithms, opening them up to any company that wants to implement the software. One of the first manifestations of the new codec will come from a longtime partner, Ikegami. At NAB, Ikegami announced it will develop a disk-based HD camcorder that uses the DNxHD codec.

And there were other signs at NAB that companies are taking the need for interoperability seriously. Thomson Grass Valley announced a partnership with Apple, opening up the Grass Valley Digital News Production products to allow the use of Apple's Final Cut Pro. Thomson Grass Valley will supply a Broadcast Plug-in software module to allow the editor to decode files stored on the company's servers.

New Tools

The survivors of the interoperability battle will be the companies that are committed to working with everyone. Apple and Avid are emerging as the leaders — for now — of the shift from working with formats to working with files. Both companies also understand the importance of working with each other. And their partners understand

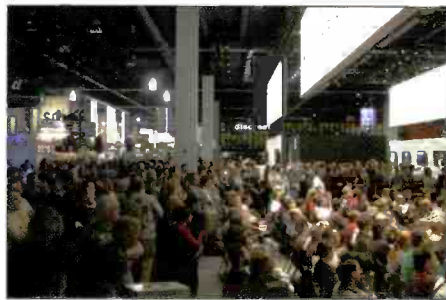

At NAB, Apple and Panasonic showed that they understand the importance of interoperability.

the need to work with both. When companies are free to develop tools that work for anyone, anywhere, then everyone wins. **BE**

Craig Birkmaier is a technology consultant at Pcube Labs, and he hosts and moderates the OpenDTV Forum.



Xenon

Introducing

The Signal Processing Router

Multi-format Routing plus optional plug-ins

Initial plug-in functions include

- Channel Branding
- Master Control
- Embedded Audio Processing

Winner of the STAR award at NAB






888.638.8745 | sales@quartzus.com | www.quartzus.com

Obviously, we've got it "COVERED"

Some of our consoles were featured on the covers of *Broadcast Engineering* magazine in 2003. Countless others appear in all the other major industry magazines.



Our industry is constantly changing, evolving, redefining or reinventing itself. At Forecast Consoles, we work very hard to provide the *Technical Furniture* for this moving target.

"If we're not careful, technology just might catch up."

Forecast Consoles is proudly celebrating our 25th Anniversary of excellence.

Let Forecast Consoles cover your next console project

Forecast Consoles, Inc. Innovator, not Imitator

FORECAST
consoles

For more information call **1-800-735-2070** or visit us on the web at
www.forecast-consoles.com

PRODUCT JACKPOT



SINGLE-CHANNEL CG

Pixel Power Clarity 100

954-943-2026; www.pixelpower.com

1RU CG for master control graphics insertion and post production; compatible with all the major master control, branding and newsroom automation systems; can be expanded to offer dual 2-D live squeezeback capability and full-frame cell, text and logo animation effects; can play back and record up to four audio channels. ■

BROADBAND UHF ANTENNA

Dielectric TUA-M

800-341-9678; www.dielectric.com

Mid-power antenna designed for multiplexed digital and analog signals; customized beam tilt and null fill; stainless steel backscreen and radiating element; provides broadband impedance characteristics suitable for single or multiplexed stations; constructed to operate in severe environments subject to high winds and heavy ice loading. ■



MULTISDI MONITOR

Leader Instruments LV 5700

800-645-5104; www.leaderusa.com

Monitors HD/SD-SDI signals with an XGA TFT color LCD in an adjustable tilt front panel; tests 20 HD-SDI and SD-SDI formats with total digital processing compliant to SMPTE 259M, SMPTE 292M and SMPTE 296M; input format, colorimetry and trilevel or black burst external reference inputs are automatically detected. ■

CARDIOID MICROPHONE

DPA Microphones Type 4021

+45 4814 2828;

www.dpamicrophones.com/eng_pub/

Phantom powered (P48) condenser microphone uses the same type of cartridge as the Type 4011, but is preamplified using a built-in thick-film-mounted FET-preamplifier; no external preamplifier needed; 5m standard cable is side-mounted; linear frequency response from 40Hz to 20kHz (± 2 dB). ■

New Tools

NLEs at NAB

BY BOB TURNER

The 2004 NAB was an exciting show, especially for those looking at digital news editing solutions.

Avid Technology

Avid introduced version 5.5 of NewsCutter Adrenaline FX and NewsCutter XP news-editing systems, the AirSpeed ingest and broadcast playback server, and version 4 of Avid Workgroups.

The NewsCutters now offer support for DVCPRO25, DVCPRO50, DVCAM, and MPEG IMX at 30-, 40- and 50MB/s (including support for Sony XDCAM and Panasonic P2 media acquisition) plus integration with the AirSpeed system. In a release expected before the end of the year, they will also support HDV, DVCPRO HD, and Avid DNxHD. Version 5.5 also introduces MXF support.

Pinnacle Systems

Pinnacle Systems had major HD news: All Liquid turnkey NLEs now support HDV, Elite HD (long GOP MPEG-2) and uncompressed HD (Liquid Edition is HDV-only). The company introduced a Liquid HD application that will work with all Liquid editing products. Pinnacle's Liquid HD video editing was awarded a *Broadcast Engineering* Pick Hit award.

Liquid nonlinear editors are now MXF-native and support Sony XDCAM and Panasonic P2 media. They also integrate directly with MediaStream servers and Vortex systems. Pinnacle also introduced CinéWave 4.6, which now supports multiple streams of Panasonic DVCPRO HD in real time. There are over 70,000 Liquid seats sold and Pinnacle announced an annual growth rate of 40 percent.

Pinnacle's Liquid Editing for

Workgroups is a complete, low-cost networked editing solution for SD (and soon HD)

video that uses Pinnacle's Palladium Store 100 (PS100). This MSRP solution includes 2TB of storage with ultra-secure RAID 10 mirroring.


Thomson Grass Valley

Thomson Grass Valley showcased its digital news-production products, including the NewsEdit XT nonlinear editor, NewsEdit LT laptop-based nonlinear editor (now supporting XDCAM and P2 formats), NewsEdit SC software-based nonlinear editor, FeedClip interactive feed-capture system, NewsQ manual playback system, NewsQ Pro automated news playback system, NewsBrowse Web-based browser/editor, Network Attached Storage system, Open SAN system, Profile XP media platform and Profile network archive.

One of the big announcements was that Apple's Final Cut Pro will be integrated into the DNP family through a Thomson Grass Valley professional plug-in module. Final Cut Pro 4.0 and Final Cut Pro HD work with the Open SAN system or the M-Series iVDR.

Quantel

Quantel launched QEdit for news and sports editing. QEdit is a low-cost, software-only application accessing the powerful version 2 GenerationQ editing tools. One unique feature is custom transitions. It allows a TV station's graphic designer on a QPaintbox or QEditPro to create a customized template for effects that could include directional blurs, flashes to color, resizes in 2-D and 3-D plug-ins, then effectively clusters these effects into one



PRODUCT JACKPOT

STUDIO LENS

Canon DIGISUPER 22xs

516-328-5000; www.usa.canon.com

Also known as the XJ22x7.3B IE-D; compact box-style design; 13.4-pound package; offers a focal length of 7.3- to 161mm (14.6- to 322mm with a 2X extender); maximum zoom speed of .5 seconds and focus of 1.5 seconds; F stop of 1.8. ■



NEWS PRODUCTION SYSTEM

Sundance Digital NewsLink v2.0

972-444-8442; www.SundanceDigital.com

Provides array of news production tools including camera control, audio and switcher controls, plus a range of video server controls; allows structured newscasts to be built with macros or drag-and-drop control; automation level can be selected on a show-by-show basis. ■

saved transition that any of the networked QEdit desktops can drag and drop onto a clip. This creates identities that help stations differentiate themselves from competitors — especially during sweeps periods. Quantel plans on making generic, customizable custom transitions available for download on its Web site.

The system offers a wide range of tools to clean up white balance, resize images for content or quality purposes, and track/blur or mosaic to hide identities. While other systems may offer similar features, QEdit has what are called one-shot effects, which enable users to fix white balance with a single key press. There is a single-key resize, a tracker that does not require complex key-frame programming, and a one-shot choice of blur or mosaic that tracks easily. You can

even spotlight the desired area, darkening the background simply and easily. Direct-to-timeline editing through IEEE 1394 is another distinguishing feature. It is a perfect fit between the QCut cuts-only application and the QEdit Pro craft editor. Interoperability with P2 and XDCAM acquisition technology was also demonstrated.

Canopus

Canopus unveiled its EDIUS HD turn-key broadcast editing solution. It includes EDIUS Pro real-time HD/SD editing software, the Canopus HD and HQ software codecs and the Canopus HDRX-E1 SDI-HD SDI I/O card. ■

Bob Turner is a contributing editor to sister publication Video Systems magazine and an editing consultant.

The Right Stuff. The Right Price. 360 Systems' Image Server 2000



WHEN THE VIDEO SERVER SALES GUY COMES CALLING, it seems there's always an Elephant in the room: *You know* storage should cost less now than ever before, but truth is, 90's-era servers can't make the change.

Which is why 360 Systems' Image Server employs a smart, next-generation design that delivers everything but the elephant-size price.

The Image Server 2000 is perfect for tape replacement, satellite ingest, graphics & animations,

or as a full-time play-to-air server. Of course it's fully compatible with most automation systems and desk-top controllers. Using FTP, you'll be able to move program content over Gigabit Ethernet, and share files with other MXF enabled products.

For just \$10,000, the Image Server 2000 delivers three video channels, impeccable images, great specs, and it also makes excellent business sense. Isn't it time to rethink what you're paying for video storage?

Check out the Image Server 2000 at www.360systems.com, and download the new user manual while you're there. Or call us direct to arrange a demonstration at your place.

360 Systems
BROADCAST

On Air Coast-to-Coast

Tel: (818) 991-0360

E-mail: servers@360systems.com

©2004 by 360 Systems. Add \$2,000 for 100 hours of storage.

PRODUCT JACKPOT

VIDEO CAPTURE CARD

AJA Video Systems Kona 2
530-274-2048; www.aja.com

Dual-rate HD/SD 133MHz PCI-X capture card supports uncompressed 10-bit SDI, HD-SDI and dual-link 4:4:4 HD at 10 and 12 bits; features eight-channel AES audio, HD/SD component analog video output and broadcast-quality HD/SD hardware up/downconversion. ■



EDITING CONSOLE


Forecast Consoles
IMAGEMASTER NLE
800-735-2070; www.forecast-consoles.com

Pre-engineered editing consoles incorporate benefits of MASTERail console system; expandable and quick to ship; offer deep counters and accessible counter bays for applications including linear, nonlinear, multimedia and graphics. ■

FOCUS ASSIST SYSTEM

Fujinon Precision Focus Assist
847-945-8923; www.fujinon.com

Built-in feature precisely adjusts the lens for optimum focus; can perform on wide shots without initial tight zooming; initially available on the XA101x8.9BESM HD zoom and HA13x4.5BRD-S28K wide-angle lenses. ■



AUTOMATION INTERFACE

Crispin PSIP updating interface
Crispin: 919-845-7744; www.crispincorp.com
Link Electronics: 573-334-4433;
www.linkelectronics.com

Dynamic PSIP updating interface works with Link Electronics' TVLinX and a station's traffic software for real-time PSIP based on actual on-air events at master control. ■

NEWSROOM SYSTEM

Dalet DaletPlus News Suite
212-825-3322; www.dalet.com

Newsroom computer system with rundown management and integrated video and text and a prompter interface; provides media asset management and archiving, ingest, desktop editing and playout automation. ■

New Tools

RF at NAB2004

BY DON MARKLEY

At the last few NAB shows, the most interesting RF products exhibited were all closely grouped around digital broadcasting. Well, they were this year too, but they were more than just small improvements to existing products.

Thales introduced new common-amplification analog VHF transmitters that use liquid cooling. Thales claims this will reduce long-term operational costs.

Thales also introduced its latest IOT DTV transmitters. They liquid-cool the amplifiers and exchange the heat to standard external cooling units. The advantage is that only a small amount of coolant, the oil, needs to be maintained as "pure." Also, a solid-state switch on the AC mains replaces the old, high-maintenance crowbar circuits.

tenna line, most notably a new superturnstile UHF antenna. This low-cost antenna for translators, LPTV or low-power DTV covers the entire UHF band without tuning and is available in either an omnidirectional or cardioid pattern. The lowest-power, single-station version of this antenna will cost under \$10K. The full-bore, 16-bay version with enough power capability for several stations will cost \$20- to \$25K.

Broadcast Electronics had an interesting item, the Big Pipe STL. This point-to-point wireless link can be scaled up to bidirectional capabilities of 45Mb/s. That means that one system can carry it



One big push this year seemed to be for large, wide-area control systems to allow one point to monitor/control transmitters over the whole country.

Harris showed a new STL system called Intraplex STL HD Plus. It transports HD audio, LAN/WAN data, telephone, intercom-voice and remote-control signals over a single T1 connection. For UHF, the company showed a new line of high-power ATSC transmitters designed for high efficiency. They replace many of the manual adjustments for IOT phase and gain corrections with advanced digital-adaptive circuitry.

Zenith showed its newest DTV receivers, which can deal with a 0dB echo without losing picture quality. Thus, the prediction that receivers would solve multipath problems appears to have come true.

RFS showed some changes in its an-

all, including digital audio, analog audio, AES/EBU uncompressed audio, RDS or HD radio data plus Ethernet and RS-232 communications.

One big push this year seemed to be for large, wide-area control systems to allow one point to monitor/control transmitters over the whole country. Obviously, this is aided by the use of our old friend, the Internet. RFS, Harris, Burke and others showed systems that perform this function.

DRS Technologies showed a beautiful 100kW shortwave transmitter.

Axcera introduced a new line of VHF transmitters. The Innovator HX is available for full-power analog operation with either internal or external diplexing. For stations planning to stay

PRODUCT JACKPOT

SD CAMERA

Hitachi HV-D15AS

800-225-1741; www.hitachi.com

Features 65dB SNR, automatic exposure range with 10 F stops and low power consumption; Hitachi processor provides high resolution and color reproduction; features noise reduction to reduce grain and other artifacts. ■

WAVEFORM MONITOR

Hamlet Flexiscope

+44 1494 729728; 321-939-0457;
www.hamlet.co.uk

Specifically geared for audio and video test and measurement; combines HD capability and a flexible architecture with low power consumption; palmtop unit provides integral 3.5-inch TFT display. ■



INTELLIGENT A/B SWITCH

Microfirst MPS-9810

201-651-9300; www.microfirst.com

A new redundancy option for the Digital Automation System (D.A.S.); monitors the D.A.S. and switches up to 32 asynchronous serial communications ports over to the backup automation processor (AP); a mirrored database of the primary AP enables seamless switching in case of a failure. ■

CONDITIONAL-ACCESS SYSTEM

Irdeto Access Irdeto Chip on Board

858-668-4800; www.irdetoaccess.com

Niche content providers can distribute Common Interface Conditional Access Modules (CI-CAMs) with an embedded Irdeto Access smart card; CI-CAMs work in compliant STBs to allow auto-expiring free trials and normal subscriptions. ■

with their VHF channel, an internally diplexed transmitter needs only a DTV exciter and mask to make the conversion when ready. The transmitter is available with a switching or linear power supply.

Axcera also has a full line of IOT transmitters for UHF and a line of low-power, solid-state transmitters for both VHF and UHF. The company now proposes the use of frequency-agile DTV translator/booster systems with its low-power transmitter line. Papers given at the show and available at the Axcera Web site explain how this will all work. Essentially, it proposes that broadcasters can chain translators together in amazingly long strings without signal degradation. Each site can return the digital signal to baseband, apply error correction, modulate the signal and convert it to the desired channel. The upconverter, which is the agile component, actually picks up the channel.

Axcera is quick to point out that fewer frequencies are needed for cross-country translator systems. The idea is that the same two frequencies can be repeated over and over again. If the system detects any small remnant of the co-channel signal, it simply treats it the same as a multipath signal with no harm to the signal. As pointed out earlier, the newest receivers are solving this multipath problem. Visit the Axcera site

to review the papers. The digital translators are poised to make some big changes in that industry.

The big shock in the industry was the news that Andrew was selling its broadcast operation to ERI. This has created some interesting changes. Andrew and ERI shared a booth on the TV side, and former Andrew staff showed up with ERI badges. This will undoubtedly lead to some interesting products. But, right now, the change is still occurring and it is too soon to look for new products. Nonetheless, the change has moved quite a bit of the antenna and hard-line manufacturing capability to the ERI site, and the rest will soon be there. ERI is making a large commitment here, and we all wish them the best of luck.

Finally, Dielectric Communications showed a new line of manifold combiners for analog and digital television systems. The units offer good characteristics; the big advantage is reduced space requirements.

In all, it was a great year for the RF side of the business. It was nice to see some action here that compared to the digital whiz-bangs offered by the studio crowd. Especially since your aging author doesn't understand what those studio folks are doing anymore.

Don Marley is president of D.L. Marley and Associates, Peoria, IL.

BE


"Omneon is the one server that fits our tight budget, meets all our requirements today and supports us as our needs change."

Helge Blucher

Vice President
Detroit Public Television

With Omneon SPECTRUM™ media servers, Detroit Public TV implemented a solution that works across their entire operation, was configured precisely to their needs, and can expand in smart, manageable increments—all without replacing the original system and, in many cases, without taking the system off-line.

To learn more about the unique advantages of an Omneon SPECTRUM media server system visit www.omneon.com.

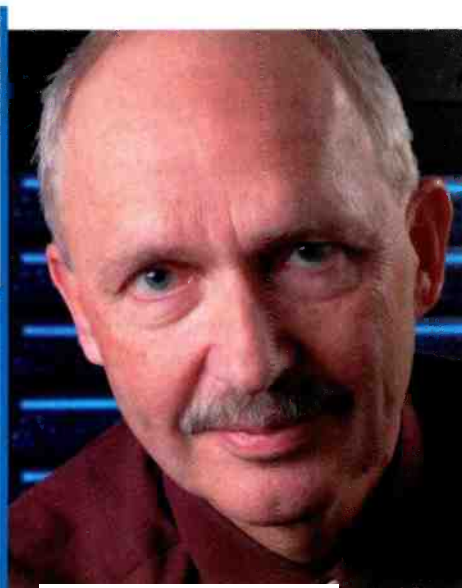

It's not just
what you serve.

It's who.


OMNEON
VIDEONETWORKS

PRODUCT JACKPOT

RECORDING MEDIA

**Fujifilm DP1001 126E
XL/DP151 126 XL**

914-789-7916; www.fujifilm.com

The DP1001 126E XL provides 126 minutes recording capacity in DVCPRO HD mode; the DP151 126 XL provides 126 minutes capacity in DVCPRO50 mode and 252 minutes in DVCPRO25. ■

ONLINE STORAGE SYSTEM

SeaChange MediaCluster 2G
978-897-0100; www.schange.com

Supports serial-ATA or SCSI drives in 6RU, 4RU or 2RU chassis; 1080 disks provide universal, format-independent access to more than 240TB of RAID 2 storage. ■



BROADCAST CONSOLE

Studer Vista 8
818-920-3212; www.studer.ch

Combines the automation capabilities of the Vista 7 and the on-air ergonomics of the Vista 6; redesigned central control bay houses 12 faders and a Vistronics TFT screen, with direct access to up to 52 output signals. ■

EDIT CONTROLLER

Accom Axial/MX
650-328-3818; www.accom.com

Supports uncompressed editing in all SD and HD formats including 24p; offers eight-channel audio edit capability; features include intelligent auto-caching, auto-assembly and optional simultaneous four-stream digitization for streamlined tape room operations. ■

HD/SD ENCODER

Radyne ComStream HE4000
602-437-9620; www.radynecomstream.com

Uses latest Tiernan technology to offer simultaneous HD/SD video encoding; flexible design architecture enables custom configurations to suit any encoding requirement; most advanced features are available as field software upgrades; features include two-pass HD encoding, 4:2:0/4:2:2 encoding and built-in video upconverter. ■

New Tools

Routing switchers

BY JOHN LUFF

One might think that nothing new in routing can be created, but manufacturers have been hard at work creating new and powerful products for infrastructure routing. For instance, Quartz introduced the Xenon routing switcher family. It incorporates submodules that allow users to add functions, such as initial graphics overlay with up to eight keys, internally. You might use this as a

company's return to small routers after the demise of the TEN-X series some time back, though Acappella has more power than many small routers. The company continues to provide large routers in the Trinx series (narrow- and wideband video up to 512x512 in one frame) and Apex series (TDM audio




Quartz's unique approach for building complex systems inside an integrated box may signal new directions for the industry.

minimaster control with no external wiring. The company plans to offer modules that shuffle embedded audio and perform other functions. This approach to building complex systems inside an integrated box may signal new directions for the industry.

Some routers represent a single point of failure, but Utah Scientific has added redundant automatic failover crosspoint cards to its Utah-400. This unique feature allows users to replace failed cards without disrupting a single signal path. The routers also include signal-presence detection, which can be used to set up signal-restoration paths when an input signal has failed.

Thomson Grass Valley has introduced a new small-scale router family, Acappella, which offers up to two levels of 16x4 routing in a single rack unit. An abridged version of the company's Encore control system, Prelude, is embedded in Acappella, offering sophisticated features in a small router. Prelude can control routers up to 128x128. Acappella marks the

router up to 256x256 in one frame), under the control of Jupiter, Encore and Concerto control systems, which all support SNMP monitoring. The Trinx line now includes analog-to-

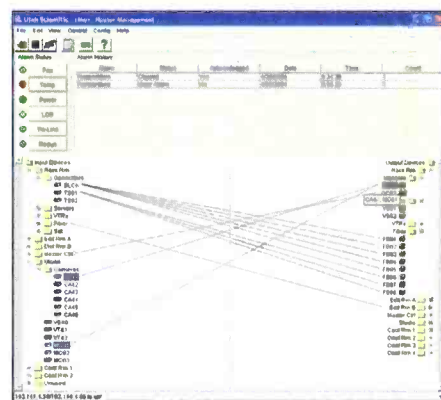

Utah Scientific's rMan router management application is software used to graphically show the connections between specific inputs and each output within a routing system.

digital converters on input modules as well as digital-to-analog converters on outputs. Thomson Grass Valley also announced optical output modules for Trinx.

NVISION introduced its highly

PRODUCT JACKPOT

HD MONITOR

ERG HDM-EV80D

+81 3376 081 61; www.erg-ventures.co.jp/e

Rack-mounted, 8.4-inch HD monitor offers enhanced color and gamma adjustment functions and a memory preset function; HD/SD inputs can be intermingled; four input options and a DC output simplify wiring two monitors consecutively from one DC unit. ■

most entertaining booth presentations, employing a contortionist to symbolize its products' flexibility.

John Luff is senior vice president of business development for AZCAR.



MAB attendees visited booths and saw demonstrations of many new products for infrastructure routing.

expandable NV7512 large-scale TDM audio router, which handles both AES and MADI inputs. The product can be expanded to 4096 by extending the TDM bus between frames. The company also showed an HDTV version of its NV5128 router with integral MCR switcher modules.

PESA introduced Premier, a small-scale router that ranges in size from 8x4 to 16x16. It can accommodate multiple signal formats, including composite, Y/C, RGB, RGBHV and stereo audio. (Future releases will include SDI, HD-SDI and AES/EBU.) The company also showed Cliccontrol, a Web-based routing-switcher control extension, and the UCI-2000 protocol conversion unit, which can interface to other manufacturers' products.

Leitch continued to show its Panacea, Integrator and Integrator Gold routing products in a variety of sizes, but offered no new routing products. Sony showed its established SDI routing switchers, which included the HDSX5800 wideband system.

Pro-Bel showed a new ATM-based audio-routing product, Sirius Fusion, which uses the AES 47 standard and also can route MADI as AES. The product line includes A/D- and D/A-converting I/O interfaces and up to 128x128 in a single 7U frame. Pro-Bel had one of the

Over 946,080,000 seconds of precision timing



WHEN you require the best, most accurate in precision timing look only to ESE. Designed for "Precision Timing", ESE Master Clocks & Accessories have been the industry standard for over three decades.

Whether using GPS, WWV, Modem, Crystal or line frequency accuracy – all ESE Master Clocks can drive digital or analog slave clocks, as well as interface with video and/or computer based systems. Call or visit our web site for more details.

• 3-Year Warranty •



142 Sierra Street • El Segundo, CA 90245 USA
Phone: (310) 322-2136 • Fax: 310.322.8127

www.ease-web.com

UPS

MGE UPS EPS8000

714-557-1636; +33 4 76 18 30 00;

www.mgeups.com

Built-in Web server capability enables detailed UPS monitoring from remote locations; assures true digital power quality for enterprise applications in models from 555kVA to 800kVA. ■

DIGITAL ASSET MANAGEMENT

ARKEMEDIA Technologies

Enterprise Edition

+44 1256 869 200; www.arkemedia.com

Compliant with all metadata standards; features hierarchical and extensible metadata tools, thesaurus functions, taxonomy management, media object and asset versioning, extensive folder features and dynamic asset associations. ■

GLOBAL END-TO-END HD SERVICE

BT Broadcast Services

202-721-8599; www.bt.com/broadcastamericas

Fully integrates fiber and satellite; designed to increase revenue opportunities for broadcasters by enabling them to meet the expected surge in demand for HD coverage of major sporting and entertainment events around the world. ■

AUTOMATION SOLUTION

Digital Transaction Group AIRO

512-837-3737; www.dgtv.com


Designed for master control automation and broadcast transmission control of single- and multichannel broadcasting operations in assisted, unassisted or unattended operations. ■

AUTOMATED JOIN IN PROGRESS

Florical Systems Auto JIP

352-372-8326; www.florical.com

Designed to make it nearly effortless to join a program already in progress, such as when a live sporting event runs longer than expected or when a breaking news event ends; operators simply push a button to signal the end of the live event, and the rest is automatic. ■



Storage

BY C. JASON MANCEBO

Recent advances in storage technologies provide great advantages to the digital entertainment field. Certainly, as content moves from tape-based storage to hard-disk, optical and solid-state storage media, exploiting these IT technologies can reduce the cost and increase the performance of the final solutions.

Under the hood

Until recently, the hard-disk technologies of choice were SCSI and Fibre Channel. These enterprise-level drive technologies were designed and well suited for the high-duty-cycle, real-time demands of film and video applications.

Because SATA was well received in the marketplace last year, NAB2004 turned away from hardware and focused much more on software storage solutions.

Real-time content collaboration, a.k.a. workflow, is a key concern, and the refinement of shared, clustered file systems is a prime, innovative technology. The Holy Grail of storage is the use of centrally located, shared-storage resources with simultaneous real-time shared content. It's important to note that not all storage-area networks have this important feature.

Apple's Xsan is the new player in this arena. Riding on the success of Final Cut Pro and the newly introduced motion graphics package, Motion, Xsan is a 64-bit cluster file system for the Mac OS X Panther. The platform can share files and volumes up to 16TB in size on a high-speed Fibre Channel network. Additionally, it's designed with bandwidth reservation, a critical feature that ensures that a critical file-system client application gets the performance it requires.

Another SAN player is Bright Systems. Its Linux-based SAN controller provides a similar clustered file system. But,

unlike Apple's Xsan, the Bright Systems' controller can support heterogeneous SAN clients, including Linux, Apple, SGI Irix and Windows.

Texas Memory Solutions showed its RamSan-320 solid-state disk, which it claims achieves 1500MB/s random sustained external throughput. This may be an excellent solution for those customers who demand a high-performance disk but have less stringent capacity requirements.

Data Direct Networks presented its S2A8500 silicon storage appliance. The system claims 1.5GB/s of sustained throughput with Fibre Channel or SATA disks.

What format war?

Given the two new storage platforms introduced last year, Sony's XDCAM and Panasonic's P2, you would expect many third-party vendors to announce their system of choice this year. And the winner is — the user!

Third-party vendors eagerly embraced both Sony's and Panasonic's storage solutions, and most vendors declared themselves format-agnostic, willingly supporting both XDCAM and P2.

Sony announced a technology partnership agreement with Avid that enables images acquired with XDCAM to be compatible with Avid's NewsCutter and Media Composer NLE systems.

Also, Quantel announced it would offer interoperability between its generationQ editing and server systems and Panasonic's professional plug-in P2 solid-state-memory-based acquisition system.

Thomson Grass Valley initially will integrate the Panasonic P2 card, into its current-generation digital news production products, NewsEdit and



ZOOM LENS

ZEISS/Band Pro Carl Zeiss DigiZoom

Zeiss: www.zeiss.de; Band Pro: 818-841-9655; www.bandpro.com

Features a 95mm front diameter and 4x zoom; offers industry-standard pitch, zoom, and focus and iris gears; Carl Zeiss back-focus mechanism accurately maintains calibration across the focusing range; focuses to just 22 inches from the image plane – 11 inches from the front of the lens. ■



GRAPHICS AUTOMATION SYSTEM

Pinnacle Systems

DekoCast Traffic Integration

650-526-1600; www.pinnaclesys.com

Allows broadcasters to schedule complex graphics payout with a single automation event; introduces a controllable mechanism for quality assurance of scheduled on-air graphics without master control intervention; on-air promotion can be scheduled as needed; can be run within customers' existing automation systems; template based. ■

WIRELESS HD CAMERA

Ikegami HDL-0101

201-368-9171; www.ikegami.com

Developed with NHK; self-contained, one-man unit with RF links and MPEG compression; selectable from 60Mb/s to 24Mb/s; video with embedded audio is transmitted over a 7GHz COFDM channel with an omnidirectional antenna to the receiving site. ■

LOGO INSERTER

Keywest Technology LogoStar II

913-492-4666; www.keywesttechnology.com

Features logo animation capabilities, an enhanced GUI that allows users to make logos move in any direction, and the addition of nonlinear effects, such as bounce and explosion and DVE-like effects; available in analog and SDI version; upgradeable to HDTV. ■

TRANSMITTER TUBE

L-3 Communications Electron Devices CEA 80

570-326-3561; www.L-3Com.com/edd

The tube can be used if the transmitter is upgraded to digital service at a later date; combines IOT and Multistage Depressed Collector technologies for electron collection efficiency; has demonstrated correctable average power output of 30kW. ■

M-Series iDVR devices. Eventually, it will use the card across the Profile server and LDK camera lines as well.

Pinnacle announced that Time Warner Cable's NY1 was installing its Vortex networked news system and equipping it with support for Panasonic's P2.

Omneon announced that its SPECTRUM media server is compatible with Sony's XDCAM. Ingested content becomes immediately available across an entire facility, thereby providing a significant improvement in the collaborative production process. Omneon also announced enhancements to its SDTI media-interface adapter to support Panasonic's compressed HD format, DVCPRO HD. With this addition, the SPECTRUM is capable of supporting all HD broadcast formats simultaneously, including MPEG, HDCAM and DVCPRO HD. Omneon also announced its support for MXF.

Other storage highlights

Thomson Grass Valley launched Profile in its new, sixth-generation version as the Profile 6G. It uses the same popular user interface, but it now includes the ability to operate in SD/HD modes in a more compact version.

SeaChange introduced its next-generation MediaLibrary 2G online storage system. The storage system supports serial-ATA or SCSI drives in compact 6RU, 4RU or 2RU chassis. A fully configured ML 2G system can support 1080 disks online, providing universal, format-independent access to more than 240TB of RAID 2-protected storage.

360 Systems has added several new features to the Image Server 2000. The video server now handles FTP transfers between Image Servers and supports NAS storage and other MXF-compliant products.

SGI showed its InfiniteStorage solution for broadcast featuring a data-centric broadcast workflow. Based on the Media Server, it provides enhanced

MXF capabilities across the SGI InfiniteStorage TP9100 SAN server line. It can also support CXFS, MassTech, MassBrowse, MassProxy and MassStore for low-resolution browse, proxy and archive applications. Third-party support for SGI's CXFS file system comes from several vendors, including Alias, Apple, Discreet and Quantel.

SGI also highlighted its MXF integration by demonstrating working systems with Avid NLEs using multiple SGI Media Servers, all under the control of Harris automation. Atlanta-based Crawford Communications announced that it has purchased fully redundant CXFS servers with 4TB of TP9500 storage. Georgia Public Broadcasting has also invested in SGI technology by operating a complete IT infrastructure that facilitates easy file sharing and complex media management.

Doremi Labs showed its MCS-HD video server with four independent, shared-storage channels, two play channels, two record channels, selectable compression rates and a VTRlike front panel.

Leitch was highlighting its NEXIO modular, scalable server system for transmission and news environments. It serves integrated applications with a reliable platform for editing, browsing and media management across a multitiered storage hierarchy. The server provides fault tolerance and interoperability (including IP), and supports multiple compression formats in both SD and HD.

While there were both innovative and not-so-innovative storage solutions shown on the exhibit floor, at least most were not the smoke-and-mirrors demos of years past. They are real, deliverable products. ■

C. Jason Mancebo is chief technologist at Korsade Technologies, a broadcast and digital media technology consulting firm in Silicon Valley.

AUTOMATION SYSTEM

ON-AIR Systems ON-AIR Central Version 4.0

+44 20 7663 3663; www.on-air-systems.com

New version includes multichannel audio and a restyled user interface; provides end-to-end playout, including automated transcoding, ingest and content management of live data feeds with integrated graphics, playout, logging and creation of management reports. ■

BROADCAST SYSTEM CONTROLLER

Pharos Communications Pilot MCR

+44 118 950 2323; www.pharos-comms.com

Enables full desktop management of broadcast systems; integrates with the established Pilot RT networked-based matrix control system; an enhanced version of Pharos Pilot Designer allows users to configure new device control displays. ■

PAN/TILT HEAD

Telemetrics PT-LP-S3

201-848-9818; www.telemetricinc.com

For camera and teleprompter systems; all connections to the camera and pan/tilt head are made at the fixed base of the unit, eliminating problems associated with multiple cables revolving with the head, including strain relief and interference. ■



18-INCH FLAT-PANEL LCD TELEPROMPTER

Telescript FPS-180

201-767-6733; www.telescript.com

Designed for studio and large venue productions using full-size studio and ENG cameras; incorporates a rod-mount system for large pedestals with studio cameras; easily installs on-site; is lightweight and offers a high-contrast display. ■

UHF POWER AMPLIFIER

CPI-Eimac K3 MSDC IOT

650-592-1221; www.eimac.com

Simplified to three stages; achieves 58 percent efficiency; low-pressure, low-flow oil cooling eliminates problems associated with water cooling systems. ■



New Tools

Streaming media

BY TOM PATRICK MCAULIFFE

Many broadcasters have diversified into other media areas. Diversifying makes good business sense. But making it profitable, especially when it comes to streaming content on the Internet, has always been a conundrum for broadcasters.

At NAB2004, there were more than 300 streaming or Internet-related companies ready to help broadcasters find a way to make the Internet pay.

But broadcasters, despite all the optimistic talk, manufacturer stroking and backslapping going on, have three main problems when it comes to profitable streaming. First, they can't sell ads effectively on the Web. Second, the public can't afford broadband or DSL-level Internet access and third, even if it could, the majority of the United States still is not wired for the high-speed broadband needed for video and audio. Add the United States' forced conversion to DTV, and you can see why streaming is at the bottom of some broadcasters' to-do lists.

Despite these problems and challenges, there were some great new products on display this year.

Encoda launched its new product, VeriStream, which quickly pinpoints streaming system errors and failures on a LAN or across a worldwide network. The product is designed for multichannel environments, such as cable television headends or direct-to-home broadcast operations.

ViewCast showed its new Niagara PowerStream encoder, which delivers streaming video to mobile/handheld devices. The new Osprey-300 addresses both streaming and video editing needs. The PCI-X bus interface provides compatibility with the latest PC technologies, delivering high-performance/high-bandwidth streaming with professional editing performance.

BBC Technology came from the UK to NAB2004 sporting a new contract with Discovery

Networks International to provide high-bandwidth services. It will stream the network's content to Discovery Channel Web site users via its dedicated broadband service.

The real-time, broadcast-quality MPEG-4 (AVC/H.264) encoding capability of SkyStream Networks' new Mediaplex-20 video delivery platform was also on display.

Lots of great gear in the NAB aisles proved, to me at least, that there are many viable solutions that will help broadcasters provide near-broadcast-quality streaming once the infrastructure hurdles are addressed. Rest assured that eventually — once the transition to digital is complete — broad-



Streaming products on display at NAB proved broadcasters will find viable solutions for profitable streaming when the time comes.

casters will somehow find a way to make streaming programming profitable. In the meantime, don't hold your breath. It may be quite a while, and there are more important things to do first!

BE

Tom Patrick McAuliffe is a journalist, entertainer and contributing writer with Video Systems magazine.

A PRIMEDIA Publication

Broadcast Engineering

www.broadcastengineering.com

Editorial Director: Brad Dick, bdick@primediabusiness.com
International Editor: Jerry Walker, jwalker@primediabusiness.com
Technical Editor: Donald Keller, dkeller@primediabusiness.com
Sr. Assoc. Editor: Susan Anderson, sanderson@primediabusiness.com
Sr. Assoc. Editor: Laura Collins Dixon, ldixon@primediabusiness.com
Asst. Editor: Chevon Payton, cpayton@primediabusiness.com
Asst. Editor: Heidi Hueseman, hhueseman@primediabusiness.com
Sr. Art Director: Michael J. Knust, mknust@primediabusiness.com
Assoc. Art Director: Robin Morsbach, rmorsbach@primediabusiness.com
Technical Consultants: Computers & Networking – Brad Gilmer
 Antennas/Radiation – John H. Battison
 Digital Video – Michael Robin
 Transmission Facilities – Donald L. Markley
 Legal – Harry C. Martin
 New Technology – John Luff
 Industry Watcher – Paul McGoldrick
 New Media – Craig Birkmaier
 International Technology – Sypa

Sr. VP: Peter L. May, pmay@primediabusiness.com
Group Publisher: Dennis Triola, dtiola@primediabusiness.com
Marketing Dir.: Christina Heil, cheil@primediabusiness.com
Vice President of Production: Lisa Parks, lparks@primediabusiness.com
Sr. Ad Prod. Coord.: Sonja Shaffer, sshaffer@primediabusiness.com
Classified Ad Coord.: Michelle Hooper, rhooper@primediabusiness.com
Dir., Audience Marketing: Barbara Kummer, bkummer@primediabusiness.com
Group Show Director/LD: Sharon Morabito, smorabito@primediabusiness.com

PRIMEDIA

Business Magazines & Media

COO: Jack Condon, jcondon@primediabusiness.com
Executive Vice President: John French, jfrench@primediabusiness.com
Corp. Comm/Mktg.: Karen Garrison, kgarrison@primediabusiness.com

Primedia Business to Business Group - 745 Fifth Ave., NY, NY 10151
Chief Executive Officer: Martin Maleska, martin.maleska@primedia.com

Primedia Inc.

Chairman: Dean Nelson, dean.nelson@primedia.com
President and CEO: Kelly Conlin, kelly.conlin@primedia.com
Vice Chairman & General Counsel: Beverly Chell, beverly.chell@primedia.com

MEMBER ORGANIZATIONS

Sustaining Member of:
 • Society of Broadcast Engineers
 Member, American Business Media; Member, BPA International



BROADCAST ENGINEERING, ISSN 0007-1994, is published monthly (except semi-monthly in June and December) by PRIMEDIA Business Magazines & Media Inc., 9800 Metcalf Ave., Overland Park, KS 66212 (primediabusiness.com). Current and back issues and additional resources, including subscription request forms and an editorial calendar, are available on the World Wide Web at broadcastengineering.com.

SUBSCRIPTION RATES: Free and controlled circulation to qualified subscribers. Non-qualified persons may subscribe at the following rates (Prices subject to change): USA and Canada, 1 year, \$70.00, 2 years, \$135.00, 3 years, \$200.00; Outside USA and Canada, 1 year, \$85.00, 2 years, \$165.00, 3 years, \$245.00 (surface mail); 1 year, \$155.00, 2 years, \$295.00, 3 years, \$440.00 (airmail delivery). For subscriber services or to order single copies, write to Broadcast Engineering, 2104 Harwell Circle, Bellevue, NE 68005 USA; call 866-505-7173 (USA) or 402-505-7173 (outside USA); or visit www.broadcastengineering.com.

ARCHIVES AND MICROFORM: This magazine is available for research and retrieval of selected archived articles from leading electronic databases and online search services, including Factiva, LexisNexis and Proquest. Formicroform availability, contact ProQuest at 800-521-0600 or 734-761-4700, or search the Serials in Microform listings at proquest.com.

REPRINTS: Contact Wright's Reprints to purchase quality custom reprints or e-reprints of articles appearing in this publication at 877-652-5295 (281-419-5725 outside the U.S. and Canada). Instant reprints and permissions may be purchased directly from our Web site; look for the Copyright tag appended to the end of each article.

PHOTOCOPIES: Authorization to photocopy articles for internal corporate, personal, or instructional use may be obtained from the Copyright Clearance Center (CCC) at 978-750-8400. Obtain further information at copyright.com.

PRIVACY POLICY: Your privacy is a priority to us. For a detailed policy statement about privacy and information dissemination practices related to Primedia Business Magazines and Media products, please visit our Web site at www.primediabusiness.com.

CORPORATE OFFICE: Primedia Business Magazines & Media, 9800 Metcalf, Overland Park, Kansas 66212 • 913-341-1300 • primediabusiness.com

Copyright 2004, PRIMEDIA Business Magazines & Media Inc. All rights reserved.

Digital Automation SYSTEM

"It really works!"
 - Bill Ziegler, CTO WLVT

"Flexible, reliable, & stable!"
 - Mike McGraw, Dir. Development Clear Channel Spectacular

"Far more efficient!"
 - Joe Glynn, VP Eng. WVIA

"Easy to use!"
 - Paul Byers, Dir. Eng. & Ops. WOED

Modular Expandability:
 Schedules, Devices, Workstations

Comprehensive Intuitive G.U.I.

Context Sensitive On-Line Help

Remote Control, Diagnostics, and Upgrades

Dynamic Logging, Error Checking, and Alarming

24/7/365 Technical Support

Interface to any Traffic System


Automation that Works!

www.microfirst.com

MEASURING THE DIFFERENCE in Video Cable Design...



The innovator and leader in video coax technology, Gepco continually advances and develops high-resolution video coaxial cables that ensure optimal picture quality and exceptional reliability in today's demanding High Definition, multimedia and broadcast video applications.



- All Reels 100% Swept Test & Certified
- 3 GHz Bandwidth for HDTV
- Gas-Injected, Crush Resistant Dielectric
- Zero Center Conductor Migration
- Exceeds SMPTE Specifications

GEPACO
 INTERNATIONAL, INC.

TRANSMITTING CLARITY

www.gepco.com email: gepco@gepco.com

800.966.0069

TELEVISION AUDIO PROCESSOR

Modulation Sciences MSI-3300

732-302-3090; www.modsci.com

Multifunction unit combines analog-to-AES3 and AES3 (with automatic speed detection)-to-analog conversion with high-quality gain riding and a transmission audio processor; conditions audio for transmission in a variety of media, including cable modulators, satellite uplinks and fiber modulators. ■

SCALABLE TDM DIGITAL AUDIO ROUTER

NVISION NV7512

530-265-1000; www.nvision1.com

Supports analog as well as digital audio signals; linearly expandable to offer 2048x2048 channels; MADI-format multichannel digital I/O also is featured, as well as high-performance 24-bit converters; enables users to manage large numbers of mixed-format audio signals. ■

DVD AUTHORIZING APPLICATION

Microsoft DVD Producer – WMV HD Edition

425-882-8080; www.microsoft.com

Special version of Sonic's authoring application supports the production of DVD titles using Microsoft WMV HD; WMV HD is designed to deliver HD video at data rates comparable to SD DVD video. ■



ROUTER

Pro-Bel Morpheus

631-549-5159; www.pro-bel.com

Manages systems from single channels up to the most complex multichannel environments; features the MediaBall concept, which provides a way to handle secondary events such as interactive TV. ■

REMOTE/SPORTS LENS

Thales Angenieux 70 HD

973-812-3858; www.angenieux.com

Delivers a focal range of 9.5mm to 665mm and an aperture of f/2.2; features dust and condensation-free enclosures; requires low power for operation, allowing direct connection of the lens to the camera. ■

New Tools

Monitoring, test and measurement

BY PHILIP J. CIANCI

Each generation of equipment shown at NAB integrates more test and measurement features and invariably includes some type of monitoring capability. Therefore, monitoring must now be considered part of the traditional realm of test and measurement.

All broadcasters seek a total end-to-end monitoring, test and measurement system for essence, network and software applications. In this era of convergence of broadcast engineering and IT technologies, it was surprising that traditional IT companies, which offer SNMP-enabled network-monitoring systems, did not demonstrate broadcast-related applications. Nor did I find any PC products that monitored configuration/application health.

Now that nearly all broadcast-equipment vendors have incorporated some kind of SNMP capability, many have gone so far as to develop their own resource-management application. Vistek offers ViewNet capabilities for its newly launched range of HD products. Evertz's VistaLINK offers comparable signal-monitoring capabilities for its fiber-optic transmission products and vast array of baseband processing cards.

Addressing the issue of SNMP implementation vendor compatibility, Snell & Wilcox's RollSNMP extends SNMP monitoring available in its RollMap and RollCall to other vendors' hardware and software products. With a feature set that includes unified alarm reporting for all system elements, mapping of system interconnections and identification of the physical location of resources, this integrated application suite

approaches complete infrastructure signal-path monitoring, fault diagnosis and resolution.

Facilities spread across large campuses or numerous locations need verification of incoming and outgoing signal quality. For such facilities, Evertz has expanded its line of interface products to fully support HD. These products include integrated monitoring and measurement of signal parameters. And, of course, the requisite SNMP interface is available.

MPEG transport-stream monitoring systems were a hot item again, but this year with a twist: the capability to assess compressed video quality. K-WILL debuted its Video DNA monitoring line, which decodes an MPEG transport stream and analyzes elementary packet video in real time. Rohde & Schwarz's DVQ performed similar functions. Both systems allow an A/B comparison of SDI video with respect to compressed MPEG-2 elementary stream video. DVQ allows users to set QoS levels and trigger alarms to initiate reconfiguration of encoding parameters or distribution paths. Tektronix upgraded its AD953A and claims to be the first with a transport-stream-analysis system that supports both the H.264 and WM9 compression standards.

Digital program insertion is a reality, and verifying that transport streams are compliant with the ANSI/SCTE 35 2001 DPI standard is imperative. Pixelmetrix, known for products such as DVStation-IP (an MPEG-2 transport-stream test-and-monitoring over Ethernet system),



PRODUCT JACKPOT

BROADCAST DEVICE CONTROL TOOLS

OmniBus Systems G3 Control 303-237-4868; www.OmniBus.tv

Provides device access, operation and management over distributed networks; consists of G3 Desktop, G3 Routing and G3 Machine Control; based on standard open-IT protocols. ■

SD MPEG RECORDER

FOCUS Enhancements FireStore FS-M

408-866-8300; www.FOCUSinfo.com

Includes MPEG-2 recording, playout and timeshift recording; timeshift feature enables simultaneous record and playback functions; has a 120GB removable disk drive and is expandable to 200GB; provides more than 72 hours of continuous DVD-quality MPEG-2 recording; user-selectable bit rates of up to 12Mb/s. ■

presented the DPI Auditor, a new DPI software application that features splice information logging and reporting capabilities. This product monitors the compliance of bitstreams for digital program insertion.

Triveni debuted its next-generation DTV transport-stream monitor and analyzer, StreamScope MT-30. It monitors MT-30, DPI SCTE 35 digital cue tones, MPEG-2 PSI and ATSC PSIP. It supports ASI, VSB, SMPTE 310, QAM and Gigabit Ethernet inputs, making this unit extremely versatile.

Not to be outdone, Sencore has introduced a DPI monitoring system that logs the start time of the avail, duration and avail count. It can monitor up to eight ASI TS streams simultaneously and log SCTE 35 activity for 25 programs per transport stream.

And, from the other side of the pond, Thales introduced GARNET, a

handheld MPEG-2 analyzer, and MPEGScan, a media-file-validation application for TS servers.

Tektronix introduced WFMNLE, which tests and measures graphic effects for compliance with legal color space for Avid tools. Its real-time waveform and vector displays, and its arrowhead and diamond waveform displays, identify component and composite gamut errors. Material can be run through the timeline, errors logged and action taken to correct the violations. WFMNLE is presently available as an Avid plug-in, and there are plans to release versions for other editing systems in the future.

For those in the trenches who still need to trace signal paths cable by cable, Wohler will soon offer an HD-SDI signal generator, PenPal HD, which includes 26 video test patterns, 18 serial formats and four stereo pairs of embedded AES audio — and fits in your shirt pocket. It will be an indispensable tool for tracing signal continuity in any size plant.

Leader's LV 5750 portable SDI monitor can help verify HD and SD distribution integrity anywhere in the plant. Full-screen or multiple displays allow viewing of waveform, vector, picture, audio and status. Bar graphs allow you to monitor eight channels of audio. A digital data dump can facilitate TRS, XYZ and VANC analysis.

Last but not least, ENCO's Guardiën, a speech-recognition-technology-enabled, automated audio zapper can be trained to recognize the seven (or eight) words that you can't say on the air and will bleep out the offending audio, log the event and save the audio clip. This is certainly a well-timed product introduction. Can a wardrobe-malfunction macroblocking depixelizer be far behind? **BE**

Philip J. Cianci has been in the TV business for 20 years and done circuit design in the Grand Alliance ATSC prototype system.



NAB attendees found that equipment manufacturers are increasingly integrating test and measurement features and including a monitoring capability.

I·D·
15 Years of Excellence

**Thinking Blue?
Join the Club!**

Here's what some of our Club Members say ...

"We outfitted six of our news cameras with the ENDURA System and the photojournalists love them. They can't believe the amount of runtime they get before needing a recharge Needless to say the overall light weight is a plus as well. The only gripe I've heard is the crews using the old battery system want to know when they are getting ENDURA's".

**Mark Schaefer, Director of Engineering
WFLA-TV**

"We are pleased with the power to weight ratio and reliable performance of the IDX Lithium Ion batteries. The quality of their products and exceptional service and support we get from IDX, gives us the best return on our investment".

**Peter Larson, Vice President
Broadcast Sports Technology**

"While compact and amazingly lightweight, the IDX ENDURA System has proved itself completely durable with tremendous holding power. I have taken IDX ENDURA batteries into extremely difficult environments for commercials, features, and documentaries...the batteries have performed flawlessly."


**Matthew J. Siegel
Director of Photography**



**endura
SYSTEM**

Leading the World
**Lithium Ion
Technology**

IDX System Technology, Inc.
1602 Lockness Place, Torrance, CA 90501
Phone: (310) 891-2800 Fax: (310) 891-3600
Email: idx.usa@idx.tv WWW: www.idx.tv



Format conversion

BY JOHN LUFF

There was a time when video formats were NTSC, PAL or SECAM. Today, it's not that simple. Not only do broadcasters have to contend with the 50Hz and 60Hz standard-definition systems, but there is also a plethora of HDTV formats in 16:9 aspect ratios, and a few SDTV 16:9 formats as well. To these, add progressive-scan and interlace variants, 24Hz adaptations, and many formats related to the NTSC color subcarrier (60/1.001). It presents an interesting bouquet of possible production and air formats.

As with any conversion between standards, format conversion can be either simple or very complex, depending on which two formats you choose to convert. Converting analog components properly scaled into digital components sampled to meet ITU-R BT601 (SMPTE 259M) is relatively easy. Filter properly, sample, quantize and code the samples for transmission.

But pick a different conversion and the degree of difficulty increases dramatically. Take, for example, a true 60Hz 720p60 HDTV signal and jam it into a 1080i59.94 transmission system. Spatial and temporal samples don't line up nicely for the conversion process. Several things have to happen. First those pesky progressive frames must be sliced and diced into interlace fields. Seven hundred and twenty lines must become 480. Secondly, in the next frame, make sure the vertical samples are

interpolated from the correct lines in the 720 frame so they end up a smidge lower to line up with the even 1080i field. After that, begin again. The frame rate doesn't match; so temporally interpolate a few 720 frames to come up with a candidate frame

single chip solution to mathematically convert pictures. The GF9320 scaling processor replaces what was once a ½ rack of heat buildup. Arguably, a design using individual components that are optimized for the task might do a better job. But, at first approximation,

Format conversion can be either simple or very complex, depending on which two formats you pick for any particular conversion.

to use for the vertical interpolation to the 1080i (540 line) field. With each successive pair of conversions, the temporally interpolated frame moves a smidge, so its control has to be sophisticated. The line rate is also a tad off frequency as well (1/1.001).

The math involved in the conversion process is complicated. Gennum, a Canadian chip manufacturer, sells a

this is a pretty sophisticated and high-quality solution. Figure 1 shows the chip's capabilities.

There are several opportunities left to create great conversions, or poor ones. The quality of any A/D and D/A conversion involved in the process is a major factor. Getting the filter mask to match the standard precisely still requires good old-fashioned design talent.

Other considerations include integrating a de-interlacing solution and sundry other required components. Clearly, this is no amateur design project for the basement. Many recent, modestly priced conversion boxes offer such integrated solutions, some of which are now confined to a single module in a D/A tray. One manufacturer, Cobalt Digital, sells a box a little larger than my Palm Pilot that does a pretty good job; it is designed using precisely this type of integrated solution.

What sets sophisticated, high-quality solutions

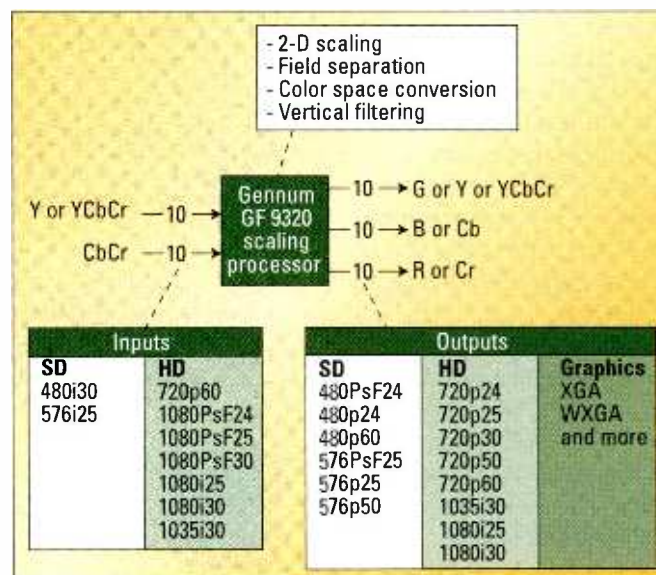


Figure 1. Gennum's GF9320 scaling processor makes converters less costly and complex.

Sophisticated, high-quality solutions are set apart by the quality of the optimized code that controls them, or, in some cases, by a custom integrated solution. For several years, Teranex has offered some of the best conversion equipment available. Its products come as an outgrowth of a processing engine designed initially for government applications. I don't suppose that was used for converting the images from the Hubble Telescope. But, in any event, they designed a box that used multiple processors on multiple boards with more computing power than any of us would know what to do with. This year, the company introduced a new solution, the XM series modular product, which fits in a D/A tray and produces about the same results.

It's pretty impressive, but it's clear that the science and engineering involved are becoming mature. When that happens, competition pushes prices down rapidly. This is happening now, just in time for the serious implementation of HDTV production and distribution systems.

It is valuable to remember why conversion products exist. They are the bridge between eras of technology or between competing economic interests. The 525 and 625 standards coexisted for many years with little interchange before the first converters were put in service in Europe in the 1960s, when Telstar first beamed live television between continents. Telstar 1 launched in July 1962. It permitted only minutes of live connection, but it required a bridge more immediate than kinescope copies sent by commercial aircraft. Today, we see the overlap of NTSC and PAL with HDTV. At some point, other media will supplant HDTV. In all cases, the bridge period requires a new device to enable both technologies to succeed simultaneously. So long as we don't have one world, standard conversion will remain a fixture in the engineer's toolkit.

It is logical to look to a product range that can be used for conversion in both directions. For instance, today we have converters with single inputs that accept either analog or digital inputs and convert to the opposite without reprogramming. The same is true of standards converters that auto sense 625 or 625, or 1080i and 720p, or combinations thereof, allowing outstanding flexibility. This kind of auto-adapting bridge is being moved into master control and routing switchers and even production switchers. At some point in the not too distant future, you will be able to plumb up a system without being too worried about the boxes talking to each other, leaving you to concentrate on programming them for the functions you want them to perform. System integration will become "function integration"...and then it'll be time for me to retire!

BE

John Luff is senior vice president of business development for AZCAR.



Send questions and comments to: john_luff@primediabusiness.com

JUNE 2004

THE OCTO RANGE
HI-TECH MADE SIMPLE

Give your High Resolution Presentations all the effects they deserve with the New Octo Range (OCTO-FX™, OCTO-FADE™, OCTO-LOGO™ and OCTO-PLUS™)

A/V SCALER SEAMLESS SWITCHER

- UNIVERSAL, SIMPLE & COMPACT
- 8 A/V Inputs
- Video: HDTV & Computer up to 1280 x 1024
- Dual Output: Scaled up to SXGA 5 DILA
- Audio Stereo: 8 Inputs + 1 full featured microphone input

ANALOG WAY

From USA & Canada: Analog Way Inc. New York Phone: (212) 269-1002 Fax: (212) 269-1345 Email: salesusa@analogway.com

From Europe, Africa, South America & Middle East: Analog Way, France Phone: (33) 1 69 47 18 00 Fax: (33) 1 69 47 18 01 Email: sales@analogway.com

From Asian & Asian Pacific: Analog Way Pte Ltd Singapore Phone: (65) 62 826 800 Fax: (65) 62 826 205 Email: salesasia@analogway.com

Broadcast Engineering
subscriptions

As the television industry continues to redefine itself, **Broadcast Engineering** is there. **Broadcast Engineering** is the industry's preferred resource for learning about the ever-evolving television market. Stay current on the latest technology developments, new players, products and decision-makers.

To start your **FREE** subscription with the industry's #1 authoritative source of technical information*, go to www.broadcastengineering.com and click on SUBSCRIBE NOW.

*2002, Paramount Research Study, World Edition.

redefining television

broadcastengineering.com **107**

4sight's HRM-1500

BY JIM BOSTON, ANDY HUTTON, LOU JANIS AND ROB MARTIN

The error correction and error masking in modern digital equipment ensures that digital signals do not gradually degrade with increasing attenuation in the signal path as analog signals do. Instead, a digital transmission path continues to work perfectly up to the point where it suddenly does not work at all — the well-known cliff effect. As signals approach the digital cliff, errors go rapidly from nonexistent to severe — swamping recovery efforts and making the path unusable.

Bandwidth and signal requirements

Although the SDI signal is digital in nature, it has many analog qualities that can be used to predict how close

York to Los Angeles to represent one second in time, the total time taken up by a single bit cell would represent less than half a centimeter travel. The HD bitstream has a fundamental frequency of 750MHz. If the third harmonic is added ($3 \times 750\text{MHz}$), the resulting waveform resembles a square wave. If additional odd harmonics were added in the correct amplitude and phase, a nearly perfect waveform would result. In reality, with the extremely high bit rates needed for HD, only the third harmonic makes it more than a few feet down a coax.

Spectral analysis

The physical layer used to transport the data is composed mostly of coax,

to look more like a sine wave and may become unrecoverable.

The bottom line

The weight of the cabling needed in a broadcast facility often equals the weight of the equipment. For this reason, facilities, especially trucks, are built with the lightest cables possible. Many facilities use minicoax, even with HD. Unfortunately, smaller-diameter cable results in increased HF losses. RG-59 type coax might show 5dB loss per 100 feet at 750MHz, whereas minicoax has 9.59dB of loss. At 2250MHz (the center of the HD third harmonic) RG-59 type typically has 9.14dB loss per 100 feet, while minicoax has a loss of 16dB.

Figure 1 graphs energy loss against distance for a coax path. It shows that third harmonic energy drops at a much greater rate than the fundamental energy as distance increases. This is why loss at both levels must be considered.

Usually the error headroom value is checked with expensive test equipment, such as a spectrum analyzer. 4sight's handheld HRM-1500 meter offers broadcasters designing, building and maintaining HD facilities a simple, economical way to check the health of HD signal paths. It determines the amount of energy in the third harmonic, which indicates how close to the error cliff the HD bitstream is. It also provides a simple indication of distance from the error cliff, more detailed information on overall bitstream energy, and a breakdown of fundamental and third-harmonic energy.

BE

Jim Boston, Andy Hutton, Lou Janis and Rob Martin are engineers with 4sight. For more information on the HRM-1500, visit www.4sightproducts.com.

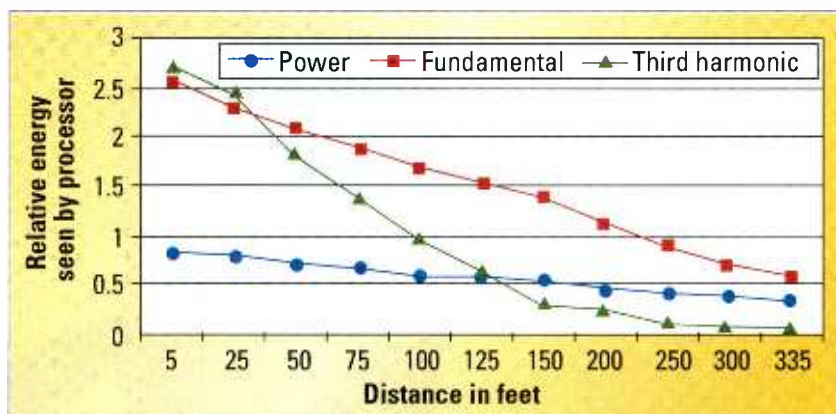


Figure 1. This graph shows the energy loss an HD signal suffers as it travels in a coaxial cable. After traveling about 250 feet, fundamental energy drops to a third of its original value, while the third harmonic drops to the noise floor, making the HD signal unrecoverable.

to the error cliff a particular digital path is. The SMPTE292 bit-scrambling algorithm essentially produces a square-wavelike signal. The peak-to-peak value of this signal should be 0.8V and the rise time or transition time between the 20 percent and 80 percent amplitude points should be only 270ps. Using the distance of New

York to Los Angeles to represent one second in time, the total time taken up by a single bit cell would represent less than half a centimeter travel. The square wave data signal starts

TALLY MAPPER™

- ◆ Tally Routing & Mapping
- ◆ One Button Operation
- ◆ Store Maps Internally
- ◆ Edit From a PC/Laptop



A Compact Solution,
Ideal for Mobile Units and
Multiple Production Setups.

Videoframe™
Control System Solutions
Tel: 530-477-2000

www.videoframesystems.com

The HD Maestro™

Real-time, PC-based
High-resolution (1080i) HD
MPEG Encoding Workstation



- Input HD-SDI, output DVB-ASI
- Based on the LSI Logic DoMiNo™ chipset
- Perfect for post production HD content distribution
- PC platform provides flexibility and connectivity

For more information on the HD Maestro or any
DVEO products, call 858 613-1818. Or visit
www.dveo.com

DVEO
Pro Broadcast Division
by CMI

HDVI-10

SDI to DVI CONVERTER



Convert your low cost
LCD Monitor into a HD/SD
SDI video monitor
for \$1,000!



doremi

tel. 818 562-1101

www.doremilabs.com

Precision Color Bar & Test Signal Generators

CSG-50 \$379

- Digitally synthesized full/SMPTE color bars, blackburst, composite sync, 15 Hertz Ref.
- Built-in timer switches bars to black, tone to silence at 30/ 60 seconds
- Crystal controlled, 1 KHz, 0 dB audio
- RS170A, SC/H phased. No adjustment needed.

CSG-50B \$538

- All features of CSG-50 PLUS
- 3-5 outputs of blackburst
- + subcarrier



TSG-50 \$469

- Generates 12 digitally synthesized video test signals/ patterns
- Built-in timer switches pattern to black, tone to silence at 30/ 60 seconds
- Outputs: video, composite sync, 400/ 1KHz, 0dB audio tone, 15 Hertz Ref.
- RS170A, SC/H phased. No adjustments needed

TSG-50B \$628

- All features of TSG-50 PLUS
- 3-5 outputs of blackburst,
- + subcarrier



Unconditionally Guaranteed!

HORITA®

www.horita.com

Contact your local video dealer
or call (949) 489-0240

ELECTRONICS RESEARCH, INC.

EL Series UHF Antenna

The EL Series UHF
Transmitting
Antenna for either
DTV or NTSC
applications



ERI®

Your Single Source for Broadcast Solutions

Sales@ERInc.com | +1 (812) 925-6000 | www.ERInc.com



Time

to advertise in
*Broadcast
Engineering
magazine*



contact:


Jennifer Shafer

800-896-9939

jshafer@
primedia
business
.com

CAPACITORS FAIL MORE OFTEN THAN ANY OTHER COMPONENT

Check any Electrolytic Capacitor *In Circuit* with
100% Accuracy in 3 Seconds---GUARANTEED*

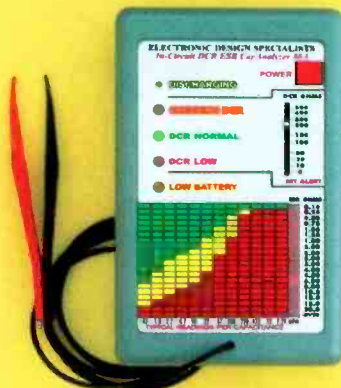

*Automatically discharges capacitor first
Checks DCR with alerts for leakage or shorts
Measures DCR to 500 ohms with Alert
Measures ESR from .1 to 20 ohms @ 120KHz
Checks capacitors from 0.47uF to 2200uF
Beeps one to five beeps for capacitor quality
Color chart shows good-fair-bad readings
One-handed tweezer test probe included
Checks both through-hole and surface mount
* 60-day satisfaction money-back guarantee*

The trick to locating bad capacitors *in-circuit* is not to measure capacitance, but to measure ESR at high frequencies, and compare readings *in relation* to capacitance. The **CapAnalyzer 88A** is the only test instrument that will perform the series of tests and conditions that will guarantee 100% accuracy. Even NASA uses it!


Maintenance engineers for the major TV networks ABC, NBC, CBS and FOX specify the **CapAnalyzer 88A**, as well as technicians at AT&T, GTE, Verizon, Comcast and AOL/Time-Warner. Service engineers for professional broadcast equipment companies like Panasonic Broadcast, JVC, and Sony specify the **CapAnalyzer 88A**, as do thousands of independent service technicians.

\$179 MSRP ELECTRONIC DESIGN SPECIALISTS, INC.
561-487-6103 www.eds-inc.com

BROADCAST VIDEO Over IP

- Broadcast Quality at 1.5 Mbps
- Contribution Feeds
- Live News Gathering
- Portable DNG & SNG
- Advanced Error Correction
- Realtime or Store & Fwd
- Multi-Network T1, E1, IP

Streambox®

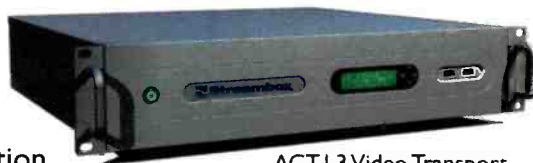

ACT-L3 Video Transport

Call or visit our website today!

www.streambox.com · sales@streambox.com · 206.956.0544 x222

For Sale

AcousticsFirst™
Toll-Free Number: **888-765-2900**
Full product line for sound control and noise elimination.
Web: <http://www.acousticsfirst.com>

Training

Fiber Optic Training
Hands On or Classroom
• Videos, CDs, DVDs
• National schedule
• Custom classes
1-800-451-7128

The LIGHT BRIGADE
Your Fiber Optic Resource.

Professional Services

D.L. MARKLEY

& Associates, Inc.
CONSULTING ENGINEERS

2104 West Moss Ave.
Peoria, Illinois 61604
Phone (309) 673-7511 • FAX (309) 673-8128
www.dlmarkley.com
Member AFCE

GILMER & ASSOCIATES, INC.
TECHNOLOGY / MANAGEMENT CONSULTANTS

BRAD GILMER
PRESIDENT

2207 RINGSMITH DR
ATLANTA, GA 30345
TEL (770) 414-9952
FAX (770) 493-7421
EMAIL: bgilmer@allnet.com

The NLE Buyers Guide

A buyers guide to nonlinear video editing systems and disk recorders / servers for editing with a searchable database of over 200 products
<http://NLEguide.com>

JOHN H. BATTISON P.E.
CONSULTING BROADCAST ENGINEER,
FCC APPLICATIONS AM, FM, TV, LPTV
Antenna Design, Proofs, Fieldwork
2684 State Route 60 RD #1
Loudonville, OH 44842
419-994-3849 FAX 419-994-5419

Employment

Employers/Employees
Click On
TV-ENGINEERS.COM

System Integration

GENCOM TECHNOLOGY
MPEG II & Satellite Headends
Remote Trucks & ENG
Production Studios
34 Years of Television Experience
Design & Consultancy - System Integration
Ph: 516-997-5675 - Fax: 516-997-4666
www.gencom.tv

MOBILE UNIT ENGINEER IN CHARGE (EIC) - MIRA Mobile Television, a five truck mobile facilities company located in the Pacific Northwest, is seeking an experienced mobile unit EIC. Minimum of 3-5 years mobile production experience with extensive digital TV systems knowledge and troubleshooting ability. Knowledge of HD systems a plus. Strong client relationship skills mandatory. Extensive travel in western U.S. and western Canada. No Phone calls. Send or e-mail resumes to: R. Kirk, MIRA Mobile Television, 5775 SW Jean Rd., Suite 103, Lake Oswego, OR. 97035, rkirk@miramobile.com, Equal Opportunity Employer

DIRECTOR OF ENGINEERING - WPXI(TV) the Cox-owned NBC affiliate in Pittsburgh is looking for a Director of Engineering. If you're an operations-oriented, experienced engineering manager with strong technical skills, a track record of organizing and managing television operations, and want to be a key leader at a station with a heavy emphasis on local news, programming, and production, read on. Candidates should have a minimum 5-years experience in Television engineering management, a BSEE and a FCC General Radio Telephone License. SBE certification a plus. Must demonstrate success in managing capital and operating budgets, managing computer integration and networking, value effective maintenance practices and cross training. Must have enthusiasm for goal-oriented customer-focused service. We want someone with the management background to oversee our current television facility and help us design our brand new "digital from the ground up" building. Yes, we are breaking ground on a new facility. If this sounds like a perfect fit, you should apply, but only if you're committed to working with and developing a terrific group of people. Want to be part of the team? Send a cover letter and resume to Ray Carter, VP & GM, WPXI, 11 Television Hill, Pittsburgh, PA 15214 Email rcarter@wpxi.com or fax 412-237-1286. EOE

WSBC BROADCASTING is looking for a Manager of Engineering. We will soon own five AM stations and one FM station in the Chicago area. We need an experienced person, familiar with AM directional patterns and multi-tower arrays. In addition, the person will be involved in all engineering and technology aspects for this growing company. Resume, job and salary history to: Harvey Wells • WSBC Broadcasting • 1645 West Fullerton Ave. • Chicago, IL 60614. WSBC Broadcasting is an Equal Opportunity Employer.

BERMUDA CABLEVISION - is seeking applications for the post of; General Manager for Cable Television...General Responsibilities: To provide management direction for the activities and operations of the Cable Television systems throughout Bermuda. Core Duties and Responsibilities: Preparation of budgets and forecasts and direction of operations to meet defined objectives for growth and profitability. Management and monitoring of staff to maximise productivity and to improve the quality of customer service. Interpretation and implementation of corporate policies and procedures. Building and maintaining relationships with community, country residents and public officials for the benefit of the organisation. Reporting to corporate office, providing a continuing evaluation of operating results and working with all departments to maintain the highest level of customer service. Also includes interviewing, hiring, and training employees; planning, assigning, and directing work; appraising performance; rewarding and disciplining employees; addressing complaints and resolving problems. Education and Experience: Bachelor's degree (B. A.) with a minimum of 5 years experience in the Cable Television industry covering operations and maintenance of systems including knowledge of digital television roll-out. Experience in government relations required. A formal financial qualification would be of distinct advantage to applicants. Other Requirements: PC skills including presentation and accountancy programmes. Strong organisational skills. Excellent overall communication skills. Must be committed to providing exceptional service at all times. Salary and benefits will be commensurate with experience. Applications in writing only are invited and should be addressed to; Personnel Director, WestStar TV Ltd., Box 30563 SMB, Grand Cayman, Cayman Islands, British West Indies, e-mail: weststartv@weststartv.com

BROADCAST ENGINEER (STUDIO) - KNME-TV (PBS) at the University of New Mexico, seeks an experienced studio engineer to work in a dynamic environment. KNME, New Mexico's oldest public television station, was first in NM to begin broadcasting digital in 2001. The studio digital conversion project is well under-way and fully funded. KNME serves 1.6 million+ viewers in central and northern New Mexico. It operates a complete digital production facility with SD and HD capability, and a full-service teleport with Vyvx network connectivity. We are seeking a career-oriented professional who wishes to grow with us. The position offers an excellent benefits package, including university tuition for the entire family, and 4 weeks vacation. The Albuquerque/Santa Fe area offers great quality of life with many cultural and recreational opportunities. For complete vacancy announcement and application, please check www.unm.edu under "jobs". Refer to requisition #M38888. Resumes must be accompanied with a "Supplement to Resume" form, in web page. ALL APPLICATIONS FOR THIS POSITION MUST BE SUBMITTED VIA eJOBS, UNM's ONLINE APPLICATION/RESUME SYSTEM. Go to the eJOBS website, <http://ejobs.unm.edu>, to apply. This posting opens on May 17, 2004 and will remain open until July 10, 2004.

WDSI FOX61TV - seeks Maintenance Engineer with good computer skills, experience with UHF Transmitter A MUST, studio equipment, analog and digital tape recorders required, and excellent communication skills. Will maintain company vehicles and DVC Pro equipment. Send resume and cover letter to: WDSI FOX61 Attention Christene Ramsey, 1101 East Main Street, Chattanooga, TN 37408, email to wdsijobs@pgtv.com or fax to 423-265-3636. NO PHONE CALLS PLEASE. Deadline for resumes is June 30, 2004. WDSI FOX61 is an equal opportunity employer and a drug free workplace.

**Advertise in
Broadcast
Engineering**

contact
Jennifer Shafer
800-896-9939
jshafer@primediabusiness.com

The Walt Disney Company

Broadcast Engineer

The Situation

The Broadcast Engineer position is located in Kent, Washington and resides within the Buena Vista Datacasting business unit; part of The Walt Disney Company. Buena Vista Datacasting has just launched MovieBeam™, a video-on-demand movie rental service transmitted via digital wireless signal to an electronic receiver.

The Position

Reporting to the Manager of Network Deployment, this position will be primarily responsible for installing the MovieBeam™ technology into Broadcast Towers, performing installation analysis and generating/coordinating drawings and integration points to interface the MovieBeam™ technology into the Broadcast Stations Analog transmission system, and executing installation, integration and activation activities in the deployment of the MovieBeam™ technology into Broadcast Stations. Other responsibilities include: the operation and maintenance of deployed MovieBeam™ technology; preparation of failure analysis and recovery procedures for the MovieBeam™ technology, as deployed in individual/unique Broadcast Stations; monitoring the performance of the operational systems and analysis of system logs; and supporting the development of tools to automate the monitoring and performance of the MovieBeam™ technology.

The Company

Walt Disney Company is a diversified, international family entertainment and media company with 2003 annual revenues of \$27 billion. Its operations include theme parks and resorts, filmed entertainment, including motion pictures and television shows, home video and DVD products, records, broadcast and cable networks, internet and direct marketing, consumer products, radio and television stations, theatrical productions, publishing activities and professional sports enterprises.

The Ideal Candidate

Qualified candidates will be BS Graduates with an RF or Electrical Engineering degree, have over 5 years experience in television broadcast engineering, comprehensive knowledge of FCC rules & regulations for all phases of broadcast television, and thorough understanding of NTSC television transmitter installation & maintenance. Other required skills include: comprehensive knowledge of video test signals & measurements; working knowledge of high power RF systems; "hands-on" experience with and understanding of television station operations; understanding of Linux and Microsoft computer systems and general office software applications such as word processing, spreadsheet, e-mail and internet browsers programs.

The Opportunity

This position represents an opportunity to perform deployment, operation and maintenance of the MovieBeam™ technology used in the BVData Distribution and Broadcast Network.

The Compensation

An attractive compensation plan, including base salary, bonus potential, and comprehensive benefits plan, including stock purchase and 401(k).

WE ARE AN EQUAL EMPLOYMENT OPPORTUNITY EMPLOYER

Joelle Jennings
The Walt Disney Company
Enterprise Talent Acquisition
500 So. Buena Vista Street, Burbank, CA 91521-7477
(818) 558-2200 joelle.jennings@disney.com

Help Wanted

A TV CHIEF ENGINEER is needed at LeSea Broadcasting's WHNO-TV 20 in New Orleans, Louisiana. Candidates must have high technical skills in Master Control, Studio, Remote Venue and Transmitter operations and maintenance (IOT desired), including non-linear video editing, satellite receiving, tape & DVD record and play, video server, camera, remote truck and high-power transmitter equipment troubleshooting. Strong computer skills are a plus. SBE Certification desirable. At least 3 years as a chief or assistant chief is required. Exceptional interpersonal, written and verbal communication skills a plus. Send your resume and cover letter to: WHNO TV 20, Chief Engineer, 1100 S. Jefferson Davis Parkway, New Orleans, LA 70125 or email it to pjbeene@lesea.com. No phone calls will be accepted. EOE

BROADCAST MAINTENANCE ENGINEER (PORTLAND, OREGON) - KATU TV seeks a Broadcast Maintenance Engineer to install and maintain video, audio, and ancillary equipment associated with television broadcasting including server-based systems, switchers, routers, signal processing devices, audio/video distribution, graphics systems, and transmission equipment. C-Band uplinking experience a plus. For a full description of this position logon to www.katu.com. Send your cover letter and resume to: Rolonda Stoudamire, KATU, 2153 NE Sandy Blvd., Portland, OR 97232. E-mail resumes@katu.com. No Phone Calls Please. Equal Opportunity Employer.

	Page #	Advertiser	Web site
		Hotline	Address
AcousticsFirst	110		
ActivePower	31	877-flywheel	activepower.com/a1130
ADC	27	800-366-3891	adc.com/broadcast
AJA Video	40	800-251-4224	aja.com
AnalogWay	107	212-269-1943	
Angenieux	30	973-812-3858	angenieux.com
AntonBauer	53	203-929-1100	antonbauer.com
Avid Technology	4-5	800-949-avid	avid.com
Axcera	43	724-873-8100	info@axcera.com
Axon Digital Design	72	888-919-9379	axon.tv
Azden Corp.	49	516-328-7500	azdencorp.com
BBC Technology	81	888-222-3820	bbctechology.com
Belden	82		belden.com/4b65.pdf
Bogen Imaging	51	201-818-9500	bogenimaging.com
Calrec Audio	69	+441422842159	calrec.com
Chyron Corp.	16		chyron.com
Clear-Com Intercom Sys.	63		clearcom.com
Computer Modules	109	858-613-1818	computermodules.com
CPI/EIMAC Division	21	650-592-1221	eimac.com
Dolby Labs Inc.	19	415-558-0200	dolby.com
Doremi	109	818-562-1101	doremilabs.com
Ensemble Designs	91	530-478-1830	enssembledesigns.com
Electronic Design Spec.	110		
ERG	74	949-263-1630	erg-ventures.com
ERI-Electronics Research, Inc.	109	812-925-6000	erine.com
ESE	99	310-322-2136	ese-web.com
Euphonix	39	650-855-0400	euphonix.com
Evertz	IBC	905-335-3700	evertz.com
E2V	34	914-592-6050	http://comms.e2vtechnologies.com
For. A Corporation of America	89	714-894-3311	for-a.com
Forecast Consoles Inc.	93	800-735-2070	forecast-consoles.com
Frezzi	57	800-345-1030	frezzi.com
Fujinon Inc.	67	973-633-5600	fujinon.com
Gecom Technology LLC	110		
Gepco	103	800-966-0069	gepco@gepco.com
Gilmer & Assoc.	110		
Hamlet Video	64	+44 1494729728	hamlet.co.uk
Harmonic	75-78	800-788-1330	harmonicinc.com/broadcast
Harris Corp./Broadcast Div.	3	800-4HARRIS	harris.com
Horita	109		
IBC	83	+4420 7611 5500	show@ibc.org
IDX Technologies	105		idx.com
Inscriber Technology	29	800-363-3400	inscriber.com
Intelsat	33	202-944-8545	intelsat.com
Keystone America	110		
KNME-TV PBS	111		
Leitch	BC, 23	800-231-9673	leitch.com
Markley & Assoc.	110		
Marshall Electronics	52	800-800-6608	lcdracks.com
Maxell Corp.	9	800-533-2836	maxell.com
Microfirst Inc.	103		microfirst.com
Miranda Technologies	11	514-333-1772	USsales@miranda.com
Network Electronics	44	800-420-5909	network-electronics.com
Nvision	56		nvision1.com
Omneon	97	408-585-5000	omneon.com
Panasonic Broadcast	7	800-528-8601	panasonic.com/p2
Prime Image	65	408-867-6519	primeimageinc.com
ProBel	86	631-549-5159	pro-bel.com
Quartz USA	92	888-638-8745	quartzus.com
Radyn.com Stream	35	602-437-9620	radn.com
Rohde & Schwarz	15	888-837-8772	rohde-schwarz.com
Ross Video	17	613-662-4886	rossvideo.com
Sachtler	25	516-867-4900	sachtler.com
Saltzbrener StageteC	18	+499545-440-0	stagetec.com
Screen Services Italia	73	+39 0303582225	screen.it
Solid State Logic	71	212-315-1111	ssl-broadcast.com
Sony Pictures Digital Media	45	800-527-6642	
Streambox	110		
Sundance Digital	50	972-444-8442	sundancedigital.com
Thomson Broadcast	13		thomsongrassvalley.com
Utah Scientific	47	801-575-8801	utahscientific.com
VideoFrame	109	530-477-2000	videoframesystems.com
Video Technics	70		newsflow.tv
VideoTek	41	800-800-5719	videotek.com
Vinten Broadcast Ltd.	85	888 2 vinten	vintenvector.com
Walt Disney Pictures	112		
WDSI	111		
West Star TV Limited	111		
Wheatstone Corporation	IFC	252-638-7000	wheatstone.com
WHNO	112		
WPXI	111		
WSBC Inc.	111		
360 Systems	95	818-991-0360	360systems.com
Zandar Technologies	68	+353 1280 8945	zandar.com

US/CANADA

WEST

George Watts III
(360) 546-0379; Fax: (360) 546-0388
georgeww3@aol.com

EAST

Josh Gordon
(718) 802-0488; Fax: (718) 522-4751
jgordon5@bellatlantic.net

EAST/MIDWEST

Joanne Melton
(212) 462-3344; Fax: (913) 514-9249
jmelton@primediabusiness.com

INTERNATIONAL

EUROPE

Richard Woolley
+44-1295-278-407
Fax: +44-1295-278-408
richardwoolley@btclick.com

EUROPE

Tony Chapman
+44-1635-578-874
Fax: +44-1635-578-874
ARCintect@aol.com

ISRAEL

Asa Talbar
Talbar Media
+972-3-5629565; Fax: +972-3-5629567
talbar@inter.net.il

JAPAN

Mashy Yoshikawa
Orient Echo, Inc.
+81-3-3235-5961; Fax: +81-3-3235-5852
mashy@fa2.so-net.ne.jp

CLASSIFIED ADVERTISING OVERLAND PARK, KS

Jennifer Shafer
(800) 896-9939; (913) 967-1732
Fax: (913) 967-1735
jshafer@primediabusiness.com

REPRINTS

Wright's Reprints
(877) 652-5295;
International inquiries, (281) 419-5725
jbanda@wrightsreprints.com

LIST RENTAL SERVICES

Marie Briganti, Statistics
(203) 778-8700 x146
(203) 778-4839
primedia@statistics.com

Customer Service: 913-967-1707 or 800-441-0294

BROADCAST ENGINEERING June 2004, Vol. 46, No. 6 (ISSN 0007-1994) is published monthly and mailed free to qualified persons by Primedia Business, 9800 Metcalf Ave., Overland Park, KS 66212-2216. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canadian Post Publications Mail Agreement No. 40597023. Canada return address: DP Global Mail, 4960-2 Walker Road, Windsor, ON N9A 6J3. POSTMASTER: Send address changes to *Broadcast Engineering*, P.O. Box 2100, Skokie, IL 60076-7800 USA. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2216 Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 2004 by Primedia Business. All rights reserved.



Multicasting: Doom and gloom on the airwaves

BY PAUL MCGOLDRICK

Ever since talk about offering broadcasters additional RF channels began, people have used the word multicast to describe a potential revenue model for digital broadcasting. The term was ill-defined, and remained so for many years. But, finally, people are making proposals, both formally and informally, about directions that this model could take.

Modest proposals

These proposals are a world apart from the four traffic-camera images that KRON TV's digital channel has multicast, or the view of Detroit from the Canadian side of the Detroit River that WDIV TV has multicast. In conversations at NAB2004, it was clear that people are treating some of the ideas quite seriously. But are they practical?

Just before NAB, NBC announced that it was going to start a national digital network called "The Weather and Alert Channel," which it expects its O&Os and 92 percent of its 215 affiliates to carry as a multicast channel. A definite first in this program is that NBC proposes to split the costs of set-up and operations 50/50 between itself and the stations that adopt the programming. Networks will find this to be a useful weapon in their effort to pressure the cable industry and the FCC to ensure that must-carry rules apply to multicast channels. The rest of the multicast offerings out there today are rather tepid material compared to the seemingly daily appearance of new channels that are vying for space in cable systems' limited bandwidths.

Multicast numbers are already rather impressive. According to Decisionmark, which tracks the DTV roll out, 213 stations were multicasting in January 2004.

Of those, about half were public TV stations multicasting mostly adult and children's educational material. The commercial stations are offering news/weather type options, which would obviously be a threat to cable's Weather Channel if must-carry applied.

Bold proposals

But the big plans are much more extensive. One proposal I've heard, going beyond the limited offerings that USDTV has made in its start-up cities, is to compete directly with cable and satellite by banding digital RF channels together, with four to six SD programs on each channel. The broadcasters in the group would carry their own feeds, as usual, plus cable-type offerings. If everybody cooperated, and presumably PBS stations could not play at this party, the higher-DMA cities might be able to offer a dozen RF channels to give a maximum of, say, 72 program choices.

The viewers would then have to obtain, by buying, renting or as a giveaway, a set-top box that could sort out all these terrestrial channels and their content. And, to be able to pay for all these services, the stations would charge participating viewers the standard \$19.95 a month. USDTV has a Chinese minority partner to supply the STBs.

The degree of cooperation by all these stations would have to be incredible and the viewing public would have to accept a major change in its life: the idea that over-the-air broadcasting would no longer be free. This contradicts a concept that has almost become a fundamental right for many of us. A separate entity would have to form to handle the distribution of the STBs and billing/collections. And, of course, once this model was in place

in a city that has killed HDTV, unless you accept a reduction from, say, six SD programs to only two when HD content is being transmitted. Viewers' reaction would not be pleasant. A short while ago, my state's daily newspaper eliminated the overnight grids from its TV listings because most of the programming consisted of paid advertorials and to save ink. Those grids have since been restored because of the howls from the many late-night viewing owls out there.

Doom and gloom

No, I just don't see this model as feasible. And, looking at the other models centered around news, broadcasting news has never been a smart way of making money in television (not that you would think that when you look at the more than 40 companies that offered news/weather products at NAB). But, if there is no revenue stream from multicasting, what will happen to terrestrial TV broadcasting?

I have to say that I see nothing but doom in the future unless the broadcasters supplement an HD offering with novel content in one or two channels of multicast SD signals. Even then, the must-carry of that content on cable will be critical. If broadcasters don't take that direction, I can see them handing back a large number of digital channel licenses to the FCC at about the same time that the analog licenses go away. Those additional licenses may turn out to be the kiss of death for the industry as we know it. **BE**

Paul McGoldrick is an industry consultant based on the West Coast.



Send questions and comments to:
paul_mcgoldrick@primediabusiness.com

MVP™

Multi-Image Video Processor



Experience the Dawn of Evertz MVP™...The One to Watch!

The Most Advanced and Comprehensive Multi-Image Display System Today!

See Us At TAB2004-Booth #200

Tel: 1-905-335-3700 Toll Free 1-877-995-3700 www.evertz.com

evertz®

Leitch – For HDTV.

Editing

VelocityHD™ NLE

Store and Serve

NEXIO MTS™ Transmission Server

Routing

Panacea™ / Integrator Gold™

Signal Processing

NEO™ and 6800+™ Modular Processors

Branding

DTP™ Digital Turnaround Processor / HD LogoMotion II™

Master Control/Transmission

DTP™ Digital Turnaround Processor / Opus HD™ Master Control /
NEXIO MTS™ Transmission Server / TrimStation™

Control/Monitoring/Display

CCS™ Command and Control Systems /
MediaNet™ Management / NEO SuiteView™

LEITCH®

For Your Integrated Content Environment

Products that improve workflow in your HD Environment

- VelocityHD™ Real-Time HD/SD Post Production Non-linear Editor
- NEXIO MTS™ MPEG Transport Stream Transmission Server
- Integrator Gold™ Large Multi-format HD/SD Routing Switcher
- Panacea™ Compact Multi-format HD/SD Routing Switcher
- NEO™ Modular Processor
 - HD Up and Down Converters
 - HD Frame Synchronizers
 - HD Distribution Amplifiers
- 6800+™ Modular Processor
 - HD Audio Mux/Demux
 - HD Frame Synchronizers
- Opus HD™ Master Control
- DTP™ Digital Turnaround Processor
(MPEG-2 processor for localizing programs – motion logos, ads, clocks, stock and local news overlays, Emergency Alert Systems – EAS)
- TrimStation™ — Transport Stream Trim and Groom
- HD LogoMotion II™
- All HD products are fully integrated with Leitch's CCS™ Command and Control System applications
- NEXIO MediaNet™ Media and Asset Management
- NEO SuiteView™ — Multi-display Processors

www.leitch.com

 **LEITCH.**