

BroadcastEngineering®


NOVEMBER 2012

www.broadcastengineering.com

A PENTON MEDIA PUBLICATION

CBS SPORTS NETWORK

This eye-catching studio is built to multitask

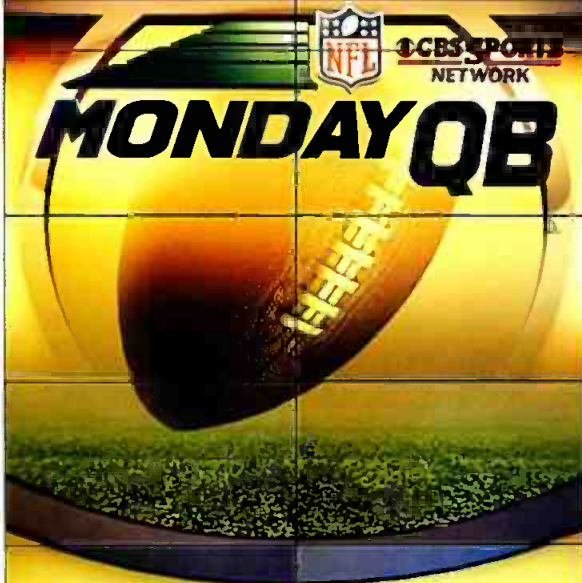

ALSO INSIDE:

SHOOTING QUAD HD FOR HD PROJECTS

Higher resolution means
better-looking crops

CLOUD STORAGE

High-speed connectivity is a
production requirement

MXF AND AAF

Pick the wrapper based on the task

CELLULAR BONDED VIDEO

Covering sports in a new way

Audio waveform visualization.

C10HD

Big console power in a compact, simple and affordable package.



- Integrated Production Assistants; Dialogue Automix, C-Play, Station Automation and 5.1 Upmix
- Renowned SSL reliability and support
- Premium audio quality, ready for 5.1 production
- Simple to install with flexible I/O options
- Easy to operate for users of all skills levels

Get in touch

East Coast - Steve Zaretsky | T: 1 (212) 315-1111 ext. 15 | stevez@solidstatellogic.com

West Coast - George Horton | T: 1 (213) 249-9229 ext. 15 | georgeh@solidstatellogic.com

Take the video tour at:
www.solidstatellogic.com/C10

Broadcast Audio. This is SSL.

Solid State Logic
S O U N D | | V I S I O N



You have a Vision. Stun the World.



TriCaster™ — the most complete, multi-camera video production systems on the planet.

Seasoned pros, garage bands, schools, sports teams, churches, and you — all have one thing in common — a vision to communicate, in ways you never thought possible. With TriCaster, bringing your ideas to life is easier than you think: and choosing the right equipment is just as easy. There's an entire line of TriCaster live production and streaming solutions, starting at \$4,995 — one is perfect for you, and your budget. From cart-and-carry models, to 4U heavy duty systems — broadcast, stream, publish, project and record — all at once. Now, go rock the planet.

Find out which TriCaster is right for you at NewTek.com.

©2012 NewTek, Inc. All rights reserved. TriCaster is a trademark of NewTek.



BroadcastEngineering®

FEATURES

- 40 Shooting Quad HD for HD projects**
The increased resolution enables full HD crops.
- 46 Cellular bonded video**
Sports are covered in new ways with the technology.

BEYOND THE HEADLINES

DOWNLOAD

- 10 Content preparation for adaptive-bit-rate video**
Target devices will drive packaging decisions.

FCC UPDATE

- 16 New online public file system**
Securing stations' passcodes is essential.

DIGITAL HANDBOOK

TRANSITION TO DIGITAL

- 18 Multiplexing**
New multiplexing technologies are emerging, offering significant gains in bandwidth efficiency.

COMPUTERS & NETWORKS

- 22 MXF and AAF**
Which wrapper you use depends on whether you're broadcasting or editing.

PRODUCTION ROOM

- 26 Wireless microphone systems**
Preparation is key to avoiding audio problems.

SEE IT ONLINE!

Check out "Brad On Broadcast," our editor's thoughts about the latest industry news. What caught Brad's eye at the recent AES show?

Learn more at www.broadcastengineering.com



40



46





All-in-one Portable Live Production Switcher

\$8,500 Order Now
visit store.livestream.com



5 LIVE INPUTS
5 LIVE OUTPUTS



VIDEO MIXER/
SWITCHER



BUILT-IN
MULTIVIEW



AUDIO MIXER



RECORDING
AND PLAYBACK



TRULY
PORTABLE



STREAM TO
LIVESTREAM

SYSTEMS INTEGRATION

NEW MEDIA NETWORKS

30 Cloud storage

High-speed, secure networks are needed to realize the benefits of the cloud.

SHOWCASE

34 Trading up

CBS Sports Network's studio upgrade has a major player at the top of its game.

NEW PRODUCTS & REVIEWS

APPLIED TECHNOLOGY

50 Harris' Versio

TECHNOLOGY IN TRANSITION

52 Evolution of encoding

HEVC may be the next compression technology to arrive in consumers' homes.

DEPARTMENTS

8 EDITORIAL

56 CLASSIFIEDS

58 ADVERTISERS INDEX

LATEST NEWS!

On Oct. 17, 2012, the FCC revised rules to allow Wireless Communications Service (WCS) license holders to use 30MHz of spectrum in the 2.3GHz band for wireless broadband services.

Learn more at www.broadcastengineering.com

GET CONNECTED!

Visit *Broadcast Engineering's* newly redesigned website to register for an account. Join in on the discussion of latest happenings in the broadcast industry. You can also find us on Twitter at twitter.com/BE_magazine.

Learn more at www.broadcastengineering.com



34

ON THE COVER:


When CBS Sports Network executives set out to build a new studio for the network, they had to take into account production for dozens of studio shows, original programs and more than 350 live games. Photo courtesy CBS.

50



52

ENCODING

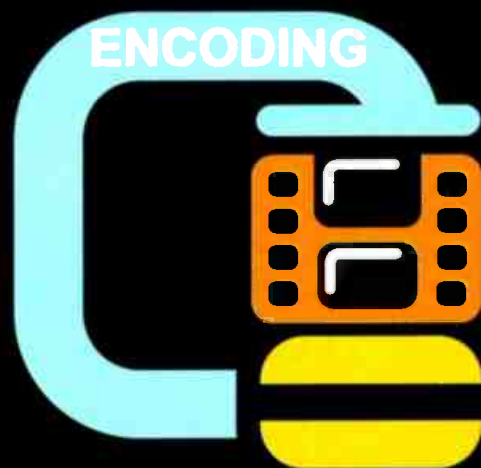

8



Game. Set. Match(ed).

VENICE + STAN

Stereo Broadcast Workflow

Gain complete control over stereo broadcast. With STAN (Stereoscopic Analyzer), VENICE equips camera operators and production engineers with:

- Real-time analysis and correction of geometric distortions for live S3D production
- High-quality stereo recording to NLE-friendly file formats
- Metadata recording for post production

VENICE is a powerful multi-channel video server. Visit www.dvsus.com for more information.

VENICE for Broadcast: Add flexibility to your Game.



ROHDE & SCHWARZ

DVS

A Rohde & Schwarz Company

Visit us at booth #912



HDTV on steroids

In late October, the Consumer Electronics Association (CEA) begins the drum beat about innovation, new technology and, of course, new products. The noise is all focused on the association's upcoming Consumer Electronics Show in January. It's often hard to discern real product technology from all the smoke and mirrors as vendors scramble for attention. Although the event is titled "Consumer," broadcasters should often take heed as the last two broadcast-related innovations originated at that show — digital/HDTV and 3-D. One worked; the other, not so much.



This year's convention ramp-up is symbolized by the association's annual "Five Technology Trends to Watch" report. In the report, the CEA predicts five technologies that will soon affect consumers. This year's report includes one that will affect *Broadcast Engineering* readers — super high-resolution video displays.

A 4K TV is "the HDTV experience on steroids," says John Taylor, vice chairman of CEA's 4K Working Group and vice president of public affairs and communications at LG Electronics USA. Taylor's committee is charged with evangelizing 4K technology, which "gives manufacturers and retailers alike another opportunity to attract a high-end customer" with super large-screen TV sets.

However, not so fast says Jon Peddie, president of Jon Peddie Research. Even for those early adopters, he says, "the tricky part" with 4K is that there needs to be content. "That's going to be the barrier more than the price or the technology," he says. Peddie also notes that has been the problem for "stereovision" or 3DTV, for which there remains "insufficient content to keep viewers happy."

"Indeed, there is no 4K content available today," Taylor agrees. But, "Blu-ray 4K material is not too far off. And, with innovation in the video compression arena, you'll see 4K delivered over the Internet, through cable and even through over-the-air broadcast television." The CEA predicts broadcasters will be using ATSC 3.0 in "in eight to 10 years."

Chris Chinnock, president of Insight Media (a market research and consulting firm focused on emerging display technologies), says, "Most people are going to look at their TVs and say, 'It looks really good and crisp to me. Why do I need 4X as many pixels?' And, the answer is, from a visual acuity point of view, you probably don't."

Chinnock continues, saying, "Most people are not going to see a difference — certainly not under a screen size of 50in viewed from a normal living room viewing distance." It will be on home screens — 60in and larger — where the benefits of a 4K image will be apparent. And, according to Chinnock, "the trend is to bigger screens."

The CEA estimates that while only 20,000 4K TVs will ship in 2013, the number sold will rise to 190,000 units in 2014 and 1.3 million units in 2015.

As with many consumer products, the real driving force is not just technology improvements, but an industry looking for the next shiny object to wave in front of consumers and separate them from their hard-earned cash.

A 4K consumer study done last August showed only 26 percent of survey respondents said they were interested in 4K technology, while 49 percent were not interested and 25 percent were undecided.

Before we push back, recall that many engineers laughed when HDTV was first introduced. (It was too big and expensive; digital quality was sufficient.) Then, we had those HD camera displays locked on rotating Geisha dolls. That was early HD, and many engineers said no one would pay \$10,000 for a TV set, even if the picture was sharper. Well, some viewers did, and, thanks to technology, a 40in HDTV today costs less than \$300.


So too will be the path of 4K.

BE

Broad Dick

EDITORIAL DIRECTOR

Send comments to: editor@broadcastengineering.com

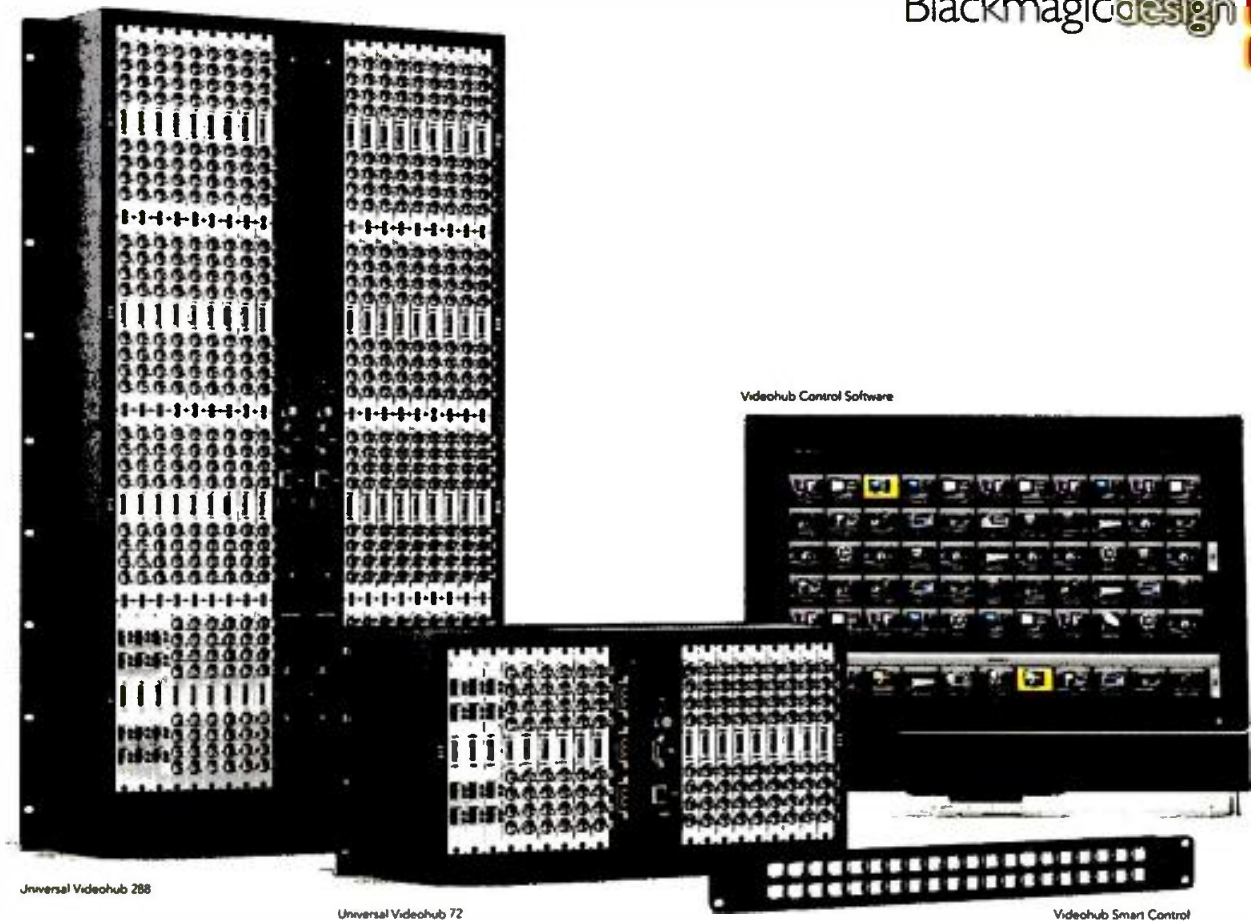

Now it's easy to build your own customized SD, HD and 3 Gb/s SDI router!

Build your own customized router any size you need! Universal Videohub is a powerful broadcast grade routing switcher featuring up to a massive 288 inputs, 288 outputs and 288 deck control ports. You can add interface cards to either regular SDI or optical fiber SDI connections as well as single or dual power supplies and single or dual cross-points for full redundancy. Cards can be removed when powered so all electronics can be swapped at any time for 24/7 reliability!



Industrial Strength Routing Switcher

With up to 288 inputs and 288 outputs, Universal Videohub has enough SDI connections for the largest facility. With so many SDI inputs and outputs, Universal Videohub is perfect for broadcast with multiple feeds, as well as post production where you need loads of monitoring! Universal Videohub also includes 288 RS-422 deck control ports for a complete routing solution.

SD ↔ HD



AUTO SWITCH

Simultaneous SD, HD or 3 Gb/s Video

Universal Videohub handles mixed SD, HD and 3 Gb/s SDI connections all on the same router at the same time. Universal Videohub detects when an input changes, and automatically sets all the connected outputs to match the changed input. For a true broadcast quality solution, all SDI outputs are fully re-clocked and output SDI slew rates update automatically.



World's Highest Quality

With future proof 3 Gb/s SDI connections built in, Universal Videohub allows twice the SDI data rate than normal HD-SDI. Use 3 Gb/s SDI for 1080p60 and high resolution real time 2048 x 1556 feature film editing.

3 Gb/s SDI allows auto switching between all SD, HD and 2K video formats in both 4:4:4 and 4:2:2 quality.

Network Router Control

Universal Videohub is compatible with hardware control panels such as Blackmagic Design's Videohub Smart Control and for lower cost includes free software control panels for both Windows™ and Mac OS X™. Software panels let you route from your desktop! Universal Videohub uses ethernet for the control panel interface so you can control your routing from anywhere in the world!

Mix and Match to Customize!

Universal Videohub SDI Interface (4 x SDI I/O)		\$385
Universal Videohub Optical Fiber Interface (4 x SDI I/O)		\$995
Universal Videohub 72		\$3,945
Universal Videohub 72 Crosspoint		\$4,245
Universal Videohub 288		\$8,345
Universal Videohub 288 Crosspoint		\$19,995

Learn more today at www.blackmagicdesign.com/universalvideohub

Content preparation for adaptive-bit-rate video

Target devices will drive packaging decisions.

BY JOHN PALLETT

Today's media landscape is radically more diverse than just a few years ago. The delivery of consistently acceptable image and sound quality is taken for granted by viewers, despite uncertain or fluctuating bandwidth. Adaptive-bit-rate (ABR) streaming technology makes this possible.

What is ABR streaming?

ABR streaming is a delivery technology designed to provide consistent, high-quality viewing in situations where bandwidth may fluctuate, and where viewers may be on a wide range of devices.

Prior to ABR streaming, Web or mobile video delivery was typically done by encoding a single downloadable file or stream at a fixed bit rate and frame size. Viewers could buffer some of the video, and then simultaneously download and play it back. This delivery model was similar to cable transmission, where a single bit rate is transmitted over a reliable medium.

Unfortunately, transmission mediums for Web and mobile devices are unreliable, and bandwidths vary. During fixed-rate video playback, viewers with low bandwidth suffer from excessive buffering (delaying playback). To compensate, providers have tended to encode at lower bit rates, punishing viewers with high bandwidth. Even then, any fluctuations in bandwidth can cause buffering delays.

To solve this problem, ABR streaming content is encoded into multiple layers, each potentially a different bit rate, frame size and/or frame rate. These layers are combined into a single package that represents the original content. ABR players switch between layers depending upon the device and



ABR streaming is ideal for mobile and Web video delivery.

available bandwidth, to ensure consistent high-quality playback.

For example, a single ABR package might include six layers, each encoded at progressively higher bit rates. As a viewer watches content on his/her mobile phone during a train ride, the player will adaptively switch between low bit rates and high bit rates, depending upon the connectivity of the device.

How does it work?

Most ABR streaming technologies use standard Web protocol (HTTP delivery) to send video. This offers advantages over specialized streaming protocols such as RTSP or RTP, as HTTP-based delivery works immediately on Internet networks and can take advantage of edge technologies designed to cache HTTP requests.

During playback, video and audio are delivered via HTTP in small fragments, each representing some small amount of video, typically between 3 and 10 seconds in length. Each content package includes multiple layers, and each layer may include many fragments. For example, an hour-long movie may have 12 layers,

each with a thousand fragments. The player is provided with a package manifest file outlining which layers are available and the location of the fragments for each layer.

During playback, the player requests and downloads a fragment from a layer. While the fragment is played, the connection speed is monitored, and the player may opt to switch layers, either increasing or decreasing the video bit rate based upon the connection speed. Players may also choose layers with different frame sizes or frame rates to optimize the visual experience for the device. This adaptive behavior is what ensures consistent playback regardless of connection speed or device.

There are several different ABR streaming technologies available: Apple HTTP Live Streaming (or "Apple HLS"), Adobe HTTP Dynamic Streaming (or "Adobe HDS"), Microsoft HTTP Smooth Streaming, and more recently MPEG Dynamic Adaptive Streaming over HTTP (or "MPEG DASH"). Each technology requires a complete ecosystem. The content must be prepared correctly, and the correct player must be used. All of the technologies work fundamentally in the same manner, using HTTP for content delivery in fragments.

Where these technologies differ is largely related to the structure of the underlying packages. For example, HLS for older versions of iOS requires a separate file for each video fragment. In contrast, most other packages store fragments for a layer in a single file, allowing the player to download fragments using HTTP byte range requests, which download a small part of a larger file.



Meet the KUMO 3232

The newest member of the KUMO Family

AJA's line of KUMO routers expands to include the new KUMO 3232, a 32 input by 32 output SDI router that continues the AJA tradition of high-quality signal routing in a compact 2RU size to fit any budget. With redundant power supplies and looping reference connections, KUMO is perfect for any broadcast, production, or post-production environment.



Powerful remote control

Control KUMO routers with direct push-buttons on the KUMO Control Panel, or via your LAN from any web-browser with no special software required.



Unparalleled quality

KUMO 3232 strikes the right balance of capacity, compact size and quality -- exceeding SMPTE specifications and allowing longer cable runs with less interference.



Total integration

KUMO 3232 setup is easy with Bonjour and ZeroConfig -- and Grass Valley Native Protocol support allows seamless integration with your facility over RS-422 or Ethernet.

Find out more information at www.aja.com

Because it matters.

AJA
VIDEO SYSTEMS



The Linear Acoustic AERO.one sale. All is CALM, all is (definitely) right.

A timely offer for frugal TV broadcasters.

AERO.one V3 Audio/Loudness Manager
 5.1+2 plus EAS » AEROMAX® Loudness Control
 » Dual UPMAX® automatic upmixing and downmixing
 » 5.1+2 Dolby® Digital (AC-3) encoding » GPIO control
 » Dual power supplies » Available SNMP

Only \$7,000

Purchase factory-direct now through January 31, 2013.
 Contact us at: sales@linearacoustic.com



LinearAcoustic.com

©2012 Linear Acoustic Inc. All rights reserved.

DOWNLOAD

BEYOND THE HEADLINES

Other differences in ABR technology relate to the viewer experience. Apple HLS, for example, provides for a dedicated key frame layer, allowing users to scrub through the video quickly. Other packages allow an audio-only stream with a poster image for extreme low-bit-rate situations.

Preparing content

Preparing ABR content takes several steps. First, the desired packaging and layer structures need to be identified. Next, content must be encoded, checked for quality, packaged, encrypted and delivered. (See Figure 1 on page 14.)

Choosing packaging and profiles

Packaging choice is generally driven by what devices must be supported. Not every device supports players for every type of ABR streaming technology. As a result, one should catalogue both the devices and the players that will be supported. The necessary packaging will naturally become apparent as a result.

The selection of optimal bit rates, frame sizes and frame resolutions will vary depending upon device types, connection types and encoding technology. Apple and Adobe provide excellent starting points with suggested profiles suitable for their ecosystems. However, practically speaking, the entire catalogue of devices, expected network connections and network costs must be considered when designing layers.

With these considerations, layer design is a balancing act between frame size, bit rate and quality. However, the actual encoding technology used may have the biggest effect upon quality. For example, one study performed by the MSU Graphics & Media Lab showed that the use of x264 encoding technology saved necessary bit rates by as much as 50 percent compared to other H.264 encoding technologies at the same quality level. As a result, it is recommended that layers be designed while performing actual encoding tests with the final encoding technology.

Most packages, however, generally contain between 16 and 24 layers. Part of layer design will require a reduction in the number of layers. It is best to select a few common native display frame sizes (such as 1080p) and then encode multiple bit rates to those frame sizes. Doing so will avoid unnecessary performance degradation on players that use software scaling (particularly important for Adobe HDS).

Encoding, packaging, delivery and DRM

Each layer will require that a complete H.264 stream be encoded. With 16 to 24 layers, encoding an ABR package can easily require 20 times the processing power needed for a single H.264 stream. Fortunately, highly parallelized multirate H.264 encoding technology exists that re-uses information across the different streams. When combined with GPU acceleration, today's encoding systems can offer 10 or 20 times the speed of CPU-based systems.

When preparing for multiple devices, an important aspect of encoding is transmuxing, the ability to re-use



Rethink editing

New Vegas Pro 12 simplifies broadcast production by providing one platform for complete video and audio development. With powerful tools supporting a wide variety of formats for multi-screen distribution, Vegas Pro 12 continues to set the standard, by offering:

- **Project Interchange** – Exchange project data with other popular editing platforms
- **Smart Proxy Editing** – Automatically and dynamically replace clips on the timeline with high-quality, edit-friendly HD proxies
- **New format Support** – Edit Panasonic P2 AVC-Intra and DVCPRO clips natively, and master to HDCAM SR™ at up to 880 Mb/s
- **Comprehensive S-Log Workflow** – Leverage the wide dynamic range of your S-log footage with an integrated, end-to-end ACES (Academy Color Encoding Specification) production workflow
- **Color Match OFX Plug-In** – Quickly and easily match the color characteristics of different video clips using the ultra-wide L*a*b color space
- **Expanded Edit Mode** – Fine-tune the timing of your project interactively while the timeline is playing back
- **Project Media Tagging** – Fast, effective media searching using Quick Tags and Smart Bins
- **Updated Masking Tools** – New masking shapes and Effects Masking tool for quickly obscuring a face or logo
- **Stereoscopic Auto-Pairing** – Bulk pairing of stereoscopic subclips on the timeline for more efficient 3D editing

Fast, efficient, and affordable. Vegas Pro 12 delivers the features you're looking for. Isn't it time to rethink the way you edit?

To find out more about the entire set of new features and enhancements, or to download the free trial visit:
www.sonycreativesoftware.com/vegas12



Scan to see a full list of Vegas Pro features.

encoded H.264 streams across multiple package types. This prevents having to re-encode the same bit rates simply to package the video differently.

With on-demand content, it is important to perform QC checks on the different video streams. QC may be performed visually or by using automated tools that measure quality across all of the streams.

On-demand content often requires user authentication and protection prior to playback, which requires digital rights management (DRM). When using DRM, the video must be encrypted during packaging, typically using AES 128-bit encryption. DRM systems typically have subtle requirements for how the encryption is performed by the encoder or packager, and it is important to validate that the two are compatible.

Finally, content delivery will be performed, either as a compressed TAR file or in the native package form. Where

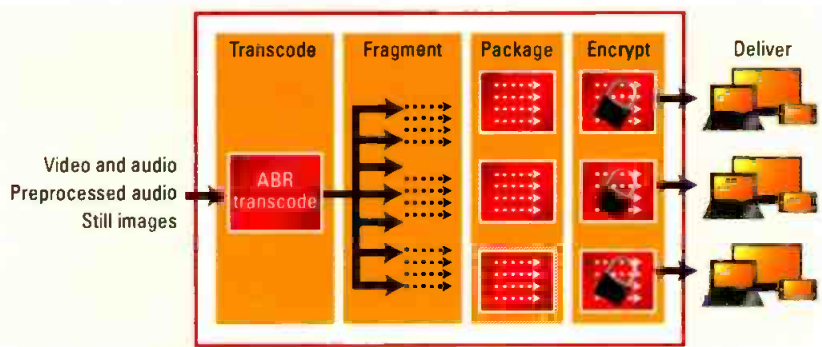


Figure 1. ABR production workflow

possible, it is recommended that the entire production process (ingest, encoding, transmuxing, packaging, quality control, encryption and delivery) be combined into a single automated workflow. Manual steps will significantly slow production time and may result in errors. It is also recommended that the ABR production process be combined with non-ABR production into a single automated system. This reduces system maintenance costs, offers a single view into the overall content production for all distribution channels and allows workflow efficiencies such as unified metadata preparation

and content preprocessing.

Conclusion

Preparing video for ABR streaming generally requires research up front to choose technologies and encoding profiles, and a well-integrated, accelerated encoding approach to ensure workflow efficiency. With today's tools, it is possible to fully automate the ABR content production workflow with full integration into existing content preparation and delivery workflows.

BE

John Palett is director of product marketing, Telestream.

AHEAD OF THE GAME BEHIND THE SCENES

With tightly integrated, file-based systems and infrastructure that provide unmatched workflow efficiencies for live entertainment, sports, and studio productions, Grass Valley™ live production solutions can help you face any challenge. With our deep understanding of live production business models, we'll develop a strategy that places our production tools as part of a no-compromise solution designed to unleash your full creative power.

more info at: www.grassvalley.com/solutions/live-production

- LIVE PRODUCTION SOLUTIONS
- Software Production Tools
- Cameras
- Video Infrastructure
- Replay Systems
- Media Servers
- Production Switchers
- Routing Switchers

WHERE CONTENT BEGINS



THE MOST IMPORTANT THING ABOUT YOUR MOBILE PRODUCTION TRUCK ISN'T THE TRUCK.

On the road, every second counts. So does every square foot and every pound. With mobile production solutions from Harris, versatile platforms are densely packed for form, fit and function. Rapid-fire configuration lets you simply pull up and power up. Rugged, redundant architecture guarantees no game-time downtime. Life on the road just got a whole lot smoother.

broadcast.harris.com/mobileproduction

harris.com

HARRIS
assuredcommunications®

New online public file system

Securing stations' passcodes is essential.

BY HARRY C. MARTIN

The FCC's online public inspection file system for television (including Class A) licensees became effective in August. For the majority of stations, the new system has thus far been largely a non-event. That's because the primary impact of the new system, at least initially, has fallen on a relatively small universe of stations — i.e., affiliates of ABC, CBS, NBC and Fox in the top-50 markets

— who have had to upload all new political-file materials. Stations in smaller markets, even those affiliated with the top-4 networks, do not have to upload political files until 2014.

However, the public-file rule requires that licensees in all markets upload *newly created* public-file materials (except political materials as noted) on the FCC public-file website. The first such universal public-file upload deadline — for the third-quarter issues/programs lists — was Oct. 10, 2012.

The FCC has imposed a two-tiered system for access of stations' online public files. The FCC has created a system of public-file passcodes that can be set up by each licensee and then distributed to station personnel. The licensee's FCC Registration Number (FRN) and FRN password are used to set up the passcode, but to allow staff to upload materials without sharing sensitive FRN password information with them, only the passcode is needed to access and manipulate the file.

To actually get into its own public file for uploading purposes, a licensee will need to know the station's FCC Facility ID Number (FIN) and its separate online public-file passcode.

Securing passcodes

The FCC has designed the system with security in mind. Presumably, at the station level, there will be at least several staffers who will be responsible for getting the necessary materials uploaded. Obviously, each of them will need to have access to the necessary passcode. But it is important that access to passcodes be limited to those staffers who can be trusted to keep them secure.

If an employee familiar with the

code leaves the station's employ, licensees may want to make sure that his or her access to the file is immediately terminated. All the licensee has to do is enter the station whose passcode it wants to change into the system, and click on the "Generate New" button at the bottom of the station's information list. The public-file system will immediately give the licensee a new passcode for that station.

The commission's system does not permit licensees to designate their own passcodes.

The commission's system does not permit licensees to designate their own personalized passcodes. The apparently random passcodes generated by the FCC's system are likely far more secure than whatever a licensee might select.

Under the former public-file system, anyone trying to remove materials would have had to deal with the physical barriers of personnel and locked file cabinets. Under the new online system, a raider needs only two pieces of information — the station's FIN and its passcode — to get into the file from anywhere, any time of the day or night. The FIN is easily obtainable through the FCC's Consolidated Database System (CDBS), so protecting your passcode is the key to making sure no one deletes or otherwise manipulates your file.

Harry C. Martin is a member of Fletcher, Heald and Hildreth, PLC.

Dateline

- On Dec. 1, 2012, television and Class A TV stations in Arkansas, Louisiana and Mississippi must begin their pre-filing renewal announcements in anticipation of filing their renewal applications on Feb. 1, 2013.
- On or before Dec. 1, 2012, noncommercial TV stations in Alabama, Connecticut, Georgia, Maine, Massachusetts, New Hampshire, Rhode Island and Vermont must file their biennial ownership reports.
- On or before Dec. 1, 2012, television stations, Class A TV, LPTV stations and TV translators in Alabama and Georgia must file their license renewal applications.
- On Dec. 1, 2012, television and Class A TV stations in the following locations must post their 2012 EEO reports on the FCC's new public-file Web page and on their own Websites: Alabama, Colorado, Connecticut, Georgia, Maine, Massachusetts, Minnesota, Montana, New Hampshire, North Dakota, Rhode Island, South Dakota and Vermont.

? Send questions and comments to: harry.martin@penton.com

You need a Flexible, Scalable, Reliable Channel-in-a-Box Solution



Just Add ICE

ICE is the only channel-in-a-box solution designed from the point of view of the channel rather than the box. The result is an Integrated IT-based playout solution that delivers robust, scalable and affordable operation whether you have one channel or 100+ channels.

Get the cold hard facts at
snellgroup.com/ICE

Multiplexing

New multiplexing technologies are emerging, offering significant gains in bandwidth efficiency.

BY ALDO CUGNINI

Having previously discussed aspects of multiplexing in this column, this month we'll consider the technology in broader terms. In general, multiplexing is the process of transmitting multiple signals within a common channel, with the purpose of using a shared medium. On the receiving end, a demultiplexer (demux) extracts the individual signals that were originally combined in a multiplexer (mux).

Multiplexing basics

Multiplexing can increase channel utilization by multiple programs or optimize channel use by a single program, or both. The amount of bandwidth needed to transmit a multiplex must be higher than that of the constituent signals (usually a straight sum of the individual bandwidths, plus any additional overhead), although the increase may be offset by means of information-reducing techniques, such as compression.

So the usual goal of multiplexing is not to save bandwidth, but to use it efficiently and to share a common, typically scarce or expensive, medium. It is also possible to split a single source signal into multiple lower-rate signals, transmit those and then perform the inverse function at the receiving end — a process called Inverse Multiplexing (IMUX).

Multiplexing can be divided into three general types: time domain, frequency domain and spatial domain. Time Division Multiplexing (TDM) is essentially the time-based switching of multiple analog or digital input signals. In the digital realm, we can extend the utility of TDM to that of switched information packets within larger streams. With the

ubiquitous MPEG standards, packets of information (each potentially carrying different content) are multiplexed within a program stream or transport stream, and statistical multiplexers (stat mux) can dynamically adjust the amount of bandwidth needed by each constituent program within a larger stream, making for efficient use of a limited-bandwidth "pipe."

So the usual goal of multiplexing is not to save bandwidth, but to use it efficiently and to share a common medium.

Other forms of content distribution use multiplexing, too. Within storage devices or information streams, multimedia files can combine various video, audio and data components into one package or file format, forming a pre-multiplexed container. Ethernet is another TDM means for carrying multiple packets from and to different destinations using a common cable, often with routers (another form of multiplexer) along the way. And, pixel-based displays use multiplexing order to minimize the number of interconnections to the display-driving transistors.

Frequency Division Multiplexing (FDM) is widely used in broadcasting and networking. FDM involves the use of multiple carriers to transmit multiple signals over a common medium, usually cable or wireless

spectrum. This involves the process of modulation, whereby the information signal is impressed onto the carrier signal.

One common form of FDM is Orthogonal FDM (OFDM), used for DVB-T, DSL modems and various 802.11-based wireless local area networks. Another variation of FDM is Wavelength Division Multiplexing (WDM), which places information onto multiple optical carriers within a beam of light carried in free space or over an optical fiber.

Spatial Division Multiplexing (SDM) is a technique whereby multiple RF signals occupy the same bandwidth (or carrier frequency), but in a different physical space. Cross-polarization is one long-established variety, whereby independent signals are transmitted on the same carrier frequency by using orthogonal electric field vectors, commonly referred to as horizontal and vertical. When received by orthogonal antennas, the two signals can be separately detected and demodulated. In addition to placing two signals on orthogonal planes, the carriers are often displaced by 90 degrees of electrical phase shift as well, resulting in Circular Polarization (CP), which has been shown to alleviate some of the effects of multipath interference.

Another form of SDM exploits a characteristic called Orbital Angular Momentum (OAM), which operates by placing separate signals on multiple elements of a specially constructed helical antenna. Sometimes called "twisted radio beams," OAM emerged from research in optical communications and is different from CP. With CP, the electric field vector rotates in space, whereas with OAM, the wave front rotates. OAM signals

Complete the picture

with the power of ChannelPort



Focus on your channel, not your technology

Harmonic's Spectrum ChannelPort speeds, simplifies and dramatically reduces the cost of deploying new television and video channels by integrating sophisticated branding and graphics with clip playback, master control switching, live feed and Emergency Alert System support. Beyond "channel in a box," ChannelPort is part of Harmonic's industry-leading Spectrum media playout system and fits seamlessly into new and existing environments.

▶ ▶ ▶ Learn more at harmonicinc.com/channelport



harmonic

have been generated by using antenna arrays consisting of concentric uniform circular arrays, with the antenna elements in the arrays fed with a successive delay from element to element. Although OAM is believed

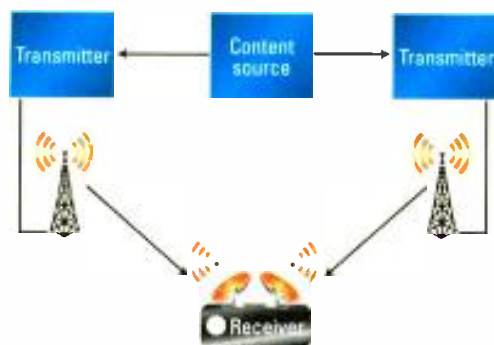


Figure 1. MIMO uses multiple transmitting and receiving antennas, all operating on the same frequency or in the same channel.

by some to offer substantial gains in bandwidth efficiency, others remain skeptical, describing it as a subset of Multiple-Input-Multiple-Output (MIMO) at best, with equivalent properties and no added advantage.

Emerging technologies

New multiplexing technologies are also emerging. MIMO is an SDM

technology that increases transmission capacity by using spatially separated transmission antennas together with spatially separated receiving antennas. Currently used in 802.11n wireless technology, MIMO works by splitting a source signal into several lower-rate components and transmitting those components in the same frequency channel from spatially separated antennas, as shown in Figure 1. The transmitters radiate into the broadcast area on the same frequency, and multiple antennas are used to receive the transmitted signals, which arrive from different directions. (Note that the input/output terminology refers to the "air" medium, and not the source or destination equipment.)

MIMO technology is based on an earlier concept called Distributed-Transmit-Directional-Receive (DTDR). In some respects, the Single-frequency Network (SFN) and distributed transmission modes of digital terrestrial television share similarities with MIMO, the key difference being that multiple receive antennas are not used with digital transmission systems such as DVB and ATSC.

MIMO is not diversity reception,

which uses multiple receiving antennas to combat multipath, but only one transmit antenna. Nor is it a directional array, which uses multiple transmitting antennas to generate a directional transmission pattern. And is not a combination of both.

One intriguing aspect of MIMO technology is the ability to operate in a closed-loop fashion, i.e., with feedback. When one-to-one communications are used (such as for unicast and peer-to-peer links) and a return channel is available, receivers can send, back to the source, channel information regarding scattering, fading and power decay with distance. This information can then be used by an intelligent transmitter to change coding parameters that can maximize the use of the channel, and minimize the received error rate.

Combined with large-area self-configuring networks, emerging multiplexing technologies are hoped to offer significant gains in bandwidth efficiency — a national resource that is in ever-increasing demand. **BE**

Aldo Cugnini is a consultant in the digital television industry.

? Send questions and comments to: aldo.cugnini@penton.com

Multiviewers

with four outputs and four way internal cascading. Capable of enabling a 2x2 wall display.



Rainier 3G Plus A new multiviewing experience.

<http://avitechvideo.com> | twitter.com/AvitechVideo | 1.425.885.3863

See us at
GovComm
Booth 635

CCW
Booth 1247

WHEN IT REALLY MATTERS...

Real-Time Networks for
Video, Audio, Data and
Communications

RED BULL STRATOS
MISSION CONTROL

ROSWELL
NEW MEXICO



MXF and AAF

Which wrapper you use depends whether you're broadcasting or editing.

BY BRAD GILMER

Many broadcasters know about MXF, and they have heard of things such as MXF for Finished Programs (AS-03) and MXF for Commercials (AS-12). But, this month, I want to focus on MXF's bigger brother, AAF.

In the middle 1990s, a joint task force was created by the SMPTE and EBU. The purpose was to address the impending flood of digital video proposals. There were a number of different, competing proposals on the table regarding compression, handling of metadata and the exchange of program material as files. Many in the industry were concerned that without a concerted effort, the market would fracture, leaving end users to sort it out. Fortunately, the task force produced a number of recommendations that later led to standards that have helped drive industry consensus about what constitutes interoperable digital video.

The remit of the task force went beyond coming up with recommendations for interoperable digital video formats, however. The final report included in its name "Harmonized Standards for the Exchange of Program Material as Bitstreams." The group spent a significant amount of time working on something called wrappers. After spirited debate, it was decided that two classes of wrappers should be developed — one for broadcast and one for editing. The group felt that a single wrapper could not accommodate the differing

needs of these two application areas. Ultimately, the wrapper for broadcast became MXF, and the wrapper for editing became AAF.

Before we delve fully into AAF, let's talk about wrappers, what they do and why they are important.

Inside the wrapper

When using professional digital video, specifically SDI video, the relationship between video and audio is set in the standard. SMPTE 259M, and later SMPTE 292M, for HD, not only specified how video and audio should be streamed, but they also were specific about where additional information such as subtitles and timecode should be carried. Other standards specify exactly how this additional data should be formatted. For manufacturers and users, the world was relatively simple; a stream arrived and was comprised of interleaved pieces of video and audio, along with some "essence data" such as subtitles.

But, in a file-based world, there were many possible ways to exchange the same program material contained in the SDI stream. Should you send a video file, followed by a separate audio file, followed by a data file that told how to play back the two files in sync? Should you send a single file with everything in the same file? Should the video be kept separate from the audio, or should it be mixed together, as in an SDI stream? Where do you put the all-important timecode? And, how do you relate the timecode to the video and audio to which it refers?

Those were just some of the questions that surfaced when we looked at transporting programs as bit streams. The wrapper gave us a way to describe how the video, audio, subtitles, timecode and other "essence" should be

packaged together in order to be sent from one place to another. A wrapper can contain video, audio and data essence (subtitles). (See Figure 1.) The concept of a wrapper as a way to organize essence is common in both MXF and AAF. This is a simplistic drawing, but it gives you the idea that the wrapper contains video, audio and data, along with identifiers that are used to keep track of each essence component.

The reason I say that this drawing is simplistic is that there are further definitions within MXF itself that constrain the possible arrangements of essence within the file. For example, MXF OP-Atom requires that only a single essence component be included in a file. In other words, an MXF OP-Atom file contains only a single video element or a single audio element. MXF OP-1A allows the combining of video and audio in a single wrapper. But, again, how are the essence types laid out in the file?

Some MXF files contain video as a separate entity from audio. Others contain interleaved video and audio, meaning there is a single essence file that contains a bit of video, followed by a bit of audio channel 1, followed by a bit of audio channel 2, and then back to video again. There is also room in the interleaved file for subtitles.

One last important point: MXF and AAF specifically allow someone who receives the file to understand how video, audio and essence data all relate on a timeline. Of course, this is critical to working with professional video.

The need for AAF

If MXF contains many different possible layouts, you may be wondering



Figure 1. This simple illustration shows that a wrapper can contain video, audio and data essence such as subtitles.



THE WIRELESS MASTERPIECE.



DIGITAL 9000

A pinnacle of innovation, this is the best-in-class digital wireless system available and a future-proof investment. We're lifting the curtain.

DIGITAL 9000 – The Wireless Masterpiece.

www.sennheiser.com



SENNHEISER

The Pursuit of Perfect Sound

why there is a need for AAF at all. The reason is fairly simple. AAF allows you to wrap up many different tracks of video, audio and data essence, and describe how these different tracks relate to each other. Think about layering or compositing in an edit application. For those not familiar with this idea, layering allows an editor to superimpose one layer of video, say an animated graphic or a window of video, on top of another base layer. Compositing is a common application in editing, but it is not common in the on-air environment, where users generally are playing back finished program material.

An AAF file could contain a base layer consisting of a video and two audio tracks, a compositing layer consisting of another video and two audio tracks, plus some editing metadata that instructs how to manipulate these two pieces of video to produce the finished result. (See Figure 2.)

Another difference between AAF and MXF is a result of what I stated above — that MXF is primarily intended to be used in an on-air environment, while AAF is generally intended to be used for editing. Therefore, it is a common user requirement that MXF files be complete and ready to play at any time. Therefore, many (but not all) MXF files contain video and audio *inside* the file. By contrast, it is not uncommon to find that an AAF file that contains only



Figure 2. An AAF file could contain a base layer, a compositing layer and some editing metadata,

references to external essence. In other words, the AAF file is small and only contains metadata, including pointers to the actual essence files and other metadata with instructions regarding what to do with them.

So, why is there this fundamental difference between AAF files and MXF files? Well, imagine you are in an air playout situation. The last thing you want to find out just as you are going to air (or after you have pressed the “play” button) is that an audio or video track cannot be located on a remote storage device. Since MXF files need to play when the “play” button is pressed, it makes a lot of sense to package video and audio inside a file.

By contrast, think about a typical broadcast promo. If your station produces local promos, you might be surprised to find out how many separate video, audio, graphics, subtitle and descriptive video elements go into a simple 15-second promo. Now, imagine a half-hour, multi-camera, pre-produced news program. This edit project could have more than 1000 (several thousand, actually) individual elements associated with it. It is likely to be more efficient to organize separately the different elements going into this program on disk, perhaps using shared storage. An AAF file could then be a lightweight, metadata-only file, with pointers to the actual content stored on shared storage. This is a common way to build a professional video editor.

So, AAF and MXF may be used differently, depending on the application. For finished programming, use MXF. For an edit environment, or an environment where you need to describe the relationship between a number of separate elements, use AAF.

Lastly, AAF and MXF are interchange formats and meant to be the lowest-common-denominator to get content from one system to another. It is common or likely that inside a system, you will not find AAF or MXF (with some exceptions). Also, since these are baseline formats, it is common to find capability-adding extensions. But, these extensions could hamper interoperability.

BE

Brad Gilmer is president of Gilmer & Associates, a consulting technology firm. He is also executive director of the Advanced Media Workflow Association and executive director of the Video Services Forum.

? Send questions and comments to: brad.gilmer@penton.com

**THE NEXT GENERATION
OF FULL DUPLEX WIRELESS**

*Performance of a rack mounted
system - at a fraction of the cost!*

- 8 people communicate simultaneously
- Dual channel with party line switching
- Self-contained headsets - no beltpacks!
- Portable for on-location use
- Range up to 800 yards

1.800.399.5994 **www.eartec.com**

EFFICIENTLY CONVERTED

HDMI to HDSDI Converter

HDSDI to HDMI Converter



Scaling
Genlock
AES Audio
Remote Control
Frame Rate Conversion

doremi
www.doremilabs.com

www.americanradiohistory.com

Wireless microphone systems

Preparation is the key to avoiding audio problems.

BY DEE ANA BELL

Recently, a colleague of mine traveled to Seattle to do a field production. He and his assistant spent the morning testing their gear, including the wireless microphone system mounted on the back of the camcorder, while setting up their shot. The wireless microphone setup provided for dual mics, but only one lavalier was needed for this assignment. Everything worked fine prior to the shoot, but when the talent arrived and was miked up, swishing sounds were present in the microphone audio. Because the videographer did not have the time to troubleshoot the new system, he simply finished the shoot with a standard wired microphone.

By definition, a wireless microphone system is simply the replacement for the audio cable connecting the microphone to the sound system. It is a microphone with an attached or built-in radio transmitter that sends to a nearby receiver tuned to the same frequency. The receiver's output is connected to the camera or studio sound system. This configuration eliminates the microphone cable, giving the talent freedom of movement and location.

Unfortunately, achieving this result is sometimes not so simple because of external radio interference and the difficulties sometimes caused by close channel spacing. To overcome these issues, engineers and shooters need to be prepared to address a variety of obstacles, some of which can be tough to eliminate.

Wireless does not mean interference-free

Stating the obvious, wireless is definitely not an economical replacement and not as simple as the audio



One of these things is not like the other. Wireless microphone systems have their own set of potential problems, but with adequate preparation and some troubleshooting, they can be overcome.

cable, yet it has become a preferred method for many professionals in the field. A wide variety of wireless microphone systems are available, ranging from analog, to digital hybrid to all-digital systems, the newest wave in wireless microphone systems. Wireless microphones can operate in VHF, UHF, 2.4GHz and even 6GHz to 8GHz bands, though most professional wireless microphone systems still stay within the UHF bandwidths because they offer the largest contiguous block of radio spectrum.

In a typical analog wireless system, the transmitter modulates the audio signal with the tuned radio frequency using wideband FM modulation while the receiver demodulates the received radio signal back to the audio signal. If you think about it, the scheme is reasonably close to the same process used for FM radio transmission. The problem is achieving 100dB dynamic range, which is considered the minimum for high-quality audio, and staying within the 200kHz bandwidth limitation.

An unprocessed audio signal transmitted using FM and keeping within

the legal bandwidth has a dynamic range of about 50dB. This is because the dynamic range is directly proportional to the amount of FM that can be applied to the carrier. To increase the dynamic range, analog wireless microphones use a process called companding, a combination of compressing and expanding. Compression is achieved by using a variable gain amplifier (VGA) or at the transmitter. This circuit compresses 100dB input range by a ratio of 2:1 to fit within the 50dB dynamic range. Expansion occurs at the receiver, again using VGAs to restore the original 100dB dynamic range. Further signal-to-noise improvements can be obtained by pre-emphasizing the audio at the transmitter input and then de-emphasizing it (reversing the process) at the receiver.

The audio also must be limited to prevent over-modulation and distortion. These processes improve the audio quality but at some cost of high-frequency roll off; it is necessary to roll off lower frequencies that would interfere with the companding circuitry. Therefore, frequency response is

SONY
make.believe




MVS-3000

don't compromise... switch

Broadcast-grade performance for everyone.

Now journalism schools, houses of worship and corporate A/V departments can produce the same quality as the networks. Because Sony builds high-end technology into three new live production switchers: the compact MVS-3000 with 1 M/E, the larger MVS-6520 with 2 M/E and the MVS-6530 with 48 inputs and 3 M/E. They're easier to configure, easier to operate and far easier to acquire. They deliver multi-format support, multi-viewer output and brilliant menu panel control. And Sony expands your creativity with 2.5D resizers, color correction and four preview windows per M/E. Sony's latest MVS switchers. The quality you always wanted at the price you never expected.

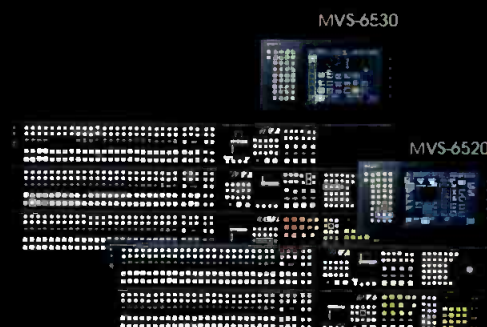

visit sony.com/switchers

© 2012 Sony Electronics Inc. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. Sony and the make.believe logo are trademarks of Sony.

typically about 50Hz to 15,000Hz for analog wireless systems. Professional analog wireless systems are able to achieve a better frequency response, perhaps out to 18,000Hz, by using more sophisticated circuitry in the companding and pre-emphasis stages.

Digital hybrid systems use analog FM transmission combined with DSP to enhance the system's audio. It replaces the traditional analog companding circuits in the transmitter and the receiver. Using DSP achieves a flatter frequency response through the use of digital techniques such as predictive algorithms. It also can increase the dynamic range and decrease companding artifacts (distortions).

An all-digital system digitizes the input signal in the transmitter, and it stays in the digital format until the receiver output. With the typical digital wireless systems, an analog-to-digital (A/D) converter is at the input of the transmitter, next is the DSP with three

main processes, where the digital signal is digitally encoded in the codec channel coding in the channel coder (error correction and synchronization), and finally the modulated signal constructed in the digital modulator.

In the receiver, like the transmitter, three main processes are then performed in the DSP. First, digital demodulation takes place in the digital demodulator, followed by channel decoding in the channel decoder, and then digital decoding in the codec. Finally, if not connected to a digital audio system, it goes through a digital-to-analog (D/A) converter to the analog audio output of the receiver.

Instead of compressing the audio signal, most wireless digital systems use a data compression scheme using an algorithm called a codec (code-decode) similar to MP3. For digital wireless systems, they are specialized codecs like the APT-X lossless codec that have low latency and can

operate in a special hybrid mode for applications in communication that are subject to bandwidth constraints. The result of the high-performance lossless compression is after decoding the compressed data stream; the original uncompressed audio is restored in high quality.

The advantages of digital wireless systems include wider audio bandwidth, no intermodulation distortion and the availability of more operating frequencies via closer spacing.

Digital wireless technology keeps advancing, and manufacturers will soon release digital wireless systems with no digital data compression in the UHF bandwidth. By not having compression, a digital wireless link may provide the ability to match the sound quality of the wired microphone.

Some limitations

One of the disadvantages of wireless

OCTOPUS 6

Newsroom Computer system

visit us at booth 1250

Flexible:


- platform independent (Mac OS, Windows, Linux)
- MOS compliant

Cost effective:

- one time payment
- floating licenses

Innovative:

- customizable modern interface
- social media integration

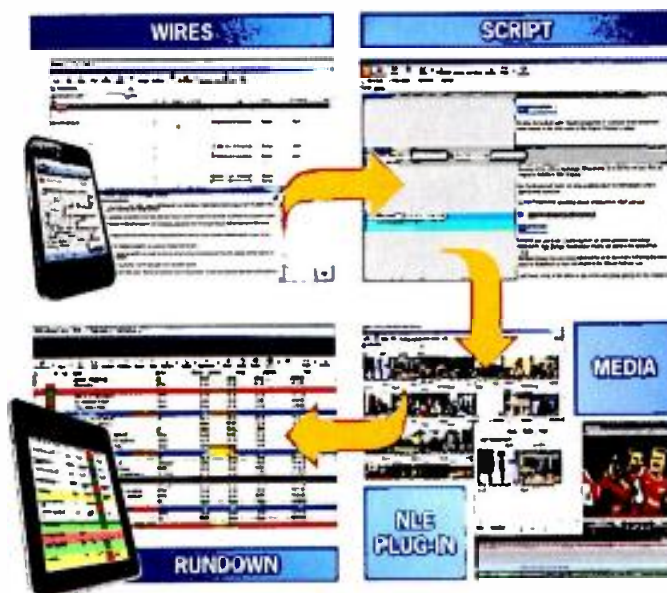

www.octopus-news.com

microphone systems is the potential for interference. There are three basic types of interference: radio frequency interference (RFI), intermodulation (IM) and electrical interference.

In the example earlier, the videographer's system used diversity technology, which means each receiver has dual antennas. A diversity system helps reduce multipath caused by RF reflections, which cause fluctuations in received signal strength and fading. Nondiversity receivers have only one antenna. Intermodulation arises from the combination of two or more signals at different frequencies within non-linear circuits and can occur when transmitters are operated close to receivers or other transmitters. IM does not occur in digital modulation, which is one of the advantages of digital wireless systems.

Today, nearly all wireless systems provide frequency agility instead of

the single-frequency-crystal-tuned systems of the past. Typically, wireless systems are tunable across a specific band of frequencies. Manufacturers even offer software for frequency coordinating to aid in finding available frequencies based on your location. Frequency scanning can also be helpful in finding a clear, available frequency.

The shooter in my story did have a frequency scanning options, but he was not sufficiently familiar with the feature to quickly identify and resolve the noise problem. It was, therefore, quicker to fall back to older, but reliable, wired microphone technology to complete the shot.

High-end systems


There are some sophisticated wireless systems available. Intelligent wireless systems use 2.4GHz back channels to communicate with the transmitter and the receiver in a

two-way data link. This permits the user to actually change operating frequencies on the fly. With remote control, the user is able to change audio gain, transmitter power and even transmit frequency on some systems. In addition, some wireless systems' receivers can recognize an interfering signal on the audio link and tune both receiver and transmitter to a clear channel with little signal interruption.

Of course, the price and complexity of convenience increases with each feature (even more so if its digital), and such systems are not needed for most live camera stand-ups. I am still waiting for the day when wireless microphone systems can reliably match wired microphone performance at a wired microphone price.

BE

Dee Ana Bell is chief operator/production engineer for NWPTV and NWPR at Washington State University.



APANTAC

*Extensive range of cost-effective
MULTVIEWERS for Broadcast, ProAV
and **ANY** application in between*

- ▶ Auto-Detects 4-64 Inputs / Sources
- ▶ Built-in CATx extenders (1080p @ 115 feet)
- ▶ Embedded & discrete audio monitoring
- ▶ Multiple outputs: DVI, HDMI, VGA, SDI
- ▶ Skin Technology for customizable user interface
- ▶ Cost-effective, compact solution with 3-year warranty

TAHOMA-LE Multiviewers

*Standard series of Multiviewers - 3G, SD, HD, Analog
multi-image display processing*

TAHOMA-LX Multiviewers

***Built-in Routing Switchers** - view any input source on
any Multiviewer output - 3G, SD, HD*

TAHOMA-LI Multiviewers

***Looping Video Inputs** - for further distribution or
duplication of inputs - 3G, SD, HD, Analog*



KOIN-TV with APANTAC Multiviewers



PATENT PENDING

www.apantac.com **info@apantac.com**

Main: +1 503 968 3000 • West Coast: +1 714 815 7421 • East Coast: +1 814 238 2365

Cloud storage

High-speed, secure networks are needed to realize the benefits of the cloud.

BY PATRICK SCULLY

Despite some concerns over the cloud's ability to serve as a reliable and cost-effective storage solution for business and consumer applications, we are seeing a shift toward it. The equipment and services markets are growing rapidly for cloud storage services. For example, the Taneja Group estimated the total cloud storage hardware market in 2010 was \$3.2 billion, growing 31 percent per year to \$9.4 billion by 2014. And 451 Research calculated the cloud storage services market was \$769 million in 2010, growing 47 percent per year to \$4.4 billion by 2014.

The rationale for such growth curves is certainly worth exploring. A study from Forrester points to a significant cost advantage of cloud storage solutions over traditional internal enterprise storage. In that study, the annual cost of cloud storage for 100Tb of data was estimated to be \$231,600 vs. \$955,500 for internal storage, a 76 percent reduction in storage costs.

Some media and entertainment applications could benefit from the lower-cost cloud storage model because the creation, distribution and conversion of video content in digital form is a huge driver of storage and corresponding data protection.

Media and entertainment is seeing an unprecedented growth in storage due to higher-frames-per-second (fps) cameras and video resolution. For example, fps has increased from a historical 24fps to 48fps in the upcoming film *The Hobbit* by Peter Jackson, to 60fps in the latest *Avatar* movie, with increases to 300fps expected in the near future. At the same time, digital video production continues to increase resolution from 2K

initially to 4K today, with 8K and 16K distinct possibilities for the future.

As a result, the raw video content produced by high-resolution digital production can quickly get into the Tb/h — even more for stereoscopic capture from multiple cameras. For example, Coughlin Associates predicted a more than fivefold increase in entertainment-industry storage between 2012 and 2017, and will reach more than 87 petabytes (Pb) of storage shipped per year. Even when only considering cloud services for vaulting capacity to complement internal data centers, this represents a significant cost-savings alternative.

Data protection

Data protection and archiving measures are more complicated because of this massive video data generation. Data protection typically involves making copies of the original data, and ensuring copies are distributed, both across multiple disk arrays and geographically. This ensures the survivability of the vaulted content and its availability whenever it is required. Typically, nonlinear editing (NLE) post-production storage is a mix of direct and network-attached local storage. Coughlin Associates recently found that 15 percent of participants are now using cloud-based storage in their post-production, and around a quarter of these had more than 1Tb in the cloud.

Recent service outages from cloud providers, such as Amazon EC2, Google and Microsoft, only reinforce the point that even well-tested backup plans can occasionally fail and cause downtime. Although these are becoming less frequent as the cloud model matures, the basic data



As they move to file-based post-production, broadcasters are putting more of their content in the cloud.

protection practice of multiple data sets in multiple locations should still be deployed for maximum reliability. Failing to follow these principles can lead to major production delays when the cloud is used in a collaborative workflow and negatively impact the sale and distribution of content to downstream users.

Although the cloud services discussed until now are applicable across various industries, from media and content production to financial and government-use cases, let's now explore different use cases of the cloud for the media and content production and distribution industry and their networking implications. Focusing on cloud storage, let's consider three typical use cases: backup/archive, content and I/O. Among the three, each is defined by different parameters, such as I/O specifications, including bandwidth and response time; geographical diversity; annual downtime; and recovery point and recovery time objectives (RPO and RTO).

In the case of backup or archive storage, one can consider how such

SDI GEAR FOR PROFESSIONALS

VERSATILE • AFFORDABLE • RELIABLE



NEW!

\$995

Quad SDI to HDMI Multiviewer for 3G/HD/SD

Matrox MicroQuad lets you use an affordable HDMI display to view up to four SDI video signals and show or hide labels and VU meters. It's powerful 10-bit scaling engine and advanced filtering algorithms always ensure a crisp, artifact-free monitoring experience. The small, easy-to-use device is ideal for OB vans, on-set productions and live events. All controls are on the unit itself, no computer is required. Alternatively, use the Windows-based Matrox MicroQuad Remote application to control the unit from a distance.

Dual SDI to HDMI Mini Converter for 3G/3D/HD/SD

Matrox MC-100 lets broadcast engineers and A/V professionals satisfy their diverse needs when it comes to managing SDI signals. This single portable unit can be used as a HD-SDI switcher, a distribution amplifier, a multiplexer, and a 3D processing unit. You no longer need to purchase different devices to perform these tasks. Matrox MC-100 lets you do it all with one inexpensive, easy-to-use mini converter. It should be in every video professional's toolbox.



\$495



**starting at
\$995**

HD-SDI Scan Converter with Genlock

Matrox Convert DVI scan converters let broadcasters easily and economically incorporate content from computers, iPads, and iPhones into news programs. They are also the perfect appliances to drive projectors and large displays at live events and in houses of worship. These products are ideal for creating broadcast video from computer applications such as Skype, YouTube, Google Earth, FaceTime, media players, presentation software, and web browsers.



www.matrox.com/video/SDIgear/be

1.800.361.4903 (US and Canada), 514.822.6364

matrox
Digital Video Solutions

Matrox is a registered trademark. Matrox MicroQuad, Matrox MC-100 and Matrox Convert DVI are trademarks of Matrox Electronic Systems Ltd. All other trademarks are the property of their respective owners.



Transmit HD Content Over SD Infrastructure



RFC microLite Elite System

**Nucomm
Messenger**

**Nucomm
Newscoder 4**

- Wireless Camera Systems
- MPEG-4 HD from the Field
- Workflow – Media Exchange
- ASI / IP Hybrid Fixed Link Systems
- ENG Trucks



IMT
A Video Group brand



Nucomm

908.852.3700
www.imt-broadcast.com

an approach can help the industry meet vaulting requirements of raw and/or produced content. Given the enormous amount of storage required for applications such as sporting events footage or the next blockbuster hit (tens or hundreds of petabytes of data), the cost savings of cloud storage are extremely attractive. In this case, characteristics such as geographical diversification and recovery consistency and assurance would typically have more influence in the service definition than the bandwidth and response time.

Content storage, on the other hand, could be characterized by higher availability and I/O rates. It also benefits from a certain degree of geographical diversification for storing and distributing large files. Distribution of produced content, such as television programming, movies, trailers and clips to various partners, thus, becomes simplified and more cost-effective. Higher availability here ensures content can be sold and distributed when needed, and in a timely manner with sufficient bandwidth.

A third use case for cloud storage would be better served by I/O storage. Optimized for performance with greater bandwidth, reduced response time and highest availability specifications, with less emphasis on geographical diversification, this type of cloud is primarily geared toward active development. This would be ideally suited to content ingestion and post-production workflow collaboration. When we consider the size of individual video frames (roughly 50MB for 4k frames), this translates into high bandwidth requirements, whether we consider real-time content ingestion (from 1.5Gb/s to more than 12Gb/s for current formats) or faster-than-real-time transfer of stored content using 40Gb/s or 100Gb/s transmission rates. The low-latency characteristic of this type of storage also makes it suitable for online post-production work.

Although the compute offering of the cloud creates an interesting alternate and/or complementary solution for the media and content industry, such as transcoding and watermarking, it relies on the same type of networking infrastructure used for other parts of the cloud offering.

Network architecture

For this potential to be fully realized, however, the various types of cloud services described in the preceding paragraphs can deliver only the performance the underlying network architecture will allow. The foundation of this architecture starts with a high-speed, high-capacity network that can withstand the enormous amount of data being uploaded, edited and retrieved from the cloud. Whereas 2.5Gb/s or 10Gb/s speeds were deemed plentiful less than a decade ago, today's applications benefit from 40Gb/s and 100Gb/s coherent networks.

The traffic flows must also be optimized to ensure latency-sensitive applications are prioritized and routed accordingly through a service-aware architecture. For example, the speed and reliability of the network is of utmost

importance for news editors and producers who must edit hours of raw footage into a 30-second spot for the next newscast. In this case, not only does the cloud need to be available and reachable, it needs to be accompanied by a highly resilient network infrastructure offering five or six "9s" of reliability (99.999 percent or 99.9999 percent up-time) as part of the overall network design for business-critical applications using available protection, mesh and control plane options.

In addition to high resiliency demands, today's networking infrastructure must be able to respond to predictable, and unpredictable, bursts of traffic appropriately

Even well-tested backup plans can occasionally fail and cause downtime.

with scalable bandwidth. If not, video editors, news producers and content distributors will incur serious headaches. In addition to varying bandwidth demands, the architecture must also be flexible to accommodate various types of traffic services — whether Ethernet-based, Fibre Channel — or be able to transport video streams in their raw formats.

Given the high value of the content created and distributed in the entertainment and broadcast industry, and the inherent data protection requirements, it is also important to consider the security aspect when dealing with cloud services. Even though content is viewed as generally secure once in the cloud, (a recent survey from 451 Research found that only 10 percent of respondents considered the data in the public cloud insecure), an important aspect of protecting the proprietary information is considering the security of the in-flight content as it transits to and from the cloud. A networking solution that incorporates data encryption as part of its transport infrastructure alleviates that concern by ensuring the data is kept secure as it traverses the network and complements the cloud offering by securing the data while in transit.

Such features and characteristics of an assured network help accelerate and facilitate access to cloud solutions for a number of use cases in the broadcast industry and, along with the significant cost advantages of the cloud compared to internal data centers, are key considerations when evaluating networking options. A powerful, carrier-class production network with enhanced security provisions, along with cloud-based services, is guaranteed to assist the video production industry in overcoming the quality, latency and security challenges of today's increasingly distributed file-based workflows.

BE

Patrick Scully is product line manager and video transport expert for Ciena.

4x4 SDI Matrix Switch



Model 2444S

Sensoray's Model 2444S supports all single-link SDI standards—SD, HD, 3G. It is compact, low power and offers unmatched control flexibility via a front panel, Ethernet and RS-422/RS-485.

NOW ONLY \$850

Data rates: 270 Mbps–2.97 Gbps

Standards: SMPTE 259M(C), 292M, 424M

Input cable length: 270 Mbps–400 meters

1.475 Gbps–200 meters

2.97 Gbps–110

503.684.8055 | SENSORAY.com/2444S



The Most Powerful Matrix Intercom Just Got Faster.

When systems and resources are often shared across broadcast studios, and time is limited in mobile productions, the need to instantly execute system-wide changes becomes critical.

NEW!



The new Eclipse HX, the most powerful and comprehensive digital matrix platform, delivers more:

- Improved performance and resource utilization for executing system changes in real time
- Expanded system capacity for doing more
- New V-Series rotary panels provide easier and faster audio level adjustments for Intercom mixing and IFB assignments

Clear-Com

For more product information or sales contact: www.clearcom.com

© 2012, Clear-Com LLC. All rights reserved. © Clear-Com, the Clear-Com logo, and Eclipse are registered trademarks of H&M Electronics, Inc.



BY MARIEL BRADY

Trading UP

CBS Sports Network's studio upgrade has a major player at the top of its game.

CBS Sports Network, the cable home of CBS Sports, had outgrown its studio. Built in 2003 for CSTV: College Sports Television, a cable start-up featuring college sports, CBS Sports Network's Chelsea Piers studio in New York City was in need of an update.

The upgrade began in 2010 with the network's transition from standard- to high-definition. It continued this summer with the goal of revitalizing and upgrading the network's on-camera look with a new set, as well as expanded graphics and transmission areas to accommodate the growing network's needs.

When setting out to design and build a new studio, network executives had to take into account not only the dozens of studio shows and original programs produced out of the facility, but the more than 350 live games produced by the network each year.

Project planning

Patty Power, senior vice president of operations, and Kelly Dunne, senior vice president of marketing and creative services, led the group in designing the new set, along with a design team from Jack Morton Worldwide. The group wanted to make better use of the 6,000sq-ft stage occupied at CBS Sports Network, only half of which was utilized by the old set. Another goal was to raise the grid, which

had been rather low despite the studio's 20ft ceilings. Having more technology visible throughout the set was a priority, as the team sought a more modern look.

Power and Dunne also worked with chief technical officer Walter Raps and Tyler Hale, vice president, studio production, to identify an operations and production workflow — one that allowed the creation of a state-of-the-art, cost-effective facility that could be completed in a tight time frame. While planning for the process began over a year prior, actual

The new CBS Sports Network studio was designed to make better use of 6000sq-ft of space, where the old set used only half of that.

Great Things. Small Packages.

The UTAH-100 family of routing and distribution products from Utah Scientific has a well-earned reputation for value, performance, and reliability. Two new members of the family are adding *flexibility* to the list.



The **UTAH-100/XFD** Fiber Distribution Frame packs up to 16 channels of coax-to-fiber and fiber-to-coax conversion into a compact 1RU frame.

Fiber-per-channel, WDM, and CWDM solutions, including Gigabit Ethernet over fiber, make this unit the logical choice for all of your fiber applications.



The **UTAH-100/XHDA** is a 3G-capable High Definition Distribution Amplifier with a big difference. It has 8 amplifier blocks, each of which can be programmed by the internal web interface to serve 2, 4, 6 or 8 outputs.

This unmatched flexibility makes it perfect for mobile systems, allowing a single unit to replace racks of DAs.



The UTAH-100 family offers a wide selection of routers in all signal formats in sizes from 8x8 to 32x32 with standard built-in web control and options for built-in or remote control panels, third-party control interfaces, redundant power supplies.

The family also includes Distribution Amplifier packages and modular DA solutions for all applications.

Contact your Utah Scientific representative today or visit us at: www.utahscientific.com for more information on this ever-expanding product family.



The Best in the Business

US Utah Scientific
www.utahscientific.com

Technology at work

ASG Atempo: archival software
Belden: 1505A, 1694A and 1805A cabling
Blackmagic Design: routers
Calrec: Omega digital audio console
Cobalt Digital: 9084 RGB color corrector
Data Direct Network: storage with 300TB for hi-res and 120TB for proxies
Dataton: WATCHOUT multi-display production and playback system
Evertz: 3000DVT video wall processors
EVS: XT2 servers
Impulse Design: custom furniture
Miranda: Kaleido-X multiviewers, NV8576 hybrid router
NEC: 32in and 46in monitors
Orad: PlayMaker HD/SD slow-motion server
Panasonic: 85in display
Primestream: FORK production suite
Sharp: 60in monitor
Sony: HSC300K multiformat cameras, MVS8000X production switcher and XDCAM PDW-HD1500 recorders
SpectraLogic: T120 robot library
Talley Display: LED screen

renovation could not begin until after the NCAA Division I Men's Basketball Championship in April. It then needed to be completed before college football season in August.

Technical facilities

After the design and technical requirements were clear, Richard Hart, vice president, entertainment production and technical operation, CBS, ensured that construction and installation were implemented by the CBS Scenery Shop. This group has been involved in all major productions constructed at CBS for more than 50 years. Most recently, it has been involved with the fabrication of "CBS This Morning," WCBS local news, "Anderson Live," CBS Sports and "CBS Evening News." Projects are fabricated through the direction of shop head David Tasso and his team, including shop foreman Tom Bianco



TVU networks

TVUPack®

The Choice of Leading Broadcasters for Portable 3G/4G Live Video Broadcast



TVUPack 8100



TVUPack 8200



TVUPack Mini
Fits in the
palm of your hand



TVUPack Mini SE
Exclusively for
Sony Camcorders

- Resilient, stable video transmission
- Backpack, camera-mount & belt-mount solutions
- Easy to use featuring one-button operation

- Multiple wireless connections
- Starts up in seconds
- Fits easily into production workflows

Scan or
TVUPack.com



and project engineer Pat O'Donnell. Head electrician Joseph Bradley and charge scenic artist Mark Prouse created the intricate lighting, paint and graphics.

Project engineer Patrick O'Donnell took on implementing the design

and working closely with Marianne Fischer and Raps to construct the production space. Fabricating the unique set that boasts layers of monitors, metallic details, custom LED light fixtures, oversized ceiling units and an immense anchor desk was

challenging. After the fabrication process was completed in their facility, Bianco then oversaw the installation.

Raps and his team oversaw the installation of nearly 50 LCD monitors — a mix of 60in Sharp, 46in NEC, 32in NEC and 85in Panasonic displays, all fed from three Evertz 3000 DVT video wall processors. The system was configured with 18 shared inputs and 54 outputs, as well as a Dataton WATCHOUT multi-display production and playback system with eight outputs. An LED screen from Tally Display, similar to those used at stadiums, also was installed in the set's floor, allowing the creative team to simulate fields and courts. Both the videowall and floor screens can be fed from any video source on the facilities' Miranda hybrid router or Sony MVS8000X video switcher, which pass through Cobalt's 9084 RGB color corrector for final adjustments.



Nearly 50 new LCD monitors, including a mix of 32in, 46in, 60in and 85in displays, help the CBS Sports Network staff produce shows and more than 350 live games each year.

a **NEW** world of time code for SD & HD video



The ESE HD-488/SD Time Code Reader, Generator and Inserter

ESE introduces a new world of flexibility and features for time code with the HD-488/SD Time Code Reader, Generator and Inserter for HD and SD Serial Digital Interface video.

- Generates/Inserts Time Code • USB Setup Interface • User Friendly Control
- Universal Power Supply (90-264 VAC) • Accepts Multiple HD Formats
- Time Zone Offset • LCD Setup/Status Display • Dual LTC Output



142 Sierra Street
El Segundo, CA 90245 USA
Tel: (310) 322-2136

www.ease-web.com

Updates also included a SAN upgrade, which increased proxy storage by about 58 percent and main storage used for high-res video by about 55 percent. The Data Direct Network is about 300TB for high-res and 120TB for proxies. Archival software uses ASG's Atempo with some custom written modules, utilizing the network's existing SpectraLogic T120 robot. Transmission was moved to a larger space, allowing for future growth. IP connection was enhanced between the

Chelsea Piers facilities and CBS television network broadcast center about 2.5mi away, which will allow additional feeds to and from the center. In all, the team re-wired more than 10mi of studio wiring, including Belden 1505A, 1694A and 1805A cabling.

In addition to transmission, all studio and remote graphics operations were relocated to a larger, self-contained location with room for growth and enhanced quality control. Blackmagic Design routers were added to existing Miranda multiviewer

feeds to user monitors so they can be easily switched out depending on show requirements. Custom furniture from Impulse Design was also added, as was further integration with CBS Information Technology and CBS Interactive for score and statistics feeds.

Studio C and Control Room C, where the "Tim Brando Show" is produced daily, were relocated to allow for the larger main set. Also, audio and video ties were increased, and the integration with the main control rooms also was enhanced.

Other upgrades included five Sony HSC300K multiformat camera systems, hardware upgrades for the two EVS XT2 systems, several Kaleido-X multiviewers and the Miranda NV8576 hybrid router.

The control room features a Sony MVS8000X with 80 inputs, four ME and four DME channels, as well as a Calrec Omega 56 fader 5.1 capable digital audio console. Production capabilities include a 2x Orad PlayMaker, 2x EVS XT2, 12 Sony XDCAM PDW-HD1500 recorders and 24 channels of live XDCAM format ingests using Primestream's FORK production suite. **BE**

Mariel Brady is junior publicist, CBS Sports Network.

Project team:

CBS Sports Network: Patty Power, senior vice president, operations; Kelly Dunne, senior vice president, CBS Sports marketing; Tyler Hale, vice president, studio production; Walter Raps, chief technical officer; Marianne Fischer, vice president, studio operations; Demetra Marcus, vice president, marketing

CBS Scenic Shop: Richard Hart, vice president, entertainment production and technical operation; David Tasso, shop head; Tom Bianco, shop foreman; Pat O'Donnell, project engineer; Joseph Bradley, head electrician; Mark Prouse, head scenic artist

Installation Technicians: Jim Parkinson, timeframe productions, system engineering & integration; Mike Steinhart, director, broadcast technology solutions; Jonathan Handler, broadcast post production engineer; Thomas O. Carroll, Jr., installation technician; Mike Moutopoulos, installation technician; Ryan Breen, installation technician; Doug Terpsa, installation assistant

Jack Morton Worldwide: Juliann Elliott, associate designer; Andri Durette, senior design director

KEEP CALM & IN CONTROL

Cobalt makes it easier than ever to monitor multi-program MPEG streams and measure and log materials emanating from your facility. From readily accessible records to powerful long-term data storage, the Cobalt SPOTCHECK provides CALM proof-of-compliance in a minimum, maintenance-free package.

SPOTCHECK

SPOTCHECK


- Monitor Multi-program MPEG streams (IP or ASI) at transmit encode point
- Measure and log all material emanating from facility
- Easily and readily accessible records and query for all programming emission
- Powerful, long-term data storage providing detailed correlation to loudness, audio/video clips, and ancillary data.
- Segments can be searched using date/time, IO, or other criteria from as-run list

COBALT DIGITAL ENGINEERING FOR TOMORROW'S BROADCAST

1 (800) 669-1691 / sales@cobaltdigital.com / cobaltdigital.com

COBALT

New Keying and Layering Technology

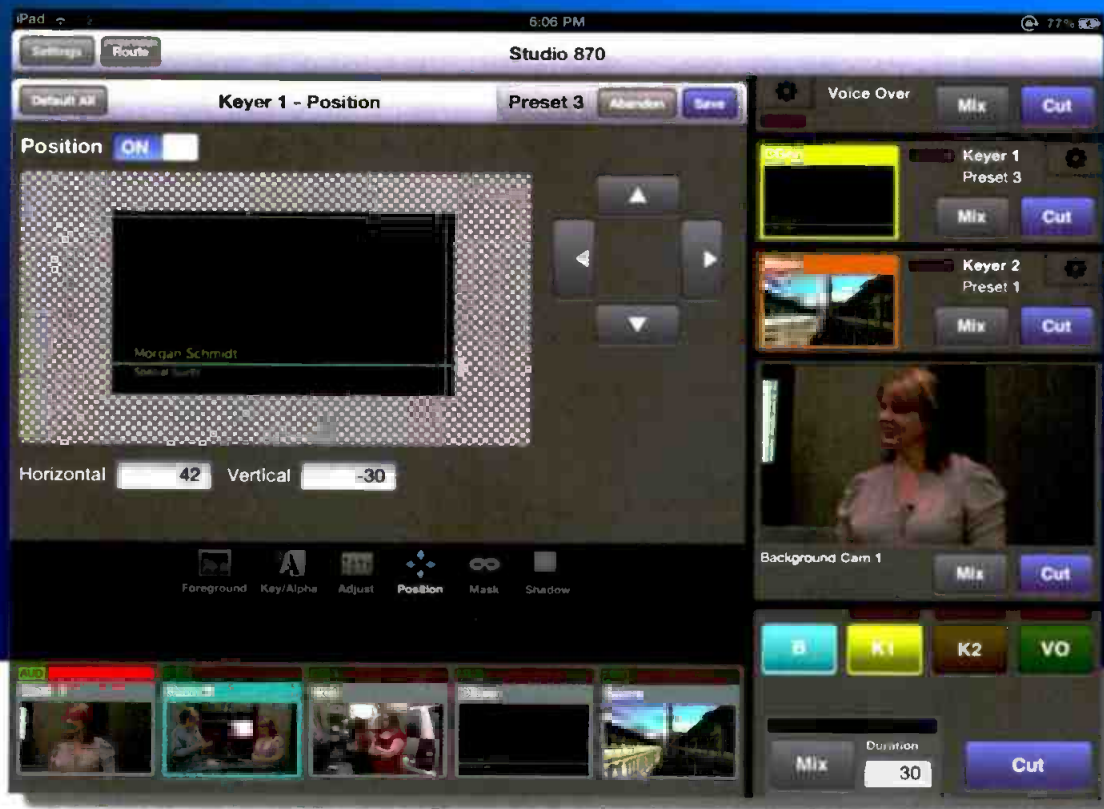

Introducing the new, award winning Avenue Layering Engine – multi layer keying that's just right for branding, small master control, flypacks and trucks. There's a frame sync on every input so go ahead and use sources that aren't genlocked. And the extraordinarily intuitive iPad™ control gives you new freedom in switching a show or event.



Two, independent linear keyers, program/preset background transitions, audio mixing, voice over and breakaway, make it an agile and flexible solution for combining audio and video content. Inputs can be driven by SD, HD or 3G SDI signals from cameras, remote feeds, character generators, graphic and stillstore systems, and video servers. Realtime processing, low latency and serial control make it easy to integrate into your next project.



ENSEMBLE
DESIGNS

+1 (530) 478-1830
www.ensembledesigns.com

www.americanradiohistory.com

Shooting **Quad HD** for HD projects



Figure 1. Camera view with the 10X lens zoomed-in

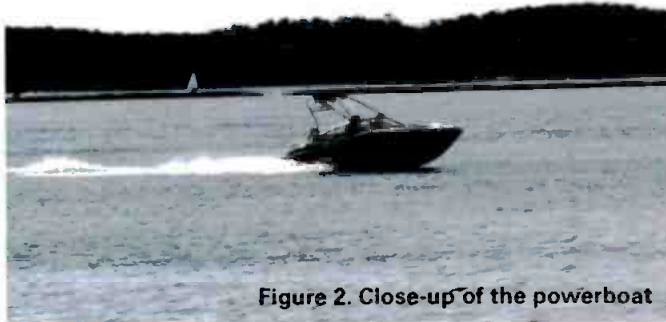


Figure 2. Close-up of the powerboat



Figure 3. Close-up of skiers

The increased resolution enables full HD crops.

BY STEVE MULLEN

Were I to suggest that there are advantages to shooting certain broadcast projects with a 4K2K camcorder, I have no doubt what your response would be after giving me a harsh “are you crazy” look: “There’s no editing equipment for 4K2K, no distribution system of any kind and no 4K2K HDTVs for sale at any price.”

Telling you that several 4K2K HDTVs have already been announced for delivery during the remainder of this year will not, I am sure, modify your negative view. Nor will telling you that I can edit 4K2K on a lightweight MacBook Air be likely to modify your opinion.

The fact that neither in-plant nor external distribution systems can

handle 4K2K is a solid reason in your view that super HDTV is years, if not a decade, away.

Nevertheless, I’ve little doubt that when you shoot digital photographs, whether you display them on your computer monitor or HDTV, you shoot your photos with a camera that has 12 to 16 megapixels. In fact, if you have one of the newest cameras,



See TSL Professional Products at
CCW-HD World, Booth #859

products@tsl.co.uk

bexel

prosales@bexel.com

SoundField Surround Sound Microphones and Processors

TSL's new SoundField Microphone and Processing technologies enrich the customer experience by bringing atmospheres of sporting events, concerts, documentary locations and film sets to life with a SINGLE MICROPHONE


NEW DSF-B Digital Broadcast Surround Microphone package

- A Revolution in Surround Sound Broadcasting and Recording



The DSF-B Digital Broadcast package provides simultaneous digital surround and stereo soundscapes of large-scale outside broadcast events such as sports stadiums and concert hall venues

- Simultaneous digital surround and stereo soundscapes at large-scale sporting events
- Removes the need for multiple arrays
- Generates multi-channel audio from a 'single point' source
- Completely phase-coherent
- Easily collapsible surround to stereo or mono
- No loss of frequency, imbalance or other phase-related issues
- Microphone parameters controlled remotely, including orientation, angle, pick-up pattern and rotation
- Package consists of DSF-2 microphone, DSF-2 Controller and DSF-3 processor




Additional features with the
DSF-3 Control APP



- Snap/Tilt - Rear, Front surround axis can be individually tilted to focus on sound sources above or below the microphone
- Variable polar patterns - Front, Centre and Rear
- Zoom Control

SoundField UPM-1

- Hands on upmixing to 5.1 for live broadcast



Designed to integrate seamlessly into a post-production workflow, the UPM-1 plug-in is available in VST, RTAS (Mac and PC) and AU (MAC only) formats.

It's ideal for post production houses or HD broadcasters that need to ensure all of their material is transmitted in 'fold-down' compatible 5.1. This includes archived stereo, stereo only-broadcasts, effects and jingles, etc.

UPM-1 Plug-in

- Upmixing in Post Production



The UPM-1 upmix processor has a unique algorithm to perform detailed real-time analysis of stereo source material, identifying and separating the ambience from the direct sound.

With only five physical rotary controls to manage all upmix parameters, the UPM-1's simplicity has proved to be a must for any OB application or broadcast studio working in 5.1 surround.

io Workflows, Tally Systems and Power Management solutions

Products available from stock in the USA. Email: prosales@bexel.co.uk
or contact our partner BEXEL for more information: Tel: 800-842-5111 or 818-565-4339

Speak to TSL direct, please contact us: TSL: +44 (0)1628 676 221

Email: products@tsl.co.uk Web: www.tsl.co.uk/products.aspx

www.americanradiohistory.com





Figure 4. Wide shot from a locked-down camcorder



Figure 5. View of the dock, jet ski, lake and sky



Figure 6. Close-up of the jet ski

you may be shooting photos with 24 to 36 megapixels.

There are two reasons why you shoot photographs with six to 18 times more pixels than can be displayed. First, the higher the shooting resolution, the better image detail that will appear on a lower-resolution

display. Second, the high-resolution original allows you to severely crop a picture and still have more than 2 megapixels in the cropped image.

Both of these reasons also apply to shooting video. The key is to think of source resolution separately from distribution and viewing resolution. One can shoot at four times the distribution and monitor resolution. Second, the ability to crop video is important when shooting sports or documentaries.

In this article, we'll look at four different types of cropping that can be applied to video. I used JVC's GY-HMQ10 Quad HD handheld ENG-style camcorder.

Multiple view crops

When shooting with a single camera, one lacks the ability to capture multiple views of the same subject. However, if one has a super-resolution source image, one can crop multiple views from the same video. (See Figure 1 on page 40.)

Let's look at a close-up of the powerboat pulling two skiers. (See Figure 2 on page 40.) It's important to remember that even though this is a crop, it still has 2 million pixels that comprise a full HD image.

Similarly, a close-up of the skiers still contains 2 million pixels. (See Figure 3 on page 40.)

Because both views come from the same camera as it pans with the action, it's possible to cut between the

views. It's also possible to superimpose the two views.

Crops from locked-down camera

In some cases, it's desirable to place a camera on a tripod and lock it down for a wide shot. The problem, of course, is that a wide view is only useful in a few situations. It often functions only for establishing shots and brief cutaways. (See Figure 4.)

In a much better composed shot, most of the distracting objects have been cropped away, leaving a view of the dock, jet ski, lake and sky. (See Figure 5.)

Having the ability to pull multiple shots from a locked-down camera gives the producer the ability to make more use of the camera. (See Figure 6.)

As we will see, an NLE's ability to crop, over time, from one view to the other enables the locked-down shot to look like a camera zoom — something that could only be accomplished were a remote-controlled pan-tilt head and remote zoom control available to the camera operator.

Pan and zoom crop

Final Cut Pro X provides a "Ken Burns" effect that can be used to animate cropping within a Quad HD image. The green window defines the initial view, while the red window defines the final view. (See Figures 7, 8 and 9 on page 44.)



ENESYS
Test & Measure

USA
DVEO
Broadcast Division

Analyze, Capture and Play RF, ASI and IP with a Laptop

USB compact adapters for:

- DVB-T2/T/C, QAM, ATSC, ISDB, DTMB...
- RF, ASI, IP, LVDS, TTL interfaces

DiviSuite: comprehensive analysis

- Record and play MPEG2-TS and T2-MI
- Analyze RF, MPEG2-TS and T2-MI
- Decode services (H.264 / MPEG2, EPG, ...)




U.S. Distributor: www.dveo.com

www.enesystest.com

HD/SD 2 M/E - 3M/E Digital Video Switcher

HVS-4000HS
"HANABI"

HD/SD Frame Rate Converter

FRC-8000

HD/SD/Analog/PC Mixed High Resolution Multi Viewer

MV-3200

FOR-A ALL STARS

LTO-5 Video Archiving Recorder
LTR-100HS/120HS

VRCAM2
Sensorless Virtual Studio System
Powered by BRAINETORM



HD Variable Frame Rate Camera
VFC-7000
"Flash EYE"

3G/HD/SD Multi Purpose Signal Processor

FA-9500



Featured Product is

LTO-5 Video Archiving Recorder

LTR-100HS/120HS

Re-Defining Media Archive Workflow

A video archiving recorder with the latest storage standard drive built in, LTO-5 (Linear Tape Open). With its over-whelming 1.5 TB of recording capacity and LTFS portable file system, the LTR-100HS/120HS can be used as material/program exchange media server. Using high quality codec with HD-SDI input/output and MXF wrapper/un-wrapper, the MXF files on LTO-5 tape can easily be used by other NLE systems. The LTR-100HS/120HS enables you to build handy video "archive at ingest" solutions.



[MPEG-2 model]

LTR-100HS

NEW

[AVC-Intra/DVCPRO model]

LTR-120HS

www.for-a.com

- Head Office (Japan) Tel: +81 (0)3-3446-3936
- USA Western (CA) Tel: +1 714-894-3311
- USA Eastern & Midwest (NJ) Tel: +1 201-944-1120
- USA Southern (FL) Tel: +1 305-931-1700
- Latin America & Caribbean (FL) Tel: +1 305-931-1700
- Canada (Toronto) Tel: +1 416-977-0343
- UK (London) Tel: +44 (0)20-8391-7979
- Italy (Milan) Tel: +39 02-254-3635/6
- Middle East-Africa (Dubai) Tel: +971 4-887-6712
- Korea (Seoul) Tel: +82 (0)2-2637-0761
- China (Beijing) Tel: +86 (0)10-5170-9870

Continuous Innovation



Figure 7. Green window defines initial view, while red window defines the final view



Figure 8. Beginning of pan and zoom



Figure 9. Final frame of pan and zoom

Note that the rightward digital pan is possible even though the camera is panning to the left. If this pan looks disturbing, one can place a smaller green window over the kids while placing a larger red window over the Jet Ski. In this case, both pans will have the same direction.

Creative crops

Figure 10 shows a wide shot taken by the camera operator. Knowing that the shot should finish with a close-up of the green plants, the operator zooms into the center of the plants.

To the producer's eye, the plant's center is void, containing nothing of interest. (See Figure 11.)

By setting up a digital pan that begins with the whole image and finishes cropped to the right, the final close-up is far more interesting to the viewer. (See Figure 12.)

Export HD

When a crop is larger than 1920 x 1080 (or 1280 x 720), the cropped image is auto-downscaled during export. Of course, it's important not to crop Quad HD to smaller than the export resolution.

Using Apple's Final Cut Pro X, one edits Quad HD exactly the same as one would edit full HD. In both cases, one edits ProRes Proxy copies of the original ProRes 422 HQ or ProRes 422 video.

An export is made to a full HD file using ProRes 422 HQ or ProRes 422 at 1080i59.94 (or 720p59.94).

It's also possible to edit Quad HD using Final Cut Pro and Media Composer (OS X and Windows). Ultimately, the exported file can be sent to a plant's on-air server.

The advantages of shooting Quad HD are available whether one shoots with a low-cost ENG-style camera



Figure 10. Wide shot of garden



Figure 11. Zoom into center of the plants

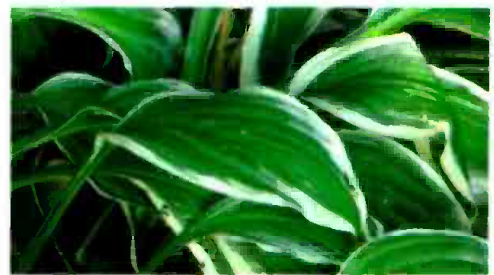


Figure 12. Corrected zoomed view

or a far more expensive cinema-style camera. The difference is one of image quality, not post production. **BE**

Steve Mullen is the owner of DVC. He can be reached via his website at <http://home.mindspring.com/~d-v-c>.




NEXUS Master Monitoring with Loudness Metering

- Loudness Metering in accordance to EBU R128, ITU-R BS.1770-2, ITU-R BS.1771
- Realtime Spectral Analysis, 31 or 61 frequency bands
- True Peak Metering in accordance to ITU-R BS 1770-2

DISCOVER STAGETEC INNOVATIONS

NEXUS

More than Digital Audio Routing

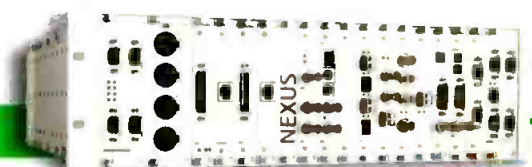

STAGETEC USA
usa@stagetec.com
www.stagetec.com





The talk of broadcast.

From local radio to large-scale live television productions, we provide powerful and intuitive digital mixing solutions that help to create the memorable events in broadcasting.

VISTA 1i
DIGITAL MIXING CONSOLE



VISTA 5 M2
DIGITAL MIXING SYSTEM



VISTA 9
DIGITAL MIXING SYSTEM



usa.studer.ch
studer-usa@harman.com

STUDER
by HARMAN

CELLULAR BONDED VIDEO

Sports are covered in new ways with the technology.

BY KEN ZAMKOW AND
MEIR SCHRIEBER

Cellular-based bonded uplink is becoming a frequent sight in sports venues. By using portable devices that bond together multiple 3G, 4G and other data connections, broadcasters can now quickly transmit live video from anywhere at lower costs than traditional uplink solutions, as well as transmit on the move or inside structures without line-of-sight or cabling restrictions. This has led to a variety of applications, such as transmitting a much greater number of live varsity games, sports news hits from the road, complete live press conferences and previously impossible live footage from inside locker rooms, golf courses, race tracks and more.

However, while allowing greater flexibility and lower costs, it is also important to understand limitations of transmitting over public cellular networks, and to use the technology in ways that produce the best results.

How it works

Bonded cellular video technology is an aggregation technique designed to group several physical links into one logical link. This provides fault-tolerance and high-speed links between the aggregation device and its paired bonding server.

The technology enables the use of several links (from two to 32) and combines them to create increased bandwidth and the data/video trunk. Should links fail, the bonding technology automatically redistributes traffic across remaining links. Automatic redistribution is done in typically less than 100ms, so no outage is noticed. In practice, a number of separate cellular or other data



Live transmission from events like the NFL Super Bowl is among recent uses for cellular bonded technology.

connections — which, individually, may not be very robust — are combined into a bigger pipe. This pipe can transmit despite any temporary individual lost connections to the cell tower or lost packets on the way to the server, for example. Data connections can include 3G and 4G modems across most major U.S. cellular carriers, as well as Wi-Fi, WiMAX, Ethernet and even portable satellite links.

The bonding device encodes video coming from a camera or a field switcher, dices it into multiple data packets and transmits each group of packets through a different modem or carrier. Information travels through cellular towers and the public Internet, and arrives in a receiver that recombines data into raw video again and then outputs it to a studio switcher (for on-air) or transcodes and sends it to a content delivery network (for online).

Typical bit rates

Transmission rates can vary dramatically based on location, time of day and number of people in a certain area. In good 4G areas, transmission rates may be as high as 10Mb/s to 12Mb/s, compared to an average of 1Mb/s to 3Mb/s in some 3G areas. Of course, it's impossible to predict available bandwidth at a given time. Therefore, another job of the bonding solution is to characterize each link every few milliseconds in terms of bandwidth, delay and loss rate. Then, it creates a Gaussian normal distribution graph for each parameter, assigns a real-time weight based on the graphs, and feeds this weight to the scheduling/queuing process. This allows for the best real-time decision regarding which link the next incoming packet should use. Typical bonding techniques use the following methods to overcome fluctuations:

- **Adaptive bit rate:** By changing the encoding rate on the fly, the bonding unit can maintain transmission even as bandwidth swings.
- **Signal boost:** The bonding unit may use special antennas that increase range compared to consumer air cards, as well as overcome multi-path fading in environments where signals bounce around different obstacles (walls, beams, etc.).
- **Forward error correction (FEC):** The unit will send redundant data along with the main feed, so that if some of the original packets are lost, the decoder can still recover the information. The Reed-Solomon FEC algorithm takes a predefined block of packets (FEC group) and calculates several augmented FEC packets. If, for example, the FEC group is composed of 20 packets, and we add four FEC overhead packets, any lost packet, up to four, can be recovered.

yellobrik®

finally, bricks done right...

HDMI CONVERSION



CHD 1812

- ◆ HDMI to SDI conversion (3Gbit)
- ◆ Integrated frame synchronizer
- ◆ Cross lock compatible
- ◆ Analog audio inputs + embedder
- ◆ Optional fiber output

see all the yellobriks at
www.lynx-technik.com



LYNXTechnik AG | Broadcast Television Equipment

www.lynx-technik.com

• **Latency control:** The higher the latency is, the more likely all data packets will arrive in time. Users can select a low latency (as low as sub-second end-to-end), which carries a greater risk of occasional packet loss. Or, a higher latency (anywhere from

2 to 60 seconds, or even store-and-forward) can be chosen, which provides more time to recover lost data. End-to-end latency has a great effect on bonded link quality. If a user selects a low end-to-end delay, say one second, then considering encoding and decoding time, and SW processing time (approximately 500ms), the remaining time for a packet left to arrive from the transmitter to the receiver may be as low as 500ms.

It's up to users to decide which parameters to use, based on the content transmitted. On-the-move coverage, where changes are fast and individual link properties vary, a higher end-to-end delay profile will enable better recovery from changes without data loss. But, in areas with good cellular coverage, when the camera is static, a lower delay profile can work fine.

• **Changing resolutions:** As resolution increases, the bit rate also needs to in-

crease. By lowering the output resolution, one can get by with lower bandwidth in congested locations. The bandwidth control engine detects any state where the outgoing bandwidth is lower than the encoding bandwidth. It will then decide whether to let the encoder use a higher Quantization Parameter (which lowers the encoder bandwidth), or perform a video scaling (feeding the encoder with a lower-resolution image) in order to lower the encoding bandwidth.

A good bonding engine will receive from the user general preferences (low delay, best quality, etc.). Based on these, it will automatically adjust bonding parameters. This means the engine will decide on a packet-by-packet basis how much FEC overhead to use, the optimal encoding rate, what resolution to use at any given time, what frame rate to use, what packets to drop under extreme low



Cellular-based uplink makes live shots from the NBA's All-Star Weekend possible with just a single camera.



Powering Your Productivity. Enhanced by the energy of a Thunderbolt.

From capture through distribution, ATTO powers high-performance audio & video workflows. Leading industry solutions rely on ATTO's product portfolio to provide reliable, high-performance storage & network connectivity that is trusted by top audio & video professionals. With qualified and certified solutions from ATTO, you can now have the same technology that drives their success.

Introducing Thunderbolt™ Desklink Devices

Thunderbolt technology connectivity to:

- SAS/SATA
- SAS/SATA RAID
- Fibre Channel
- Ethernet



For more information contact your
ATTO reseller or an ATTO representative.

ATTO Technology, Inc.
155 CrossPoint Parkway
Amherst, NY, 14068
+1.716.691.1999
www.attotech.com



Fibre Channel | SAS/SATA | SCSI | iSCSI | 10GbE | Thunderbolt™

BW cases, what packet lost recovery mechanism to use (retransmit, FEC, error concealment, bad frame skip), and how to promptly compensate the overall system knobs upon any network behavior changes that affects the uplink capabilities.

Common uses

Some of the most frequent recent uses for sports coverage include:

- *Live ENG:* Channels have utilized cellular bonding to transmit live from road games, press conferences and events like the NFL's Super Bowl, NBA All-Star Weekend, the Olympics and the World Cup. A reporter or photographer can set up a live on-air shot from a single camera and send footage back while covering a team or a competition. All of this is done without trucks or hardwired connections.
- *Upload edited packages:* Reporters can upload edited packages from the road

without relying on slow hotel Internet connections or individual mifi cards.

- *Live behind-the-scenes camera:* Broadcasters or franchises can set up exclusive behind-the-scenes web shows while walking around locker rooms, stadium suites, etc. Similarly, rather than only clipping sound bites, many stations' and franchise's websites stream coach and player press conferences for the benefit of devoted fans.

- *Live varsity games and specialty sports:* Thanks to the lower cost of cellular transmission, broadcasters, schools, new media publishers and specialty sports groups can transmit full games and competitions to the web that traditionally would not be shown on-air. Many times, these productions vary from one camera to a fully switched production fed to the bonded unit.

- *In motion, in the field:* Freed from line-of-sight restrictions, cables or trucks, broadcasters are using bonded

backpacks to transmit races from on-board moving cars, boats and helicopters without requiring RF solutions.

Summary

Traditional uplink solutions provide guaranteed bandwidth. Yet, these can be costly and require line-of-sight, cabling or fixed locations. Cellular bonded uplink can vary in transmission rates, but it opens a variety of sports live coverage opportunities from new locations and on new platforms by understanding needed parameters. Networks, stations, new media publishers, leagues and teams can optimize the use of cellular bonding and create a breadth of new content offerings that were once too expensive or complex to produce. **BE**

Ken Zamkow is director of sales and marketing, LiveU. Meir Schrieber is vice president, research and development, LiveU.



File-Based Transcoding

Transcending Transcoding

Digital Rapids Transcode Manager® 2.0 blends high-volume media transformation and workflow processes so seamlessly it's almost unfair to call it transcoding. Unlock new revenue opportunities and reduce your costs with streamlined, intelligent workflows.

- Superior quality, flexibility and scalability
- Logic-driven process automation maximizes efficiency
- Intuitive, visual workflow design tools
- Powerful **Kayak** platform enables rich third-party integration

Visit our website to learn more: www.digitalrapids.com/tm2



www.digitalrapids.com

905-946-9666 x212

Connecting Content to Opportunity

Encoding • Transcoding • Workflow • Streaming • Broadcast

Harris' Versio

The channel-in-a-box platform allows broadcasters to adapt and evolve workflows.

BY ANDREW WARMAN

To call channel-in-a-box an industry trend is to state the obvious. But, to say that every solution follows the same design and deployment philosophy is not necessarily accurate.

In many cases, the channel-in-a-box (CIB) explosion helps broadcasters simplify new channel launches and addresses needs like disaster recovery. How these needs are solved varies greatly, even within the boundaries of what we know today as CIB.



Versio combines baseband video, channel branding and automated workflow capabilities in an easy-to-deploy, software-based 1RU platform.

The new Harris Versio integrated playout platform builds in the required functionality to launch a channel while providing freedom to integrate wide-ranging external workflow components. This is a significant advantage for broadcasters that need to leverage content across the workflow, including, but not limited to, existing shared storage systems, traffic and billing, and asset management systems.

For broadcasters concerned with reliability, a key benefit is the ability to gradually transition workflow functions to the platform. The baseline Versio product combines video server, channel branding, graphics and automation components in its 1RU form factor. Automation and/or clip storage doesn't have to be internal, allowing for a smoother transition and a choice of how to manage playout and deal with associated risks.

The overall feature set compresses multiple functions into the design with the ability to scale from one to hundreds of channels. It doesn't force broadcasters to use all capabilities.

Beyond the chassis' own capabilities, the solution also reaches farther across the workflow, allowing users to leverage existing digital asset management and traffic and billing systems. This helps manage overall channel costs and potentially increase revenue by bridging business and playout functions. The tight integration allows traffic operators to sell and schedule new commercial spots in close proximity to air time.

Reason for existence

Cost-efficient operation of multiple channels is often essential to the growth and success of broadcasters. Consumer thirst for new programs, special interest channels and content across multiple viewing platforms means that broadcasters need to offer intriguing and compelling programming to grow audience share and revenue. However, they also need to be budget-conscious, and new channel launches with specialized content can be expensive.

The launch of multiple channels and services within standard broadcast architecture traditionally requires the purchase and integration of single-function products such as servers, automation, master control switchers and graphics systems. Versio's design offers a solution for broadcasters working to control operating costs while adding channels. It also incorporates proven yet evolving Harris technologies that cover key technical elements. In addition, it offers simple scalability as the number of services increase.

Ultimately, the solution is designed to help broadcasters grow and protect revenue through a flexible, cost-effective platform. The ability to add channels individually makes the cost-per-channel linear, versus sizable investment increments common to standard playout systems for each group of new channels. Time-to-air for new channels is also significantly decreased from months to a matter of weeks or days. As a result, the time taken for turning investment into revenue generation is significantly reduced.

As broadcaster needs change over time, Versio can adapt to those changes with a simple reconfiguration. This may be changing between onboard and external automation, between using shared or internal storage, or by applying software license keys to turn on features.

Features and operation

The shift from hardware- to more software-centric workflow models has already simplified the playout infrastructure. This system evolves the model, offering a single platform to support everyday operations such as file ingest, closed caption and pre-recorded audio insertion, audio channel management, DVE and mix effects, and upstream/downstream device control.

On a more expansive level, the solution allows broadcasters to decide how and when to grow services — including mixed SD and HD content, as well as 2D and 3-D graphic branding. The solution uses its resources, matching appropriate IT hardware with software requirements. Graphic branding is a GPU-centric operation, with its own set of SSD media drives to enable fast loading of graphics.

Harris branding technology also supports optional DVE capabilities and mix effects, as well as RSS and ODBC-driven text such as snipes and lower-thirds. A separate set of hard drives is used for on-board clip storage to maximize storage capacity from the small footprint. CPU supports video encode and decode operations, and allows maximum clip codec and wrapper format support.

The option to use external SAN storage or the platform's standard integrated storage adds flexibility to media sharing. SAN-connected servers stream directly without having to cache content to a local disk via fully redundant Ethernet connectivity.

The integrated video server function supports 2X internal channels, which enable mix effects under automation control and an optional baseband record channel. The output is a fully branded channel, with support for SNMP monitoring, the Magellan log server and Versio's onboard multiviewer. Broadcasters can also run automation directly on the chassis, or leverage a new or existing external ADC or D-Series automation controlled over Ethernet. Used with an external automation system, the platform offers the

ability to control more upstream and downstream devices.

The on-board automation function offers full control of integrated resources plus external device control including VTR, router, subtitle

The platform's deployment flexibility rests within the integrated software licensing.

and external graphic branding systems. An intuitive user interface allows the operator to monitor and modify playlists independently to centralize control.

The pertinent takeaway is reliability. Deployment options, including seamless integration with existing infrastructure, ensure long-term durability and scalability — with the freedom to control built-in functions as desired. Therefore, broadcasters seeking to prove the reliability of the CIB concept have more freedom to do so.

Beyond the basics

The flexibility of deployments rests within the integrated software licensing, which can quickly enable or disable options. Additional options include advanced branding, including 2X 2D DVE and switching between a live input and disk-based clip playback. Its expansive codec support also reduces concerns for successful clip playback in a wide variety of formats.

Other options reach farther into the workflow, including automated file movement using Invenio Motion media asset management and Harris Live-Update-based interfacing with its traffic and billing systems. The latter employs BXF, which allows fluid playlist changes between traffic and automation functions, so traffic can sell ads almost to air time.

It is clear that CIB will grow in importance in the playout space. The prospect of lower costs, easier operation and simpler, faster deployment are important attractions. Blending this with versatility and proven reliability makes channel-in-a-box a potent option to today's standard approaches.

BE

Andrew Warman is senior product marketing manager, Harris Broadcast Communications.


RTM – The Most Accurate QoE Monitor/Recorder

- ✓ Video Quality
- ✓ Audio Quality
- ✓ Lip-Sync
- ✓ A/85 Loudness

**NOW WITH
REAL-TIME
DMOS**



visit
www.videoclarity.com



RTM

Encoding technology

HEVC may be the next compression technology to arrive in consumers' homes.

BY JOHN LUFF

It seems like we have had compression technology forever. We haven't, unless you include the adoption of interlace scanning, the original analog compression system. Digital compression has existed for essentially as long as we have had digitized video (and audio). I distinctly remember attending SMPTE conferences as a much younger person in which a major topic was "bit-rate reduction" technology, another term for what we now call compression. Context is everything, so let's venture back a bit to see why this was so complicated.

Before CCIR 601

Before ITU-R BT.601 (or its original popular name, CCIR 601) there was little agreement on the sampling format for moving images. The research into how to sample and store video was centered in fine research institutes on several continents. Of course, video was what we would today call standard definition, a distinction that was not helpful before NHK showed HDTV to the world in the late '80s. And there was no common agreement on component video as the basis for imaging, nor storage and transmission.

So, sampling grids did not need to be locked to any other notions, and in fact there was no requirement that it be based on rectangular sample grids. Some proposals that were quite popular included samples aligned 45 degrees to the line structure.

Opening the barn door

When researchers looked into how to compress images, the work first had to be done to define some basic parameters, like how many samples per second it took to reasonably

represent and transmit quality images. When SMPTE and EBU did the heavy lifting of trying to define a standard (601) for sampling images, it made a huge difference to the advancement of digital imaging.

It led directly to the development of the first practical digital recorder from Sony, which was uncompressed. Picture quality was never approximate; it was a full and exact reproduction of the sampled image. One might



argue that sampling itself threw away valuable content, and some at the time no doubt did. Indeed, for some applications, that was certainly true. However, the adoption of the 601 standard opened the barn door and let research proceed on bit-rate reduction of standardized streams.

DCT-based compression was not invented for 601 sampled images, but quickly work centered on using DCT as the basis for compression. Two international standards were established to harmonize the work on compression worldwide. JPEG (Joint Photographic Experts Group) and MPEG (Moving Pictures Experts Group) created the base standards we use today in due process bodies from which all manufacturers and users would benefit. Other work preceded MPEG and JPEG, including work that created standards adopted widely in Europe but never very successful

in North America, for reasons I have never fully understood.

The ETSI (European Telecommunications Standards Institute) compression standards (ETS 300.174) used rates based on integer fractions of European data transmission standards, especially E-1 at 34Mb/s. One-half and one-quarter of the E-1 rate yielded 17MB and 8Mb rates, which the EBU deployed widely on its satellite network in the '90s. But with the rapid advances in MPEG compression, it became clear that MPEG offered higher quality for the same bit rate, and thus better economy for interconnection. Eventually, broadcasters worldwide adopted MPEG-2, most based on the DVB specifications which facilitated interoperability.

Other forces at work


At work at the same time, of course, are other forces that affected how compression products would be designed and deployed. It is important to recognize that while MPEG was always seen to be a one-to-many approach, with the expense of processing put on the single encoder and cheap decoders making the economics viable, the first deployments were exclusively in the backhaul market.

DVDs brought digital compression to consumer products only after several years of successful and increasingly high-quality deployments in the backhaul market. The use by PBS of General Instruments DigiCipher compression systems for network distribution beginning in 1994 is a good example of early deployments that were successful. But a DigiCipher encoder was expensive, and cost was a major barrier to widespread use of compression, for instance, in satellite newsgathering.

Kyrion

Accept nothing less

Your DSNG truck deserves it

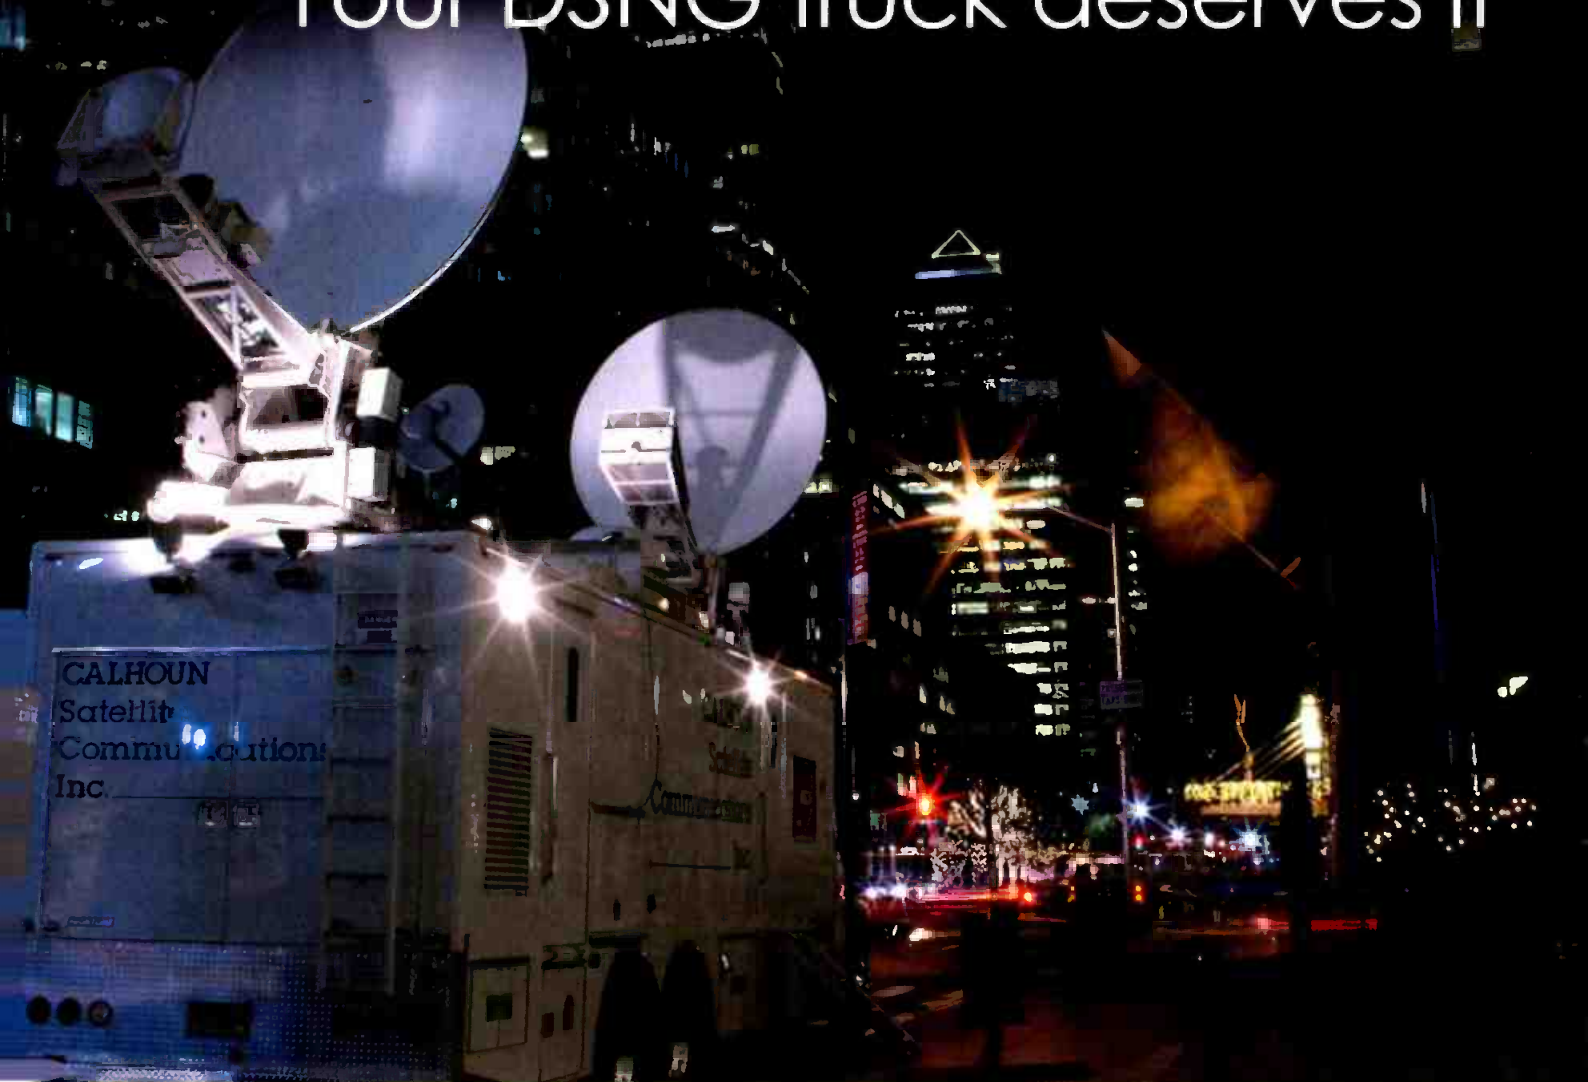

Upgrade your fleet to Kyrion CM5000, the best in class contribution encoder, designed to help satellite up-link professionals navigate unexpected obstacles.



- Meets all DSNG requirements: SD & HD, MPEG-2 & MPEG-4, 4:2:0 & 4:2:2, 8-bit & 10-bit, up to 1080p60
- Complete front panel access with video monitoring
- Boots faster, whisper-quiet in operation, easy web graphic user interface
- Second video channel or modular design with optional built-in DVB-S/S2 modulator

=ateme

Keep content looking great wherever it's played

The development of specialized chips that enabled the complex calculations needed for MPEG compression to be done on single boards changed the dynamic completely. As solutions became more compact and less expensive, people began to experiment with more marketplace uses, which drove up volume and drove down prices. Early MPEG encoders cost an order of magnitude more than a decoder, and up to around 25 times as much.

Over the last two decades, that ratio has declined to perhaps 3:1 (professional decoders and encoders), and even less. Appliances for streaming content to the Internet can be purchased for less than a single decoder cost in the '90s. We have also seen decoder implementations in finished consumer devices sold at discount for a fraction of what one encoding chip cost 20 years ago.

HEVC

As it always seems to be, the dynamics are not much different today. This year, we will see the first HEVC (High Efficiency Video Codec) systems, which should lower bit rates by 30 percent to 50 percent. The complexity of HEVC is astounding, and implementations in silicon are perhaps the only way it can be produced economically.

To gain the advantages HEVC can offer, the cost of an encoder/decoder pair will jump up, which makes the most likely early deployments look like the backhaul market, again. This cycle is likely to repeat again in a few years, driven by the impact of consumer scale deployments. HEVC may be the next compression technology to arrive in consumers' homes. MPEG-2 has lived for two decades, H.264 is already approaching its second decade, and the early

deployments of HEVC will certainly begin this year.

This dynamic repeats in many parts of our industry. Display technology intended for consumer deployment shows up first in professional uses, like flat panel monitors on set for productions, and later in consumers' homes as increased quantities drive prices down and widespread deployments bring new technologies to the edge where they mature and follow the same cycle.

We have become an industry dependent on the infusion of development dollars into potential consumer technology, which then trickles into our small corner of the economic puzzle.

BE

John Luff is a television technology consultant.

7 Send questions and comments to: john.luff@penton.com

SMPTE Compliant Video Switching Networks Over Fiber Multimode, Singlemode or CWDM Wavelengths up to 70 km

CCW/HD World #814
GovComm #451

Video SFP Modules
MSA/non-MSA
Dual Transmitter
Dual Receiver
Transceiver

OMX-16 with Optical Port Card

opticom

emcore
empower with light

Contact us at 626-293-3400 or go to www.opticom.com/sfpmodules

RAI Amsterdam

Conference 12-17 September : Exhibition 13-17 September



Exhibit at IBC2013

Raise your profile, move into new markets, develop distribution channels and generate sales leads.

- **50,000+ attendees** from over 160 countries
- **1,400+ of the industry's leading companies**
- **more than 1,000 accredited press**
- **free feature areas** including
 - IBC Connected World
 - Future Zone
 - IBC Production Village
 - Workflow Solutions Village
 - IBC Big Screen
 - Industry Insights Conference Stream - including WCME
- **leading event** for professionals involved in the creation, management and delivery of electronic media and entertainment worldwide
- **world renowned conference** with global leaders presenting their views on the future direction of our industry
- **97% of 2011 exhibitors** re-booked in 2012

To exhibit at IBC2013 contact the Exhibition team at: exhibition@ibc.org



People Movers

Penton Marketing Services provides content that moves your customers. Partner with us. We'll make you the authority in your field with custom campaigns that work as hard as you do.

- Content
- Websites
- Search Marketing
- Social Media
- Lead Lifecycling
- Mobile & Video

Leverage our expertise as content experts. Make the move today and move your customers. All aboard.

Learn more:
PentonMarketingServices.com
 800.553.1945



United States Postal Service		Statement of Ownership, Management, and Circulation		(Requester Publications Only)	
1. Publication Title: Broadcast Engineering	2. Publication Number: 3002 1994	3. Filing Date: 10/24/12			
4. Issue Frequency: Monthly	5. Number of Issues Published Annually: 12	6. Annual Subscription Price: Free to Qualified			
7. Complete Mailing Address of Known Office of Publication (Not Printer): Penton Media, Inc., 9800 Mercant Ave., Overland Park, Johnson County, KS 66212-2216					
8. Complete Mailing Address of Headquarters or General Business Office of Publisher (Not Printer): Penton Media, Inc., 249 West 17th St., Fourth Floor, New York, NY 10011-5390					
9. Full Names and Complete Mailing Addresses of Publisher, Editor, and Managing Editor: Publisher: Wayne Medlin, Penton Business Media, Inc., 200 W. Wabash Ave., Ste 2300, Chicago, IL 60611, Editor: Brad Dick, Penton Business Media, Inc., 9800 Mercant Ave., Overland Park, KS 66212 & David Austerberry, Penton Business Media, Inc., 44 Belle Vue Rd., Salisbury, Wiltshire, SP1 3YD, United Kingdom, Managing Editor: Susan Anderson, Penton Media, Inc., 9800 Mercant Ave., Overland Park, Johnson County, KS 66212-2216					
10. Owner: Full name and complete mailing address: Penton Media, Inc., 249 W 17th St., Fourth Floor, New York, NY 10011-5390, Penton Business Media Holdings, Inc. (owns 100% of the stock of Penton Media, Inc.), 249 W 17th St., Fourth Floor, New York, NY 10011-5390					
11. Known Bondholders, Mortgagees, and Other Security Holders Owning or Holding 1 Percent or More of Total Amount of Bonds, Mortgages or Other Securities: None					
12. Tax Status (For completion by nonprofit organizations authorized to mail at nonprofit rates) (Check one) The purpose, function, and nonprofit status of this organization and the exempt status for federal income tax purposes: N/A					
13. Publication Title: Broadcast Engineering	14. Issue Date for Circulation Data Below: August 2012		Average No. Copies Each Issue During Preceding 12 Months		No. Copies of Single Issue Published Nearest to Filing Date
15. Extent and Nature of Circulation					
a. Total Number of Copies (Net press run)			41,986		40,243
b. Legitimate Paid and/or Requested Distribution (By Mail and Outside the Mail)					
(1) Outside County Paid/Requested Mail Subscriptions stated on PS Form 3541 (include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange copies)			77,812		26,852
(2) In-County Paid/Requested Mail Subscriptions stated on PS Form 3541 (include direct written request from recipient, telemarketing and Internet requests from recipient, paid subscriptions including nominal rate subscriptions, employer requests, advertiser's proof copies, and exchange copies)			0		0
(3) Sales Through Dealers and Carriers, Street Vendors, Counter Sales, and Other Paid or Requested Distribution Outside USPS®			10,343		10,265
(4) Requested Copies Distributed by Other Mail Classes Through the USPS (e.g. First Class Mail®)			0		0
c. Total Paid and/or Requested Distribution (Sum of 15b (1), (2), (3), and (4))			88,154		37,117
d. Nonrequested Distribution (By Mail and Outside the Mail)					
(1) Outside County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from Business Directories, Lists, and other sources)			799		817
(2) In-County Nonrequested Copies Stated on PS Form 3541 (include Sample copies, Requests Over 3 years old, Requests induced by a Premium, Bulk Sales and Requests including Association Requests, Names obtained from Business Directories, Lists, and other sources)			0		0
(3) Nonrequested Copies Distributed Through the USPS by Other Classes of Mail (e.g. First Class Mail, Nonrequestor Copies mailed in excess of 10% limit mailed at Standard Mail® or Package Services Rates)			0		0
(4) Nonrequested Copies Distributed Outside the Mail (include Pickup Stands, Trade Shows, Showrooms and Other Sources)			1,984		1,185
e. Total Nonrequested Distribution (Sum of 15d (1), (2), (3), and (4))			2,783		2,002
f. Total Distribution (Sum of 15c and 15e)			90,937		39,119
g. Copies not Distributed			1,050		1,124
h. Total (Sum of 15f and g)			91,986		40,243
i. Percent Paid and/or Requested Circulation (15c divided by 15f times 100)			93.20%		94.88%
16. Total circulation excludes electronic copies. Report circulation on PS Form 3526-a worksheet					
17. Publication of Statement of Ownership for a Requester Publication is required and will be printed in the November 2012 issue of this Publication					
18. Sonia A. Trent, Audience Development Manager					Date: 10/24/12
I certify that all information furnished on this form is true and complete. I understand that anyone who furnishes false or misleading information on this form or who omits material or information requested on the form may be subject to criminal sanctions (including fines and imprisonment) and/or civil sanctions (including civil penalties)					PS Form 3526-R, August 2012

Make the move to HD

All-in-One Professional
IRD for Satellite / IP
Applications

Trade-in your old IRD and get a new UC-IRD+ for only \$1,495



All features come as standard

MPEG-2 MPEG-4 HD SD DVB-S DVB-S2 QPSK 8PSK HD-SDI SDI ASI IP HDMI BISS CA

Trade-in your old modulators for new state of the art DVB-S/S2
QPSK/8PSK UC-250L2 modulators for only \$2,950



Simply send your old IRD or modulator (analog or DVB-S) to qualify.
For more details please contact us by phone or email.

+1-408-329-4158
sales@upcom.com
www.upcom.com

For Sale

Acoustics First®
Toll-Free Number: **888-765-2900**
Materials to Control Sound
and Eliminate Noise™
<http://www.acousticsfirst.com>

Products & Services

CBT Systems On-Air Lights

ON-AIR
ON-AIR
ON-AIR
Made in the U.S.A.
Contact CBT Systems at
858-536-2927
www.cbtsystems.tv

Inter BEE 2012

International Broadcast Equipment Exhibition
November 14 Wed >>> 16 Fri Tokyo, Japan
Makuhari Messe
Organized by JEITA Japan Electronics and Information Technology Industries Association
<<http://www.inter-bee.com/en/>>

Employment

JOINT MASTER CONTROL OPERATIONS CONTENT MANAGER/MASTER CONTROL OPERATORS

JMCO, operator of PBS's first joint master control environment and an affiliate of WCNY, in Syracuse, NY, one of the nation's most innovative non-profit, has openings for Content Manager/Master Control Operator positions for a new centralcasting operation that will serve PBS stations in NY, NJ and throughout the country. This position offers an opportunity for a self-starter with good communication skills who thrives in a fast-paced independent work environment.

The Content Manager will operate the systems that manage digital media assets and distribute material over various platforms, to support the operation of a multiple stream joint television master control operation. Candidates must have experience in a multiple stream digital media facility. Strong computer skills required. All inquiries should include resume, cover letter and salary requirements, directed to

hr@jointmastercontrol.org

<http://jobzone.broadcastengineering.com>

JOINT MASTER CONTROL OPERATIONS MAINTENANCE/IT ENGINEER

JMCO has openings for Maintenance/IT Engineering positions for a new centralcasting operation in Syracuse, New York that will serve PBS stations in NY, NJ and throughout the country. This position offers an opportunity for a self-starter with good communication skills who thrives in a fast-paced independent work environment.

The JMCO Operations Maintenance/IT Engineer is responsible for all equipment operating at peak efficiency, ensuring proper operation of network equipment as well as broadcast equipment, creation, management, and execution of a preventive maintenance strategy and plan for hub facility and associated spokes, and make recommendations to the Director of Operations for system upgrades, capital improvements, equipment installations and equipment procedures.

Candidates must have experience in a multiple stream digital media facility. Strong computer skills required. Two (2) year EE degree or 7 years electronic experience or 5 years in broadcast TV and/or FM or equivalent combination of education and experience. All inquiries should include resume, cover letter and salary requirements, directed to

hr@jointmastercontrol.org

BroadcastEngineering
THE JOURNAL OF DIGITAL TELEVISION

TO REACH INDUSTRY PROFESSIONALS
PLACE YOUR AD TODAY!

JULIE DAHLSTROM P 312.840.8436 F 913.514.3684 JULIE.DAHLSTROM@PENTON.COM

Editorial Director: Brad Dick, brad.dick@penton.com

Editor: World Edition: David Austereby, david.austereby@penton.com

Managing Editor: Susan Anderson, susan.anderson@penton.com

Production Editor: Andrew Ward, andrew.ward@penton.com

Production Editor: Curtis Kitchen, curtis.kitchen@penton.com

Production Editor: Laura Dixon, laura.dixon@penton.com

Senior Art Director: Robin Metheny, robin.metheny@penton.com

Technical Consultants:

Computers & Networking - Brad Gilmer

Digital Video - Aldo Cugini

Legal - Harry C. Martin

New Technology - John Luff

Industry Watcher - Anthony Gargano

Market Leader: Wayne Madden, wayne.madden@penton.com

Brand Manager: Carmen Lake, carmen.lake@penton.com

Sr. Marketing Manager: Kim Davidson, kim.davidson@penton.com

Director, Online Sales: Angie Gates, angie.gates@penton.com

Production Coordinator: Curtis Jansen, curtis.jansen@penton.com

Audience Development: Sonja Trent, sonja.trent@penton.com



Penton Media, Inc.

249 West 17th Street

New York, NY 10011

Chief Executive Officer: David Kieselstein, david.kieselstein@penton.com

MEMBER ORGANIZATIONS

Sustaining Member of: Society of Broadcast Engineers

Member, American Business Media,

Member, BPA International,

The Missouri Association of Publications



missouri association of publications

BE US/Canada Subscription Rates: Free/controlled circulation to qualified subscribers. Non-qualified persons may subscribe at the following yearly rates (subject to change): USA - \$59; Canada - \$69; Outside US and Canada - \$99. Digital subscription \$12 worldwide. Customer service can be reached at: broadcastengineering@pbnews.com or by calling 866-505-7173 or 847-763-9504

BE World Subscription Rates: Free/controlled circulation to qualified subscribers. Non-qualified persons may subscribe at the following yearly rates (subject to change): USA - \$59; Canada - \$69; Outside US and Canada - \$99. Digital subscription \$12 worldwide. Customer service can be reached at: broadcastengineering@pbnews.com or by calling 866-505-7173 or 847-763-9504

ARCHIVES AND MICROFORM: This magazine is available for research and retrieval of selected archived articles from leading electronic databases and online search services, including Factiva, LexisNexis and Proquest. For microform availability, contact National Archive Publishing Company at 800-521-0600 or 734-761-4700, or search the Serials in Microform listings at napubco.com.

REPRINTS: Contact Wright's Media to purchase quality custom reprints or e-prints of articles appearing in this publication at 877-652-5295, +00-1-281-419-5725, or penton@wrightsmedia.com

PHOTOCOPIES: Authorization to photocopy articles for internal corporate, personal, or instructional use may be obtained from the Copyright Clearance Center (CCC) at 978-750-8400. Obtain further information at copyright.com.

PRIVACY POLICY: Your privacy is a priority to us. For a detailed policy statement about privacy and information dissemination practices related to Penton Media products, please visit our Web site at www.penton.com.

EDITORIAL and BUSINESS OFFICE: Penton Media, 9800 Metcalf, Overland Park, Kansas 66212 • 913-341-1300 • penton.com

Copyright 2012, Penton Media, Inc. All rights reserved.

AD INDEX

Broadcast Engineering is not responsible for errors in the Advertisers Index.

	Page #	Advertiser	Website
AJA Video	11	800-251-4224	aja.com
Apantac	29	503-616-3711	apantac.com
Ateme	53		ateme.com
ATTO Technology	48	716-691-1999	attotech.com
Avitech International	20	877- AVITECH	avitechvideo.com
Blackmagic Design	9	408-954-0500	blackmagic-design.com
Clear-Com Communication Systems	33	510-496-6600	clearcom.com
Cobalt Digital	38	800-669-1691	cobaltdigital.com
Digital Rapids Canada	49	905-946-9666	digital-rapids.com
Doremi Labs	25	818-562-1101	doremilabs.com
DVED / Computer Modules	42		devo.com
Eartec	24	800-399-5994	eartec.com
Ensemble Designs	39	530-478-1830	ensembledesigns.com
ESE	37	310-322-2136	ese-web.com
Evertz Microsystems	IBC	877-995-3700	evertz.com
For-A Corp. of America	43	714-894-3311	for-a.com
Grass Valley Group	14		grassvalley.com
Studer by Harman	45	866-406-2349	studer.ch
Harmonic	19		harmonicinc.com
Harris Corporation	15	800-231-9673	broadcast.harris.com/mobileproduction
IBC 2013	55	+44(0)20 7832 4100	ibc.org/register
Integrated Microwave Technologies	32	908-852-3700	imt-broadcast.com
Linear Acoustic	12	717-735-3611	linearacoustic.com
Livestream	5	877-977-8732	livestream.com
Lynx Technik	47	+49 6150 18170	lynx-technik.com
Matrox Electronic Systems	31	800-361-4903	matrox.com
Newtek	3	210-370-8000	newtek.com
Octopus Newsroom Trading	28		octopus-news.com
Opticom-Emcore	54	858-450-0143	emcore.com
Playbox Technology	BC	404-424-9283	playbox.tv
Solid State Logic	IFC	212-315-1111	solidstatellogic.com/c10
Riedel Communications	21	818-241-4696	riedel.net
DVS a Rohde & Schwarz Co.	7		dvsus.com
Sennheiser Electronic	23		sennheiser.com
Sensoray	33	503-684-8005	sensoray.com
Snell Group	17		snellgroup.com
Sony Creative Software	13		sonycreativesoftware.com/vegas12
Sony Electronics	27		sony.com/switchers
Stagetec USA	44	888-782-4391	stagetec.com
Television Systems	41	44 (0)1628 676 221	tsl.co.uk
TVU Networks	36	650-969-6732	tvupack.com
Utah Scientific	35	800-453-8782	utahscientific.com
Video Clarity	51	866-748-8072	videoclarity.com

SALES OFFICES

KEY ACCOUNTS SALES MANAGER

Carmen Lake

(772) 344-6035

Fax: (913) 514-7326

carmen.lake@penton.com

US/CANADA

East and classified sales

Julie Dahlstrom

(312) 840-8436; Fax: (913) 514-3684

julie.dahlstrom@penton.com

West

George Watts III

(360) 546-0379; Fax: (360) 546-0388

georgeww3@aol.com

INTERNATIONAL

Europe

Richard Woolley

+44-1295-278-407

Fax: +44-1295-278-408

richardwoolley@btclick.com

Israel

Asa Talbar

Talbar Media

+972 (77) 562-1900

talbar@talbar.co.il

Japan

Masayoshi Yoshikawa

Orient Echo, Inc.

+81-3-3235-5961; Fax: +81-3-3235-5852

mashy@fa2.so-net.ne.jp

Asia Pacific

Tan May Ling

InterAct Media & Marketing

+65-9623-1405; Fax: +65-6265-3000

tmiling@singnet.com.sg

REPRINTS

Wright's Media

877-652-5295

+00-1-281-419-5725

penton@wrightsmedia.com

LIST RENTAL SERVICES

MeritDirect

Marie Briganti, (877) 796-6947

mbriganti@meritdirect.com

Kristen Killingback, (914) 368-1062

kkillingback@meritdirect.com

Chris Blohm, (914) 368-1031

cblohm@meritdirect.com

Customer Service:
866-505-7173 or 847-763-9504

Broadcast Engineering, November 2012, Vol. 54, No. 11 (ISSN 0007-1994) is published monthly and mailed free to qualified persons by Penton Media, Inc. 9800 Metcalf Ave., Overland Park, KS 66212-2216. Periodicals postage paid at Shawnee Mission, KS, and additional mailing offices. Canadian Post Publications Mail Agreement No. 40612608. Canada return address: Bleupich International, P.O. Box 25542, London, ON N6C 6B2. POSTMASTER: Send address changes to Broadcast Engineering, P.O. Box 2100, Skokie, IL 60076-7800 USA. CORRESPONDENCE: Editorial and Advertising: 9800 Metcalf, Overland Park, KS 66212-2216 Phone: 913-341-1300; Edit. fax: 913-967-1905. Advert. fax: 913-967-1904. © 2012 by Penton Media, Inc. All rights reserved.

FACILITY CONTROL SIMPLIFIED

Easily control every component of your facility using **MAGNUM**



Evertz' MAGNUM Control System and VUE clients address the ever-growing challenges that broadcasters face as facilities are becoming larger and more complex.

MAGNUM is a unified control system that seamlessly manages multiple components of the broadcast chain from production switching to routing to master control and multi-viewing.

VUE's user friendly and customizable interface provides flexible and reliable control across all broadcast operations from content creation to distribution. The VUE clients help to reduce operating costs and increase efficiency throughout the facility by presenting a single interface tailored to the specific tasks or workflow required by the users.

www.evertz.com • 1.877.995.3700

evertz



Evertz (Canada HQ)
+1 905-335-3700
sales@evertz.com

US West Coast Sales
+1 818-558-3910
uswestsales@evertz.com

Washington DC Sales
+1 703-330-8600
dcsales@evertz.com

South-East Europe Sales
+385 1-2001-665
SEeuropesales@evertz.com

New York Sales
+1 201-337-0205
newyorksales@evertz.com

Dubai Sales
+971 4-422-9113
middleeastsales@evertz.com


UK Sales
+44 (0)118-935-0200
uksales@evertz.com

Asia Pacific Sales
+852 2850-7989
asiapacificsales@evertz.com



From a Single Channel Playout Server to a Multi Channel Turnkey Broadcast Centre

It's All in a PlayBox

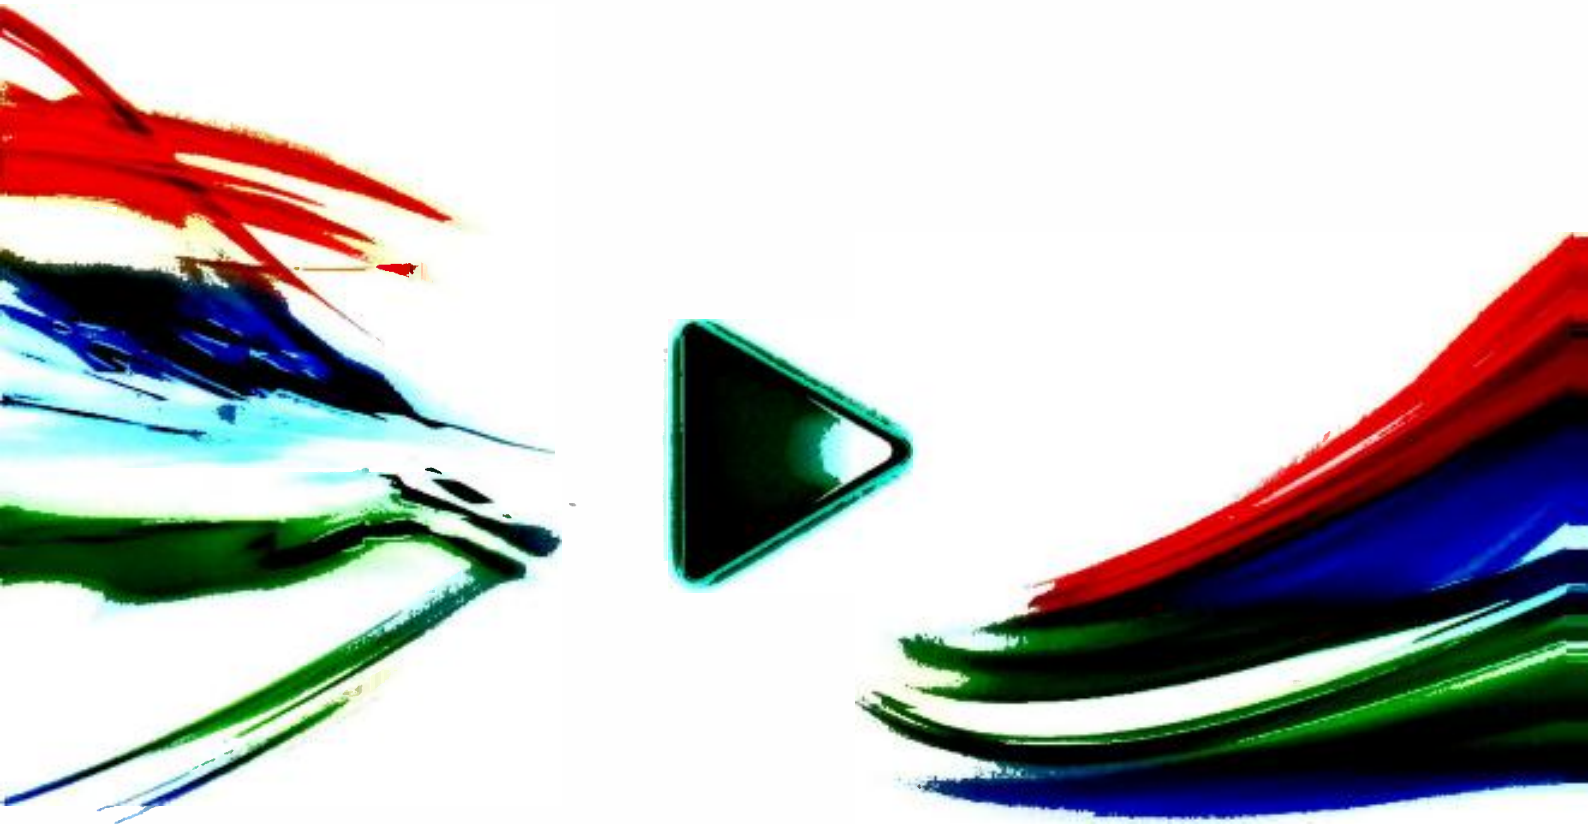

- **Single and Multi Channel Playout Automation with interactive CG and Graphics**
- **Traffic Management • Media Asset Management and Archive • Newsroom System**
- **Remote Redundant Playout • Ad Insertion and DPI • Time Shift**
- **IPTV and Internet TV Solutions**
- **Available in HD / SD and DVB (ASI/IP)**

General Sales Contacts: sales.usa@playbox.tv • **Website:** www.playbox.tv

• **PlayBox UK** +44 1707 66 44 44 • **PlayBox Bulgaria** +359 2 9703050 • **PlayBox Romania** +4 031106 5115
• **PlayBox Turkey** +90 216 3379402 • **PlayBox Adria** +381 113117286 • **PlayBox Albania** +355 44 80 45 52
• **PlayBox USA** +1 404 424 9283 • **PlayBox Asia Pacific** +603 7954 3400 • **PlayBox India** +91 9811913333