

BROADCAST[®] engineering

\$3



Radio sound quality
SMPTE replay

Quality, Reliability, Service...

Excellent Reasons for Choosing ADM®



ADM 2400 Series II Console

ADM understands how critical it is for professionals to be assured of unfaltering performance under the most demanding conditions. That's why everything we do at ADM—from initial concept to final production—is geared to providing consoles of unexcelled quality and reliability.

The finest of components are used in ADM consoles to assure long life and trouble-free operation. Our exclusive five-year warranty, the most generous in the industry, attests to this fact. Service—if you ever need it—is prompt and professional. Contact ADM Technology, Inc.

Home Office: 16005 Sturgeon
Roseville, Michigan 48066
(313) 778-8400. TLX 23-1114

Rocky Mountain Sales: (801) 486-8822

West Central Sales: (817) 467-2990

West Coast Sales: (415) 664-2400

East Coast Sales: (313) 778-8400

ADM®

The Audio Company

Pinzone 8200 Satellite Receiver

Performance PLUS Versatility



PERFORMANCE?

- 7.0 dB TRUE DYNAMIC C/N THRESHOLD!
- 11 dB NOISE FIGURE (12 dB MAX!)
- DUAL CONVERSION — BEST IMAGE REJECTION
- HIGH PERFORMANCE SWITCHABLE AFC
- STAND ALONE OR W/SEPARABLE DOWNCONVERTER
- MEETS EIA RS-250B STANDARD FOR END-TO-END TELEVISION RELAYS
- NOISE-FREE RECEPTION AT 3 to 5 dB LOWER C/N THAN CONVENTIONAL L-D RECEIVERS
- ONE SWITCH CONTROL ADAPTS CIRCUITRY FOR DIRECT INTERFACE TO ENCRYPTION DECODERS!
- FULL 30 MHz I.F. BANDWIDTH AND 8.4 MHz VIDEO BANDWIDTH PRIOR TO FINAL SUBCARRIER FILTERING
- STUDIO QUALITY PERFORMANCE AND RELIABILITY

VERSATILITY? JUST TAKE ONE LOOK!

- 24 CHANNEL FREQUENCY AGILE
- DETENT AND MANUAL TUNING
- AUTOMATIC LNA SELECTION
- BUILT-IN 4 GHz COAXIAL SWITCH!
- FULL FUNCTION METERING — SIGNAL STRENGTH AND CENTER TUNING
- LNA POWER THROUGH THE COAX OR BNC CONNECTOR
- INVERT VIDEO SWITCH
- FULL REMOTE CONTROL — CHANNEL AND LNA SELECTION
- TWO EASILY CHANGED PLUG-IN SUBCARRIER DEMODS WITH AUTO-PRIORITY SELECT CIRCUITRY

OUTPUTS: Video (2) 1 V PP 75Ω
 Composite 1 V PP 75Ω
 Audio (2) + 4 dBm 600Ω
 Headphone 0-1.5 V HI-Z
POWER: 115 VAC/230 VAC opt; 20 watts
SIZE: STD 19" RACK MOUNT, 5 1/2" H x 14" D

\$2845

**COMPLETE!
21-DAY DELIVERY**

COMPLETE TVRO SYSTEMS AVAILABLE.
 Delivery in 3 to 5 weeks. Featuring:

3.7 and 5.0 meter PRODELIN dishes.
 6.0 and 7.0 meter dishes.
 DEXCEL Low Noise Amplifiers and
 CABLEWAVE feed lines and coax.

CALL (304) 296-4493 and ask for Basil!

PINZONE COMMUNICATIONS PRODUCTS, INC.
 10142 FAIRMOUNT RD. • NEWBURY, OHIO 44065 • (304) 296-4493

Circle (2) on Reply Card

A Fenner Affiliate

BROADCAST[®] engineering

The journal of broadcast technology

April 1982 • Volume 24 • No. 4

6 FCC update

8 News

10 Associations

12 Editorial

AM stereo: To be or not to be?

14 AM stereo?

By Bill Rhodes, editorial director

20 The Odyssey of Homer

By Richard Fairbanks, staff engineer, Universal Recording Corporation, Chicago, IL.

36 Case study: WCBU

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

48 Radio sound quality: Notes on headroom

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

56 INTV conference replay

By Phil Dean, president, Phil Dean Associates, New Rochelle, NY

66 SMPTE TV conference: "Tomorrow's Television"

By Carl Bentz, technical editor

70 HDTV study group focuses on realism

By Blair Benson, TV technology consultant, Norwalk, CT

78 Conversations

Interviews with Abe Rolnick, president, Digital Video Systems, and Neil Vander Dussen, president, Sony Broadcast Products Company

80 Low power TV outlook

By Harry Martin, Washington, DC

86 Innovations from abroad: Pro video from British manufacturers

By Michael J. Adams, British correspondent, United Kingdom

89 New products

97 Index

99 Classified ads

©Copyright 1982, by Intertec Publishing Corporation. All rights reserved. Photocopy rights: Permission to photocopy for internal or personal use is granted by Intertec Publishing Corp. for libraries and others registered with Copyright Clearance Center (CCC), provided the base fee of \$2.00 per copy of article is paid directly to CCC, 21 Congress St., Salem, MA 01970. Special requests should be addressed to Cameron Bishop, publisher.

ISSN 0007-1994.

BROADCAST ENGINEERING (USPS 338-130) is published monthly by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212-9981. Postmaster, return form 3579 to the above address.



THE COVER shows some of the equipment and staff members of station WCBU at Bradley University, Peoria, IL. An article by Gary Breed, chief engineer at WCBU, appears in this issue and describes some of the design suggestions followed to achieve superior sound quality at WCBU. (Photos are courtesy of the Bradley University Audio-Visual Services.)

NEXT MONTH:

- Audio time compression and delay
- Teletext update
- TV test equipment roundup

**"I want the world.
Consistent .05% corner registration
and full auto-setup of up to 96
cameras on computer command."**

HITACHI HEARD YOU.

AUTO SETUP

Don't want much, do you?

Dynamic registration not just at dead center but at all four corners.
Plus 2-minute auto-setup of all those cameras.

You're asking for some smart camera system, networks
of the world and top-drawer video production companies.

Well, Hitachi heard you, and has created an outright *genius* —
the Hitachi SK-110 Camera System.

The computer registration capabilities of this camera system
produce pictures of a
clarity and resolution
previously unheard of.

And you get auto-setup
at the push of just one but-
ton, and zero reference,
too, where the computer
sets the green channel and
compares blue and red to
it with absolute precision.

The SK-110 is not only self-correcting, but self-diagnostic
as well. It gives both video screen display and hard copy print-
out; can be hooked into the CRT for control room monitoring.

There's a high-performance contour corrector;
5 automatic setup modes including quick check;
5 data files; so many other unique features an ad
can't begin to tell you about them.

The ultimate Hitachi SK-110. Contact the
broadcast video division at any of the offices
listed below. Hitachi Denshi America Ltd.,
175 Crossways Park West, Woodbury, NY
11797 (516) 921-7200. Offices also in
Chicago (312) 344-4020; Los Angeles
(213) 538-4880; Atlanta (404)
451-9453; Cincinnati (513) 489-6500;
Dallas (214) 233-7623; Denver
(303) 344-3156; Seattle,
(206) 575-1690; and Washington,
D.C. (301) 459-8262.

Circle (3) on Reply Card



THE DIASCOPE LENS WITH A DIFFERENCE.



Schneider 15X Zoom Lens with built-in diascope.

The diascope design in the Schneider 15X zoom lens is different from other such lenses on the market. And that's what makes the difference in the performance it will add to your TV cameras.

The diascope is extremely stable. It incorporates an integrating sphere light source which virtually eliminates shading, resulting in maximum flatness of field of the projected image. Three independently controlled light sources provide optimum ease in adjusting diascope characteristics to match the camera scene requirements. And, to maintain constant color temperature and light level, it utilizes servo-controlled optical feedback of light.

Featuring a 15X zoom range, the lens provides a wide horizontal viewing angle (55°); with extended zoom capability out to 480mm with built-in 2X servo-controlled range extender. Utilizing the world-famous Schneider optics, it delivers a crisp, clear picture and uniform focus throughout all color channels.

The lens is now available for the RCA TK-47 broadcast camera and other top-of-the-line microprocessor-controlled cameras such as Ikegami and Hitachi. Contact **TELE-CINE CORP.**, 400 Crossways Park Drive, Woodbury, NY 11797, or call toll-free (800) 645-7239.

Schneider 15X DIASCOPE LENS

Tele-Cine Corp. is a subsidiary of Schneider Corporation of America.

Circle (4) on Reply Card

BROADCAST engineering

Editorial and advertising correspondence should be addressed to: P.O. Box 12901, Overland Park, KS 66212-9981 (a suburb of Kansas City, MO); (913) 888-4664. Circulation correspondence should be sent to the above address, under P.O. Box 12902.

EDITORIAL

Bill Rhodes, *Editorial Director*
Carl Bentz, *Technical Editor*
Rhonda L. Wickham, *Managing Editor*
Karen Arnhart Booth, *Associate Editor*
Mary Thornbrugh, *Editorial Assistant*
Tina Thorpe, *Editorial Assistant*
Pat Blanton, *Directory Editor*

ART

Kevin Callahan, *Art Director*
Joy Viscek, *Graphic Designer*

TECHNICAL CONSULTANTS

John H. Battison, *Antennas/Radiation*
Blair Benson, *TV technology*
Dennis Ciapura, *Technology*
Howard T. Head, *FCC Rules*
Donald L. Markley, *Facilities*
Art Schneider, A.C.E., *Post-production*

CORRESPONDING ASSOCIATIONS

American Society of TV Cameramen
Association for Broadcast
Engineering Standards
National Association of Broadcasters
National Radio Broadcasters Assn.

CIRCULATION

John C. Arnst, *Director*
Evelyn Rogers, *Manager*
Dee Manies, *Reader Correspondent*

ADMINISTRATION

R. J. Hancock, *President*
Cameron Bishop, *Publisher*

ADVERTISING

Mark Raduziner, *Marketing Coordinator*
Mary Birnbaum, *Production Manager*

Regional advertising sales offices listed near the Advertisers' Index.

Member,
American Business Press



Member,
Business Publications
Audit of Circulation



BROADCAST ENGINEERING (USPS 338-130) is published monthly by Intertec Publishing Corporation, 9221 Quivira Road, P.O. Box 12901, Overland Park, KS 66212-9981. Postmaster, return from 3579 to the above address.

BROADCAST ENGINEERING is edited for corporate management, engineers/technicians and other station management personnel at commercial and educational radio and TV stations, teleproduction studios, recording studios, CATV and CCTV facilities and government agencies. Qualified persons also include consulting engineers and dealer/distributors of broadcast equipment.

SUBSCRIPTIONS: **BROADCAST ENGINEERING** is mailed free to qualified persons in occupations described above, nonqualified persons may subscribe at the following rates: United States, one year, \$25; all other countries, one year, \$30. Back issue rates, \$5, except for the September Buyers' Guide issue, which is \$15. Rates include postage. Adjustments necessitated by subscription termination at single copy rate. Allow 6-8 weeks for new subscriptions or for change of address. Controlled circulation postage paid at Shawnee Mission, KS.



©1982. All rights reserved.

Intertec Publishing Corp.

"I have never been as impressed with a new piece of gear as I am with our programmable SatCom Technologies earth station antenna."

Dave Frasier Technical Operations Manager
WWBT-Richmond, Virginia

WWBT is a technical leader that installs a lot of equipment. According to Dave Frasier, "The technical quality of our new SatCom Technologies' 9.2-meter antenna is excellent, and it has brought new flexibility and a more competitive edge to our programming."



The Model 920C 9.2-meter antenna incorporates high speed drives (2°/sec.) directed by a micro-processor-based programmable controller. The controller can store and access up to 39 satellite positions. WWBT is using the controller's scheduling function to move the antenna automatically from one

satellite to another at specific times throughout the day to receive syndicated programming, sports events and feeds from its Washington news bureau.

SatCom Technologies' high-technology antennas are available in sizes ranging from 3-meters to 13-meters. We also offer the exclusive Torus multiple-beam antenna in 1.5-meter and 7-meter equivalent sizes. Each antenna combines the extraordinary high surface accuracy of RSi's AccuShape aluminum reflector with an extremely rigid mount. This means greatly

improved sidelobe performance and the ability to upgrade to Ku-band.

Mr. Frasier continues, "We beat our competition, we save ourselves money and headaches. We give our viewers the best service and the best programming, whether it comes from across the state or across the country."

For more information on SatCom Technologies' earth station antennas, call David Speed at (404) 448-2116.



SatCom Technologies, Inc.

an RSi Company


2912 Pacific Dr. Norcross, GA 30071
(404) 448-2116 Telex 70-8496
Circle (5) on Reply Card



Photographs courtesy of WWBT Richmond.

FCC update

April 1982

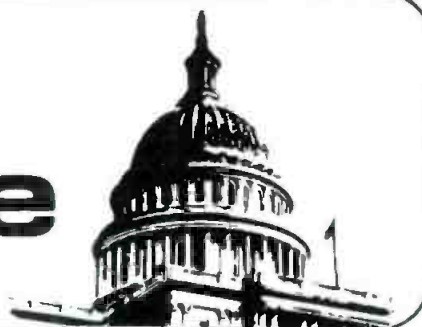

AM stereo authorized

The FCC recently authorized AM stereophonic broadcasting, but will allow broadcasters to use any non-interfering systems they desire. Although adopting a free market approach to AM stereo selection, the FCC did establish minimum technical rules to prevent interference to other spectrum users and ensure acceptable stereophonic performance.

Revised Form 313 available

The August 1981 Edition of FCC Form 313, application for authorization in the Auxiliary Broadcast Radio Services, is now available from FCC District offices or FCC Forms Distribution, Room B-10, Washington,

DC, 20554. The revised Form 313, which consists of a 2-page form and instruction booklet, is used to apply for broadcast TV microwave, aural STL and intercity relay, remote pickup and low power auxiliary (wireless mics). The revision conforms to recent changes in the rules, and with the booklet, clarifies items on the application. The August 1981 Edition of Form 313 must be used, as previous editions of the 313 will not be accepted for filing.

LPTV service authorized

The FCC recently voted to establish a Low Power TV Service to provide new broadcast programming and ownership opportunities. The service


will operate on a secondary non-interference basis with full service TV stations.

This action follows license granted for Bemidji MN in November 1981. Information released to the press in late February 1982 indicated that the commission had approved building of 79 LPTV installations. Contacts with the FCC in March said that only 23 CPs had been issued to date. Of those, five were VHF, with 18 in the VHF service. More information places six UHF channels in Colorado, three in Montana, two in Utah, two in New Mexico and one in Wyoming. The VHF channels are slated for Missouri (two), Tennessee (one), Wisconsin (one) and Wyoming (one).

Freeze lifted on UHF/radio applications

The FCC recently retained the exceptions in its broadcast multiple ownership rules that provide for case-by-case treatment of certain UHF TV applications that would otherwise violate the one-to-a-market and regional concentration rules. It also granted a petition to lift the freeze on processing of applications involving combined ownership of UHF TV and radio stations in the same market or in the same region. □

Here's what Programmers and Engineers know about ratings: BEAT'EM TO THE PUNCH

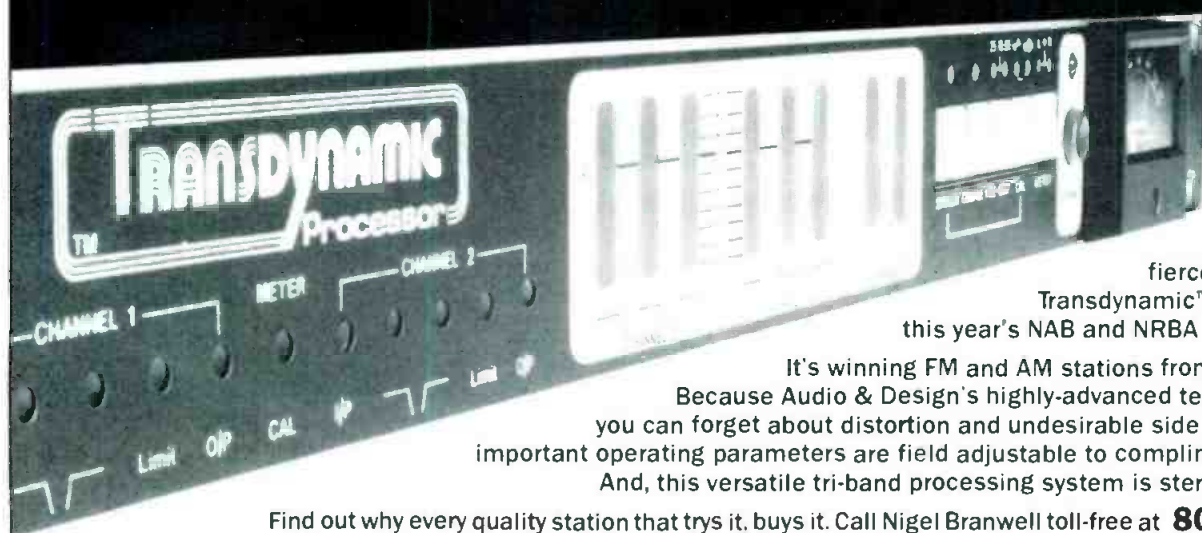

Let's face it, competition is fierce. That's why the Transdynamic™ Processor took this year's NAB and NRBA shows by storm.

It's winning FM and AM stations from coast to coast. Because Audio & Design's highly-advanced technology means you can forget about distortion and undesirable side effects. Plus, all important operating parameters are field adjustable to compliment any format. And, this versatile tri-band processing system is stereo-ready for AM.

Find out why every quality station that tries it, buys it. Call Nigel Branwell toll-free at **800-426-6170** to arrange an audition. And out-punch your competition with the Transdynamic Processor.



Audio + Design


THE HIT SOUND IN BROADCAST SCIENCE.

AUDIO & DESIGN RECORDING, INC. • P.O. BOX 786 • BREMERTON, WASHINGTON U.S.A. 98310 • TELEPHONE 206-275-5009 • TELEX 15-2426
AUDIO & DESIGN RECORDING, LTD. • NORTH STREET READING RG1 4DA • BERKSHIRE, ENGLAND • TELEPHONE (0734) 53411 • U.K. TELEX 848722

Copyright 1981 by Audio & Design Recording, Inc.

Circle (6) on Reply Card

Ampex Announces the Practical End of Video Jitters.

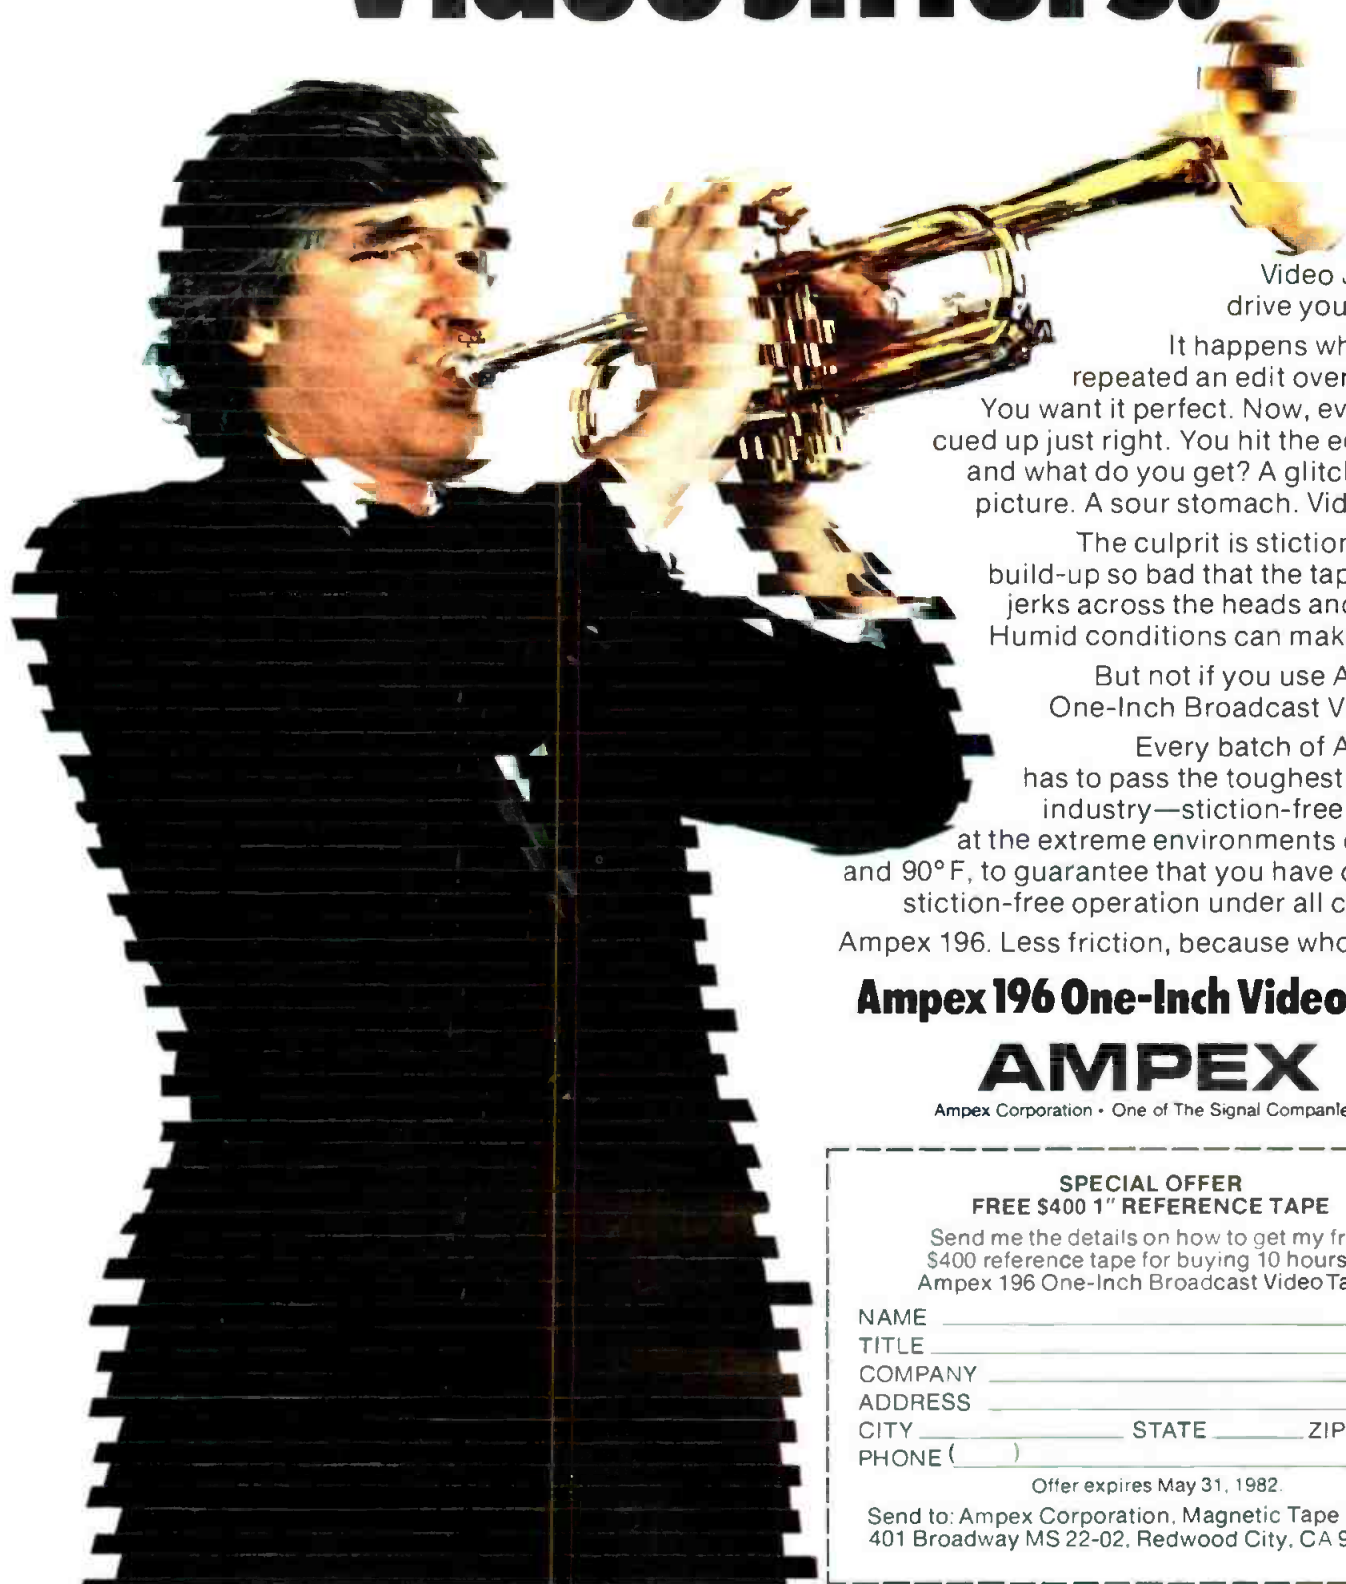

Video Jitters can drive you up a wall.

It happens when you've repeated an edit over and over. You want it perfect. Now, everything's cued up just right. You hit the edit button, and what do you get? A glitch. A shaky picture. A sour stomach. Video Jitters.

The culprit is stiction—friction build-up so bad that the tape actually jerks across the heads and scanner. Humid conditions can make it worse.

But not if you use Ampex 196 One-Inch Broadcast Video Tape.

Every batch of Ampex 196 has to pass the toughest test in the industry—stiction-free operation at the extreme environments of 90% RH and 90° F, to guarantee that you have consistent stiction-free operation under all conditions.

Ampex 196. Less friction, because who needs it?

Ampex 196 One-Inch Video Tape.

AMPEX

Ampex Corporation • One of The Signal Companies 

SPECIAL OFFER FREE \$400 1" REFERENCE TAPE

Send me the details on how to get my free \$400 reference tape for buying 10 hours of Ampex 196 One-Inch Broadcast Video Tape.

NAME
TITLE
COMPANY
ADDRESS
CITY STATE ZIP
PHONE ()

Offer expires May 31, 1982.

Send to: Ampex Corporation, Magnetic Tape Division,
401 Broadway MS 22-02, Redwood City, CA 94063

BE

Circle (7) on Reply Card

April 1982 *Broadcast Engineering* 7

MPR purchases digital recording equipment

Minnesota Public Radio has become the first broadcasting operation in the United States to be fully equipped with a multi-track digital recording and editing system. Until now, digital recording has only been installed in commercial recording studios. New standards for the technical quality of

programs broadcast nationally via satellite will be set.

The digital system, manufactured by 3M, has been installed in MPR's state-of-the-art 24-track production studio. The equipment will also be used in the production of special remote broadcasts such as performances by the Minnesota Orchestra and Saint Paul Chamber Orchestra.

MPR, referred to as the "flagship of the national system," has already earned a reputation for its quality productions. The network has won three Peabody Awards in the last four years for its programs, and currently produces and distributes more programming for the public radio system than any other station-based entity.

Telidon announces new videotext capabilities

In an address delivered recently at the Online '81 Conference in Dallas, Larry T. Pfister, vice president, Telidon Videotext Systems described powerful new capabilities for Telidon. The following were included in the new capabilities:


- keyword search, associative retrieval and full inverted file access;
- expanded gateway access to third party value-added services; and
- improved portability for Telidon data through Telidon/Basis availability on a wide range of host processors.

Speaking on "The Implications of Videotext to the Online Database Community," Pfister said that Infomart (the Toronto-based parent of TVSI), in conjunction with Battelle Columbus Laboratories, is developing a hybrid database search and videotext display system using Telidon technology and the Battelle Basis data management software to provide comprehensive textual, numeric and graphic information retrieval.

The first target of the project is the cataloging of the Canadian Record Catalog for the recording, retailing and broadcasting industries. The primary information provider is the Canadian Independent Record Production Association. This bilingual database will catalog recordings for cross-reference. It includes information on everything from a record's label, affiliation and distributor to its chart positions. The Telidon/Basis system also provides more than 80 fields of information on each performer and recording, and can also reproduce the album graphics on the subscriber's screen.

Pfister also displayed videotext "pages" created by Infomart, using the Telidon/Basis hybrid, with stunning graphics or record album covers and portraits of recording artists as backgrounds for, or incorporated with, bibliographic catalog information from the Canadian Record Catalog database. He said that the provision of the Telidon/Basis function would accelerate the market penetration of Telidon technology. □

HARRIS HAS THE RF NETWORK YOU NEED!

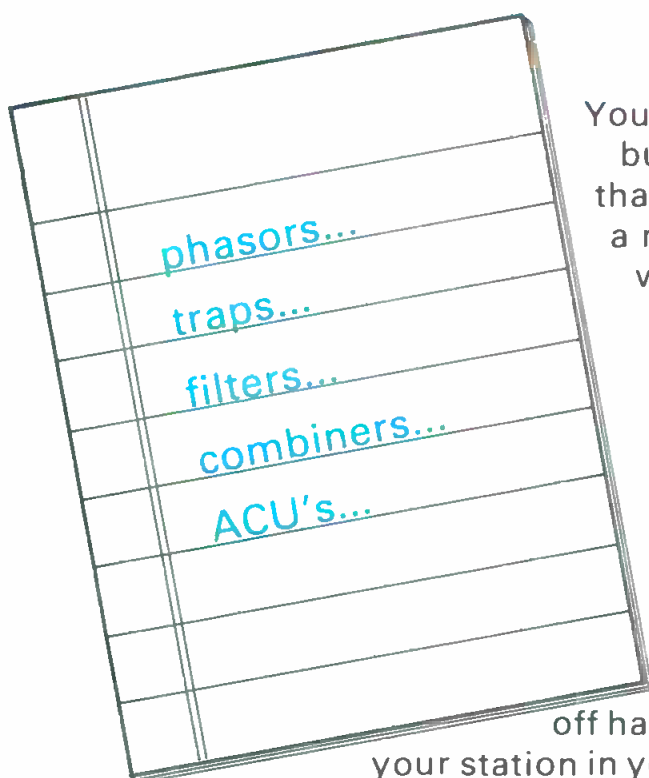

You can afford to buy the quality that comes from a manufacturer with nearly 60 years of broadcast experience. Harris' design capability and experience is an investment that will pay off handsomely for your station in years to come.

Harris can supply any type of RF network needed by AM broadcasters. First we analyze your special needs. Then we design and build the equipment for peak performance and reliability at a competitive price.

For more information, contact **Harris Corporation, Broadcast Products Division, P.O. Box 4290, Quincy, Illinois 62305-4290. 217-222-8200.**



HARRIS

Circle (8) on Reply Card

A VERY MOVING STILL STORY.

Editors, Engineers, Animators, Producers, Special Effects Specialists, Station Managers, Training and News Directors, Read This Ad.

In the beginning, all was stillness. A dark and cumbersome, costly and inefficient sort of stillness accentuated by the *kachunka-kachunka* of the slide chain machinery. Then came a company called Echo Science Corporation — us, actually — with a concept called Electronic Frame-Stor™. And suddenly, all was stillness — and light.

But what excited the engineers at Echo Science wasn't stillness at all, but movement and, yes, re-movement. These were the challenging chapters to be written in the Still Story. How to make all of those electronically stored stills move around in all manner of ways — and do so in a container that was easy to move. For the Still Story, a hero was needed.


Thus was born The Image Maker.®

The Image Maker. A Brief Definition.

Here's what The Image Maker is: A high-band color disc recording system that uses state-of-the-art electronics and an exclusive Discassette® recording medium to perform a versatile number of professional television production tasks from still frame storage to special animated effects. It is a highly reliable, very compact and most cost efficient method of acquiring an impressive package of capabilities.

Loops, Sequences, Special Effects.

The joy of The Image Maker — and the key to its success as a productivity tool — isn't just in its storage of still frames, but also in the manipulation of those stills to serve a variety of needs. In this regard, The Image Maker is a marvel of special effects wizardry, all made possible by a combination of features. Variable speed operation all the way from freeze frame to real time. Random access of as many as 512 frames on

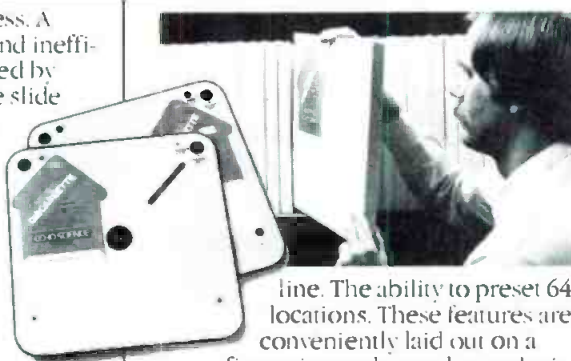

line. The ability to preset 64 locations. These features are conveniently laid out on a fingertip touch panel to make it just that much easier for the operator to do animation sequences, generate backgrounds, superimpose effects or pre-program motion loops.

From Cold Fronts To Hot Switches: The Plot Thickens.

More advanced features deliver even more broadcast and production benefits. For instance, because The Image Maker boasts variable speed in both directions, weather motion — or motion analysis of any kind is, well, a breeze. And because it also features two independent heads, the operator can preview upcoming video images, then "hot switch" to the next one without going to black.

Between the cold fronts and the hot switches are a full range of other capabilities. Instant replays. Logo and ID flashes. These are capabilities enhanced by the fact that The Image Maker will conveniently interface with today's modern character generators and titlers.

The Discassette. The Removing Part Of The Story.

Not all of The Image Maker's innovations are located exclusively within the confines of the machine itself. In fact, one of the key innovations — and one unique to Echo Science products — is our

Discassette, the removable recording medium that provides both operational and storage convenience. In this day and age, when space is at such a premium and ease of storage and retrievability are very real assets, a library of Discassettes sure beats drawers full of slides or closets stacked with disc packs.

Going Mobile With The Image Maker.

Movable images. Removable media. Both are important parts of The Image Maker story. A third, though, is The Image Maker itself on the move. Because we deal with some mighty tough customers, we build The Image Maker to be a mighty tough television production tool. The combination of the recording technology (one that eliminates the possibility of head crash), Echo Science craftsmanship, and a compact, road-rugged design makes The Image Maker as versatile on remote shoots as it is in the studio.

A Moving Conclusion. Buy One.

Perhaps the most moving part of The Image Maker story is the one you read on the bottom line. Because, ultimately, it's the cost efficiency of The Image Maker that will move you to take a closer look. Clearly, it doesn't make a lot of sense to tie up a 1-inch VTR to do routine or special effects work when the feature-rich but modestly priced Image Maker can do that — and more.

There's a happy ending to our Very Moving Still Story. Call us today and we'll write it together.



ECHO SCIENCE CORPORATION

485 E. MIDDLEFIELD ROAD • MOUNTAIN VIEW, CA 94043 • TELEPHONE: (415) 961-7145 • TWX: (910) 379-6499

Circle (9) on Reply Card



SOCIETY OF BROADCAST ENGINEERS, INC.

P.O. Box 50844
Indianapolis, IN 46250
(317) 842-0836

Battison receives award

John H. Battison, director of engineering of the WOSU-AM/FM/TV stations, Columbus, OH, received a special award from the Society of Broadcast Engineers at the annual meeting at NAB-'82/Dallas. The award acknowledges Battison's work in founding the SBE in 1964, serving as chairman of the steering committee, and serving as first president.

Battison founded the SBE following the demise of the Institute of Radio Engineers. He contacted all the broadcast stations in the United States, attempting to arouse interest (he paid his children one cent per name to send out 6000 invitations to form the new society.) At the initial meeting he was named chairman of the steering committee, and the following year was elected the society's first president. He also produced and edited the *Journal of the Society of Broadcast Engineers* for several years.

Battison has been director of engineering of the WOSU stations for about four years. Before joining the stations, he was involved in domestic and international broadcasting.

He is a registered professional engineer in Washington, DC, and practiced there for several years. He was also associated with Carl Smith of Cleveland, OH. His long career spans service with ABC in the late '40s, engineering management positions, station ownership and international consulting in the broadcast field.

He is well-known as a technical author and is an active operator with the call W8KUC. He was also OD5KX when living in Beirut, Lebanon—his wife was OD5KY. After six years service with the Royal Air Force, in which he fought in the Battle of Britain, Battison came to the United States in 1945 and went to work for KMBC in Kansas City, MO. In 1947 he joined ABC in New York as assistant chief allocation engineer. He has been active in all areas of US broadcasting. He was a member of the US Delegation at the Region II Medium Wave Advisory Committee meetings in Buenos Aires in 1980 and participated in the Radio Advisory Group following this conference.

Think of us as your mike expert.



The 635A — Perfect design from the start

The Electro-Voice 635A is probably the most widely used broadcast microphone currently available. Yet it was introduced back in 1967! There are microphone companies that haven't been around as long as the 635A! What makes a microphone continue to be the broadcasters' favorite after 15 years in the field?

The 635A was designed to be used anywhere. Its screw-machined steel case and mechanically nested parts set standards for durability and ruggedness that the competition still strives for. It was the first omnidirectional microphone designed to have a shaped, rather than flat, frequency response. A rolled off bass response combined with a slightly rising high end make it perfect for vocal

reproduction. And it was the first microphone of its type to feature an elastomer encased head capsule for reduced handling noise and additional protection from severe mechanical shock.

Despite all the technological advances in the broadcast, recording and sound reinforcement industries, the 635A continues to be the "audio man's screwdriver" — a microphone tool that can be used anytime, anywhere, for almost anything. When a product is designed right to start with, there's no need for it to become obsolete. All Electro-Voice professional microphones are designed with the same goal in mind. That's why people think of Electro-Voice as their microphone expert.



Ev **Electro-Voice**
a gulton company

600 Cecil Street, Buchanan, Michigan 49107
In Canada
Electro-Voice Div. of Gulton Industries (Canada) Ltd.
345 Herbert St. Gananoque, Ontario K7G 2V1

Certification exams scheduled

The SBE will give certification examinations June 18-June 26. All applications for this exam session must be received in the national office by April 26. A copy of the certification program booklet and application may be obtained by writing to the Certification Secretary, SBE, P.O. Box 50844, Indianapolis, IN 46250. ☐

**Use BE
classified ads**

Circle (11) on Reply Card

**Midwest
and JVC
put you where
the action is!**



JVC Provides Rugged Quality and Dependability. Midwest Gives Them To You Fast... And For A Great Price!

JVC cameras, recorders and editors are famous for their reliability and their ability to take the bumps and jolts of mobile unit installations. That's why they're the choice of so many cable companies.

If you need a mobile unit that can take the punishment that on location productions dish out, you need to talk to Midwest about their complete line of JVC equipped units. Midwest maintains an in-depth stock of the full JVC line.

Let Midwest put you where the action is, with rugged JVC production equipment in an M 1 or an M 20 mobile unit.

For information on the complete line at Midwest, call toll-free today.
1-(800)-543-1584

Circle (10) on Reply Card



**1021 West 8th Street
Cincinnati, OH 45203**

A UNR Company

Authorized Distributor
for JVC Products

Cincinnati, OH
513-651-1904
Columbus, OH
614-476-2800
Cleveland, OH
216-447-9745
Detroit, MI
313-689-9730
Indianapolis, IN
317-251-5750
Louisville, KY
502-491-2888
Lexington, KY
606-277-4994
Nashville, TN
615-331-5791
Charleston, WV
304-722-2921
Virginia Beach, VA
804-464-6256
Washington, DC
301-577-4903
Charlotte, NC
704-399-6336
Miami, FL
305-592-5355

AM STEREO: TO BE OR NOT TO BE?

Communication is not unilateral. Each month **Broadcast Engineering** strives to bring you the information you want and need. As we assemble an issue, we draw on widely varying backgrounds in the journalism and broadcast spheres. Objectivity is a key to our work, but we do have opinions, and so do you. Beginning with this issue, our editorial page will be our soapbox to air opinions on current issues. Through it, we will offer congratulations and encouragement as well as express disappointment and disapproval on issues in the broadcast industry, as we see them.

But the communication loop will not be complete without your participation. Give us your comments on our opinions as well as your thoughts on other topics. Future editorials will include some of your responses. Through this interaction we will better serve you, perhaps even solve a problem or two with the discussions. Opinions that differ from our own are welcome, and so are confirmations on key issues.

Address comments to: The Editor, **Broadcast Engineering**, P.O. Box 12901, Overland Park, KS 66212.

The March 4, 1982, action by the FCC allowing a marketplace selection of a national standard for AM stereo is a matter of grave concern, if not dismay. The result could well be industry-wide chaos, extensive delays, wasted efforts and astronomical costs.

The bottom line may be that this decision by the FCC will kill any hope for a successful AM stereo program in this country. But it also leaves the door open for an interested outside company or organization to decide our US broadcasting standards—and that possibility bothers us greatly.

We do not object to universal standards being developed by duly authorized and objective standards committees, such as we see functioning within the jurisdiction of the SMPTE, AES, IEEE and international technical societies. Such dedicated efforts lead to regional and global standards that benefit everyone.

However, AM stereo is facing quite a different situation. Now the major equipment proponents—Belar, Harris, Kahn, Magnavox and Motorola plus, potentially, many others—are left to wage full-scale battle in the marketplace.

Our immediate concern is that the FCC's inability to decide on a single AM stereo system may spell the death knell for the emergence of this technology as an industry. This is disheartening because the AM broadcasters urgently need an edge for survival in a highly competitive marketplace.

Our deeper concern is with the FCC itself. Does this decision mean that the FCC can no longer make the technical decisions that broadcasters need? Have the technical foundations of the commission been so weakened by the lack of adequate engineering support that it can no longer decide what is best for the industry and the public? If this is the case, then we have reached a regrettable state of affairs, and it's time our legislators and the FCC re-examine its structure and functions.

Commissioner Abbott Washburn made his position clear: "It is a proper function of government to lay down the guidelines for a single system that will result in AM stereo in every home at the lowest cost consistent with technical excellence and quality reception. I remain convinced that the commission can choose with confidence a system which will meet the needs of broadcasters, manufacturers and the public. To do so risks making the wrong choice. But with the five systems running a close race in their technical quality, that risk is minimal. And I continue to believe that it is in the public interest for the commission to choose a single system. The risk in selecting a single system pales in comparison to the consequences of compelling multiple systems to fight it out in the marketplace."

The blame for the potentially chaotic state of AM stereo must rest squarely on the shoulders of the FCC commissioners who approved the marketplace decision. The majority of their inputs—from the NAB, NRBA, most of the system proponents and from broadcasters—strongly recommended a single-system selection. They ignored these recommendations.

It has been suggested that the FCC made its marketplace ruling out of fear of industry criticism and possible lawsuits. If true, then the AM stereo decision was made out of weakness, and the present system must be changed. The FCC simply must represent the best interests of broadcasters and consumers if it is to survive and serve a purpose. Anything short of these ideals is inexcusable, especially when it leaves the door open for foreign interests to decide our US broadcast standards.

The industry needs strength in management and engineering as much as perhaps at any time in broadcasting's history. We are facing a digital decade in radio and television, with many associated standards to be considered. We are also facing teletext standards, high definition television standards, stereophonic television and bilingual television. This is no time for the FCC to be weak in its resolves nor to err in its appointed tasks. Anything short of strength and leadership from the FCC leads to waste and chaos—and the FCC might as well close its doors. □

"VIVE LA PEIRCE-PHELPS!"



TELEFRANCE USA, the French cultural and entertainment cable programming system, asked us to design and build their new video production facility in New York City.

We designed a system to fit in their available space.

We chose the precise equipment to meet their budget requirements. And we had it completed when they needed it.

TELEFRANCE said, "C'est incroyable! Merci!"

Now we'd like to do something special for you.

PEIRCE-PHELPS, INC.
VIDEO SYSTEMS DIVISION

2000 N. 59th Street, Philadelphia, Pa. 19131
800-523-4682. In Pennsylvania, call 215-879-7171.

Circle (12) on Reply Card

AM stereo?

By Bill Rhodes, editorial director

- March 4, 1982
- FCC authorizes AM stereo
- Marketplace decision
- Commissioners vote 6:1

The FCC decision to allow a free market approach to AM stereophonic has met with mixed reaction—from delight to despair. The FCC has declined to select a single, optimum system for AM stereo, thus throwing the industry into possible chaos—perhaps even killing AM stereo.

The FCC voted 6:1 to allow broadcasters to use any non-interfering system they desire, with only minimum technical guidelines. Commissioner Washburn cast the dissenting vote and spoke eloquently in favor of selecting a single AM stereo system.

Reaction from the industry has been swift, but mixed. Japanese set manufacturers found out about the decision by telegram from representatives just minutes after the decision was made. Of the five proponent systems

manufacturers involved, only Leonard Kahn was pleased with the marketplace decision. Others—Belar, Harris, Magnovox and Motorola—expressed displeasure and concern that the FCC did not select a single, best system—a decision that would have virtually assured a future for AM stereo.

The failure of the FCC to decide on a single system, regardless of the technical reasons, may actually kill the future of AM stereo. If set manufacturers refuse to build appropriate sets to receive the AM stereo broadcasts, the industry may not mature. If broadcasters cannot select and install an optimum system, the AM stereo industry may die because of signal incompatibility throughout the country and the lack of suitable receivers.

On the other hand, the door is open now for the current proponents, plus all others who want to toss their hats into the ring, to do battle in the marketplace. Only time will show who dominates and if AM stereo will survive. The possibility exists now that some foreign source, with strong government backing, could actually decide the AM stereo issue in the United States!

Thus, the FCC's action in the AM stereo matter may

CASSETTE CLEANER/EVALUATOR

Elcon EA 750 — For ¾" Cassettes

Television Equipment

U.S. Distributor of

Matthey Video and Pulse Delays

Matthey Video Filters

Elcon Tape Cleaners and Evaluators for 2",
1" and ¾" Tape

Racal Headsets for Intercom/Sportscaster
Applications

BCA Intercom/Interphone Systems

Link Video DA-s

For information, please contact:



Television Equipment Associates, Inc.
BOX 393, SOUTH SALEM, N.Y. 10590393
914-763-8893 in Calif. 213-271-9570
TWX 710-575-2600



*85% of tapes discarded for drop-out restored to service after cleaning.

*Three front panel illuminating LED displays identifies the location of video dropout, upper edge and lower edge damage.

*Quick and accurate tape grading into categories such as "Master Stock," "Standard Quality," "Dub Quality," achieved with user calibrated push buttons.

*Electronic evaluation—essential for dropout evaluation.

Circle (13) on Reply Card

YOUR AM STEREO SYSTEM IS READY AT HARRIS!

Harris, the leading broadcast transmitter manufacturer, has the complete AM stereo system*, products and services broadcasters want.

The only manufacturer to offer a complete AM stereo broadcast product line

- AM stereo generator for high quality transmission.
- Transmitter interface for most transmitters now in use.
- Stereo modulation monitor for easy system set up.
- Broad audio product line.
- Optional field installation/ checkout services.

Superior Harris Stereo System

For technical reasons alone the Harris stereo system should be your choice.

- Harris has the only system that has the same bandwidth as your current mono signal. It minimizes antenna and interference problems and is compatible with existing directional arrays, with no degradation of your signal.

- The Harris system permits the same level of modulation as your present signal to maintain loudness.
- The Harris system simultaneously provides maximum stereo and mono coverage.
- The Harris stereo system permits the use of high performance/low cost receivers that will help close the quality gap between AM and FM.

60 years of dedicated service

Harris is the only manufacturer that can put 60 years of service and experience to work to put you on a competitive basis with FM in a cost effective manner.

Act now

Harris is ready to supply you with a complete AM stereo system. Contact us today for full details. Call 217/222-8200. Or write Harris Broadcast Division, P.O. Box 4290, Quincy, Illinois 62305-4290.

*U.S. Patent 4,225,751. Other U.S. and foreign patents pending.



HARRIS

AM stereo

have far reaching consequences, and the wake created may last for years. Many view the FCC's decision as an organizational and technical weakness that fragments the industry, and they also consider it a violation of the FCC's charter to serve the best interests of broadcasting.

And, all this is occurring at a time when AM broadcasting truly needs a revitalization. In the face of potential chaos, many AM broadcasters said they still feel that the possibilities of AM stereo give them something new to talk about and that it will help them sell air time. But, if AM stereo does not mature, even this small edge will dull in time.

Broadcast Engineering will continue to report progress in AM stereo, as significant trends develop. We began talking to broadcasters and manufacturers immediately after the FCC decision was announced, and the following reflects the general pulse of the industry.

Belar

Arno Meyer, president, Belar Electronics Laboratory, said he does not think too highly of the FCC's inability to settle on a single system for AM stereo. He even suggests that the FCC may have reneged on its charter to the NAMSRC (National AM Stereophonic Radio Committee) program wherein three of the proponent systems were evaluated.

In an exclusive interview with BE, Meyer pointed out some of the pitfalls in this monumental FCC decision, including the possibility that aggressive companies or countries might shape the future of the industry by inserting early equipment into the market without regard to what may be best for the broadcaster and the public.

The official position of Belar is readiness to have monitoring equipment available for the Magnavox system, mainly because of the amount of background work in getting receiver manufacturers prepared for this system. And, Belar is ready to help broadcasters to the best of its ability.

In short, Belar is definitely in the AM stereo race.

Harris

The Harris Corporation issued the following formal statement concerning its position on AM stereo:

"Harris Corporation will begin selling its AM stereo broadcasting system (immediately) to the nation's 4650 AM radio stations and will license manufacturers of home radios to use its stereo receiving technology. The company expects to begin delivering equipment in July and estimates that AM stations will eventually invest \$100 million in stereo transmission.

"The Federal Communications Commission voted to allow AM stations to broadcast in stereo for the first time:

Continued on page 93



The Best Price—Fonts—Graphics

Circle (15) on Reply Card

SPECTRA COMPUTER SYSTEMS

391 CHIPETA WAY—RESEARCH PARK SALT LAKE CITY, UTAH 84108

801-581-5478

www.americanradiohistory.com

TEK TELEVISION
PRODUCTS

**"For
nearly
30 years
we've been
working hard
to help improve
your signal
quality."**



Tektronix®
COMMITTED TO EXCELLENCE

Tom Long
Vice President
General Manager
Communications
Division

Charles R. Barrows
General Manager
Television Products
Communications
Division

690SR Comb Decoder

496 Spectrum Analyzer

2200 Multipurpose
Oscilloscopes

(Actual displays)

**Hard work pays off.
These new products
from Tektronix continue
to help you achieve
better signal quality.**

Over the years we've been first with many of the products which have not only helped improve the quality of your signal, they've simplified your job. We continue this tradition today.

380 NTSC TEST MONITOR

The industry's first combination waveform monitor, vectorscope and general purpose oscilloscope. Only Tektronix puts these three essential functions in one compact, lightweight package.

The 380 offers priced-right performance as a production or maintenance tool, in the studio or field. Vertical interval test signals, tangential noise, differential gain/differential phase and many more measurements are handled with accuracy and ease.

DC operation and optional battery pack assure completely portable operation. Probe input provides in-circuit testing of video and other electronic circuits.

496 SPECTRUM ANALYZER

Here's high performance, plus portability unmatched among lab quality spectrum analyzers. The 496 measures signals from 1 kHz to 1.8 GHz, including AM, FM, TV and STL. There's the resolution to define power line-related sidebands,

1980 Answer™ Option 3 NTSC
Application Software

dynamic range to measure signals with power ratio of $10^8:1$ and incidental FM of only 10 Hz p-p. You get proof of performance measurements, even at remote transmission sites.

Three-knob set-up and microprocessor-aided controls make the 496 easy to use. Signals are stored and compared digitally. And full programmability can be ordered now (specify the 496P) or added easily later to fully automate your spectrum analysis. The 496 is compatible with the Tektronix 1405 Television Sideband Analyzer Adapter.

**2200 MULTIPURPOSE
OSCILLOSCOPES**

The new 2213 at \$1100 and 2215 at \$1400 represent a new performance/price standard in portable scopes. You get full-range capabilities for far less than what you'd expect to pay.

Key features include two 60 MHz channels, 2 mV sensitivity and an advanced trigger system that triggers on either TV lines or fields at any sweep speeds. Model 2215 includes dual time base for making calibrated delay measurements with accuracy to $\pm 1\frac{1}{2}\%$.

These new scopes are compact, lightweight and reliable. No better value on the market today.

**TM5000 PROGRAMMABLE
GENERAL PURPOSE
TEST EQUIPMENT**

These new IEEE-488 compatible instruments offer high individual performance and make it easier than ever to configure and program a fully automatic test and measurement system.

The line includes an instrument controller, two power mainframes, 350 MHz or 135 MHz Universal Counter/

Timers, a 20 MHz Function Generator, a triple power supply, a $4\frac{1}{2}$ digit DMM with built-in math capability, a 350 MHz RF scanner for signal switching, and a multifunction interface for linking instruments to a device or system under test.

**1980 ANSWER™
OPTION 3 NTSC**

MONITORING SOFTWARE

This new NTSC application program lets you operate Answer with more speed and programming ease than ever before. 1980 Answer Option 3 handles virtually every off-air signal measurement made today by the FCC using FCC or NTC-7 VITS. All automatically, with digital accuracy and repeatability. Option 3 also includes color bars and SCH Phase measurements. New PAL application software is available as Answer Option 2.

690SR WITH COMB DECODER

Our 690SR Color Picture Monitor offers added flexibility now with your choice of decoders with a notch or new comb filter. With its high resolution, precise convergence and stable color, the 690SR continues to represent the industry standard of reference for judging color picture quality.

For the full story, contact our nearest Field Office (listed in major directories) or call toll-free, 1-800-547-1512. (In Oregon, 1-800-452-1877.)

Tektronix, Inc.
P.O. Box 4828
Portland, OR 97208

380 NTSC Test Monitor



TM5000
Programmable
General Purpose Test Equipment



Tektronix
COMMITTED TO EXCELLENCE

The Odyssey of Homer

"Close your eyes and give your mind a listen."

By Richard Fairbanks, staff engineer, Universal Recording Corporation, Chicago, IL.

"I don't care if I am an 'up and coming' engineer! Why do I have to do this?" I screamed at my best friend over cold coffee. "I want to do music!" It seemed more like a prison sentence than a recording project. Homer's Odyssey, a 2300-year-old book with a 1-eyed giant who eats people, a witch who turns men into pigs, a hero who shoots 100 suitors with a bow and arrows, all in verse. A prehistoric Starwars in 1-hour episodes. I questioned my sanity.

Then I met Yuri Rasovsky, producer-director for the National Radio Theatre. He seemed harmless enough. Before it was over, I would watch him stalk the control room like a trapped animal, tug fiercely at his beard and alternately praise and curse the actors. He would command concentration so intense that a phone ringing caused near rigor mortis. A fear would hover over the control room that lightning might strike should a snicker or a sneeze occur. Yet, through it all, the perfectionist attitude that drove Rasovsky and myself produced what would finally be a series of eight 60-minute-long episodes.

Rasovsky operates the non-profit organization called the National Radio Theatre of Chicago. Several grants had been received toward a project of adapting the Odyssey into a serialized radio play. The original plan included 12 episodes, each to include a concluding discussion of some aspect of the times of Homer. At first the 2½-inch thick script caused me intense trepidation. Having trouble balancing a checkbook, I wondered how I would ever keep everything straight. I decided to write everything on the script and take the chance that all the mistakes would somehow cancel themselves out.

Recording

About two weeks after I met Rasovsky, 15 actors, Rasovsky with two assistants and I, with one assistant,

crowded into Chicago's Universal Recording Corporation's Studio C. One corner of the small control room was quickly filled with limiters, outboard Dolby equipment and cases of tape. The others spread out into the remaining space. In the studio area, Rasovsky requested all voices close-microphoned to minimize room sounds. I chose Shure SM-5s as primary microphones, because their response and directional patterns work well for voices within two feet. They almost never pop and are relatively forgiving of bobbing and weaving actors. Four such mics were set at right angles to one another, facing out. In one corner of the room was a Sennheiser MD 421 microphone, baffled from the others, for the poet or story narrator, the voice of Homer, if you will, portrayed by veteran actor Sheppard Strudwick.

The five microphones were recorded to 4-track, ½-inch Ampex 406 tape set for standard operating level. All tracks were Dolby'd to control audible noise and reduce possible print-through. Four non-ganged limiters kept program levels away from saturation and eased coping with the inevitable surprises. The 406 tape was chosen as a high quality, relatively print-free tape that allowed plenty of headroom at standard operating level. The 4-track format was the minimum to allow separation between voices that we would need later.

During rehearsals of each scene, actors practiced weaving in and out of assigned microphone positions, giving me a chance to prepare for problems. Good acting demands a wide dynamic range. An actor might whisper one line, scream the next. I had to anticipate delivery to keep levels artistically consistent. We worked through the script. Notes beside each line indicated which track would contain it. Future mixing would require quick references when re-recorded lines were to be cut in. Normally we assigned each actor's mic to its respective track.





Yuri Rasovsky, producer-director, (right) checks notes on the script as engineer Richard Fairbanks sets the Lexicon reverberation system. *Photo: Murray Allan*



The author, Richard Fairbanks, adjusts the Eventide Clockworks harmonizer for double voicing of goddess Athena in disguise. *Photo: Murray Allen*

Odyssey

The poet's mic was combined with mic two. Sometimes, however, narration would have its own track and others were combined. When there were two or more mics on a single channel, no more than one at a time was open in order to keep out extraneous noises.

As we recorded, each take was slated with a different number to indicate episode, page and line. A typical slate "153-9-7-6" meant take 153, episode nine, page seven, beginning on line six. "Keepers" were noted in the script for later editing references.

Occasionally an actor forgot his mic position and popped into someone else's assignment, displacing that person, similar to a case of five cats and four bowls! We madly scrambled to reassign mics, to keep important material separated. With two or three actors on each mic, that presented quite a challenge. Nimble button-punching between lines usually did the trick.

Rasovsky believed in actors really "acting." Sometimes they sat at tables. Sometimes they could move around the mics. We occasionally longed for a boom man. One love

Why Your Radio Station Should Own An Eventide H949 Harmonizer.[®]

• IT'S A COMPLETE AUDIO TIME COMPRESSION SYSTEM AT A FRACTION OF THE PRICE

The \$3500* H949 gives you the same audio time compression and expansion capabilities of competitive single-purpose units costing well over twice as much. You get the power to control time itself...with no editing, no program material deleted and no abnormal pitch effects.

• IT'S A COMPLETE SPECIAL EFFECTS DEPARTMENT

The Eventide H949 Harmonizer[®] special effects unit gives you an almost endless variety of effects. There's variable delay, echo and reverb. Feedback level and equalization controls let you "custom-tune" the audio. Pitch change capability can create new voices. Mix input with pitch-changed output for chorus and harmony effects. Want the distinctive sound of flanging? The H949 offers the best flanging ever. There's time reversal and repeat too. For even more versatility, many more effects can be created from combinations of the basic effects.

WHAT CAN THIS MEAN FOR YOUR STATION?

• IT CAN HELP YOU MAKE MORE MONEY

Go after those co-op dollars! The H949 can easily compress an existing national spot to accommodate a local retailer tag. Local advertisers who deliver their own ad copy will love what the H949 can do. Endless retakes to correct

the non-professional's timing errors are eliminated. Use pitch-change to make that local retailer sound more like an announcer (He'll love that!) Time compression with the H949 can bring order out of chaos when running back-to-back religious or political programs which are often mistimed. And, you'll find yourself doing more and better station-produced local spots—with those special audio effects that make for a more professional custom production. Your advertisers will notice and appreciate the difference.

• IT CAN GIVE YOUR STATION A MORE DISTINCTIVE, TIGHTER SOUND

The H949 Harmonizer can really make a difference. Use its special effects capabilities to produce really distinctive promos, intros and custom jingles. For a brighter, fast-paced sound, some stations choose to speed up their music by a few percent, utilizing the Harmonizer to maintain normal pitch. Using pitch-change, you can even create new voices to populate your air.

MOST EVENTIDE DEALERS HAVE EVALUATION UNITS AVAILABLE. CALL EVENTIDE TODAY FOR THE DEALER NEAREST YOU.




Eventide
the next step

265 West 54th Street
New York, N.Y. 10019
(212) 581-9290


*List price in domestic U.S.

Circle (16) on Reply Card

Have an audio problem? We have the solution!

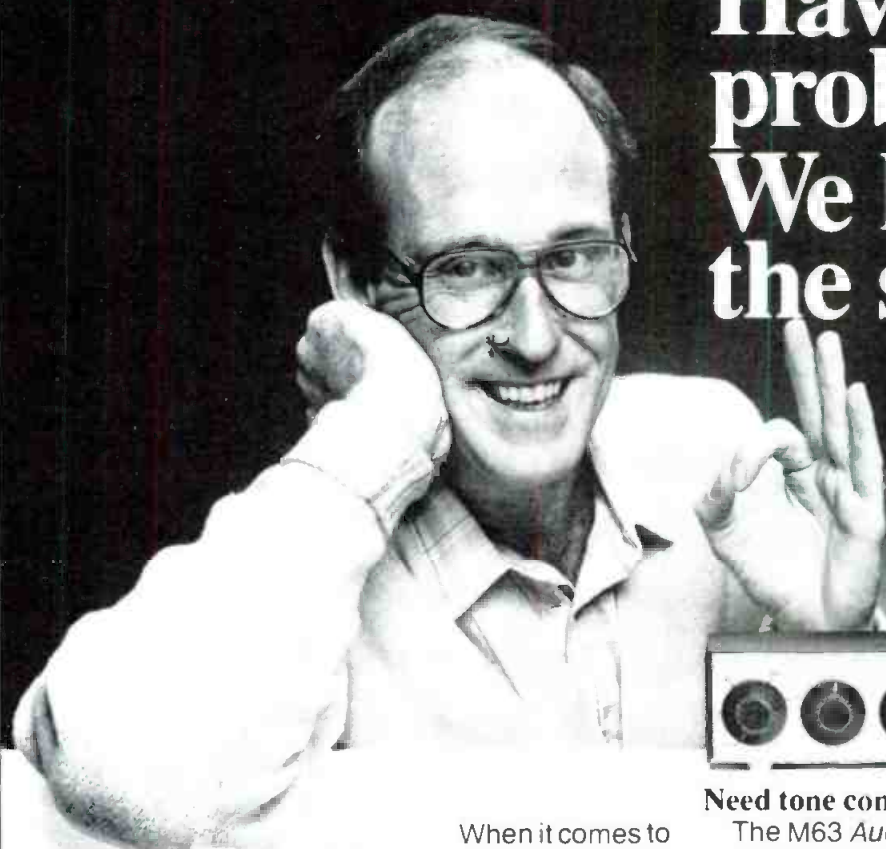

When it comes to solving your audio expansion, equalizing and control problems, Shure offers a full line of equipment designed to handle your toughest assignments. Here's a sampling:

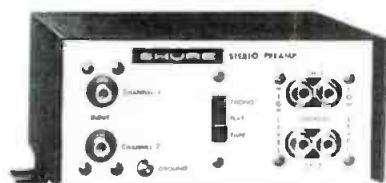

Need tone controls?

The M63 *Audio Master*® adds tone controls to any mixer (such as the Shure M67, M267, M68, M268, SE30). A must for broadcast operations over phone lines.

- Bass and treble tone controls
- Adjustable high- and low-pass filters

Got feedback problems?

The M610 Feedback Controller is specially designed to control feedback in PA systems. Also excellent in post-production rooms for eliminating unwanted background noise from broadcasts, tapes.

- Octave filters centered at 10 key frequencies

Want "audio sweetening"?

The SR107 Audio Equalizer provides "audio sweetening" in post-production rooms for audio and video tapes, and room equalization for hotel, restaurant, church public address systems—perfect where rack space is at a premium.

Trying to boost a low-amplitude signal?

The M64 Stereo Preamplifier boosts low-level signals in broadcast, recording, editing, and signal routing applications.

- Accepts phono or tape input
- Low cost, very versatile

Write for our FREE Circuitry Catalog to get the full story on Shure's lineup of professional circuitry equipment.



The Sound of the Professionals®

Shure Brothers Inc., Dept. 67
222 Hartrey Ave., Evanston, IL 60204
In Canada: A. C. Simmonds & Sons Limited

Manufacturer of high fidelity components, microphones, loudspeakers, sound systems and related circuitry.



Sheppard Strudwick is the voice of Homer.



Megan McTavish plays Odysseus' faithful wife, Penelope. Photo: Ed Sacks



Irene Worth, known throughout the United States and Europe, portrays Athena.

Odyssey

scene involved the happy couple tenderly embracing each other on the studio floor, smooching their hearts out for an X/Y pair of KM84s. Kinky, perhaps, but it achieved the desired effect.


Things were going well. We were actually ahead of schedule until one day an ear-splitting rhythm session next door leaked through enough to keep us from recording a quiet scene. One actor quipped that it might "pass for the music of the gods."

Rasovsky was enraged, and we tried to schedule rehearsals or lunch periods during rhythm dates next door.

Then the air conditioner blower hearing began to fail. It became so noisy that we had to shut it off during takes. Despite such problems and many tedious hours, the actors remained friendly and professional. Finally everything was recorded, including many crowd effects—ohs, ahs, cheers—with some overdubbed as many as four times.

Editing voice tracks

We began to edit. Within two weeks we made two complete passes through everything; deleting, rearranging,

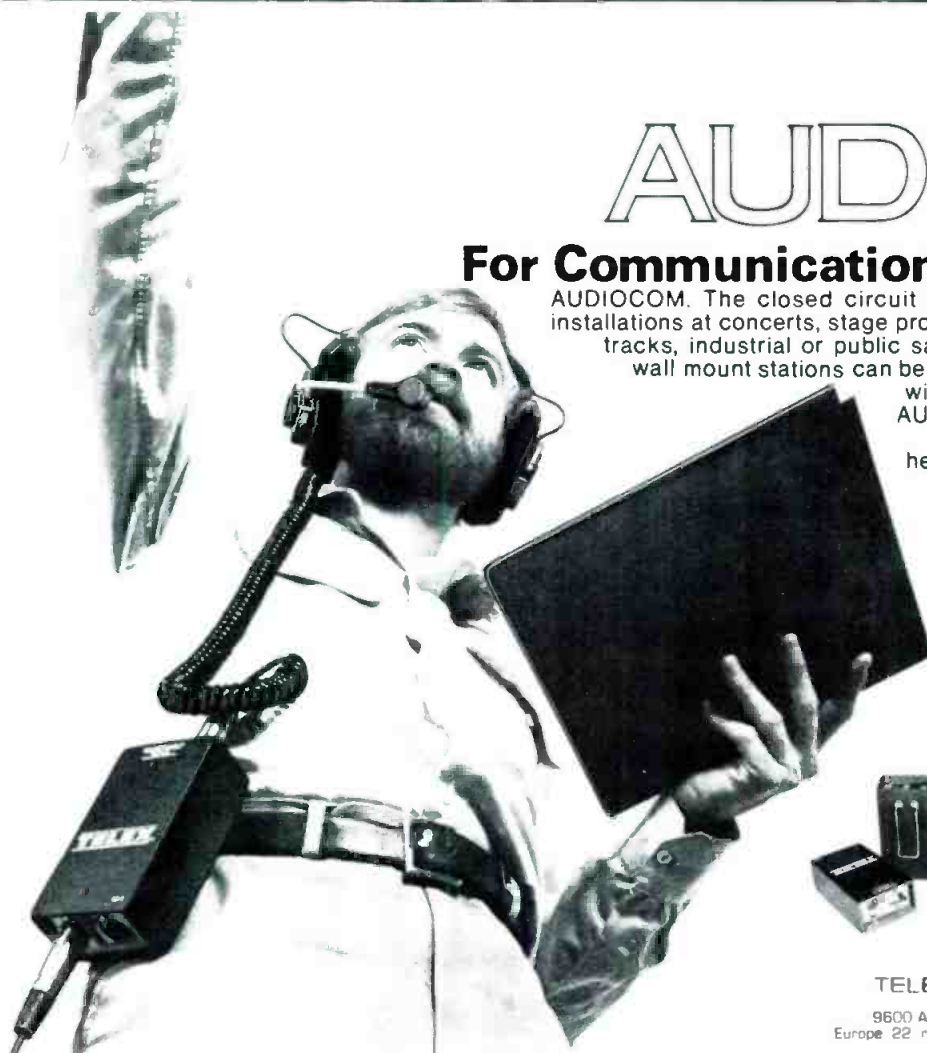

TELEX

AUDIOCOM

For Communications Behind The Scene

AUDIOCOM. The closed circuit intercom for small, large, portable or fixed installations at concerts, stage productions, film or TV studios, stadiums or race tracks, industrial or public safety applications. AUDIOCOM belt packs or wall mount stations can be "daisy-chained" by the dozens over five miles without degradation in signal quality or strength. AUDIOCOM interfaces with other sound systems and telephone circuits. AUDIOCOM includes headsets, mics, cables, switchboards, signalling kits, even battery packs for remote locations; the complete intercom system for communications behind the scene.

Quality products for the audio professional.



TELEX

TELEX COMMUNICATIONS, INC.

9600 Aldrich Ave. So. Minneapolis, MN 55420 U.S.A.
Europe: 22 rue de la Legion d'Honneur 93200 St. Denis France

Circle (18) on Reply Card

DIGITAL TEST GENERATOR

DTG-1000N



- The DTG-1000N features five identical and independently microprocessor controlled 10-bit test signal data stores with precision D/A converters.
- Each data store contains 35 computer generated, standard and new test signals in EPROMs.
- Menu style listing of all available test signals on local and remote control panels together with full status indication makes test signal selection easy.
- Internal RS170A sync generator for genlock and accurate system phasing maintains zero SCH at all times.
- Five standard trigger signals can be locked to any test signal selection from data store #5 and retained in memory.
- Auto correlation of auxiliary trigger signals to data store #5.
- Power down memory.
- Remote control up to 1000 feet for each data store.

LEITCH

Progressive Concepts in Television Technology

Circle (19) on Reply Card

Leitch Video of America, Inc.
825K Greenbrier Circle
Chesapeake, VA 23320
Tel: [804] 424-7920 Telex II: 710 882 4342

Leitch Video Limited
705 Progress Avenue
Scarborough, Ontario - M1H 2X1
Tel: [416] 438-5060 Telex: 065-25420



John Glover is cast as Telemachus, son of Odysseus.

Photo: Ed Sacks



The production staff for the *Odyssey* included Peter Green, University of Texas, Austin; Albert Lord, Harvard; James Redfield, University of Chicago; Kerry Frumkin, documentary producer; Yuri Rasovsky, director-producer; D. Nicholas Rudall, University of Chicago; Peter Arnott, Tufts University; and Jarl Dyrud, University of Chicago.

Photo: Ed Sacks

(left to right)

Odyssey

improving timing. Editing 1/2-inch tape became so natural that 1/4-inch tape felt strange. Then, finally, the day came to lay it onto 24-track tape in Universal's new "Back Room" studio. The multi-track recorder was set up with 406 tape at 3dB elevated level, recording at 15 inches per second through Dolby units. We planned to use the MCI

628 console automation for mixdown. Tracks 1 and 24 were left open for data channels. To keep the all-important voice tracks away from possible edge damage and to simplify notekeeping, the 4-track, Track 1 was transferred to Track 11, two to 12, etc. The poet, always appearing completely dry and centered in the final stereo

New Master Cart II™



THE ULTIMATE TAPE CARTRIDGE

- Superior performance in any tape machine.
- New front corner post for precise tape alignment and excellent stereo phase stability.
- Extremely low friction tape path for minimum wow and flutter and longest tape life.
- Factory loaded with Fidelipac's exclusive HOT TAPE™, for up to 8 dB more output than standard tapes.



Fidelipac Corporation

P.O. Box 808, Moorestown, NJ 08057 USA
609-235-3511 Telex 11 710-897-0254

Circle (20) on Reply Card

THE GUY WHO SAID "MONEY ISN'T EVERYTHING" PROBABLY DIDN'T HAVE YOUR JOB.


He probably didn't have a Marquee-2000 either. The Marquee-2000 Video Production Generator from BEI gives you an impressive list of standard features for only \$26,500. Call toll free 1-800-255-6226 for more details on the Marquee-2000.



MULTIFONT DISPLAY Up to four fonts from the font library can be loaded from the disc and mixed on a character by character basis.



DOUBLE-HEIGHT LOGOS Large station or client logos can be displayed alongside two rows of text when using the double-height logo capability.

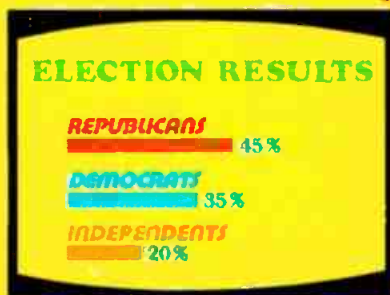

ITALICS Any row of text can be made to instantly assume a 13-degree slope at the touch of a key.



PROPORTIONAL SPACING Proportional spacing, true character overlap and variable inter-row spacing help produce captions of correct density and weight.



KEY OUTPUTS R.G.B and keying outputs are supplied from the Marquee-2000 so the output may be downstream keyed with the surrounding or drop shadow edging.

STANDARD FEATURES:

- Multi-font display capability
- 31.25 nanosecond resolution
- Internal 150-page disc memory
- Internal character and background color generator
- Edging: full surround, drop-shadow or no edging
- Proportional spacing with true character overlap
- 4 speeds of roll and crawl with auto-stop
- Automatic row centering
- Italics at the stroke of a key
- 16 horizontal tab locations
- Word flash and underline
- Character insert and delete
- RS-232-C input interface
- Double logo capability up to 128 scan lines high
- Engineer's service diagnostics card
- Preview safe area and system status display
- Firmware programming
- Compact size of mainframe

LEASING PLANS
ARE AVAILABLE




P.O. Box 937-Olathe, Kansas 66061
Toll Free 1-800-255-6226
In Kansas 913-764-1900
TWX 910-749-6401

AFFORDABLE

Serviceability
From the top, front and back with hinged door assemblies providing easy access to the audio system, major plug-in printed wiring assemblies and power system.

Advanced Transport Design
For fast and gentle tape handling of all reel sizes from 6½ inch "spots" to 2-hour, 11¾ inch reels.

AST™ Automatic Scan Tracking
Delivers disturbance-free slow motion from play to still-frame mode.

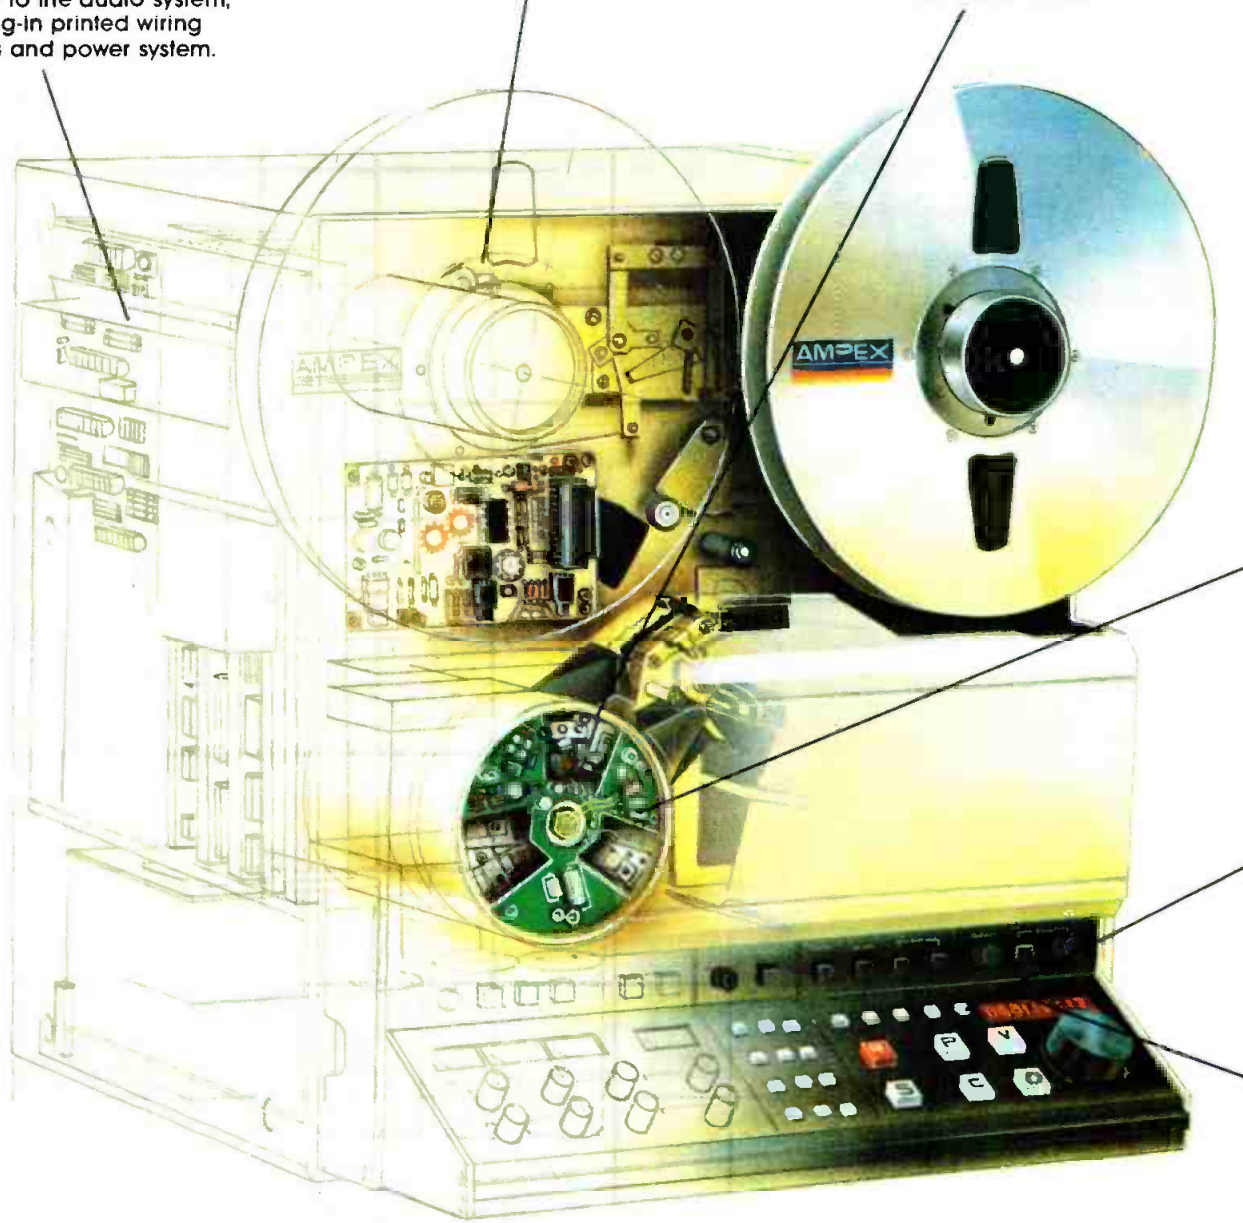

E ONE-INCH

Introducing the Ampex VPR-80. Type "C" broadcast quality on a budget.

Excellent picture quality and low cost. That's what you get with the VPR-80, the new professional video recorder from Ampex. Whether you're adding to your present facility, or moving into the professional video market, you'll find the VPR-80 to be a totally new concept. Yet, it incorporates the most demanded features of the world's most popular one-inch Type "C" VTR, the VPR-2, plus several new and advanced capabilities.

The VPR-80 provides the latest in recording technology. You get a transport designed for superior tape handling of all reel sizes from 6½ inch "spots" to 2-hour, 11¾ inch reels. It has dual microprocessors to control all VTR functions and servo systems, a universal power supply, built-in audio monitoring and a power-down feature that remembers the control panel setup even when the power's off. Plus built-in diagnostics to keep

operation and maintenance costs to a minimum. But there's more.

You also get as standard the Ampex exclusive AST™ automatic scan tracking for perfect slow motion and still frame pictures, plus frame-accurate editing with simple, operator-oriented controls. Not to mention table-top or rack-mount versatility and compatibility with the entire family of Ampex VPR accessories. With the VPR-80, everything from setup to servicing can be accomplished with a minimum of effort and time.

The VPR-80 was truly designed for the operator. And it's backed by the unique worldwide service and support that

Ampex is known for. To find out how the VPR-80 fits into your application contact your Ampex representative or write Ampex Corporation, Audio-Video Systems Division, 401 Broadway, Redwood City, CA 94063 (415) 367-2011.



AMPEX TOOLS FOR TOMORROW

Circle (22) on Reply Card

Ampex Corporation • One of The Signal Companies 

Individual Head Replacement
Quickly with only a screwdriver.
No mechanical adjustment or
drum change required.

Frame-Accurate Editing
Results from the VPR-80's precise
tape timer and search system,
AST™ and simple edit controls.

**Fault And Non-Standard
Operation Detection**
Formed as part of the power-up
sequence. If detected, the specific
condition appears as a unique
code in the timer display.

Radio changing top-tune image

By Carl Bentz, technical editor

Promotional announcements led me to sit back on a mid-October evening to listen to a radio program titled *The Odyssey of Homer* on KXTR-FM, the classical music station in Kansas City, MO. With outdated 4-channel headphones and an FM receiver set for SQ decoding, I closed my eyes to begin an aural adventure. Carefully controlled blatant use of audio effects created an experience not possible with AM radio or TV broadcasts in the United States today. Although the *Odyssey* series ran only eight weeks, the National Radio Theatre program it is a part of includes other dramatic offerings filling a 26-week run before repeats begin during the week of April 18, 1982.

Radio, as an entertainment medium beyond news/talk and top-tune formats, is not dead. Several organizations have expressed a belief in radio as a distributor of high quality, creative entertainment by means of their funding efforts. The major supporters of the National Radio Theatre projects include the National Endowment for the Arts, the John and Mary R. Markle Foundation, the Satellite Program Development Fund of the Corporation for Public Broadcasting, the Andrew M. Mellon Foundation, the Illinois Humanities Council, and a company called TRW. "Close your eyes and give your mind a listen," is TRW's suggestion for listeners.

What response might be expected for classical music format station by such a diversion from Bach, Bartok, Beethoven, Borodin and Brahms? Byl Strother, KXTR-FM program director, offered an answer. About 50 calls had been received at the station.

"One or two complained of a change from the regular format," Strother said. "The others favored the program enthusiastically with some suggestions that the airing time be changed from 10:00 p.m. to something earlier." A newcomer in radio program direction, Strother had been concerned about the possible response to theater on a classical music station. "I decided I'd rock the boat on a bet. I'm glad that I did," he said.

Kate Busch, of the Chicago-based National Radio Theatre operation, provided similar comments regarding the nationwide response. Distribution is by satellite and other vehicles to more than 239 radio stations and additional cable systems throughout the United States. NRT announced a toll-free number, 1-800-621-2373, for information for listeners. Busch indicated that more than 13,000 calls were received. Most were interested in a special publication, *Audiobill*, which provides background on the *Odyssey* project. All expressed interest and pleasure with the production.

"When a ratings service factor is applied to the calls received," Busch said, "to determine an estimated cum listenership for *The Odyssey*, the numbers are astounding—possibly as high as 5 to 8 million. We have been quite pleased."

Several dramatic series are currently broadcast by radio. All show capable creative artistry in the radio medium. Of them, however, the NRT/Universal Recording Studio production with Rasovsky and Fairbanks takes the greatest command of the imaginative powers of the human mind. Preparation and perseverance in direction and engineering; the artistry of performers Irene Worth, Shepperd Strudwick, Barry Morse, John Glover and many others; introductory hosting by Edward Asner; extensive production research into the life and times of Homer by Kerry Frumkin; and original music by Eric Salzman, all worked together.

Odyssey


mix, was given his own track. We evened levels and made certain other voices were wisely assigned to tracks. If a character narrated over the story (dry and centered), as well as appeared in the scene, that narration was placed on a separate track.

In an attempt to simplify the final mix as we dubbed to the multi-track, any desired equalization and all effects were committed to tape, even reverberation, on separate tracks. That practice later eased cutting inserts into a previously mixed master. The voices, recorded flat to start, now were treated with general equalization curves: added warmth for indoor scenes, brightened midrange for outdoor portions, flat for narration.


The voices of gods always needed to be distinct from mortals. Special reverb and delay effects were applied with an Eventide Clockworks Harmonizer and a Lexicon 224 Digital Reverberator. The effects were mixed with the dry voice directly to the god's voice track. Some special consideration was given to the goddess Athena, played by Irene Worth, who transformed herself into various disguised characters throughout the work. When she transmogrified herself, we faded the reverb and gradually harmonized the dry voice up and down as needed, combining the effect with the original voice, placing the combination on a single track. The method was preferred to an alternate means—two actors reading the same lines side by side—synchronized. The technique of combining it to one track allowed easy panning of her voice around the final mix with level changes made equally simple.

The multi-track variable speed capabilities helped us create little monsters, big monsters, man-eating children, and certainly sped the pace. Spaces were included for anticipated sound effects. A few of the pauses were intended for music cues, which as fate would have it, were not completed yet. And then the voice transfers were finished, so it was back to the top to add sound effects.

Most background presences were recorded in true stereo. Some actually came from Greece. When Universal's large collection of sound effects was not enough, Universal's Charlie Deardorff came to the rescue. On our own version of a Foley stage he built a "carriage machine," a large contraption with wheels that roll on a dirt surface for a chariot with stereo movement. Also, there was an ancient ship, a thunder sheet and a Trojan horse. By the time we finished, Deardorff had devised numerous gadgets that squeaked, creaked, clanked, snapped, scraped and a few more that just simply broke. Wet sponges (footsteps in mud), scrap metal, ripped-open soft-drink cans, pencils (at quarter speed made fine roll-

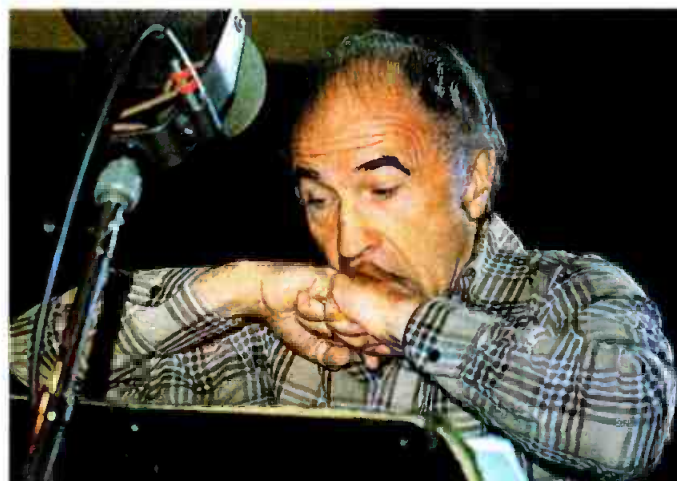

Barry Morse, once known as Inspector Girard on "The Fugitive," plays the ever resourceful Odysseus. Photo: Ed Sacks

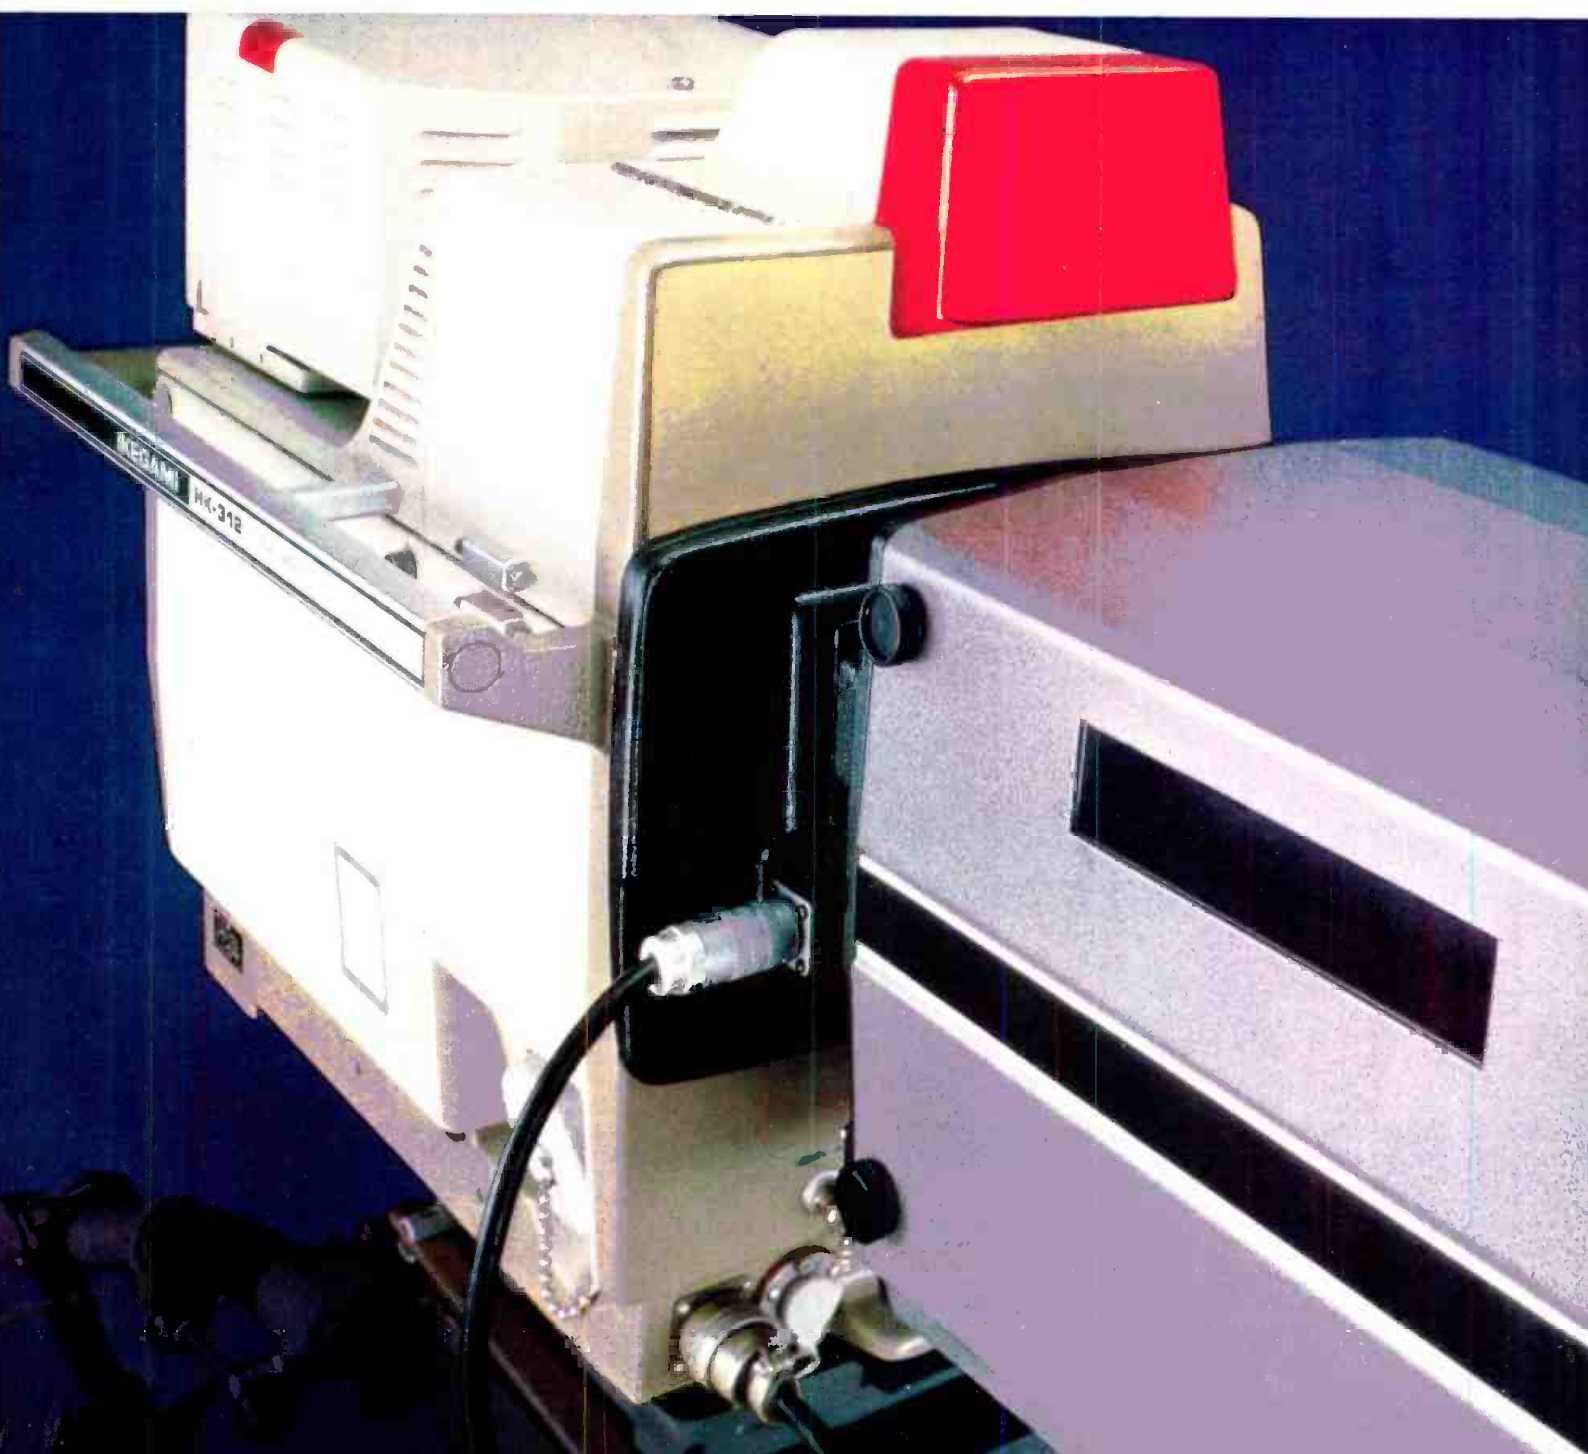

Self starter

For a fast start, no other studio camera comes close to the HK-312. It comes air ready. Just unpack it and it'll give you superior performance the first time. And, it'll keep working. The HK-312 helped establish Ikegami's reputation for legendary reliability.

The HK-312 is also an extremely stable camera that doesn't require time consuming adjustment. Add the optional Emmy Award winning computer setup and you can trim your daily checkout time even more—to less than a minute. Computer setup that has already proven itself at many leading stations.

The HK-312 includes all the essentials for superior picture quality and performance. High

resolution. Superb colorimetry. Plus an excellent signal-to-noise ratio. And with Ikegami Triax, you can extend the normal 600 meter cable length to 1500 meters with no compromise in picture quality.

One simple demonstration will show you why so many networks and leading independents are convinced that the HK-312 is the finest studio camera. To get started, contact Ikegami.



Ikegami HK-312

Ikegami Electronics (USA) Inc., 37 Brook Avenue, Maywood, NJ 07607; (201) 368-9171

Northeast: (201) 368-9171 ☐ West Coast: (213) 534-0050 ☐ Southwest: (713) 445-0100 ☐ Southeast: (912) 924-0061 ☐ Canada: (201) 368-9179

Circle (23) on Reply Card

ing logs, army boots, buckets, mic cables, and even a 100-pound slab of polished marble for footsteps came into play. A half-speeded avalanche, lightly mixed with an ominous rumble and a few groans, magically provided a Cyclops tearing off a mountain peak. Slowing down a thundersheet made a terrific explosion. Speeding up a plucked piano string caused a taut bow string "Iwang." A little twist of the knob worked wonders.

In addition to the vari-speed tricks, we added room sound to indoor scenes by playing the program through studio speakers, while mixing in a microphone placed in the middle of the studio. We flanged reverb returns, harmonized their sends. The warm, tight, "woody" room sound of a small hut came from the stereo output of the Eventide Instant Flanger with the seep oscillator disabled. The Lexicon 224 allowed creation of many different atmospheres, from a palace to the huge Cyclops' cavern. Carefully misadjusted and taped backward, it even helped to raise the dead when Barry Morse, as Odysseus, visited Hades. We noted on the script where every effect began and ended and on which track it appeared. The most complicated effects were premixed in stereo onto a couple of spare tracks while they were fresh in our minds. Others were saved for later.

After three weeks work, the effects were laid in. With music still not available, we returned to the top of the show to premix. Even though our final product would be stereo, we were concerned with the mono mix. A large portion of the listening audience would undoubtedly hear the show only in mono. We therefore monitored entirely in mono, until the final mix sessions. Mixing began with



Edward Asner hosts *The Odyssey of Homer* series.



CINE 60
NEW YORK
... The Original



The Total VTR Battery System

- Power-packed, higher performance NiCad Cells deliver more VTR running time, longer life, never need maintenance, fast charge in one hour.
- Exclusive electronic circuitry and quality construction provides the identical total reliability of Cine 60 Powerbelts... standard of the industry.
- "Total Charge Capability, anywhere..."
- On location, fast charge from any 12 Volt car system — unattended, in one hour, with our 3 lb. Car Fast Charger — no heavy inverter needed.

- From A.C., one hour fast charge with our 3 lb. Universal Model 9400 or BP 2500.
- Fast Charge four batteries — automatically and unattended — with our new, multiple, High Frequency, Regulated Fast Charger, one per hour, four in 4 hours.
- Standard charge 2 batteries overnight, with our two channel, regular Charger.
- Directly replaces original VTR batteries — Sony BP-20, BP-20A, BP-50, BP-60, BP-80, BP-90 and JVC/Panasonic PBP-1.
- See your local authorized Cine 60 Dealer. Ask about the Total VTR Battery System you need.



There's Always Something New From Cine 60

CINE 60

630 Ninth Ave.
 New York, N.Y. 10036
 (212) 584-6782
 TWX: 710-581; TELEX: 645-647

6430 Sunset Blvd.
 Hollywood, Ca. 90028
 (213) 461-3046

Circle (24) on Reply Card

Y-688³²
Total Error Corrector

CLOSE THE GENERATION GAP



4th generation, conventional TBC

4th generation, Y-688³² Total Error Corrector

Y-688³² Total Error Corrector...simply the most powerful tool available for extending multi-generation quality of color-under video tape recorders.

Professional teleproducers and broadcasters can now produce

third and fourth generation video tapes of quality close to first generation playback through conventional systems.

More than just a time-base corrector, and more than an image processor or noise re-

ducer, the Y-688³² is a Total Error Corrector. No single device or system of components, at any price, can match the performance of the Y-688³² TEC for correcting multi-generation video signal errors.





Specifications

Digital Sampling	Luma: 8 bits at 14.3MHz Chroma: 8 bits at 7.2MHz (R-Y at 3.58MHz and B-Y at 3.58MHz)
Window of Correction	32 Horizontal Lines
Signal to Noise Ratio	57dB Encoded Mode (Combs Off) 60dB Dub Mode (Combs Off) Dub In/Dub Out (Y-688) 0.5° Encoded In/Encoded Out 1.5° Dub In/Dub Out (Y-688) 0.5% Encoded In/Encoded Out 1.5%
Differential Phase (Residual Error)	5.0MHz (-3dB)
Differential Gain (Residual Error)	Dub (Y-688) 1.5%
Bandwidth	Direct 1.5%
K Factor (2T)	Heterodyne 3%
White Clip	110 IRE Nominal (Internally Adjustable)
Power	87-130VAC or 200-260VAC, 50 or 60Hz, 235W
Ambient Temperature	10°C to 40°C (50°F to 104°F)
Ambient Humidity	10% to 90%
Weight	18.2kg (40 lbs.)
Dimensions	48.3cm (19") W 8.9cm (3.5") H 60.3cm (23.75") D 54.6cm (21.5") D into rack

Inputs

Dub In
Video In (Encoded)
DOC RF
Genlock/Sync (Loop)
Subcarrier (Loop)

Outputs

Dub Out
Video 1 (Encoded)
Video 2 (Encoded)
VTR Advanced Sync
VTR Subcarrier
Blackburst
Y
R-Y
B-Y
Sync
Subcarrier
Blanking
7.2MHz Color Video

Controls and Indicators

Power	2 position switch (on or off)
Program Out	2 position switch bypasses unit circuitry in program video path, monitor video path is always activated.
Input Mode	2 position switch selects Y-688 (dub) video input signal or encoded video input signal.
Image Processing	2 position switch turns the image processing and en- hancement portion of the Y-688 ³² Total Error Corrector on or off.
Video Gain	± 3dB
Chroma Gain	± 3dB
Setup	± 20 IRE
Hue	± 30°
Video Position	± 1 usec (with respect to sync)
Horizontal Phase	± 4 usec
Chroma Phase	360°
Vertical Image	0-100% Boost of vertical detail
Horizontal Image	0-100% Boost of horizontal detail
Noise Reduction	0-6dB compression in auto position and adjusts the level of coring in the manual mode.
Auto Position	Allows automatic boost compensation when Faroudja Laboratories Record 1™ pilot tone is present in input video signal.
Power On	Green LED
Image Pilot	Amber LED (indicates Record 1™ pilot tone present in input video)
Genlock	Green LED
Video	Green LED (indicates input video present)

Fortel Incorporated
6649 Peachtree Industrial Boulevard
Norcross, Georgia 30092-9990
Telephone (404) 447-4422
Telex 804822

FORTEL

³²Y-688³² Total Error Corrector is a trademark of Fortel Incorporated.
™Record 1 is a trademark of Faroudja Laboratories, Inc.
All specifications are subject to change without notice.



the automation system, recording the data on one of the two empty tracks (1 or 24). The MCI 600 series automation system was ideal for the work. We often found it helpful to subgroup crowd effects, incidental effects and voice tracks. A mere flick of a switch here and there provided instant subgroups. Although much of the program was simple enough to balance on the first pass, some more complicated sections required several updates. We began such sections with voices only, adding effects, then subgrouping and rebalancing.

Punch-ins on the automation data tracks were unavoidable, but the MCI system coped with them easily and inaudibly. Updates and rewrites with the system are done easily and quickly. In short, the automation system handled every requirement and saved a great deal of time and aggravation. It also held consistent levels while we cut remixed segments into our master 2-track tape. Levels conveniently matched every time.

Adding music

At last Eric Salzman arrived with the music he had composed. He had taped and premixed the music in New York with different versions of each piece. We returned to the beginning and began placing the music cues. Some of the music, written and performed to precise lengths, refused to fit. Fortunately the variable speed machines again proved their worth by letting us tailor the music a few seconds longer or shorter to drop in perfectly. Salzman's knowledge of the tonality of each segment, along with variable speed calibrated in musical half-steps, helped to make "impossible" crossfades work nicely. We could produce a particular key, tempo or timbre to

fit the dramatic mood. So, still monitoring in mono, we updated the automated mix to include the music, readjusting voices and effects as needed. The extra pass also gave Rasovsky and Salzman a chance to re-evaluate the music and finalize appropriate changes.

On the final mix-down, we added the opening and closing music along with hosting remarks of Ed Asner. Because automation took care of levels, Rasovsky and I could concentrate on panning and equalization. Rasovsky used headphones. I listened to the monitors. Together we hovered over the board, twiddling controls and punching equalization in and out. He handled voices and related effects movements. I kept an eye on everything else. The script contained our track assignments and all other instructions concerning compression, automated volume and equalization changes, as we had noted them during premix sessions, so we frequently found ourselves with noses buried in the pages, fighting over pan-pots, and yelling at each other to double check assignments. The final playbacks and addition of the documentary discussions produced by interviewer Kerry Frumkin finished the project of 12 1-hour episodes. A subsequent re-editing resulted in a shorter 8-episode version to be used by the many subscribing stations.

From a technical standpoint this project proved at least as challenging as any I have ever done. Most important and most surprising, *it was fun*. What better way to spend three months, two weeks, four days, and six and a quarter hours? Plus or minus a few minutes. Yet, for me it's back to the "real world" of 32-track digital. I am told that Rasovsky is barricaded in his office, his beard growing back nicely. □

Versatile, Affordable Titlers

TM-1024B

Combines titler & message generator in one small package at one low price.



- Choice of 8 color backgrounds in stand-alone mode
 - Switchable for downstream keying applications
 - 16 page resident memory
 - Character insert & delete
 - Manual & auto sequencing with variable dwell
 - 10x14 character matrix
 - Auto line centering
- Titler and message generator combined for \$2795

T-1000A

Advanced character enhancements.



- Black and white characters in 2 heights
 - Drop shadow and border in both black and white
 - "See-thru" characters
- Plus: Roll, Crawl, Off-line editing, and 16 page resident memory
- All these features for \$3995.
- For more information, call or write today.



VIDEO DATA SYSTEMS

Corporate: Hauppauge, New York 516 231 4400
National Sales: Salt Lake City, Utah 801 566 3635

Circle (26) on Reply Card

Circle (25) on Reply Card



Looking from the on-air operating position, these five racks contain reel-to-reel tapes for on-air use, the transmitter control and monitoring equipment, and the tape room for recording and playback of network and Radio Reading Service programming.



Frank Thomas, station manager, in the WCBU production room. Note that turntables, tape decks, and auxiliary equipment are arranged in a convenient circle around the operating position.



Laura Garfinkel, WCBU operations manager, on the air during her afternoon "intermezzo" program.



The WCBU tape room contains four tape decks, satellite demodulators, cassette tape, AM-FM tuner, routing and distribution equipment. Recording and playback functions of this equipment, including audio routing and demod selection, is controlled by an Apple II computer.



Audio processing equipment available in the production room includes compressor/limiters and noise reduction units. Together with equalization available on the M-90 console, nearly all processing needs can be met.

Case study:

WCBU

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

Getting the most out of your studio means putting the most into it, through planning and design. Electronic function, physical layout and operator interaction with the equipment must all be well thought out and carefully tailored to the individual needs of the particular studio in order to create the most efficient possible combination of space and function.

Before looking at the design processes used recently to upgrade the WCBU facility, a basic plan can be laid out to follow in designing any new studio. Every station and every studio has individual requirements in terms of performance, budget, and so on, but there are some general principles that we all need to follow.

Fixed parameters

First, determine your *fixed parameters*, things not subject to change or compromise. Included in this category are available space and its location, budget requirements, and

necessary features of the studio's function. At the earliest stages, you need to establish the most basic design factors that you have little or no ability to change: where the studio is to be located, how much you have to spend, and a general idea of the features that studio will need to have. For example, is the studio a small production-oriented facility without many fancy gadgets, or is it a major on-air control room with space for a number of guests, racks of auxiliary equipment, etc.? Match the available space, the budget and the basic requirements for operating features into a workable beginning for the final configuration of the studio.

Performance and operational goals

After establishing the basic guidelines, determine performance and operational goals. Start on the details of planning and designing the studio. Create a "wish list" of everything you would possibly like to see included in


the studio. Start with the basic functions desired and the minimum number of units and type of equipment required to carry out the studio's basic task. Audio console capacity, number of turntables, cart machines, reel-to-reel tape decks, and other general types of equipment start the process. Expand on the list with desired additional equipment for operational convenience or flexibility. Define the optimum features with respect to human factors. Storage of carts, records and tapes; locations of windows, doors and traffic areas are the biggest items. Also list the details of ideal placement of equipment for convenient access, remote controls, telephone, music or copy files and other items necessary for your ideal studio.

After these first steps, you should have a complete analysis of what you want to do, plus the limiting factors you will have to deal with. With this information, you can begin working

Hitachi-5 Competition-0

That's the score in one-inch VTR technology.

We've gone the first generation of TYPE C machines *five* better...to help you get all the potential of one-inch out of your video installation. Here's what the competition *doesn't* give you.

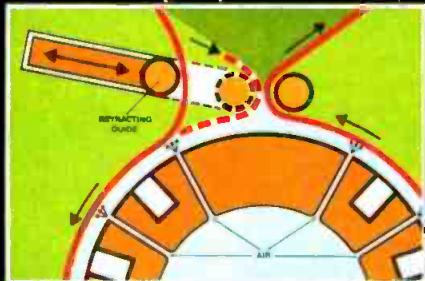

• Tape guide retracts for threading ease • Air drum eliminates head contact in shuttle/standby modes

1. Retracting Tape Guide

Retracts for unequalled ease of threading; repositions with one micron accuracy for up to two million threadings. Provides the reliability of a quad thread system in a one-inch format.

2. "PRO" Tape Path

The protective reverse oxide ("PRO") configuration of the tape path means *only* the video and audio heads touch the oxide surface. All other transport mechanisms guide the tape by its reverse side. Result: noticeably reduced dropouts; longer tape life.

3. Instant Head Replacement

Pre-aligned head design permits easy replacement of video heads in three minutes. No adaptors or jigs; no adjustments required.

4. Audio and Video Confidence


The others only let you *see* what you're taping. We let you *see* and *hear* everything being recorded...simultaneously.

5. Non-contact Tape Shuttle

In shuttle and standby modes, tape rides on a cushion of air. Increases head and tape life immeasurably. Cuts frictional

resistance, yielding shuttle times of only 80 seconds end to end.

We could go on. With impressive features like microprocessor control; broadcastable slow motion; one-touch shuttle and jog; front access circuit boards; audio spot erase; and on and on. But why run up the score, when it's already no contest? See the Hitachi HR-200, it's equally impressive portable HR-100 model, and companion TC-200 Time Base Corrector.

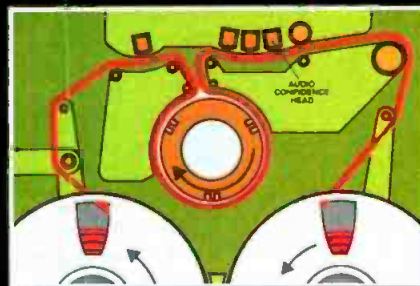

• Full audio and video confidence
• "PRO" tape path reduces dropouts

 **HITACHI**
Hitachi Denshi America, Ltd.

HR-200



HITACHI
Hitachi Denshi America, Ltd.

Tomorrow's Technology Today

175 Crossways Park West, Woodbury, N.Y. 11797 (516) 921-7200

• New York • Chicago • Los Angeles • Atlanta • Cincinnati • Dallas • Denver • Seattle • Washington, D.C.

www.americanradiohistory.com

WCBU

toward the realization of your studio design.

Final design

It is not possible to give complete "how-to" instructions for the process of arriving at the final design of your studio. There are too many variable factors in priorities and compromises that have to be made as the process proceeds. Most engineers will begin with a physical layout, planning the placement of equipment, furniture and accessories for efficient operation and good use of space. Starting there also gives the staff a feeling for the reality of the project, as they begin to visualize what the studio will look like. It probably is the best starting point for most designs. Major changes are not likely to be needed as the design progresses, because equipment sizes do not vary greatly between different models. Some accommodation for a much larger or smaller audio console would be the most likely thing to alter plans of the studio layout.

Selecting equipment for the studio is necessarily a cooperative venture between engineering, programming, production and management personnel. Everyone's process of decision is

different, but there are a number of things to keep in mind. For example, keep the audio quality goals in mind at all times. If your goals are for the ultimate in quality, then be sure *all* equipment is of top quality. Audio is definitely limited by the weak link in the system. If the goal of quality is tempered by budget constraints, then do not be tempted to get equipment that is far better than its companions in the audio chain. Unless there is another reason, such as reliability, to have exceptional equipment among average types, then the money is better spent elsewhere.

Flexibility is the next watchword. Whatever the level of quality in your studio plans, get the most out of your equipment by allowing maximum flexibility. It costs very little to add a patch panel or two, or to get a little more ambitious about a master interconnection panel. The result will be flexibility of interconnections beyond the normal configuration of equipment. The use of accessories and production aids such as compressors, equalizers, noise reduction or special-effect equipment requires a flexible interconnection system.

Finally, keep *operator convenience* in the forefront of your thoughts at all times. Let the people who will actually use the studio every day be the ones to

help you determine the human engineering principles used in placing equipment and their controls. Traffic patterns, storage areas, lighting and small convenience accessories all are part of the operators' environment as they work in the studio.

The key to good studio design is good planning, starting with your goals in mind and making the necessary mid-course corrections with attention to original goals.

WCBU's experience

About three years ago, WCBU began planning a major renovation of studio facilities to coincide with similar upgrading of its transmitting plant. WTVP-TV, a co-located TV station was also planning improvements, including a new tower, to put that station on a par with other local TV stations.

The opportunity for WCBU to participate in that project, as far as sharing tower and transmitter building facilities, took care of improving the power, coverage area and quality of the transmitted signal, but its studios needed reconstruction to do justice to the improved signal strength. Fortunately, both WTVP and WCBU were able to successfully raise local funding and secure grants from NTIA for their facility improvements. The following

CSG 365A . . .



. . . the New SIGMA Genlock Sync Generator

- RS-170A
- Adjustable Blanking
- Color Bars with I & Q
- Cross Hatch
- Black Burst Output



SIGMA ELECTRONICS INC.

1830 STATE STREET
EAST PETERSBURG, PA 17520
(717) 569-2681

Circle (28) on Reply Card

STANDS ALONE, FOR LESS. THE MODEL 100 AUDIO FUNCTION GENERATOR



The Model 100 Audio Function Generator provides a precise frequency from 100.0 Hz to 100 KHz in three decade ranges.

The Model 100 has a fully synthesized frequency selection to four significant digits throughout the frequency range.

Two separate outputs are provided,

one fixed at TTL levels for triggering or sync capability and one continuously variable from 0V to 8Vp-p into a 50-ohm load, or 0V to 15Vp-p into a 600-ohm load, in all modes.

You can't find better performance for your servicing requirements. Call or write us now for more information.


 **hf signalling inc.**

Administrative and Engineering Offices - P.O. Box 17510
Kansas City, MO 64130 - phone: (816) 931-4448


Circle (29) on Reply Card



Title Keyer

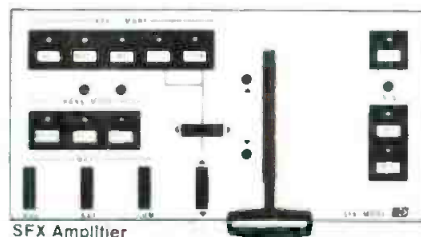


SFX Amplifier




Chroma Keyers... RGB and Encoded




Master Mix & Auto Transitions



Extended Effects Generator

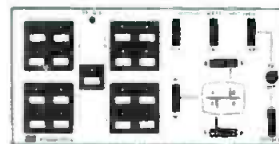


Quadplexer

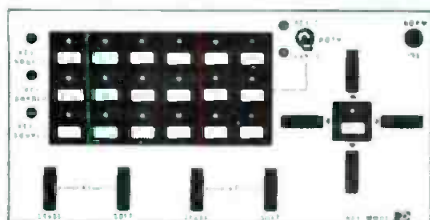


Key Module



CAP... Computer Assisted Production System

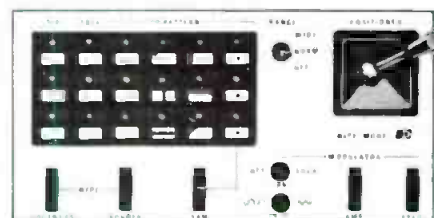

Wipe Module

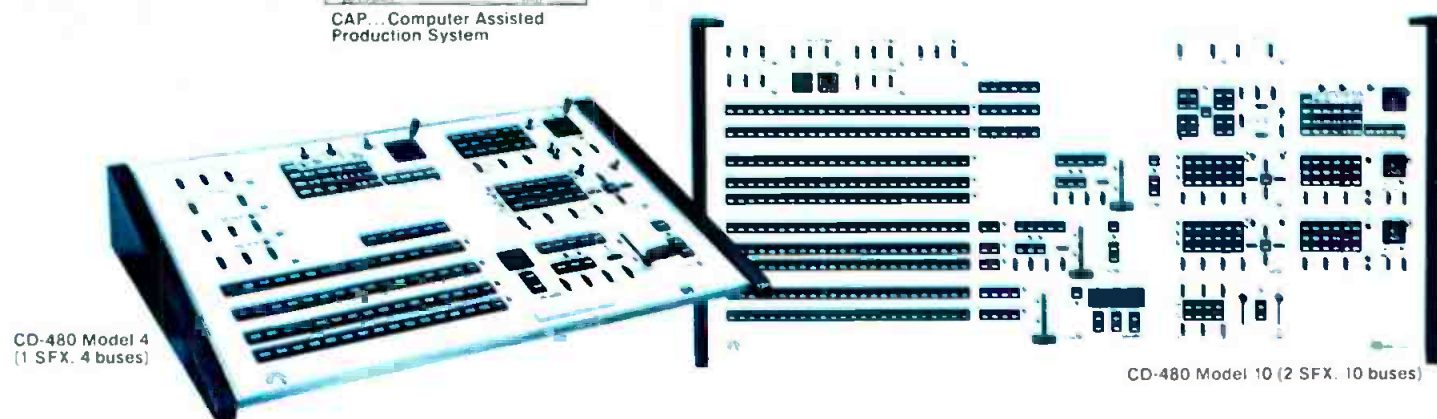

CD-480 Model 4
(1 SFX, 4 buses)

CD-480 Model 10 (2 SFX, 10 buses)

CD-480...the most powerful and modular production switcher available today.

The 480's proven superior performance, reliability and flexibility has evolved from these powerful video production modules.

That's why you can customize a 480 to your specific production requirements... within your budget. And because of the 480's modular design we can deliver the largest model within 90-120 days.

Design your own switcher starting with any one of 9 basic models, and selectively equip it with a wide range of powerful 480 modules and accessories.

No other manufacturer can offer you that flexibility... and every 480 is equipped with the unbeatable video power of the CD-480 SFX Processor System that includes the SFX Amplifier, Key and Wipe Modules.

The 480 family includes switchers with 4 buses to 10 buses... even a model you can upgrade from 1 SFX and 5 buses to a Model 8 or 9 with 2 SFX Amplifiers and 8 or 9 buses. And the 480 continues to evolve which means you can always add the latest 480 production accessories.

That's why over 300 users call the 480 the most powerful and flexible new generation switcher available today.

Start designing your new CD-480 now so you can have the competitive advantage. Call or write for literature or our complete CD-480 Design Kit.

Central Dynamics Corporation, 900 Corporate Drive, Mahwah, NJ 07430. 201-529-1550.
Central Dynamics Ltd., Montreal, 514-697-0810.



CENTRAL DYNAMICS CORPORATION

The U.S. Broadcast Company for ■ **COL** ■ **PHILIPS** ■ **American Data**
Circle (30) on Reply Card

WCBU

is a summary of the process by which the WCBU studios were designed by Keith Turcot, engineer, working with Frank Thomas, station manager, and the staff of WCBU.

Fixed parameters

First, fixed parameters were established by an estimate of the money available and the maximum operational and performance standards that could possibly be achieved. Although there was no excess of available

space, it was judged at this early stage to be sufficient. Because of the grant process, the money portion had to be done again once NTIA awarded WCBU its allocation of funds. In summary, the fixed parameters were money and a no-compromise attention to the quality of the program audio chain.

Performance and operational goals

Second, performance and operational goals were established once the firm guidelines of money and ultimate performance were set. Because performance was assumed to be the best

possible, that left only operational features to be decided upon. The following were major items on the station's list:

- Basic on-air equipment simple enough for operation by inexperienced student or part-time help was needed.
- A future move to a new studio location was in discussion. The network satellite feed recording equipment was to be electrically and physically separate, because it could end up in a different room from its neighboring equipment in the control room.
- Production room facilities had to be flexible enough to handle diverse media: ¼-inch, ½- and ¾-track reel-to-reel; ½-inch, 4-track tape; cartridges; cassette; and disc recordings.
- An interview studio, located between the control room and production room, had to be usable for either on-air or production tasks.
- The "tape room," three racks in the control room, had to be able to record from any of six satellite demodulators. Playback might be into an SCA reading service feed or be used for later broadcast.

Nothing remarkable was in the plans, just a straightforward, but highly flexible operation with specific features for operation and recording capabilities.

Final design

The results of the planning process at WCBU, room by room, are as follows.

First, let's look at the on-air studio. Of the high quality consoles available at the time of design, the Ward-Beck R-1200 had the performance desired in a straightforward layout and was chosen as the heart of the operation. With most programming played from disc, Technics SP-10 turntables, Audio Technica arms, Stanton 681SE cartridges and Stanton preamps, were selected for the turntable system. An ITC 3-D cartridge reproducer provides cart playback, and three MCI JH-110 tape decks are used for playback of taped programming.

Microphones used are the E-V RE-16s, which were used before the redesign. Although other microphones have been considered, background noise from air handling equipment in the building is the limiting factor in microphone quality. In this same area, vibrations are also present. To minimize vibration-induced rumble, the turntables are mounted on isolated bases (a commercial model with rubber isolators), and the pedestal bases have approximately 400 pounds of sandbags in each.

An outside consultant provided additional help in minimizing the

The Wireless Intercom System designed for your specific needs

The Cetec Vega Q System fulfills the demanding applications of motion picture, broadcasting and stage production communications. Sound and camera crew cuing, stunt coordination, sound program monitoring, etc. can be achieved easily without running cables.

Features

- Can interface with wired intercom systems such as RTS, Clear-Com, David Clark, four wire, etc.
- Operates simplex or duplex with up to 6 walking units plus 1 plug-in unit (at the base station, which can include a wired-intercom interface).
- Operates in the VHF high band, 150 to 216 MHz, for minimal interference.
- Usable with commonly available headsets (electret or magnetic).




 **Cetec Vega**

Division of Cetec Corporation
P.O. Box 5348/EI Monte, CA 91731/(213) 442-0782/TWX 910-587-3539
In Canada: A. C. Simmonds & Sons Ltd.

Circle (31) on Reply Card

Perfect Timing Perfect Price

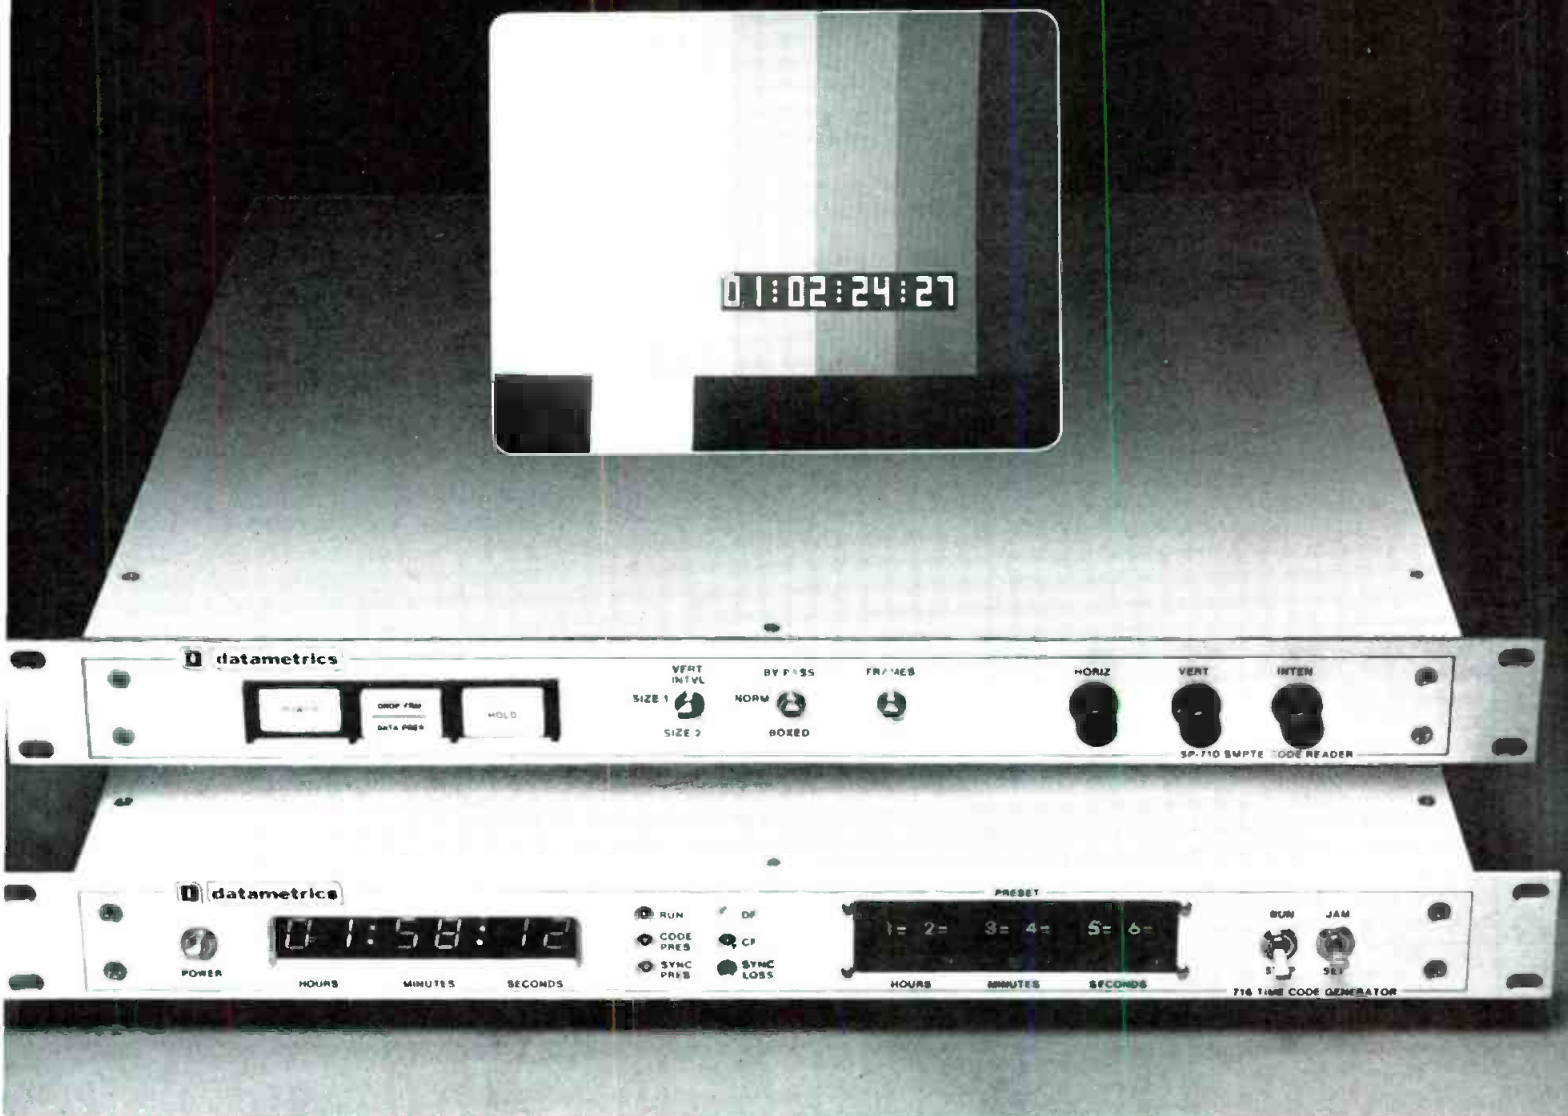

Datametrics, the quality leader in SMPTE Time Code equipment, now offers a low-profile system that meets all your time code needs perfectly ...at a very low-profile price.

The Model 710 SMPTE Time Code Reader is a versatile instrument designed to perform in studio and production environments. Features include wide shuttle speed, frame accurate decoding from 1/20 to 60X normal play speed, a built-in character generator for monitor

display and code burn-in, complete remote control capabilities, plus optional data outputs for computer editing interface.

The Model 716 SMPTE Time Code Generator produces reliable, accurate time code and can be used with the Model 710 Code Reader as a complete time code system. Standard features of the 716 include jam/sync capabilities, frame rates selectable for film or video, and compatibility to the RS-170A color frame standard.

\$ **2280.**

Available from stock at \$2280. each, these SMPTE

Time Code Units, with built-in Datametrics quality, will give you the perfect time code system...at the perfect price.

For full details, call your Datametrics dealer or contact Datametrics directly.

datametrics

DRESSER

Datametrics • Dresser Industries, Inc.
340 Fordham Road, Wilmington, Mass 01887
Tel. (617) 658-5410 TWX: 710-347-7672

Circle (32) on Reply Card

When you put new ScotchCart™ Radio Broadcast Cartridge to the listening test, you'll discover sound quality like you've never heard before in a broadcast cartridge. Bright, full-bodied sound, more like reel-to-reel than a cartridge.

ScotchCart Cartridges are compatible with the player you now use. But that's where its similarity with other cartridges ends.

The ScotchCart Cartridge design incorporates high-quality 3M recording tape inside a precision-built outer cartridge. Pressure pads have been eliminated and replaced with a constant tension arm that


delivers good tape-to-head contact, improved playability and longer life. In fact, ScotchCart Cartridges can last up to three times longer than regular carts.

Other refinements have resulted in more accurate cueing, less phase jitter, less noise and less flutter. So you end up with better sounding commercials and music programming.

But the true test is in the hearing. Return this coupon or call our toll free "Cart Line," **1-800-328-1684** (1-800-792-1072 in Minnesota). We'll send you a free brochure and information on where to order this revolutionary new cartridge.

ScotchCart™

Radio Broadcast Cartridge

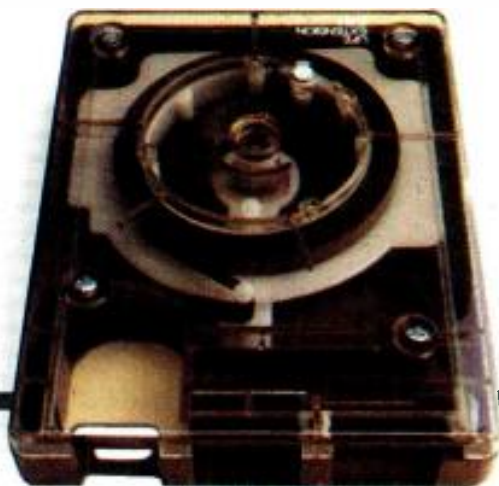

SOUNDS GOOD.

Please send me a brochure on the ScotchCart Broadcast Cartridge plus information on where I can order it.

Name _____

Title _____ Station _____

Address _____


City _____

State _____ Zip _____

ScotchCart is a registered trademark of 3M © 3M Company, 1982

Send to:
Magnetic A/V
Products Division/3M
Attention: Tom Kenny
223-5N
St. Paul, MN 55144

Circle (33) on Reply Card

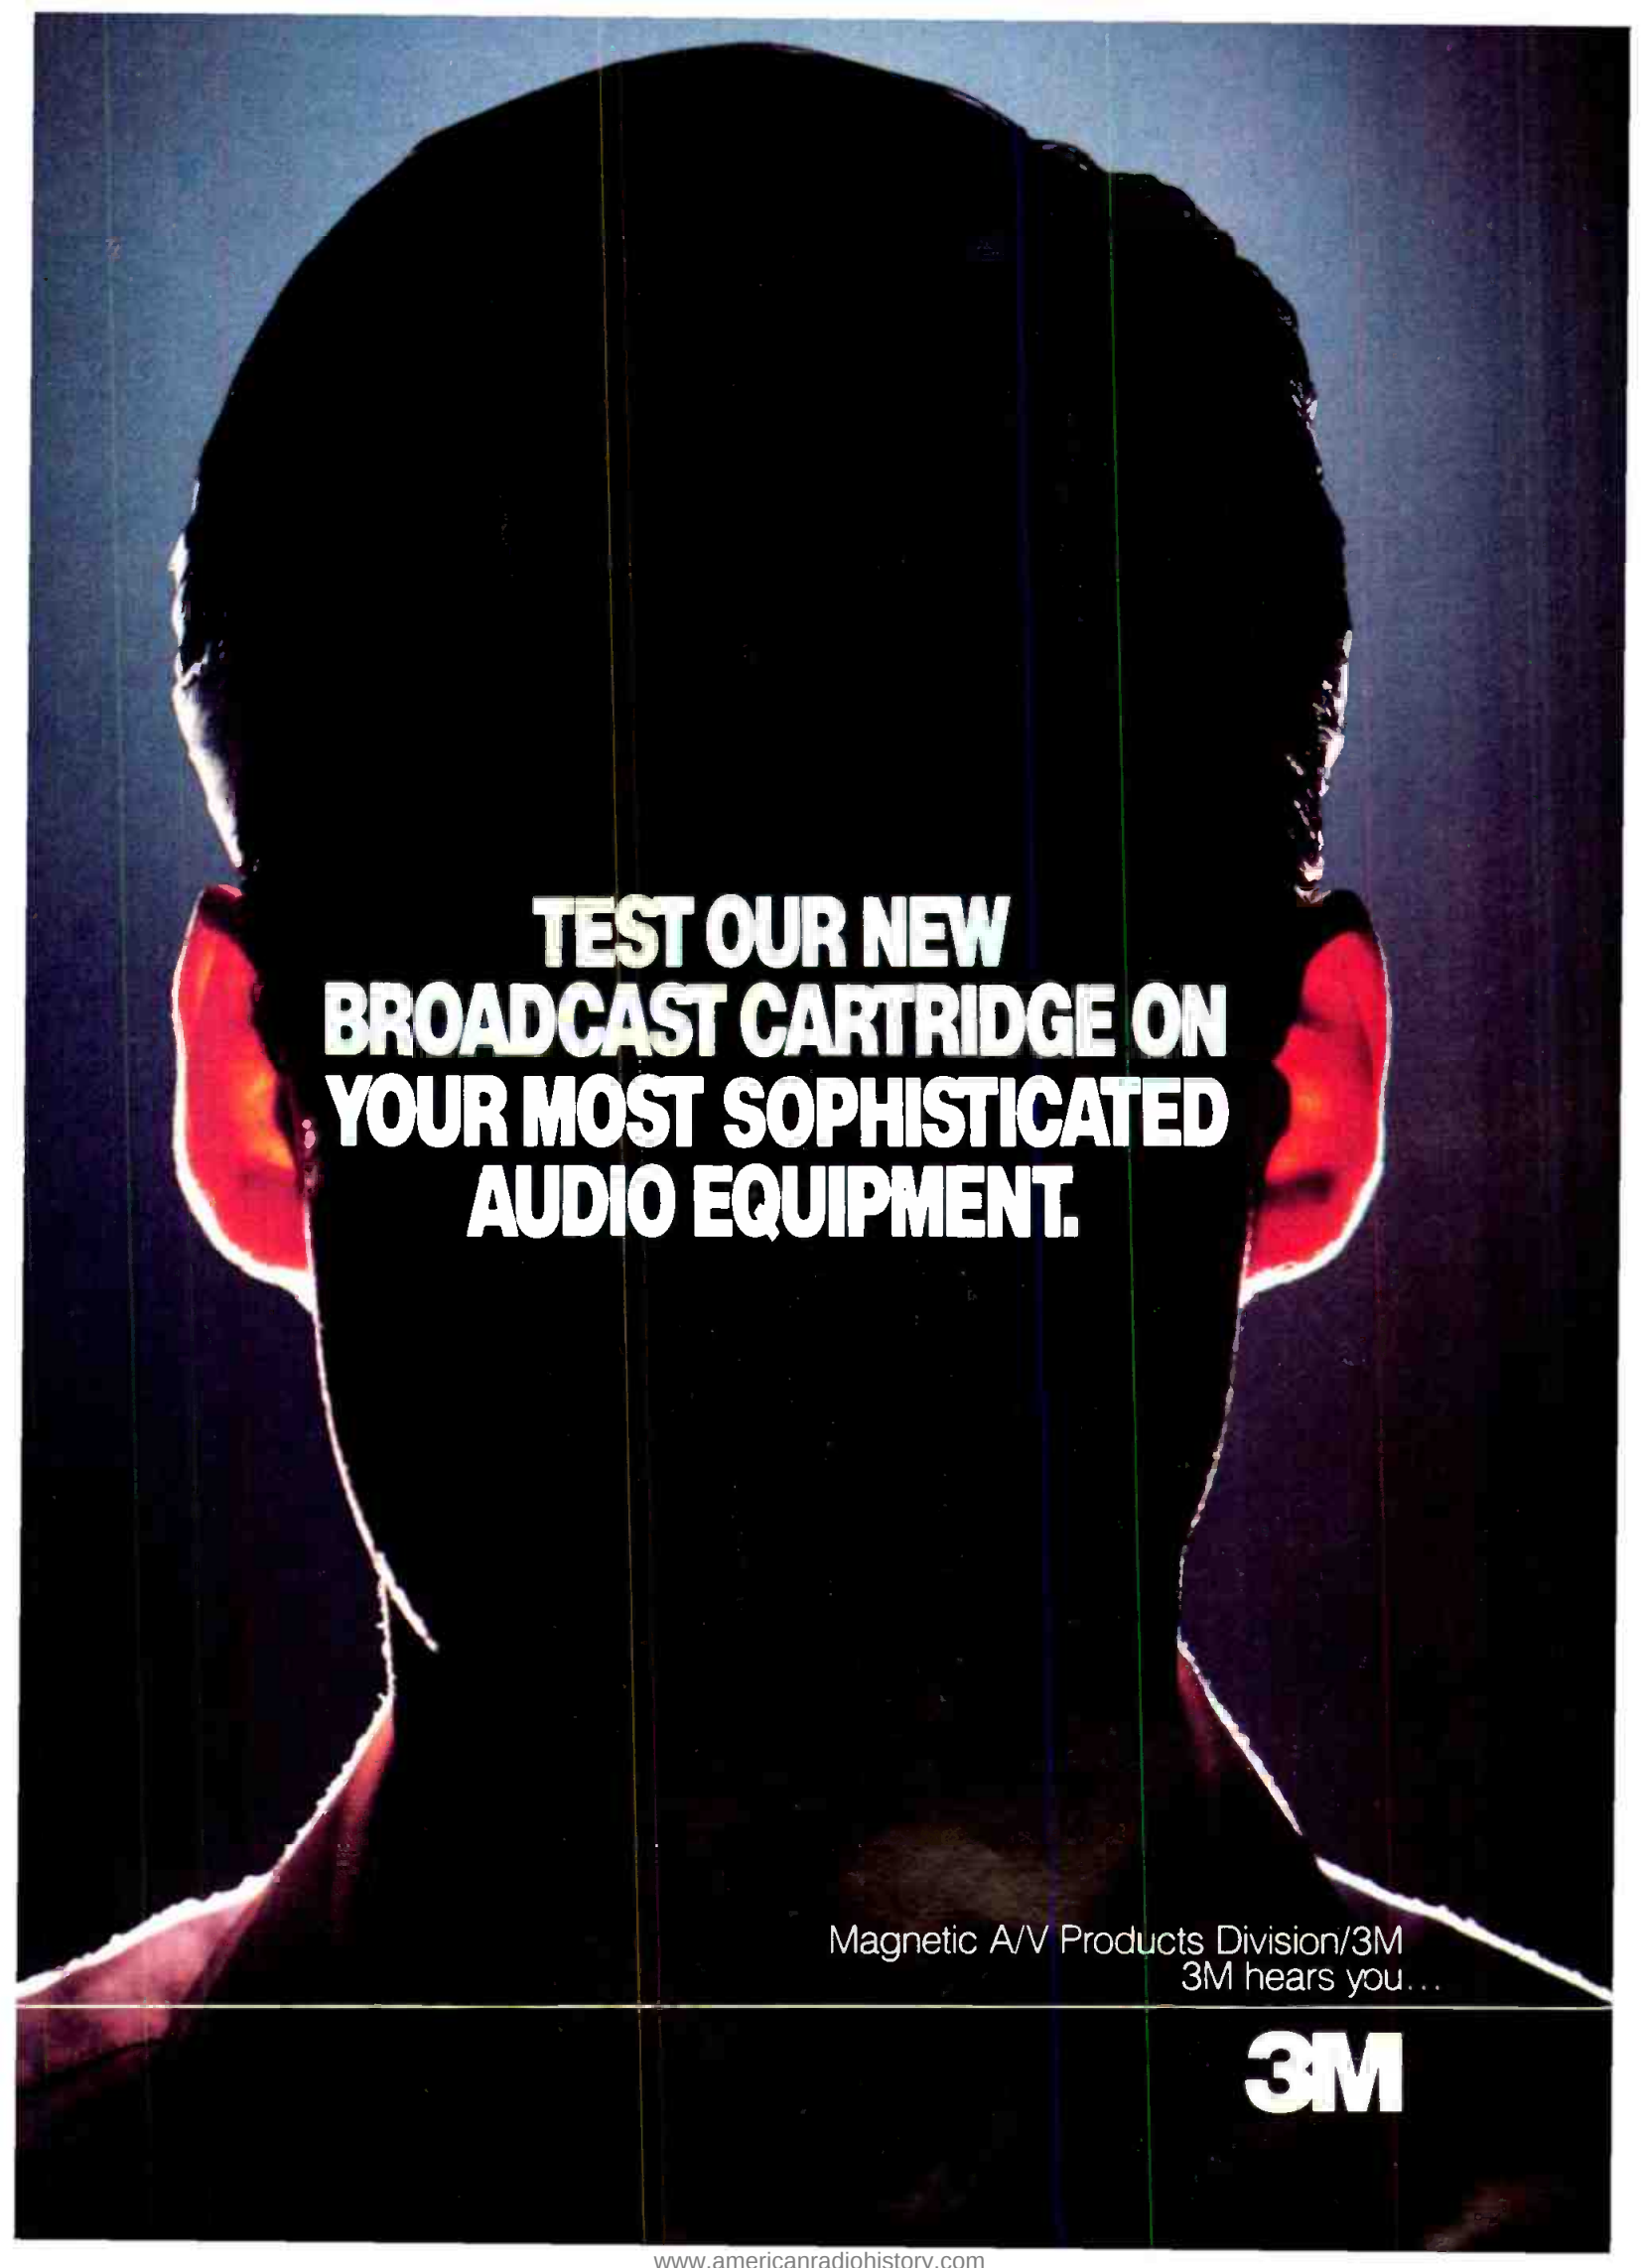

**TEST OUR NEW
BROADCAST CARTRIDGE ON
YOUR MOST SOPHISTICATED
AUDIO EQUIPMENT.**

Magnetic A/V Products Division/3M
3M hears you...

3M



Another view of the production room, showing the equipment arrangement. The wide-angle camera lens makes it look more crowded than it really is. Although it is a compact studio, it is not cramped.



From the back of the main control room, we see the spatial relationship between the equipment racks and the on-air operating position. Turntables, carts and remote controls for the tape decks are close at hand for maximum operating convenience.


WCBU

acoustical problems, although the expense of implementing some of his suggestions was beyond budget capacity. Sound-absorbent wallboard and a high absorbency ceiling tile were used with relative success. Unfortunately, ductwork for heating and air conditioning of the entire classroom building in which the

studio facilities are located passes overhead, and the air handling unit is in the same end of the building. The subtle, but audible, rumble of machines is always around. With the treatment of walls, ceiling and turntables, the only noticeable evidence of this to listeners occurs when the announcer chooses not to talk closely in to the microphone.

Audio processing is provided by an

Orban Optimod 8100A. Processing is probably not the appropriate term to describe the use of the Optimod, but rather overmodulation protection. The threshold of operation on the gain reduction functions of the unit are set rather high to avoid significant reduction in the dynamic range of the broadcast signal. There is an ongoing struggle, however, to determine just where the threshold should be set,

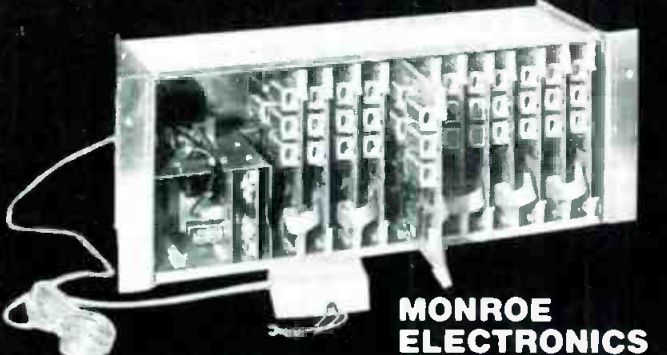

MONROE ELECTRONICS
MULTI-FUNCTION DUAL-TONE
TELEPHONE REMOTE CONTROL
RECEIVER SYSTEMS

Single function or expandable systems respond to DTMF codes to provide latching or momentary relay outputs. Verification and status information is conveyed by audible tones.

- Magnetically latching or momentary relay outputs.
- Responds to DTMF codes from standard dial-up telephone.
- Microwave or radio link audio input.
- Operates from 24 VDC or 117 VAC.
- Expandable up to 60 relay outputs.

\$1,825

OPTIONAL: contact status monitor with alarm, voltage limit status monitor with alarm and auto dialer.

ALSO AVAILABLE: Radio-telephone interconnect systems, FSK Remote Monitor and alarm systems.

Write for brochure on Tone Signal Products

M E MONROE ELECTRONICS, INC.
211 Housel Avenue, Lyndonville, NY 14098
Phone: (716) 765-2254

Circle (34) on Reply Card

Lamps...

50%

off list

Because Sitler's Supplies maintains one of the industry's largest lamp inventories, you can count on low prices and prompt, accurate delivery. More than 400 types of projector, stage and studio lamps in G.E. and Sylvania are in stock.

Lamp	List	You Pay
BTL	\$44.95	\$22.48
EGG	64.40	32.20
FEL	53.35	26.67

Prices subject to change without notice.


Call us today and check our money-saving prices. You'll enjoy FREE transportation on orders of more than \$200.

Sitler's

Supplies, Inc.

702 E. Washington St. P.O. Box 10-A • Washington, Iowa 52353
(319) 653-2123 • In Iowa call 800-272-6459

Circle (35) on Reply Card

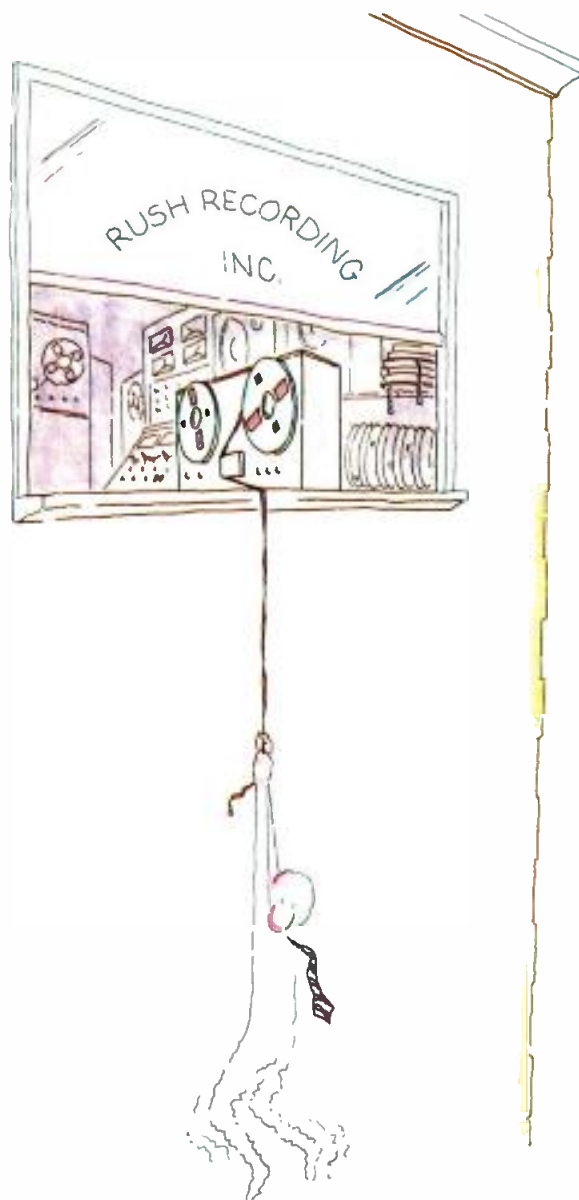

Audio engineers who try Maxell won't let go.

Maxell quality saves a lot of recording situations. Maxell meets your 1/4" open reel and audio cassette needs, no matter how demanding you are. Because we're more demanding. We've developed a name that means unique quality all around the world. For example, Maxell cassettes give you a productivity boosting four-function leader with A/B side indications, directional arrows, non-abrasive head cleaner and five-second cue to set timing and level.

You can see Maxell excellence in the cassette construction and on the 'scope or meter. The physical construction is strong enough to meet all professional requirements. Maxell open reel tape and cassettes give you quality you can hear. And your clients can hear as well.

We'll give you all the technical information you need to form your own opinions. But if you're like just about every audio professional that tries Maxell, you won't let go. Remember, we warned you!



maxell®

PROFESSIONAL/INDUSTRIAL DIVISION

Our success is magnetic.

Maxell Corporation of America, 60 Oxford Dr., Moonachie, N.J. 07074 (201) 440-8020

Circle (36) on Reply Card

www.americanradiohistory.com

because minimal processing requires close attention by the operators, and inexperienced help is often used. The studio-transmitter-link is a Moseley PCL-505C composite STL, which contributes no degradation of the audio quality. In the interest of operational ease, a QEI automatic transmitter system is used to eliminate the need for a transmitter operating log.

For the production room, use of another Ward-Beck console had been planned, but when final design con-

siderations had to compromise with the budget, a Harris M-90 (by Audiotronics) was selected for the main console. Turntable systems identical to the on-air studio were used in production as well. Two MCI JH-110 ½-track tape decks, and an MCI ½-inch, 4-track deck are the primary production tape equipment. A Revox B-77 provides ¼-track capability, and a Teac A-3X cassette unit is also installed. ITC cartridge recorders and reproducers, and an older ITC 850 reel-to-reel machine are also available. For audio processing functions, the console has equalizers on each chan-

nel, dbx 142 3-channel noise reduction units can be patched into use, and on-hand Spectrasonics Complimeters were installed to provide compression/limiting functions, if necessary. In all, very high quality and versatile production needs can be met in the well-equipped and flexible studio.

The "tape room" consists of three racks located in the same room with on-air operation. Six demodulators capture NPR network feeds. Revox A-77 and ITC 770 tape decks handle the recording and playback functions. A Ramko routing switcher is used, primarily for its remote control functions. Also located in this area is a Teac A-550RX cassette deck, providing access to material recorded in this medium. The tape room provides two operational functions: to record network programming for later broadcast; and to provide audio for the Radio Reading Service, which uses the WCBU SCA. Reading service programming comes from NPR as well as other material.


Recently put into operation was an automation system for the tape room, using an Apple II computer to automatically record, play, switch audio, select demodulator channels, and take the burden of operation from those sometimes inexperienced operators.

To sum up the design and implementation of the rebuilding of the WCBU studios, the concepts of quality, flexibility and straightforward operation were stressed. It took a great deal of planning and discussion to decide on the operational features that best fit the use to which the facility is put, and to fit the ability of the people who use it, from inexperienced operators of on-air programming, to talented production people who can create innovative and complex products in the production studio.

The WCBU facility has proven to be successful. As with any new facility, there have been problems, but few of the problems have been related to functional design. In fact, the flexibility of design, through patch panels and duplication of equipment among the three areas, has made the shakedown process of new equipment less of a problem than most stations would experience. It is an easy task to service a tape deck, for example, without disrupting operations, by patching another into its place. Unusual or special arrangements can almost always be put together, because a wide range of equipment types is available.

Planning is the key, and it pays off. The thick file of notes in Turcot's desk is testimony to the planning it took at WCBU. The operation of the station is testimony to the value of that planning. □

Big monitors up here, little meters down there . . .
with the production personnel's visual preoccupation,
is it any wonder audio quality
suffers?

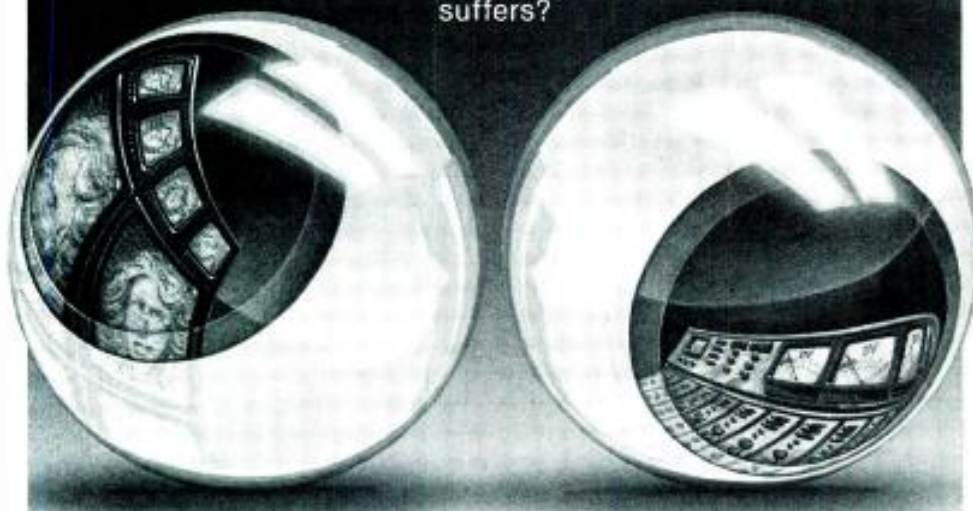

The ^{uni}VUer puts it all together!

Dynamic bar graph display over monitor video!

- 2-channel for stereo monitoring
- Display size and position variable
- Selectable PPM/VU ballistics
- Peak flasher
- Adjustable silence sense
- Transparent to monitor video
- **RACK MOUNT OR PORTABLE**
- Compatible with European standards
- Master control monitoring
- Editing suites
- Production control rooms
- VTR bridges
- Boss' office
- Anywhere in the program monitoring chain
- **ENG/EFP — in line with monitor video return provides camera operator with audio CONFIDENCE**


THE REAL WORLD TECHNOLOGIES GROUP, INC.

Santa Ana, CA (714) 957-1061
Technology Development Services by
Microsystems Institute

Circle (37) on Reply Card



Compare

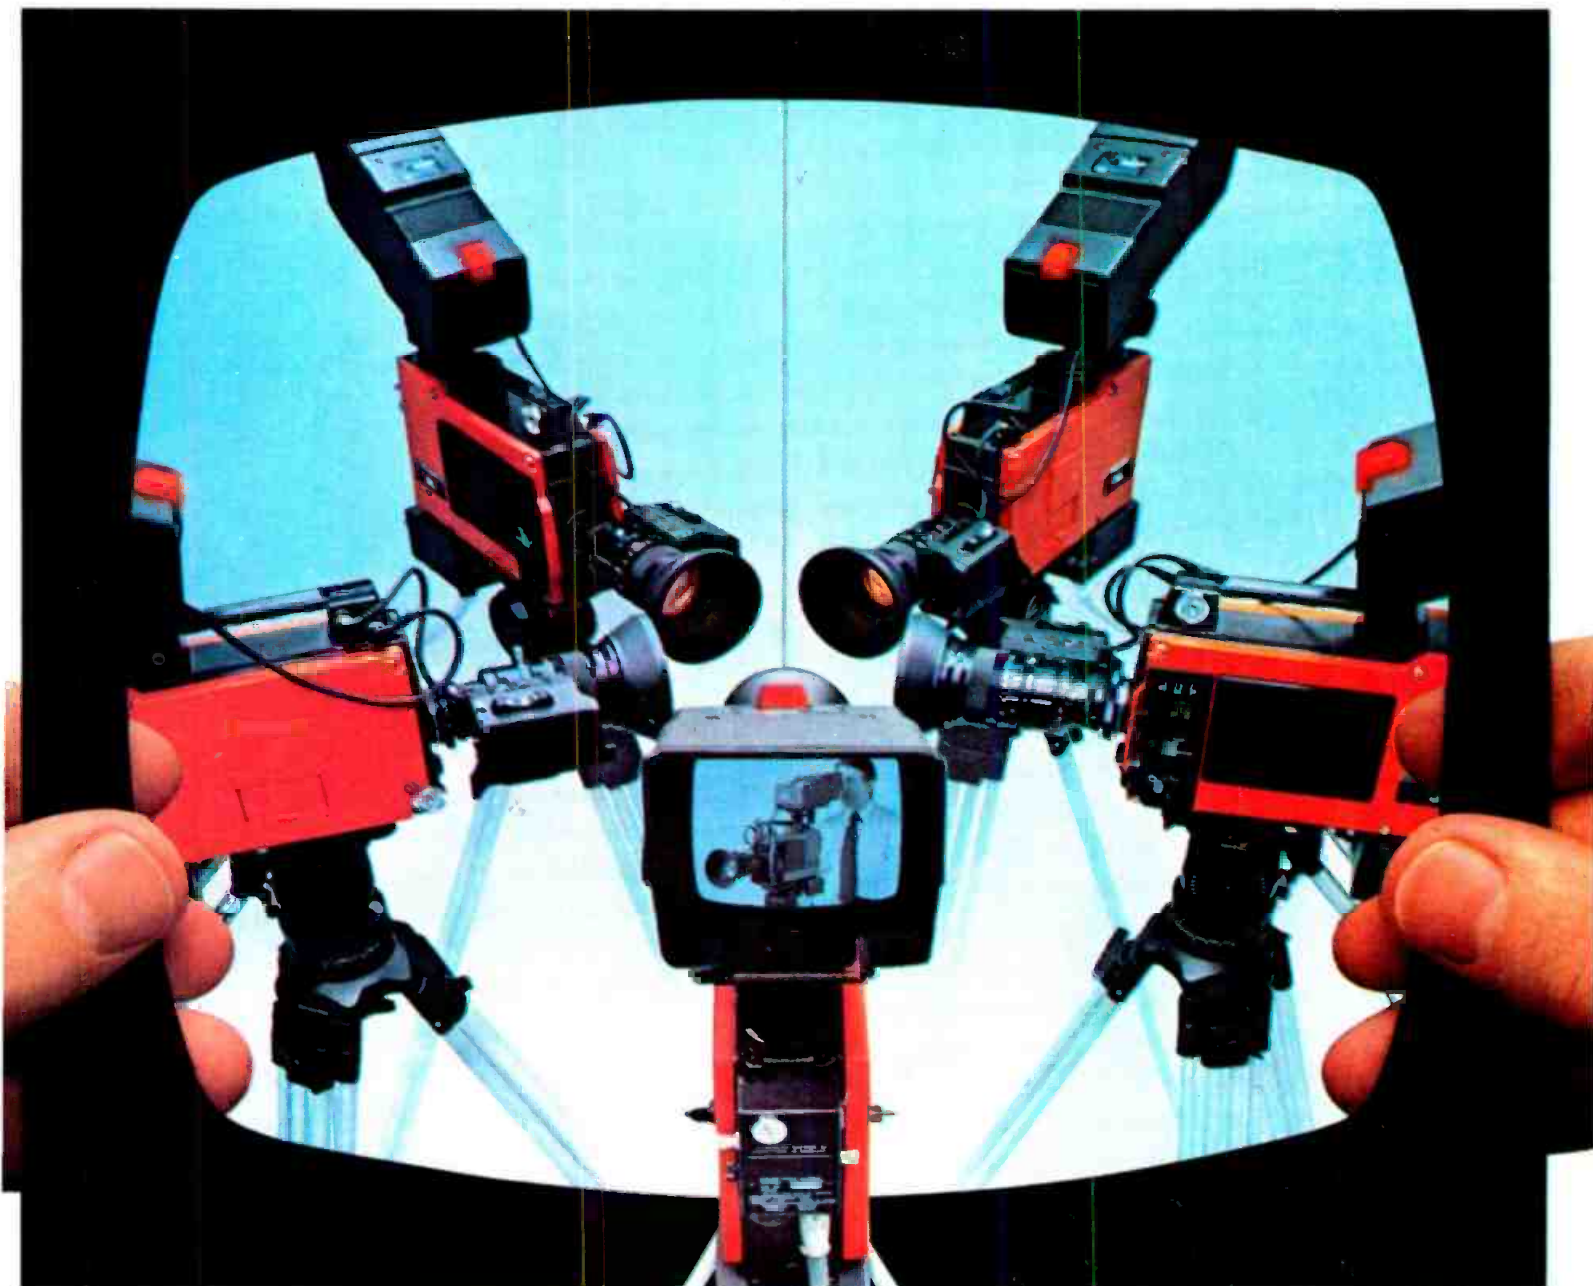

JVC's Professional Video Dealers want you to compare the newest member of the KY family of 3-tube color cameras to any other camera you may be thinking of... and to others you may have eliminated because of their high prices.

COMPARE PERFORMANCE:

The KY-2700 holds registration specs to a tight 0.1, 0.2, and 0.4%, for crisp clean pictures. That's stability!

The KY-2700 has dual-edged vertical and horizontal contour correction for the detail and sharpness you require, 500 lines resolution, and for virtually noise-free video, 54db signal to noise. That's performance!

COMPARE FEATURES:

A fast, 14:1 Servo zoom lens. Automatic Beam Control (ABC), Automatic White Balance with memory, Automatic Black Stabilizer circuit (ABS), a low 18 watt power consumption for extended battery operation, "Instant On"

© 1981 US JVC Corp TV reception simulated

The new KY-2700



performance. And much more. That's a lot.

COMPARE VALUE:

No other professional 3-tube color camera can match these specifications at a price even near the KY-2700.

That's a pleasure.

Compare it at your JVC Professional Video Dealer NOW!

For more information,

call toll-free 800-821-7700, Ext. 7005.

(in Missouri, 800-892-7655, Ext. 7005.)

Or write US JVC Corp., Dept. BE 4/82, 41 Slater Drive, Elmwood Park, NJ 07407.

Available in Canada from JVC Canada, Inc., Ontario.

Your choice.
Now.

JVC

US JVC CORP.

Circle (38) on Reply Card

www.americanradiohistory.com

Radio sound quality

Notes on headroom

By Gary A. Breed, chief engineer, WCBU-FM/WTVP-TV, Peoria, IL

One of the factors affecting the quality of broadcast audio is headroom, the capability of handling audio levels that exceed normal program levels. It is a performance parameter that you have to look for, as its audible degradation may be subtle. It is essential to have good headroom performance to maintain top audio quality under the dynamic conditions encountered in all types of program material.

Need for headroom

The nature of audio program material, whether voice or music, is one of a high peak-to-average ratio, unlike sine wave test signals commonly used for audio performance measurements. Making headroom even more important is the nature of the VU meter, which has ballistics to follow average, not peak levels. It becomes essential that your audio system maintain quality performance at levels far in excess of 0VU, because that 0 meter reading does not tell you that there are peaks occurring at much higher levels. Without adequate headroom, your station may have excellent annual proof results, but still sound less than excellent, due to distortion of peaks, crosstalk or any other problems that can occur because of high program levels.

The recording industry is equally concerned with headroom, and has responded with the widespread use of peak-reading audio level meters to avoid unnecessary processing of audio before mastering. Some broadcasters make use of peak-reading meters, but they still need to keep track of average levels. Loudness, as perceived by the listener is a function of the average audio level.) I use AGC and limiting amplifiers, often very sophisticated, to maintain a high average level for maximum loudness, while holding down the peaks as much as possible to keep within the constraints of 100% modulation.

On the whole, most broadcasters will probably continue to use the conventional VU meter as their level indicating device, in order to monitor the average level. They will also use

the audio processing equipment to further increase that average, while limiting the peaks. With this metering and processing configuration, all audio equipment should have performance of an acceptable standard at levels up to 10 to 15dB above the normal operating levels (for example, 0VU). Otherwise, peaks will be clipped, distorted or otherwise degraded.

Measuring headroom performance

The simplest way to check headroom performance is to set up the test arrangement with sine wave test signals at normal levels, corresponding to 0VU, then increase the level until distortion increases to an unsatisfactory amount. Usually, at some point the distortion will increase rapidly, due to clipping as some part of the audio chain becomes overdriven. For worry-free performance, all signal paths should be capable of operating to at least 10dB above normal with almost no change in distortion, preferably 15dB. Start with the transmitter and work backward to the audio source equipment. That way, you know that the audio path is good at all points beyond your test device. A minimum standard would be no more than 1.5% distortion at 10dB above normal, and no more than 3% at 15dB above normal. Better performance can be achieved, of course, but the audio quality will be basically unaffected if the previously mentioned figures are met.

Evaluating equipment types

Each individual component in the audio chain needs to have adequate headroom performance, or the weakest link will cause the system's demise.

Microphones

With gain adjusted to normal, establish the VU reading of the loudest expected volume and determine the performance up to 15dB above that level. If no distortion increase occurs, great! If the microphone preamp does not have adequate headroom, a pad should be inserted between the

microphone and the preamp to allow 15dB of headroom and the loss made up elsewhere in the system where headroom is abundant.

Turntable systems

Adjust gain to normal levels using a test record. If the test record has an overdeviated track, use it to find the maximum level likely to be encountered. Also use an assortment of discs (probably 45s) to find the highest levels that the preamp input will find. Hook up the test equipment and measure performance at this highest level, plus headroom allowance. If performance is not adequate, first check to see where the gain control is in the circuit. Many preamps have gain control located between stages of the amplifier, and a good first stage loses its performance advantage when a later stage is overdriven. Again, reduce the levels to that which gives the right performance, and make up the gain elsewhere.

Audio consoles


Whether you are evaluating various models for selection of new equipment or checking out your existing unit, be sure it meets headroom criteria from *all* inputs to *all* quality outputs, including monitor outputs. Once it has been determined that the console is performing the way you want, be certain to maintain the same input and output levels that were used as references during the tests.

Audio processing


Be sure that the headroom performance of these units is right, also. Check them under non-processing conditions as well as in normal operating modes. These units must handle peaks as program material and as information for the processing circuitry. Make sure they respond to peak material without quality degradation and that they will operate as processors with peaks in excess of those normally encountered. Most units have both input and output level controls, so keep them balanced, maintaining a constant level between units and throughout the audio chain.



Dual channel mix

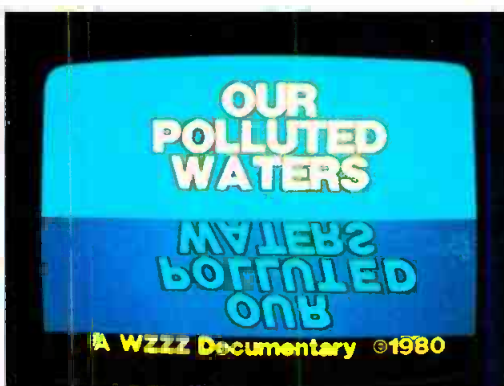

Character Flip/Rotation

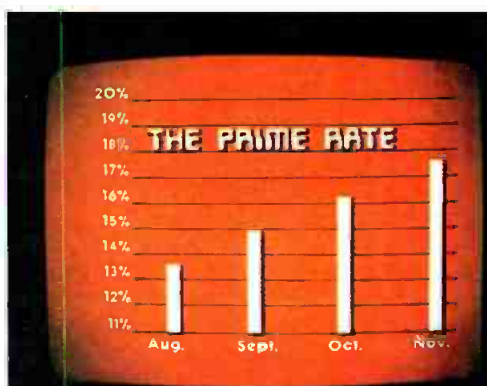


Charting capability

NBA Standings	W	L
Philadelphia	15	3
New York	12	4
Boston	10	5
New Jersey	8	11
Washington	7	11


Static headline, changing copy



Keyboard logo compose

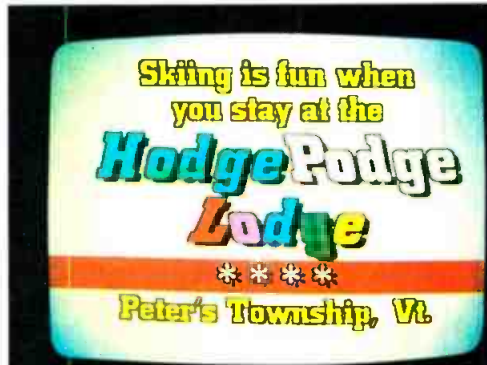

Left and right italics

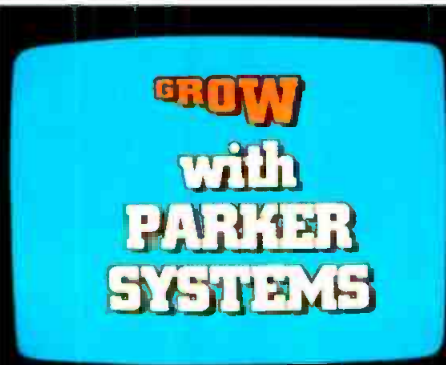


25% and 50% character reduction

Ward	D	R	I	Pcts.
✓Ward	D	99,876	39%	
Roberts	R	84,756	34%	
Jameson	I	67,543	27%	

WEZY-TV Channel 6

Computer Election Interface

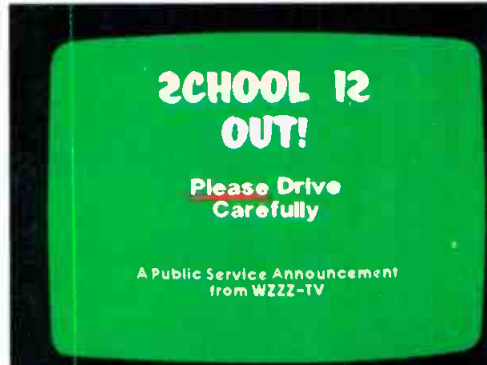

Character reversal

Many of our capabilities aren't even options on other graphic generators.

Which is the do-all, top-of-the-line graphics generator?

It may not be the one you think it is. Unless you specify the D-8800 Graphics Generator System from 3M.

It's the graphics system that gives you almost every creative capability you could want.

Such as the features you see above, photographed from a monitor using graphics generated from the D-8800 keyboard with no external hardware. Including dual channel mix. Ten roll and crawl speeds. Eight mask positions. Both horizontal and vertical autocentering. Character reduction and



italics that give you hundreds of fonts to create and store.

And much more.

Plus the D-8800 talks to you in plain English, at the keyboard. Not in codes that so often take weeks, even months to learn to decipher.

Call 3M today at 612-733-8132 and ask for a demonstration. You'll quickly discover the D-8800 is your only real option. Or write on your letterhead to: Professional Audio Video Equipment/ 3M, Bldg. 223-5E/3M Center, St. Paul, MN 55144. In Canada contact 3M Canada, Inc., P.O. Box 5757, London, Ontario, N6A-4T1.

3M hears you...

Circle (39) on Reply Card

3M

Sound quality

Amplifiers

Line amplifiers, distribution amplifiers, telephone line equalizers and amplifiers all need to have good headroom performance. More than one station has an excellent proof-of-performance, but does not sound nearly as good on the air because the telephone lines from studio to transmitter site were never checked for headroom and were overdriven by program peaks. I have not yet found a telephone company unwilling to remedy a headroom problem, but it may take a little effort to locate the right person who understands your requirement for performance.

Another example of headroom performance is a distribution amplifier that is on the market with published specifications that look fine and is rated at 0dBm output level. What is overlooked is that 0dBm is also the threshold of clipping, and to get good headroom you would have to run the DA at -10 or -15dBm output. If you buy equipment with inadequate headroom performance, send it back and get something else. Another general note is to watch for losses, such as mismatches, pads or heavily

loaded outputs. You can use up the headroom performance of the associated equipment as you turn up the level to overcome these losses.

Tape equipment

Audiotape recording and playback equipment requires attention to maintain all phases of its performance, including headroom. Alignment, bias, record and playback levels and the type of tape all influence headroom performance of tape equipment. Most stations choose one type of tape as their standard, and one brand of cartridge, in order to maintain consistency.

To evaluate headroom, first do a complete alignment of the tape unit using your tape, a test tape and the manufacturer's recommended procedure. Once set up, check headroom performance from input to output. Unless your test tape has test signals at higher than normal levels, it will be difficult to determine whether headroom problems are in the record or playback processes. The most likely place for headroom problems is in the record mode. Some popular tape equipment uses record heads that magnetically saturate at about 4dB above standard level. In order to achieve desired headroom, it may be

necessary to reduce the record level below standard. The added noise is probably less objectionable than the distortion of program peaks. In an all-cart operation, or at stations that record their music for automation, the improvement can be dramatic.

Crosstalk

Involving the station wiring, switching and distribution equipment, crosstalk is closely related to headroom because both deal with excessive levels. When checking for crosstalk, do not forget to check at 10 to 15dB above normal, and you will be sure that an allowance has been made for program peaks. In looking for a crosstalk solution, headroom type measurements can be used to establish optimum levels for in-house audio distribution.

Ongoing evaluation

An ongoing evaluation of headroom is necessary, just as are all other performance standards, if you are trying to maintain quality. Routine adjustments in levels, changes in wiring, and other small changes can add up to a loss of adequate headroom at some point in the audio chain. Keeping on top of the situation is the best way to prevent degradation in the future. □

BARCO
CHROMA DECODERS
FEATURING A UNIQUE
COMPLEX COMB FILTER

- Normal Bandpass and Notch Filter
- Switchable: One Line Comb Filter Or Complex Comb Filter
- 2 composite Inputs + RGB + Sync.
- Also PAL and SECAM.

Sole Distributor for BARCO VIDEO SYSTEMS
Rohde & Schwarz
Sales Co. (U.S.A.) Inc.
14 Gloria Lane, Fairfield, N.J. 07006
(201) 575-0750

Circle (40) on Reply Card

STL Offers The Most Complete Selection Of Test Tapes Available Anywhere

STL can serve all your needs with precision test tapes for frequency alignment, level set, azimuth set, flutter & speed tests, sweep frequency tests and pink noise analysis. Also available is the Standard Tape Manual & the Magnetic Tape Reproducer Calibrator.

Phone for fast delivery or free catalog




STANDARD TAPE LABORATORY, INC.

26120 EDEN LANDING ROAD #5 HAYWARD CALIFORNIA 94545 • (415) 786-3546

Circle (41) on Reply Card

Cable engineering



DIRECT BROADCAST
HIGH DEFINITION
TAPES-DISCS
BROADCAST
LOW POWER
TELETEXT

Cable television is the fastest growing communication technology ever known. Bolstered by advances and developments from many areas of communications and saddled with the needs and demands of paying subscribers, CATV has its own set of problems. In this demographic issue, **Broadcast Engineering** looks at technology and listens to the industry to see what is, and will be, happening in CATV.



Cashing in with cable

By Carl Bentz, technical editor

Welcome to the first indepth look at cable television by **Broadcast Engineering** taken in several years. Although broadcasters have mixed opinions of the effects CATV has had on them, there is generally a mutual respect between the two industries. If it were not for efforts by CATV operators, the massive satellite interconnects currently in use by broadcasting groups might not have developed as quickly. Broadcasters' needs for newsgathering, however, speeded the creation of production equipment that could also be used by CATV production efforts. Some CATV services may draw viewership from broadcast channels, but regular stations continue to give better general coverage to metropolitan areas than CATV can.

UHF TV appears to have been helped by CATV. Because of previously limited bandwidths of CATV equipment, the UHF frequencies were con-

verted to VHF. CATV allowed greatly improved reception for numerous UHF independents and PBS UHF affiliates, because past UHF tuner technologies left much to be desired. Commercial VHF stations, particularly ABC, CBS and NBC affiliates, are not as pleased with CATV carriage. Cable allows a viewer to see the wrong commercials. Recently messages of programming support from "local advertising" have indicated this displeasure.

System operators and programming organizations have an optimistic outlook on the future of CATV. Until satellites became vogue for many services, the local stations were the signal sources. Local stations will always be a necessary programming source, they think. But CATV people see their biggest challenge to be system expansion and upgrading to handle an ever-growing selection of program materials. □

The National Cable Television Association 31st Annual Convention, to be held May 3-5 at the Las Vegas Convention Center, promises to be informative. Beginning with the reception on Sunday evening, May 2, attendees will be kept busy. Hundreds of exhibits featuring cable programming and applicable hardware have already been booked for the 3-day convention. For those interested in more technical matters, 13 sessions have been scheduled.

More than 40 technical papers will be delivered in the technical sessions. The following general subject categories have been set.

Monday, May 3

- New Developments in Addressable Hardware
- Data Transmission Systems

Tuesday, May 4

- Why Isn't Fiber-Optics Being Used in Cable TV?
- Satellite Technology and Microwave System Design
- Multibeam Satellite Dishes
- Data Transmission Technologies
- Interfacing CATV with New Consumer Electronics Products

Wednesday, May 5

- Local Programming Facilities Design
- Control of Noise and Distortion in Distribution Systems
- Future Technologies
- System Reliability/Status Monitoring
- Videotext
- Satellite Spacing

For more information, contact the NCTA, 1724 Massachusetts Ave., NW, Washington, DC 20036; 1-202-775-3550. □

Table of contents

CE2 Cashing in with cable

By Carl Bentz, technical editor

CE4 Future trends in CATV technology

By John Ovnick, chief engineer, RCA Cablevision Systems; Bob Hamell, manager, CATV headend products; Bert Arnold, manager, distribution systems; Karl Angel, manager terminal equipment; and Bob Schoenbeck, staff technical adviser, RCA Cablevision Systems.

CE6 Block conversion for satellite receiving stations

By Kathryn F. Harrer, engineer, Video Communications Division, Scientific-Atlanta, Atlanta, GA

CE12 Stereo audio by satellite

By Carl Bentz, technical editor

CE16 Local feature programming pays off

By Carl Bentz, technical editor

CE18 A chief engineer's view

An interview with Nick Worth, chief engineer, Telecable Corporation

CE18 "CATV is doing fine"

An interview with Ted Turner

CE24 Live on cable Channel 9

By Carl Bentz, technical editor

CE25 Adapting CATV for games

By Carl Bentz, technical editor

CE27 Controlling expanded services

By Carl Bentz, technical editor

CE30 Geostationary antenna platforms

By Elmer Smalling III, president, Jenel Consultants Corporation, Dallas, TX

Pinzone 8200 Satellite Receiver

Performance PLUS Versatility



PERFORMANCE?

7.0 dB TRUE DYNAMIC C/N THRESHOLD!
 11 dB NOISE FIGURE (12 dB MAX!)
 DUAL CONVERSION — BEST IMAGE REJECTION
 HIGH PERFORMANCE SWITCHABLE AFC
 STAND ALONE OR W/SEPARABLE DOWNCONVERTER
 MEETS EIA RS-250B STANDARD FOR END-TO-END TELEVISION
 RELAYS
 NOISE-FREE RECEPTION AT 3 to 5 dB LOWER C/N THAN
 CONVENTIONAL L-D RECEIVERS
 ONE SWITCH CONTROL ADAPTS CIRCUITRY FOR DIRECT
 INTERFACE TO ENCRYPTION DECODERS!
 FULL 30 MHz I.F. BANDWIDTH AND 8.4 MHz VIDEO BAND-
 WIDTH PRIOR TO FINAL SUBCARRIER FILTERING
 STUDIO QUALITY PERFORMANCE AND RELIABILITY

VERSATILITY? JUST TAKE ONE LOOK!

- 24 CHANNEL FREQUENCY AGILE
- DETENT AND MANUAL TUNING
- AUTOMATIC LNA SELECTION
- BUILT-IN 4 GHz COAXIAL SWITCH!
- FULL FUNCTION METERING — SIGNAL STRENGTH AND CENTER TUNING
- LNA POWER THROUGH THE COAX OR BNC CONNECTOR
- INVERT VIDEO SWITCH
- FULL REMOTE CONTROL — CHANNEL AND LNA SELECTION
- TWO EASILY CHANGED PLUG-IN SUBCARRIER DEMODS WITH AUTO-PRIORITY SELECT CIRCUITRY

OUTPUTS: Video (2) 1 V PP 75Ω
 Composite 1 V PP 75Ω
 Audio (2) + 4 dBm 600Ω
 Headphone 0-1.5 V HI-Z
 POWER: 115 VAC/230 VAC opt; 20 watts
 SIZE: STD 19" RACK MOUNT, 5 1/2" H x 14" D

\$2845

COMPLETE!
21-DAY DELIVERY

COMPLETE TVRO SYSTEMS AVAILABLE.
 Delivery in 3 to 5 weeks. Featuring:

3.7 and 5.0 meter PRODELIN dishes.
 6.0 and 7.0 meter dishes.
 DEXCEL Low Noise Amplifiers and
 CABLEWAVE feed lines and coax.

CALL (304) 296-4493 and ask for Basil!

PINZONE COMMUNICATIONS PRODUCTS, INC.
 10142 FAIRMOUNT RD. • NEWBURY, OHIO 44065 • (304) 296-4493

Circle (42) on Reply Card

A Fenner Affiliate

Future trends in CATV technology

By John Ovnick, chief engineer, RCA Cablevision Systems; Bob Hamell, manager, CATV headend products; Bert Arnold, manager, distribution systems; Karl Angel, manager, terminal equipment; and Bob Schoenbeck, staff technical adviser, RCA Cablevision Systems.

Cable TV systems will be increasing their bandwidth capability in the future and making more efficient use of the operating bandwidth now available. Automatic monitoring and control of CATV equipment performance will be used to improve system reliability and reduce maintenance costs. Subscriber terminals will provide additional services and will be controllable from the headend.

Competitive franchising activity for new CATV systems has resulted in operating companies committing to provide additional channels over and above the typical 36-channel 300MHz system. Cable-system technology is responding to this requirement with wider bandwidth components (amplifiers, passives, cable) and headend equipment to generate new channels to use the additional system bandwidth. The RCA model 452 trunk/bridger amplifier, made available in 1981, has a bandwidth of 400MHz.

The cost increase of a 400MHz system relative to a 300MHz system is in the order of 20%. However, the increase in the number of available channels is almost 50%. This indicates that the increased bandwidth is a cost effective way to increase channel capacity. Many older cable systems will take advantage of the increased bandwidth technology when existing franchises expire and system rebuilding is required.

Today many cable systems generate one or more alphanumeric signal channels. The data-rate relative to the bandwidth used is very low for this method of data transmission, which provides inefficient use of the cable spectrum. Future technology will allow alphanumeric data signals to be transmitted during the vertical interval of normal TV channels rather than consuming additional channels. This type of data transmission will probably use a standard teletext signal

format that requires a decoder at the cable subscriber's terminal or a decoder as part of the home TV receiver.

RCA Cablevision has conducted extensive testing of its headend and distribution equipment to verify its performance capability relative to this new teletext signal. An area of performance that is very important to the wideband teletext signal is phase response. Poor phase response in any portion of the system can cause excessive transients and result in data errors. RCA cable products were tested individually and as a system for transient response, and the results confirmed that RCA cable equipment is ready for teletext signals when they become available.

The cable operator will also be able to devote a complete TV channel assignment to data transmission if desired. All of the horizontal lines normally used for picture transmission could be used for data rather than one or two lines in the vertical interval, as is normal for conventional teletext. This would provide efficient use of the channel spectrum.


A portion of the CATV spectrum

that is relatively untapped is the return signal path. This spectrum will gain usage as technology provides cost-compatible 2-way cable services.

Digital technology will gain more usage in headend and distribution equipment to perform monitor and control functions. Use of these functions will aid in maintenance and improve reliability of cable systems.

New amplifiers will have the ability to monitor performance parameters and to remotely switch feeder-cable return paths. New headend products will have microcomputers to monitor and analyze equipment functions. System control from a central location will become possible.

Terminals will be available in the near future with more features. First, they will have increased channel coverage to be compatible with the increased cable system bandwidth. Synthesized tuning will be the norm. Each terminal will be addressable and controlled from the headend. This will allow cable operators remote control of such things as tier level of service and subscriber disconnect. Premium channel decoding will be an integral part of this terminal. Figure 1 shows a

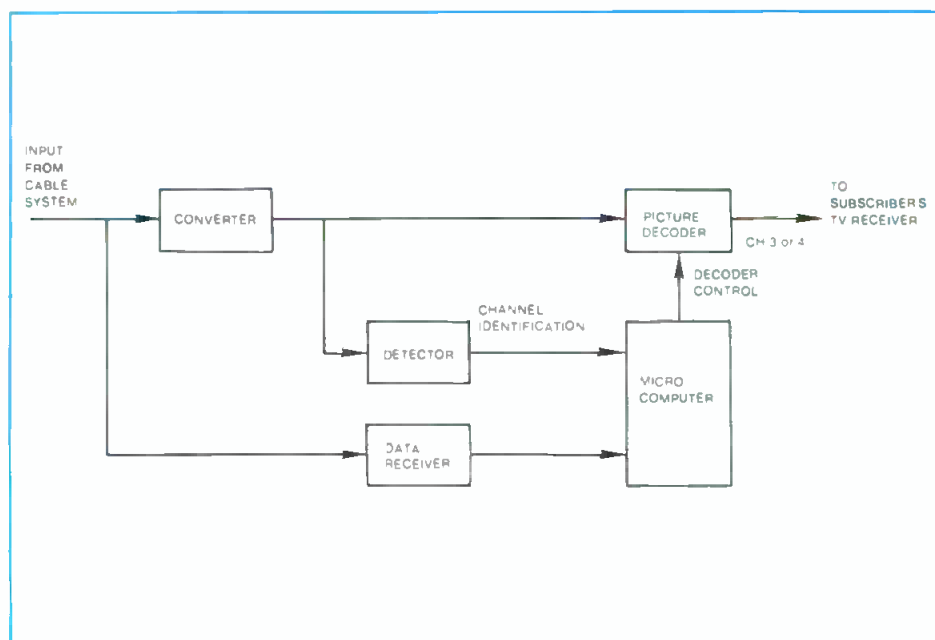

This article is taken from the *RCA Engineer*, November/December 1980, and is reprinted with permission of RCA.




Elephant Industries Inc.

Presents

"The Driveway Special"

Specially designed for the Cable TV Industry.
The answer for small bores up to 4 inches.

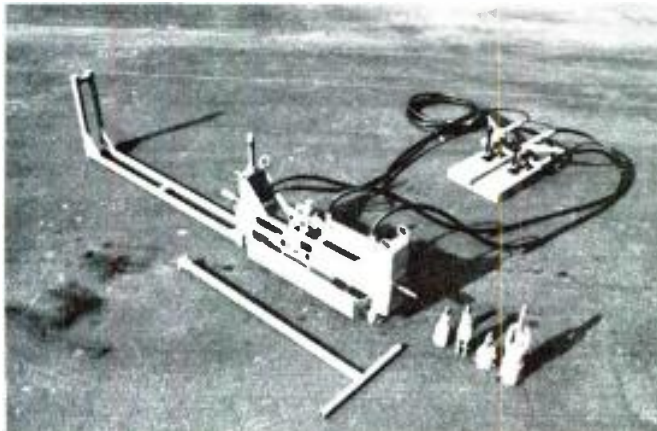

EIM-DS3


Pulls 1 in. (25 mm) to 2 in. (50 mm) pipe
at 8 feet per minute.

Compact and powerful!
Weighs only 173 lbs. (79 kilos)
Two men can handle easily!
Trench needed: 6 in. (150 mm) x 6 ft.
6 in. (1.950m) with 3 ft. (.914m)
rods or 4 ft. (1.219 m) with 1 ft.
(.3048m) rods.

The EIM-DS3 develops 17,671 lbs. of
pressure at 2,500 PSI.

Hydraulic gates lock Elephant into
trench.

Also available with a 4 in. cylinder,
which develops 31,416 lbs. of
pressure at 2,500 PSI. Great for
more difficult soil conditions.

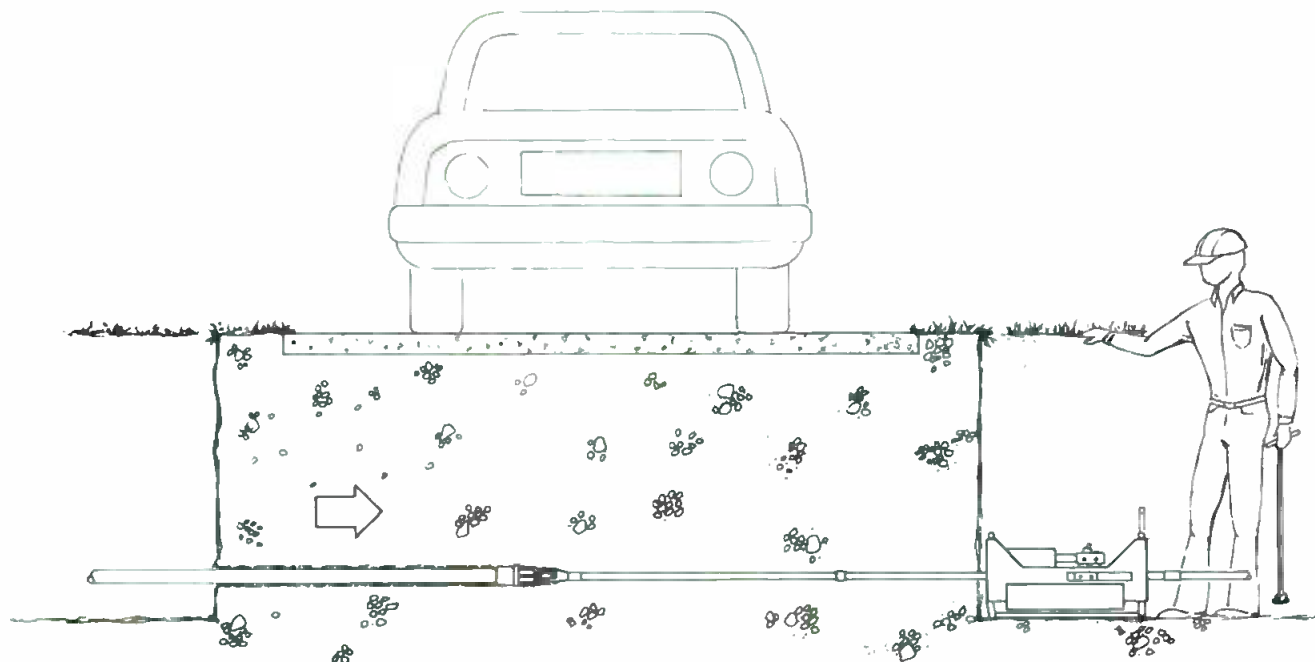

— ACTUAL OPERATION —

1. Push rod under
road.

2. Replace push cap
with expander and
pipe or cable.

3. Pull pipe or cable
back to machine.

Elephant Industries Inc.

P.O. Box 3626, 3949 N. U.S. 41
North Ft. Myers, FL U.S.A. 33903
See us at the Vegas Show. Booth 2128!

PH: 813-995-7383
813-995-0024

Circle (43) on Reply Card

April 1982 *Cable Engineering* CE5

CATV trends

converter with these near-term features.

Farther downstream another generation of subscriber terminals will be available with additional features and additional capabilities than those previously described. These units will demodulate the cable signal to baseband audio and video, which allows a more secure scrambling system to be used on premium programming. It also allows subscriber remote audio level control. Teletext data signals can also be processed from the baseband video. A return data transmission feature will allow 2-way interactive services. This terminal will be upgradable to provide the different features with plug-in modules. Figure 2 shows this type of terminal.

Use of fiber-optics will be an alternative to conventional coaxial cable for construction of CATV systems. Some experimental point-to-point transportation trunking fiber-optics systems have been built, but the cost at present is higher than using conventional coaxial cable.

Present fiber-optics systems suffer from the fact that the light signal is converted to a VHF signal for amplification and then converted back to light for transportation down

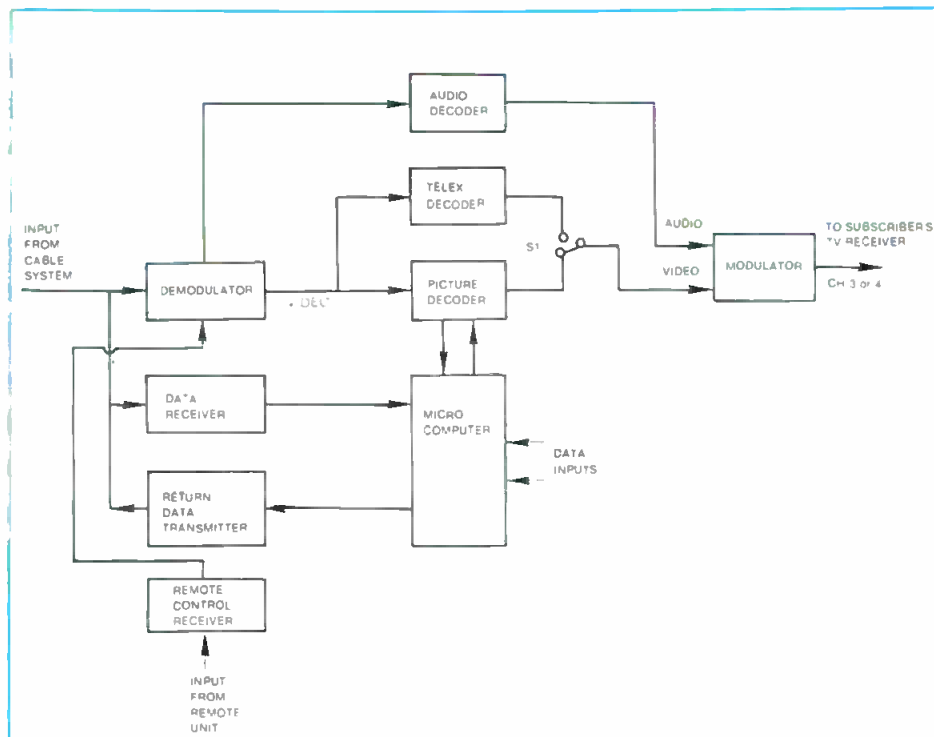


Figure 2. Future subscriber terminal.

the fiber. This means the signal is degraded by the transducers in addition to the VHF amplifier. This additional degradation reduces the spacing between repeaters to the point where it is not cost competitive with coaxial-cable systems.

The light signal must again be con-

verted to VHF if a conventional TV receiver is connected to the system. Fiber-optics will continue to be used for experimental point-to-point signal transportation, but will not gain widespread usage in CATV distribution systems until it becomes more cost effective. □

Block conversion for satellite receiving stations

By Kathryn F. Harrer, Video Communications Division, Scientific-Atlanta, Atlanta, GA

Block downconversion is a new approach to satellite receiving systems that has many advantages over conventional systems. Comparing price,

serviceability and compactness, block conversion excels in all three categories. The new equipment requires special design considerations for broadband operation.

Comparing the systems

Figure 1 shows a block diagram of a conventional system receiving a

single polarization. There is no frequency conversion at the antenna. The 3.7 to 4.2GHz signal from the antenna is boosted by the low noise amplifier (LNA) and sent via coaxial cable to the receiver. If more than one receiver is fed from the LNA, there will be an N-way power divider in the line before the receiver (N = number of

This material was presented at the Scientific-Atlanta Satellite Communications Symposium '81. It has been edited and reprinted with the permission of Scientific-Atlanta.

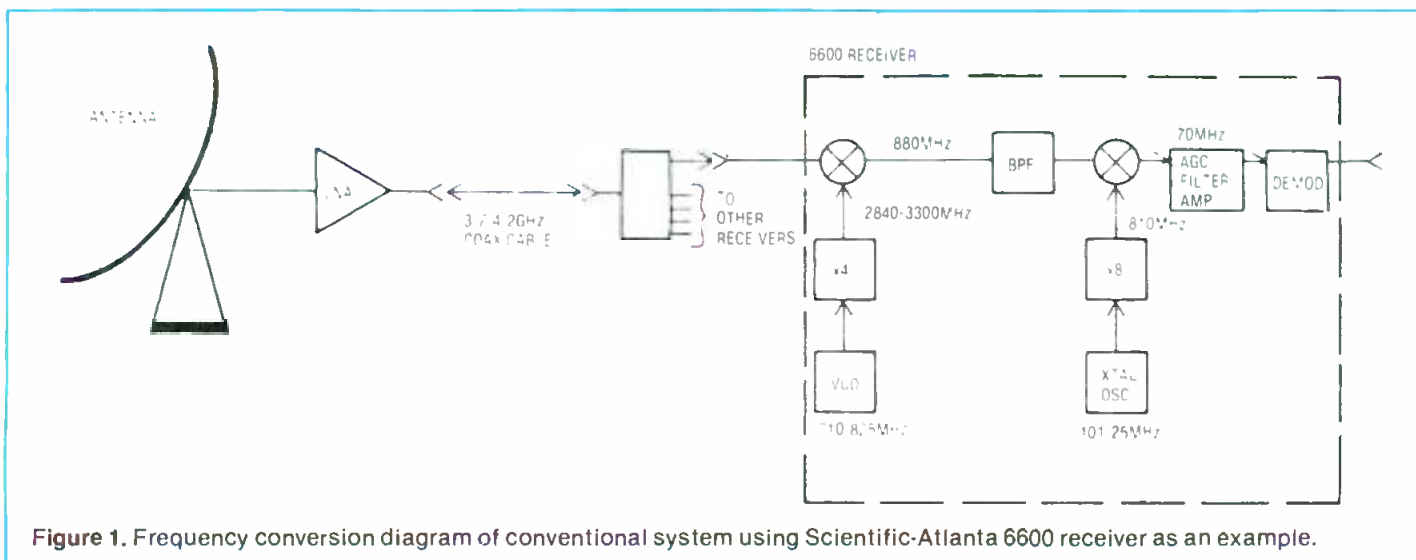


Figure 1. Frequency conversion diagram of conventional system using Scientific-Atlanta 6600 receiver as an example.

Review

THE SHOW BUSINESS DAILY

FIVE METER ANTENNA A HIT

Prodelin 5M Earth Station Antenna Sets New Standards

The smash hit of the new season isn't a stage musical, it's a new antenna by Prodelin—a star producer for more than 35 years.

Prodelin's new 5-meter antenna comes in several models offering a choice of feeds and polarizations—*high efficiency Cassegrain* with a diagonal horn and specially shaped subreflector in plane or dual polarized receive-only or transmit-receive configurations or *prime focus* with the LNA at the focal point in plane or dual polarized receive-only.

Some of the outstanding features are:

- Antenna can be easily erected without the use of cranes or special hoisting equipment.
- Segmented reflector significantly reduces size of shipping containers. Provides savings on handling and transportation costs.
- Segments have integral indexing tabs for positive self-alignment.
- Textured front surface diffuses sunlight and reduces solar heating at focal point.
- Individual reflector segments are interchangeable and field replaceable.

Prodelin's 5-meter antennas utilize a twelve-segment compression-molded fiberglass reflector. A patent has been applied for on this feature.

The parabolic reflector is easily assembled from twelve identical self-aligning segments. These segments are made from compression-molded fiberglass (FRP) material providing exceptionally high strength to weight ratio. For complete data and specifications, circle the number or contact Prodelin directly at P.O. Box 131, Hightstown, NJ (609) 448-2800.

made of fiberglass, which provides strength and corrosion



FIVE METER ANTENNA SHOWN ON LOCATION WITH HIGH EFFICIENCY CASSEGRAIN FEED.

Circle (44) on Reply Card

eliminating the need for cranes, helicopters, or heavy hoisting gear.

recommendations contained in CCIR 465 and Report 391-1.

The parabolic reflectors of these

one inch damage to c
In addition

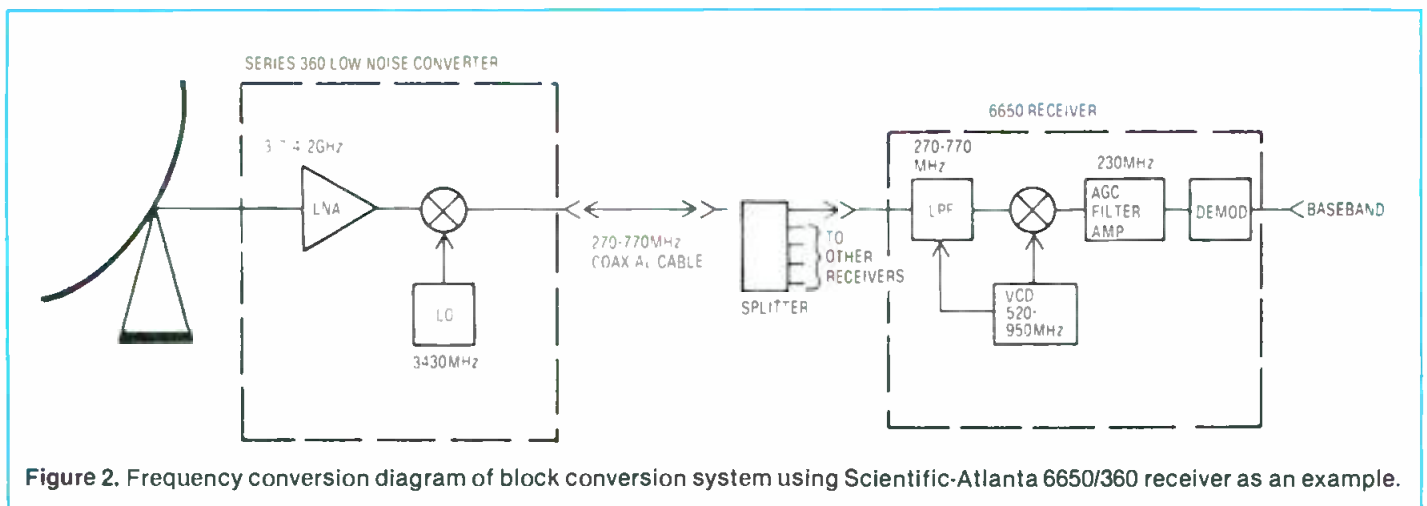


Figure 2. Frequency conversion diagram of block conversion system using Scientific-Atlanta 6650/360 receiver as an example.

Block conversion

receivers). Channel selection is accomplished in the first conversion where the desired channel is converted to a first IF frequency of 880MHz. This signal is filtered, then mixed with a fixed frequency local oscillator (LO) for a second IF of 70MHz. Gain control, filtering and demodulation are performed at 70MHz.

Figure 2 shows the block conversion technique used by a receiver in conjunction with a low noise converter (LNC). The LNC is situated at the antenna and contains an LNA and a downconverter. Downconversion is accomplished by mixing the 3.7 to 4.2GHz signal from the antenna with a fixed LO at 3430MHz, to result in a first IF of 270 to 770MHz. This signal is amplified and sent to the receiver via coaxial cable. The desired channel is selected in the second conversion for a second IF of 230MHz. Gain control, filtering and demodulation are performed at 230MHz.

Block conversion advantage

The principal advantage of block conversion is lower cost. Converting from microwave frequencies to UHF at the antenna significantly reduces the use of expensive microwave components and cable. The conventional system requires a separate microwave downconverter for each channel received (see Figures 3 and 4). In block conversion the process is performed only once for up to 12 channels of a given polarization. Less expensive cable and "F" connectors may be used from the LNC to the receiver.

A cost comparison of the two systems, each receiving two polarizations with six channels per polarization, shows that the block conversion system cost is approximately two-thirds the cost of conventional equipment. For a single channel application

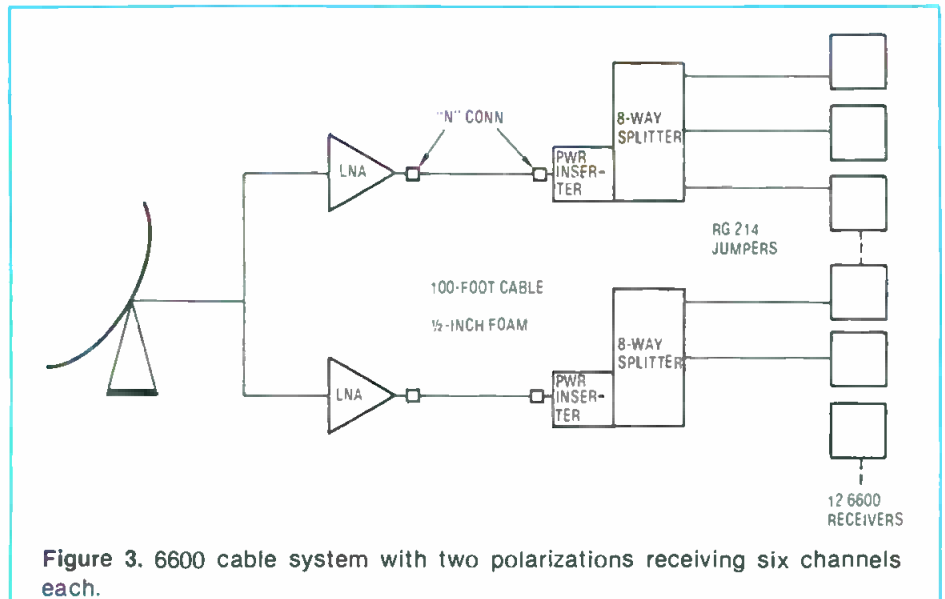


Figure 3. 6600 cable system with two polarizations receiving six channels each.




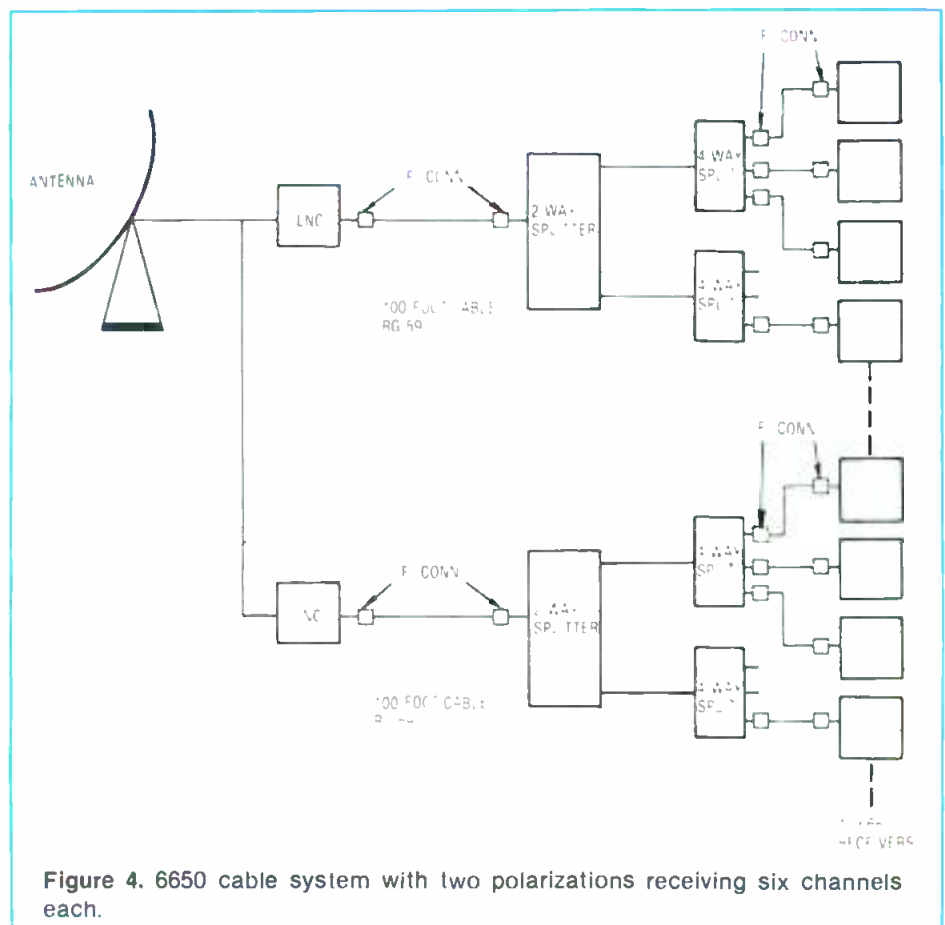


Figure 4. 6650 cable system with two polarizations receiving six channels each.

If you're into Cable Communications, We're Into Your World.

QUALITY
IN
TEST
EQUIPMENT

CONSIDER SPECTRUM MANAGEMENT.

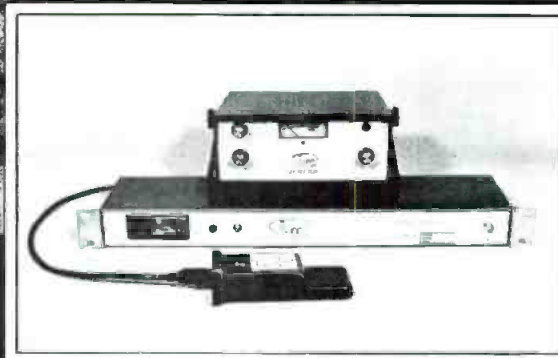

Let us introduce 3 products to assist you. Our SNIFFER is the pioneer in RF signal leakage detection; the mini STEP ATTENUATOR provides expanded testing flexibility with $\frac{1}{2}$ dB steps and attenuation range of 0-102.5dB; our SPECTRUM ANALYZER can be "the eyes of the engineer". Its frequency range is 500KHz to 440MHz.

Simplicity of design plus functional accuracy is the concept behind all three. To give you **Quality In Test Equipment**.



An Employee Owned Corporation
COMSONICS, INC.

P. O. Box 1106 Harrisonburg, Virginia 22801

1-800-336-9681

IN VA. 703-434-5965 COLLECT

Circle (45) on Reply Card

Block conversion

with one receiver and one polarization, the savings are less dramatic but still substantial, at approximately 20%. A single channel receiving both polarizations, for example, one receiver and two LNAs or LNCs, saves only about 5%. Obviously, the more channels received, the greater the cost advantage of block conversion.

A second advantage of the new system is simplified field service and maintenance of the receiver, which contains no microwave components. Troubleshooting measurements are at frequencies below 1GHz rather than up to 4GHz, as found in conventional receivers. Test equipment is less expensive and more readily available to system operators.

A third advantage of block conversion is the size reduction of the receiver. Moving first conversion components from the receiver to the antenna permits a more compact receiver configuration, up to a 50% space savings.

Design considerations

Two crucial decisions in block downconversion system design are the choices of the first and second IF frequencies. Next in importance is the choice of the second LO frequency band. The selections involve tradeoffs between cost and feasibility.

For the first IF frequency band, cable and connector types used between the LNC and the receiver are prime considerations. Other determining factors are bandwidth requirements of individual components and availability of components such as power dividers, integrated circuits and hybrids that may be used to advantage in the circuitry.

To use inexpensive coaxial cable, the first IF should be as low as possible. Attenuation in coaxial cable increases approximately as the square root of frequency. RG59 has 7.5dB loss per 100 feet at 770MHz and 21.5dB loss per 100 feet at 4GHz. It would be practically unusable for any length at microwave frequencies. While RG59 costs about 10 cents per foot, low loss 1/2-inch foam dielectric cable with 8dB loss per 100 feet at 4GHz costs approximately \$1.75 per foot. With 3dB loss per 100 feet, 7/8-inch air dielectric costs \$3.00 per foot.

A first IF of 270 to 770MHz allows use of low cost cable from the LNC to the receiver. Two additional advantages result from this frequency range,

First, UHF type power dividers and "F" connectors are readily available and usable. Second, low cost, small size frequency synthesizer ICs, prescalers and hybrid amplifiers for commercial UHF applications are ideal.

When using a low first IF, the lower the IF center frequency, the greater the percentage bandwidth. Bandpass filters become more difficult to implement. Electronically tunable filters may be required with a range greater than an octave. Variable gain networks and matching networks are exceptionally complex over large bandwidths. Lead inductance and parasitic capacitance may cause unacceptable gain deviations. Decoupling components must be chosen carefully because many components effective at the low end are self-resonant at the high end of the band. In-band intermodulation products and second or third harmonics of the IF signal also pose design problems. The key to successful circuit design involves simple circuits, minimum length bias and control lines and a compact layout with close attenuation to lead lengths.

The choice of a second IF also involves tradeoffs. Image rejection plus ease of filtering and demodulation of the final IF signal are important. Second LO tuning bandwidth is also of concern. With a second IF greater than 250MHz, image frequencies fall outside the 500MHz first IF signal bandwidth. Consider a first IF band of 270 to 770MHz with a high side LO. The center of the first channel is 290MHz. If the second IF is at 250MHz, the LO would be at 540MHz. An image appears at 790MHz, just above the upper band edge. Such a system could operate with a fixed filter in the first IF and suffer no image channel interference. Some carrier-to-noise degradation from image noise on the skirts of the filter at 790MHz may occur. To ensure that image noise is sufficiently attenuated by the filter, the second IF must be somewhat above 250MHz. This places the second IF in the band of the first IF, requiring extremely high RF-to-IF isolation in the mixer section, making this component difficult to specify and control.

A lower second IF will require a tunable image filter in the first IF section. A second IF of 70MHz, as commonly used with a channel centered at 610MHz, would produce an image frequency 140MHz away at 750MHz. Achieving 40dB image rejection over

a 500MHz tunable bandwidth would require a complex and costly filter.

A high second IF places constraints on processing before demodulation. Placing transmission zeros at ± 20 MHz in the second IF filter response to remove cross polarization interference improves the quality of the picture, particularly where reflections from buildings may degrade cross-polarization isolation of an orthogonal mode transducer. But component Q's to provide notches so close to the desired signal become higher as the frequency increases. In addition, due to parasitics of the components involved, variable gain control circuits and amplitude limiters are much more difficult to implement at frequencies much above 70MHz. A phase-locked loop demod can be used to detect the video signal at high IF frequencies. The PLL demodulator provides improved performance at low carrier-to-noise levels in the presence of multiple subcarriers (as exist with additional audio and data signals).

A final consideration for the second IF is the tuning bandwidth of the local oscillator. The lower the IF frequency, the greater percentage bandwidth the local oscillator must tune. A bandwidth greater than an octave is difficult to implement in a cost effective design. It requires a larger control voltage swing applied to the VCO, or use of two separate oscillators, to cover the range.

In the Scientific-Atlanta 6650 system design, a 230MHz optimum second IF was chosen. A tunable image filter is required, but it is easily implemented by a seventh order low-pass filter with three varactor-tuned transmission zeroes that serve to eliminate LO leakage as well as attenuate the image frequency. At 230MHz, it is possible to provide adequate filtering and gain control for phase-locked loop demodulation. A high side LO of 520 to 980MHz is rather broad, but still possible in a single varactor-tuned design with a control voltage of ± 15 V.

Block downconversion systems, involving multiple receivers, are less expensive than conventional satellite receiving systems. Also, although care in design of the receiver is involved, the receiver itself is simple and compact, yet performs as well as or better than a conventional receiving system. □

For more information, circle (266) on your reader service card

Your cable station needs a more flexible audio mixing console, but the accountant threatens you with the adding machine everytime you raise the subject.



Leader Broadcast Systems knows that you can achieve the audio production quality and flexibility that you have been looking for at one quarter or less of the cost of comparable consoles. The C-12/ Series Two by Leader is a compact high performance 12 in/4 out mixer with particular design attention given to the output subgroups. The extra flexibility in the output stages make this console the ideal tool for a cable, educational or general TV broadcaster. Also, the basic mixer is easily enlarged with 8 channel expander packs, to an unlimited number of channels.

THE OUTPUT SECTION—some highlights

- Real-time, true buffered mono, buffered full stereo and 4-channel unmixed output available simultaneously—this feature is not available in any other TV suitable mixer at anything close to the cost of the C-12/ Series Two by Leader (approx. US\$4500)
- “Read-at-a-glance” illumination of output meters including mono, stereo and sub-output
- 3 frequency tone generator for system calibration

- Separate fully isolated feed for control room (and optional studio) monitoring
- Optional talkback/slate module with an extraordinary level of designed-in flexibility, and optional Peak Program meters
- Monitoring at any stage of the signal path

THE BOARD—more highlights

- 12 switchable transformer balanced mic inputs/line inputs
- Individual gain adjustment for all input pre-amps
- Designed-in flexibility for multi-processing of signal
- Highly flexible EQ and output signal routing sections (including direct to sub)
- A very useful channel clip LED, which monitors signal at either the mic. pre-amp or the post EQ channel fader

These are just some of the features. For more information on the C-12/ Series Two by Leader, contact us.

How long is it since your accountant smiled at you, anyway?

*Console shown used by Rogers Cable Systems Inc.



LEADER BROADCAST SYSTEMS INC. 195 West Seventh Ave., Vancouver, B.C. V5Y 1L8 • (604) 685-6043 Cables: LEADERTAPE

Circle (46) on Reply Card

April 1982 Cable Engineering CE11

Stereo audio by satellite

By Carl Bentz, technical editor

Greatly increased programming possibilities may result from the use of multiple channel audio, sourced from satellite networks using subcarrier transmission techniques.

Because of the enclosed signals of CATV, stereo audio accompanying a TV production can be accomplished. NHK in Tokyo and Rohde & Schwarz in Europe have made stereo audio TV broadcasting a routine medium. In the United States, however, the only way to get stereo for your TV program is through simulcasting with an FM broadcast station or through an FM modulated channel via a CATV system.

Several of the satellite programming services already include stereo audio with others to join in the future. The Warner Amex Music Television (MTV) service was one of the first satellite channels to use stereo technology with its music oriented programming. Since that time, the Warner Amex Movie Channel has also changed to binaural audio. Concerts and specialty programming in the music field required an improved means of modulation for the multiple audio channels available via satellite.

Three methods have been developed for the satellite stereo audio. In the Warner Amex plan, dual subcarriers on a video channel are used. One handles the $L+R$ sum for mono listeners, while a second subcarrier carries the $L-R$ difference for the compatible stereo signal. A peak deviation of $\pm 200\text{kHz}$ is allowed on both subcarriers. Typical 75 μsec pre- and de-emphasis is applied. Dolby processing of the information offers noise reduction during the initial satellite communications link.

The Movie Channel employs a conventional 6.8MHz subcarrier frequency, allowing cable programming the easy choice between only a mono feed from the $L+R$ signal or full stereo. For MTV, however, the sum subcarrier was selected to be a non-standard frequency. Use of such a non-standard, it was thought, would encourage cable operators to offer full stereo to their subscribers. The sum subcarrier has been selected as 6.62MHz. For final transmission to cable subscribers, left and right channel signals are remodulated on an empty channel in the FM broadcast band (see Figure 1).

Another encoding scheme is offered on some satellite services through the Leaming Industries system. Two

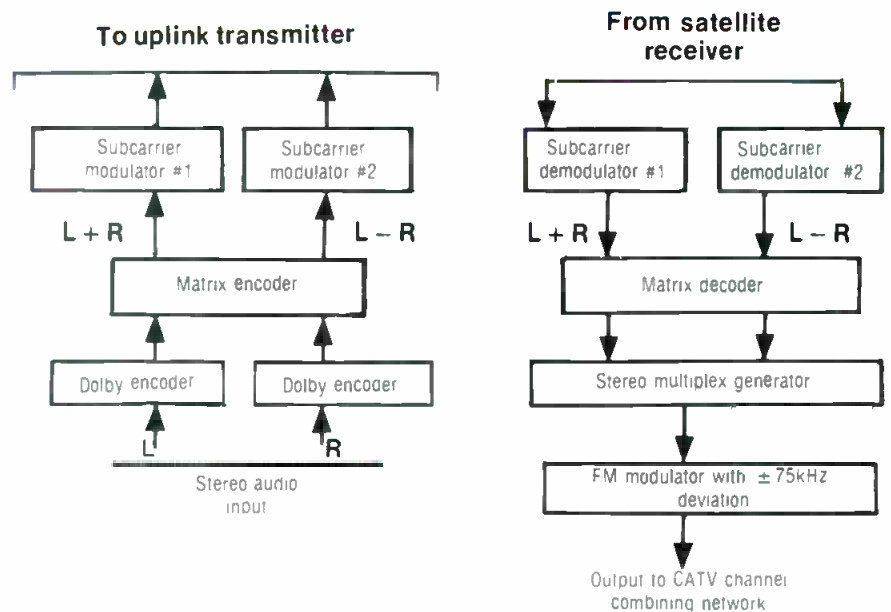


Figure 1. The Warner Amex stereo transmission system.


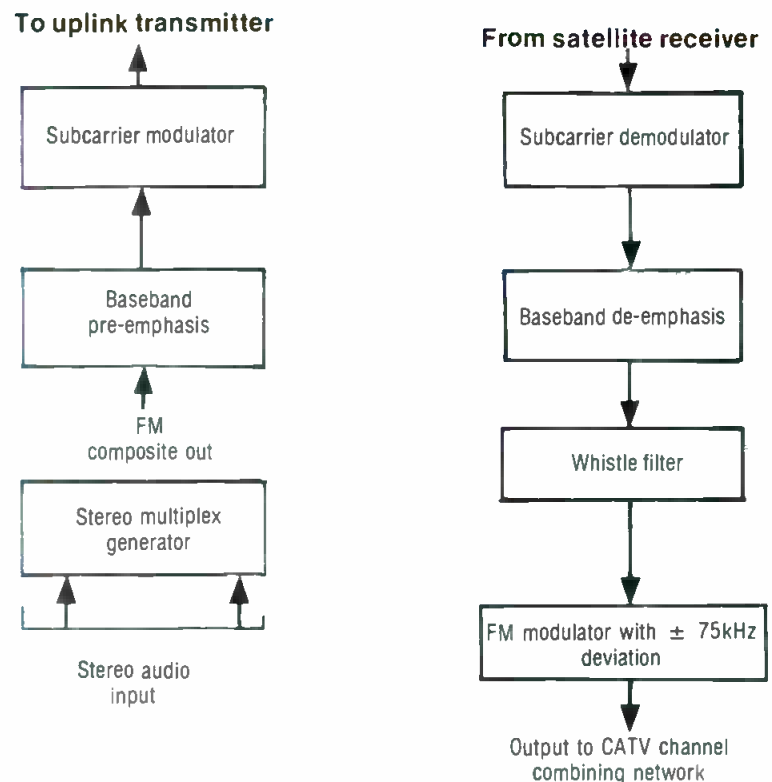


Figure 2. The Leaming composite subcarrier stereo transmission system.

NEW! FROM GILLASPIE

FOR LOW COST CABLE & INDUSTRIAL APPLICATION

The Model 5500 Satellite Receiver **3.7 - 4.2 GHz**

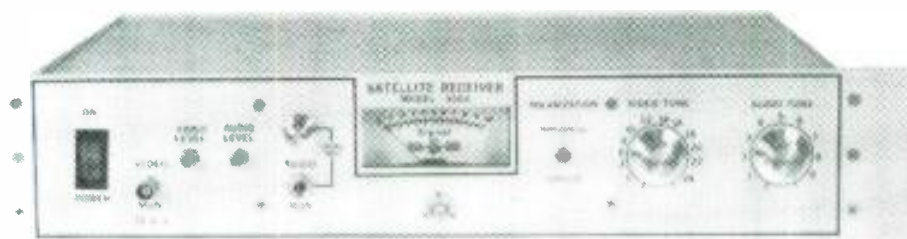

PERFORMANCE — VERSATILITY

- 13 dB Noise Figure
- Optimum Image Rejection
- Built in 55 dB Isolator
- Studio Quality — Performance & Reliability
- High Performance Switchable AFC
- Full Audio Subcarrier Tuning Agility (5-8mHz) Eliminates Need for Separate Audio Demod Cards.
- Built in Polarization Switch to Control External Coax Switch (Opt.)
- Full Function Signal Strength Meter
- LNA Power through Coax or Connector
- Full Remote Control Transponder & Subcarrier
- Full 10MHz Unfiltered Baseband Video w/Audio Subcarrier on Rear Panel.
- Can be "Stacked" for multiple channel application
- Separable Downconverter for Long Runs
- 24 Channel selection on Front Panel
- Loop through 70mHz IF between Downconverter & IF Strip for Terrestrial Interference Filtering
- 70mHz Demodulator Input That Can Be Used to Back-up Your Terrestrial Microwave Receiving System

3.7 - 4.2 GHz LINE AMPLIFIERS, COAX SWITCHES & SIGNAL SPLITTERS AVAILABLE
APPLICATION ASSISTANCE UPON REQUEST

OUTPUTS: VIDEO (2) 1v PP, 75 ADJUSTABLE
UNFILTERED VIDEO 1vPP, 75
AUDIO: 10 dBm 600 ADJUSTABLE
HEADPHONE: 0-1.5 v H1-Z ADJUSTABLE
POWER: 115 VAC 20 WATTS
SIZE: STANDARD 19" RACK MOUNT
3.5" H x 12" D

**DISTRIBUTOR &
DEALER INQUIRIES
INVITED**

408-730-2500

COMPLETE

\$1775

**DELIVERY
STOCK TO 30 DAY**

GILLASPIE & ASSOCIATES INC., 365 SAN ALESO AVE., SUNNYVALE, CA 94086

Stereo audio

audio channels are multiplexed on a single subcarrier, in essentially the same format that is used for FM broadcast stereo. In the cable head-end, the wideband composite subcarrier is demodulated, de-emphasized and finally remodulated into the FM broadcast band. Whistle filters are included in the equipment to eliminate possible audible beats between the 15.734kHz H sync multiples and the 19kHz pilot carrier of the FM system. Additional notching is accomplished at 31.468 and 47.202kHz to avoid beat formation from those frequencies with the 38kHz multiple of the pilot (See Figure 2). No multiplex generator is required in the headend.

The third plan to stereo transmission via satellite has been developed by Wegener Communications. Discreet left and right low level subcarriers provide for stereo, but it is possible to handle up to four stereo pairs on the system. Subcarrier deviation is kept low to allow for closer subcarrier spacing. Adaptive pre- and de-emphasis is used in the Wegener system to optimize signal-to-noise figures of the demodulated signals. The left and right signals are finally applied to a stereo generator and modulator at the CATV headend for

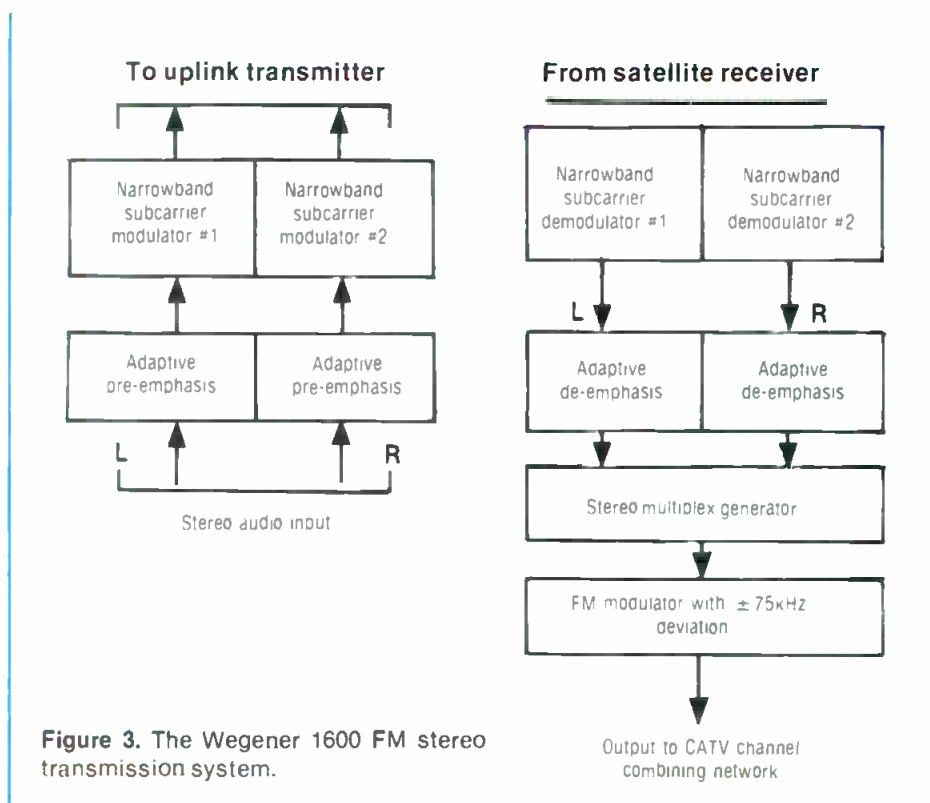


Figure 3. The Wegener 1600 FM stereo transmission system.

application to the cable (see Figure 3).

In addition to the Warner Amex services, the Learning system has been adopted for use with CBS Cable and Bravo programming. The Wegener plan will be found on WFMT, Seeburg Music, Satellite Music Network, Bonnevill Beautiful Music, Moody Bible, Continental Radio and Family Radio

programming services. As CATV systems upgrade and purchase the necessary equipment for FM channel services, the selections will increase. Meanwhile, operators interested in any of the three services are advised to check with programming suppliers for guidelines on the proper reception equipment. □

This magazine gives you good reading, good writing and good arithmetic.

We present the information in our articles clearly, accurately and objectively. That's good writing. Which means good reading.

We present the information in our circulation statement clearly, accurately and objectively. That's good arithmetic.

BPA (Business Publications Audit of Circulation, Inc.) helps us provide precise and reliable information to both advertisers and readers.

An independent, not-for-profit organization, BPA audits our circulation list once a year to make sure it's correct and up to date. The audit verifies your name, your company, your industry and your job title.

This information enables our advertisers to determine if they are reaching the right people in the right place with the right message.

The audit also benefits you. Because the more a publication and its advertisers know about you, the better they can provide you with articles and advertisements that meet your information needs.

BPA. For readers it stands for meaningful information. For advertisers it stands for meaningful readers. Business Publications Audit of Circulation, Inc.
360 Park Ave. So. New York, NY 10010



We make sure you get what you pay for.



FOR MORE INFORMATION CALL OR WRITE:

FORT WORTH TOWER COMPANY


P. O. Box 8597 / Fort Worth, Texas 76112

A/C 817 457-3060

A/C 214 264-2822 (Dallas)


TOLL FREE: 1-800-433-1816 (Except Texas) • TWX No. 910-893-4046

EARTH STATION ANTENNAS

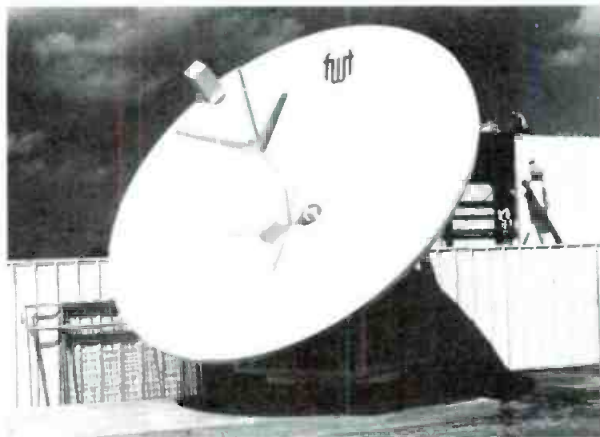

AVAILABLE IN: 10 FT., 3.6 METER, 5 METER, AND 7 METER. TRANSPORTABLE UNITS AVAILABLE IN ALL SIZES EXCEPT 7 METER. PRIME FOCUS FEEDS FOR OPERATION IN THE 3.7-4.2 GHz BAND.

TOWERS

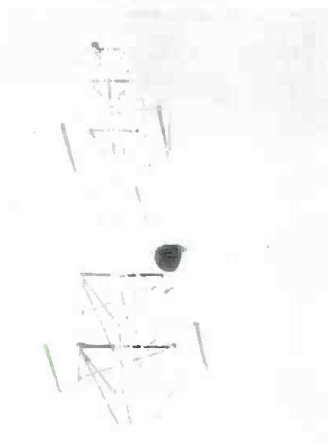

BOTH GUYED AND SELF-SUPPORTING, ARE SPECIALLY ENGINEERED FOR EVERY APPLICATION IN MICROWAVE, FM, CATV, UTILITIES OR ANY INDUSTRIAL APPLICATION.

ALUMINUM OR FIBERGLASS



BUILDINGS IN ALL POPULAR SIZES OR CUSTOM BUILT TO YOUR SPECIFICATIONS. ALL BUILDINGS ARE ENGINEERED TO WITHSTAND THE EXTREMES OF WEATHER CONDITIONS ON EVERY PART OF THE GLOBE. THESE PORTABLE STRUCTURES ARE COMPLETELY WIRED.



Occasional splashes from the pool eased the 110° heat while taping a Kansas City area country club swim meet.

Local feature programming pays off

By Carl Bentz, technical editor



Visits with Kansas City zoo residents are favorite local production programs.

TeleCable of Overland Park, KS, has put a lot of effort into local origination of programming. Community support has kept that effort in operation. The organization, one of 20 systems of the Telecable group based in Norfolk, VA, first became operational in a small section of the Northeast Johnson County area in January 1971. Growth has been continual, with a present total subscriber list of 40,000.

Several of the first programming attempts have had continuing success. *Around Town*, which airs live Monday through Friday mornings, with taped repeats in the evening, passed its two thousandth show in November 1981. Hostess Anne Debus brings community leaders, newsmakers and a myriad of personalities into the studio for the

program. Remote productions have been used from a local theme park, the Kansas City Zoo and area shopping centers. Subject matter has varied from serious discussions on drug abuse, acupuncture and breast implantation, through demonstrations in cooking and oil painting, to more light-hearted conversations with antique toy collectors and cartoonists.

Tom Leathers, publisher of a local weekly newspaper, hosts another long-lived series. Although his guests are often nationally known figures in government, entertainment and other areas, he brings out local issues as well with important people of the area.

One heated political campaign debate held on his program was later

The dual cable construction contributed to aesthetic purists' poor opinion of the CATV system, but has added to its capabilities.



Vital Industries has instituted a cost-saving manufacturer-financing program - applicable to any Vital equipment purchase.

In accordance with our longterm commitment to more responsive television industry service, equipment purchases are being directly financed by Vital Industries itself **at 10% interest.**

Recognizing the barriers raised by prohibitively high interest rates, this financing program is offered well below prime — to permit prompt acquisition, without delay, of the advanced programming and operational systems so essential to productivity and profitability.

This bottom-line economy adds to the special advantage Vital offers TV management: **a complete line of switching, video effects and station automation equipment, available from one single source** — 25 sophisticated system options, totally line compatible. Including production and post-

production mixers and switchers, plus our exclusive digital video manipulation system, the versatile Squeezoom". All are state-of-the-art products of Vital's innovative technology; and all are now available with Vital 10% financing.

This low-interest opportunity is made possible by Vital Industries' unique financial strengths, solidly established by nearly two decade's stable performance and continuing growth. Now the largest U.S. independently-owned manufacturer of TV switching, effects and distribution systems, Vital can draw on corporate resources available from few other suppliers.

For full program details, contact our Finance Department:

(800) 874-7875 Toll Free



VITAL INDUSTRIES, INC.

3700 N. E. 53rd Street
Gainesville, Florida 32601, USA

Circle (65) on Reply Card

April 1982 *Broadcast Engineering* 55

MAKE YOUR MOBILE 1 NUMBER ONE IN MOBILITY.



HANNAY REELS GET YOU IN AND OUT FAST.

No other reel is "remotely" as efficient as a Hannay Reel. You can mix and match stock parts to custom-design the ideal reels to make your hook-up and pick-up of all sorts of cable a snap. And with a wide choice of rewind options and unlimited sizes, shapes and capacities to choose from, you just can't wind up with a better reel. So when an exclusive depends on getting in and out fast, you handle the news, we'll handle the cable!



Send Today
For A Free Catalog.



CLIFFORD B. HANNAY & SON, INC. WESTERLO, NEW YORK 12193
TELEPHONE: (518) 797-3791

Circle (66) on Reply Card

INTV conference replay

By Phil Dean, president, Phil Dean Associates, New Rochelle, NY

The Independent TV Association convened in January in Washington, DC, addressing the concept that the independent TV stations and the network affiliated stations have the same viewers, and there is no qualitative

difference between them. This concept, introduced last year via the Burke Study, has been updated, refined and confirmed via a 1980 study conducted by the four independent TV stations in Los Angeles, CA.

Market share projections

TV broadcasters, whether network or independent, all have a common problem: cable TV. One panel discussion at the INTV meetings dealt with *cable and the independent*. Bill Harvey, publisher of *Media Science Newsletter*, took part in the panel discussion. He provided some recommendations to the independent broadcasters. Harvey said that in general an *independent* is much in the same position as a pay service, but is supported by advertising. For that reason, he said, investment in programming and audience promotion should be increased, keeping in mind that the primary target will be the established electronic media households.

Harvey also provided some projections for share of audiences during prime time viewing. Those projected percentages are shown in Tables I-IV, courtesy of *Media Science Newsletter*.

Table I.
Projected shares in all TV homes

	1980	1981	1982	1985	1990
Network Affiliates	83	81	78	72	60
Independents	13	14	15	16	16
PBS	3	3	3	3	2
Basic Cable	1	2	2	3	4
Pay Cable	2	3	5	8	17

Table II.
Projected shares in advanced new electronic media homes

	1980	1981	1982	1985	1990
Network Affiliates	65	63	62	59	51
Independents	15	15	15	14	12
PBS	3	3	3	3	2
Basic Cable	4	4	4	4	5
Pay Cable	17	19	20	23	27


Table III.
Projected shares in basic new electronic media homes

	1980	1981	1982	1985	1990
Network Affiliates	80	79	78	73	67
Independents	15	16	17	20	23
PBS	3	3	3	3	3
Basic and Pay Cable	3	4	4	5	5

Table IV.
Projected shares in established electronic media homes

	1980	1981	1982	1985	1990
Network Affiliates	87	86	85	82	78
Independents	12	13	14	17	21
PBS	3	3	3	3	3

One Tube, 30KW FM Transmitter

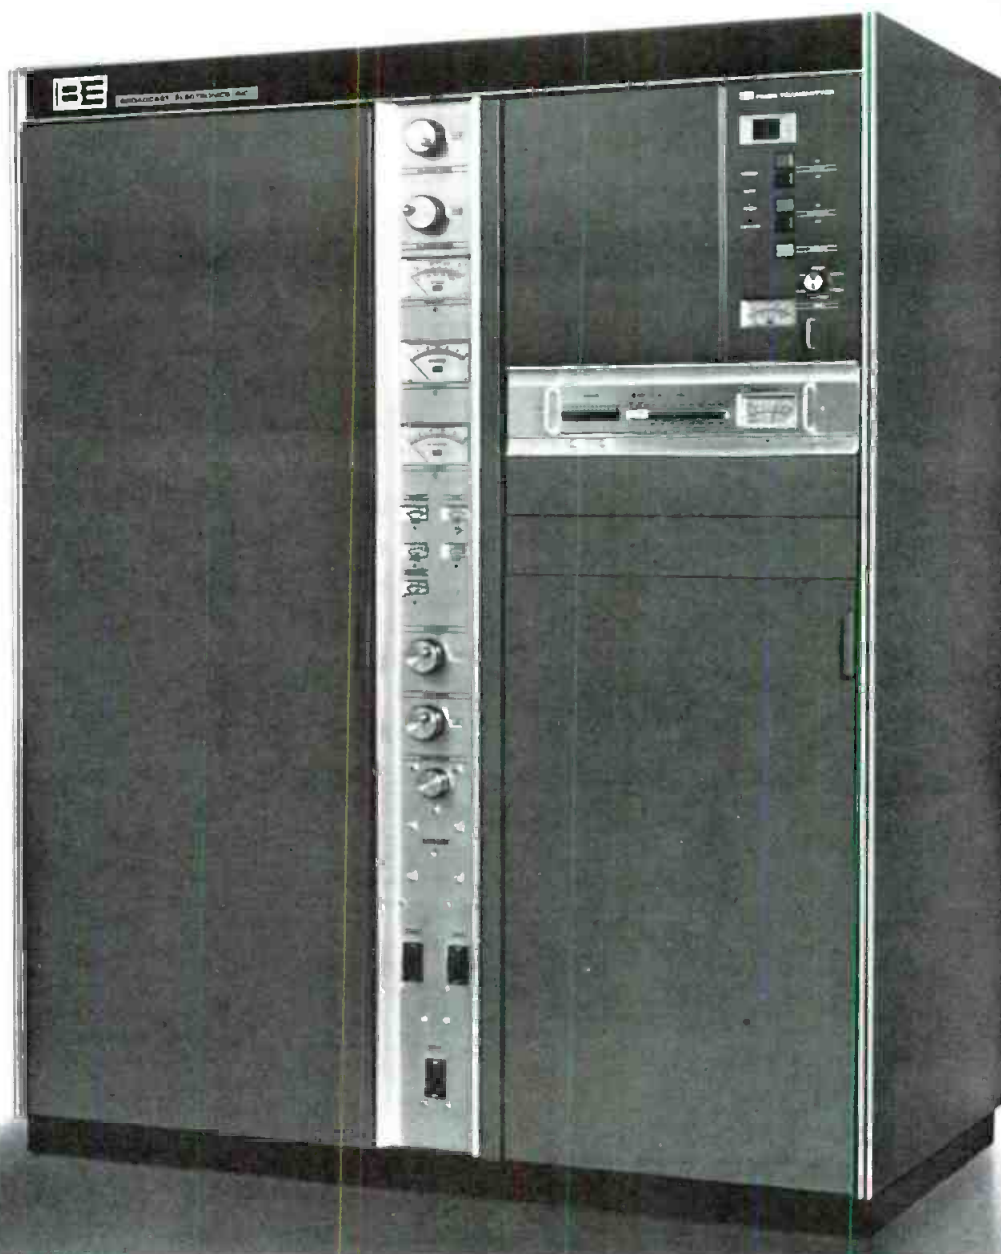

Broadcast Electronics' FM-30.

Over the Past Year, More Than 20 Broadcasters Purchased the FM-30.

Here are a few reasons why ...

World's most powerful
one-tube FM transmitter.

*Folded half-wave output cavity--
no plate blocking capacitor
or sliding contacts.

Microprocessor control
provides 127 status indications.
Great for maintenance.

Twelve meters including
4 multi-function meters.

Synthesized FX-30 exciter
with extremely low distortion
and the finest FM sound.

High efficiency for low operating cost.

Elegant styling.

Excellent reliability.

Circle (67) on Reply Card

For more information write or call Joe Engle today. 217-224-9600

a **FILMWAY** company



**BROADCAST
ELECTRONICS INC.**

*Patent Pending

4100 N. 24th STREET, P.O. BOX 3606, QUINCY, IL 62305-3606, TELEX 25-0142

www.americanradiohistory.com

AM BROADCASTING - HIGH FIDELITY Are these terms mutually exclusive?

☐ YES ☐ NO ☐ DON'T KNOW

Surprisingly, many broadcasters may not know that the correct answer to this question is no. Large sums of money are spent each year to purchase new transmitters, new studio equipment, new audio processing equipment and to modify antenna systems for improved AM sound. Unfortunately, until now, there has been no such thing as a professional quality AM monitor receiver. As a result, the perceived fidelity of an AM signal has been severely restricted by receiver performance.

Potomac has developed the SMR-11 Synthesized Monitor Receiver which will let you hear and measure the quality of your transmitted AM signal ... perhaps for the first time. Features include: Crystal Stability; 60 dB Signal to Noise Ratio; Audio Frequency Response ± 0.5 dB, 20 Hz to 8 kHz; Total Harmonic Distortion less than 0.2% (95% Modulation) at audio frequencies above 40 Hz ... please write for complete descriptive brochure.



THIS DIAL WILL TUNE YOU IN TO THE
NEW SOUND OF AM BROADCASTING

POTOMAC INSTRUMENTS

932 PHILADELPHIA AVE.
SILVER SPRING, MD. 20910
(301) 589-2662

Circle (69) on Reply Card

Want MORE Information on Advertised Products?

Just refer to the
Bingo # beneath
each ad. Circle
the appropriate
number on the
Reader Service
Card in the back
of this issue.

**Complete the re-
maining informa-
tion and mail!**

Conference replay

The Washington flavor was strongly in evidence at INTV's Ninth Annual Convention with a number of congressmen appearing on the agenda and others visiting with broadcasters from their home districts. The political star of the occasion was President Ronald Reagan, who accepted an award from the INTV for excellence in communication.

Other stars from the political arena included Rep. Timothy E. Wirth (D-CO), House telecommunications subcommittee chairman; Rep. Robert Kastenmeir, (D-WI), chairman of the House subcommittee on copy right affairs; Bernard Wunder, assistant secretary of commerce for telecommunications and information; and Mark Fowler, chairman of the FCC.

Deregulation, copyright, PTAR (Prime Time Access Rule) and must carry rules were the primary targets of the politicians with independent operators getting encouragement from Wunder, on copyright legislation; Wirth, on easing of longline telephone costs; Fowler, on deregulation; and a "comme ci, comme ca" reaction from Kastenmeir on the must carry rules on his cable TV copyright bill.

A record turnout of about 650 registrants took advantage of the political locale to visit their congressmen as well as attend the 5-day convention. More Washington atmosphere was supplied by a reception at the Capitol Hill Club and a briefing at the White House by President Reagan.

The Washington syndrome was even more evident in the series of panels and workshops scheduled for the five days of the convention. Nearly every panel concerned itself with some phase of rulemaking or regulation. Vincent Wasilewski, NAB president; Thomas Wheeler, NCTA presi-



President Reagan accepts INTV Communication award.

Our Agile 24 satellite receiver system makes things perfectly clear.

Standard Communications' new Agile 24M/S satellite receiver system does everything a broadcast studio model does—except cost as much.

The Agile 24M is a highly cost-effective, reliable satellite receiver featuring advanced circuitry like a fully synthesized phase-lock-loop tuning system, a pre-selector tracking filter, and a PLL demodulator. Dual conversion design converts the incoming signal twice for better selectivity and image rejection. The threshold extension circuit reduces noise by as much as 2 dB on dark scenes, delivering a static threshold as low as 5.5 dB carrier-to-noise. That means blacker blacks in dark scenes, with reduced sparkles.

The Agile 24M is a 24-channel, stand-alone master receiver with sufficient gain to drive as many Agile 24S

slave receivers as required to satisfy any satellite communications system. The unique Agile 24S slave receivers offer all the operating features of the Agile 24M with the exception of the first block down converter. The active amplifier loop-through design of the Agile 24S is cost-effective, eliminating need for redundant passive power dividers.

Nearly all critical adjustments and test functions can be accomplished by accessing the front or rear panel of Agile 24/S receivers. The multi-function front panel meter permits zero tuning as well as carrier-to-noise metering, eliminating the need for special test equipment. Channel indicators display both transponder number and frequency in MHz.

The Agile 24 receiver system carries Standard's full technical support. System installation and alignment is facilitated by enlarged schematic diagrams and an illustrated technical manual. Standard's field engineers offer operator training as well as on-site repairs. Where factory service may be required, 48-hour turn-

around and a loan equipment plan are available to minimize system downtime.

Look to Standard to handle all your TVRO system needs with a complete line of LNAs, down converters, earth station antennas and microwave interference filters.



Standard Communications Corp.
P.O. Box 92151
Los Angeles, California 90009
213/532-5300

In Canada:
COMALCO LIMITED
Unit 6, 6325-12 St. SE
Calgary, Alberta, Canada T2H3K1
403/259-3101

Please See Us At NCTA Booth 1125

...the TVRO System people

Circle (70) on Reply Card



Product marketing allowed at INTV convention

Something new was added to the recent INTV convention, a program market place a la NATPE's annual madcap melange of program product promotion.

The decision to allow syndicators and distributors to market their products to the independent operators at the con-

vention was made by the Indie Board of Directors.

In the past, product marketing and merchandising at the INTV was not allowed. Herman Land, president of INTV, said that independent association members were worried that too much stress on the programming sales side

might detract from the overall purposes and aims of the convention, as had occurred when distributors showed their wares at the NAB.

Despite extremely bad weather in Washington, and the fact that the Super Bowl was on one of the convention days, most of the 33 distributors attending were happy with the results and indicated they would screen their products again next year if the INTV continues the open screening policy.

One of the most unusual and most talked about unofficial exhibitors at the convention was Turner Program Sales, which was boosting, although not showing, half-hour cable feeds from CNN-2 and CNN. Sports programming, news and the political scene were among the major panel discussions during the convention.

Perhaps the most confusing of the panel sessions at the convention was that on DBS—the proposed new direct broadcast service. Comments by panelists included a dire forecast that the 'country's independent TV stations might be wiped out' if the eight DBS applications were granted by the FCC.

Marvin Rosenberg, the Washington representative for United States Broadcasting Company (Hubbard Broadcasting Company's entry into DBS), said DBS would provide many independents with the programming needed to survive in an increasingly competitive market place. In the middle was Richard Wiley, former chairman of the FCC now representing Comsat's Satellite Corporation, who saw "no deleterious effects in the broadcasting industry" and said that broadcasters should ensure their right to participate in new technologies, rather than oppose them.



VALUE-PACKED MODULAR DESIGN

From 104mm input faders to stereo/mono combining networks, Quantum now offers modular production/on-air series broadcast consoles fully equipped with professional features found previously only on those consoles priced beyond your budget.



60th Annual Convention
& International Exposition
April 4 - 7, 1982
Dallas, Texas

**QUANTUM will be shown
at NAB Booth 2006**

Please send me further details and full technical specifications.

Name _____ Position: _____

Studio/Company _____

Address _____

Phone: (____) _____



QUANTUM
AUDIO LABS, INC.

1905 RIVERSIDE DRIVE
GLENDALE, CALIFORNIA 91201
PHONE: (213) 841-0970

**Use BE
classified ads**

GET OFF THE BICYCLE AND GET ON THE BIRD

ONE UP ON THE WORLD IN SATELLITE RECEPTION.

Microdyne's satellite receiving systems expand program selection and minimize bicycled tapes. Our X-24 B-2 receiver and motorized 7-meter antenna system will enhance programming and advertising capabilities by opening the universe of satellite delivered programming to your market.

Microdyne's receiving systems are faster than tape and better than terrestrial. Our X-24 B-2 receiver offers superior electrical performance with applications in commercial and public broadcast

television stations, special events and teleconferencing. It has the capability of multiple audio demodulation, remote control and automatic


polarity selection. Our motorized 7-meter antenna system simplifies satellite and program acquisition and complements the most sophisticated receiving system available. Microdyne also manufactures a Single Channel Per Carrier (SCPC) System for radio broadcast application.

For more than a decade, Microdyne has manufactured satellite communications systems. We are recognized as the leading manufacturer of satellite receiving systems in the broadcast industry and our expertise is used for government, military and corporate communications.

As a leader in the industry, Microdyne is one up on the world in technology, manufacturing and service.



1100 TVR (X-24) (B-2)

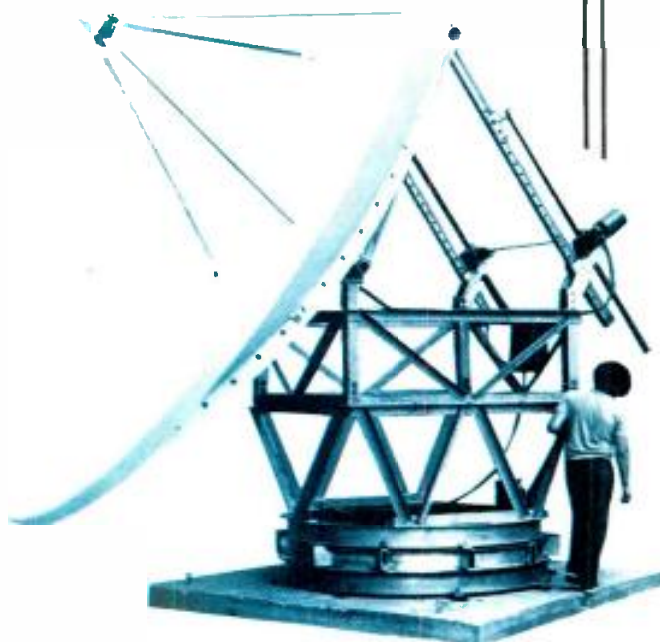


7-Meter Motorized Mount Antenna

SATELLITE SYSTEMS SCIENCE



MICRODYNE

Microdyne Corporation / Marketing Dept. 2210
P.O. Box 7213 / Ocala, FL 32672-0213 / (904) 687-4633
TWX 810-858-0307

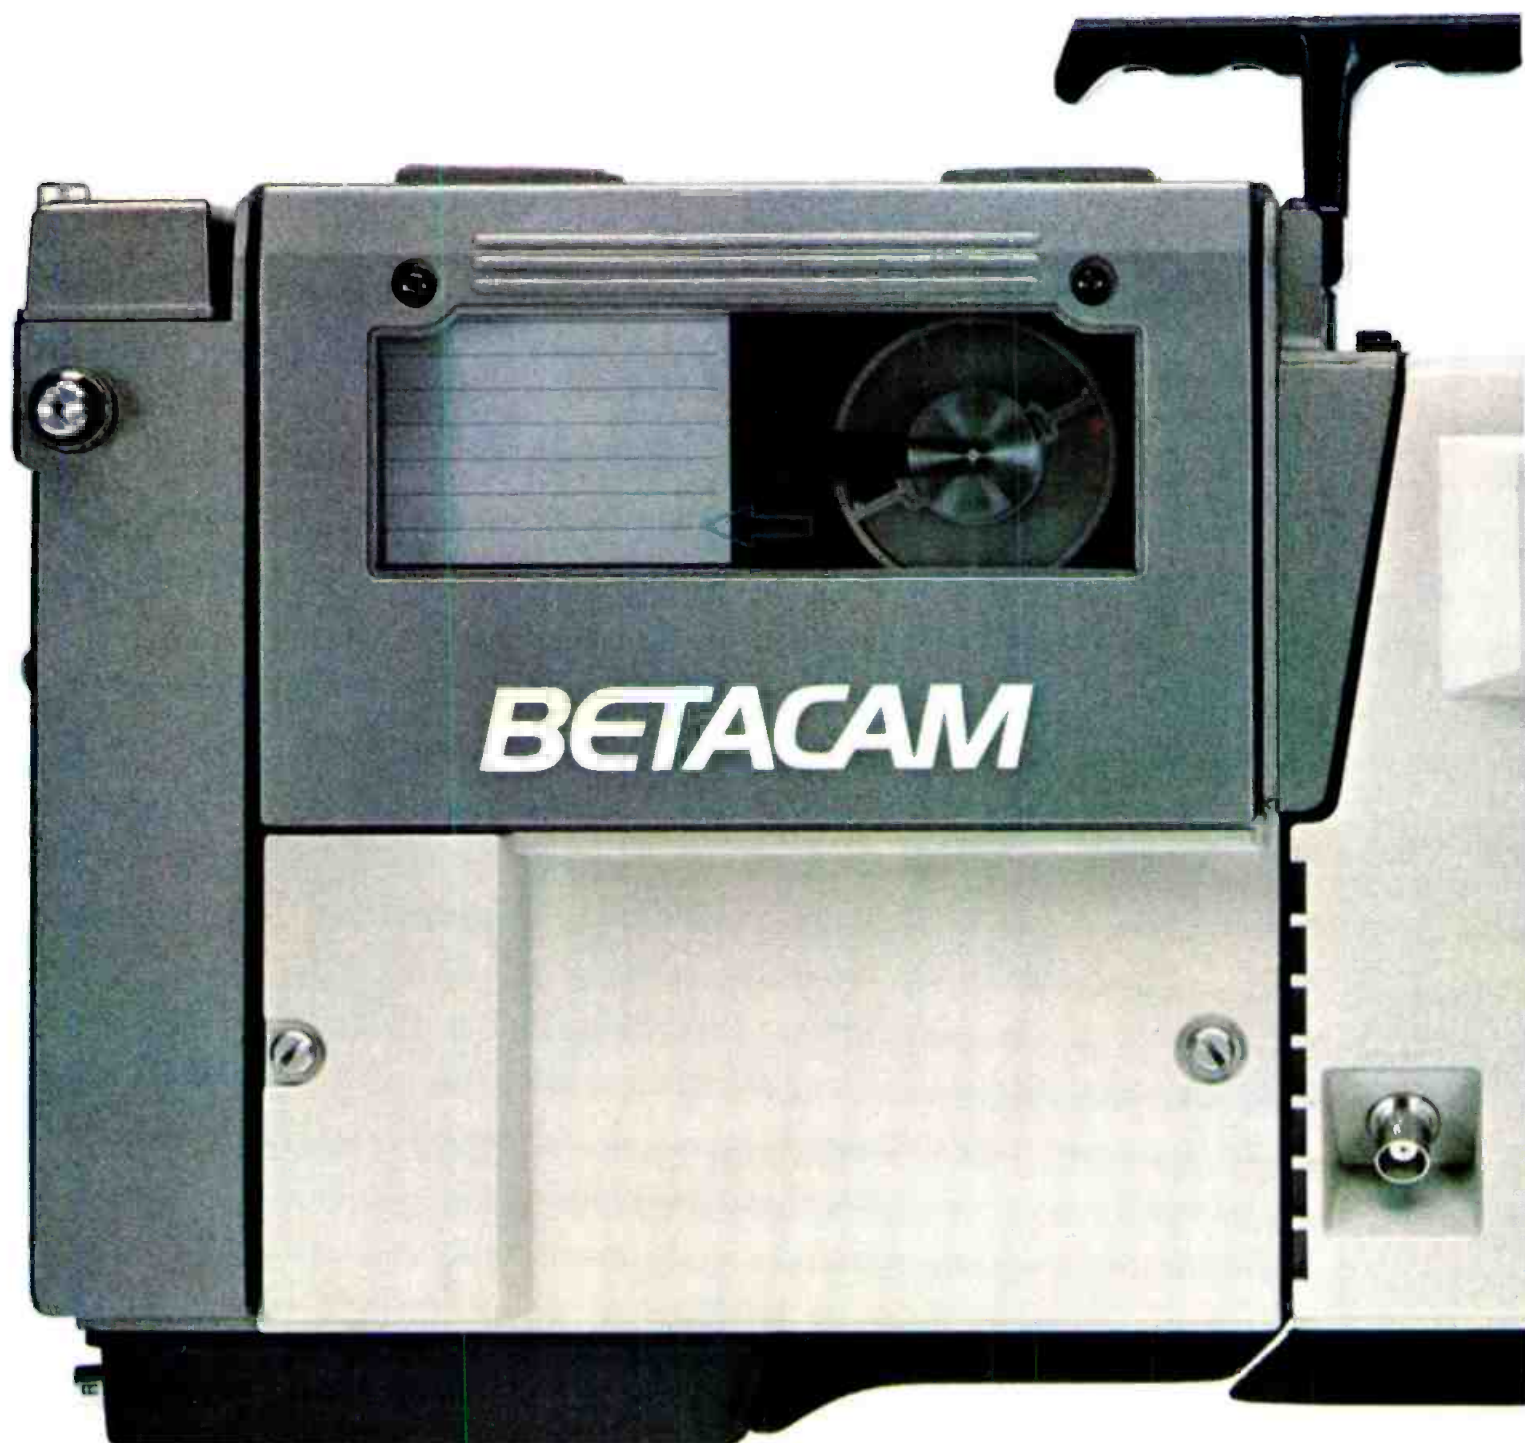

HOW TO LOSE WEIGHT TAKE BETTER

SONY INTRODUCES THE BETACAM SYSTEM

When we designed the innovative Sony half-inch ENG system, we didn't do it halfway.

So our Betacam® camera/recorder is 30% lighter than its nearest competitor. And more than 40% smaller. A big difference when you're rushing to cover a story.

But not only have we trimmed pounds and inches, we've saved you dollars and cents. In fact, the entire system is so competitively priced, you might want to buy

two of our camera/recorders rather than one of the heavier, bulkier units around. Then, obviously, you'll be able to cover twice as much news.

The Betacam camera section employs a High-Band SMF Tricon® single-tube pickup system. As a result, it has a dramatically improved picture, with better resolution and more sensitivity than conventional one-tube cameras.

And since it has 60% fewer components than three-tube cameras, the cost of maintaining it is low.



SAVE MONEY, AND PICTURES.

(Of course, there will always be applications where you prefer a three-tube camera. So you'll be delighted to know that Sony also offers a three-tube Betacam.)

The Betacam recorder also provides superior performance, with better picture clarity and a higher signal-to-noise ratio, even when compared to $\frac{3}{4}$ " machines. It records for 20 minutes on a Beta L-500 cassette, and runs for a full hour on the low-power, rechargeable battery contained in the unit. And both cassettes and batteries are inexpensive and readily available.

A separate playback unit completes the Betacam system. It's the only interface you need for existing post-production equipment. So nothing is made obsolete.

Naturally, there are many other refinements and innovations. So to request more information, call 1-800-526-0890. Or in New Jersey, (201) 256-4512, ext. B1.

Sony Betacam. Like so many other Sony Broadcast products, it seems revolutionary today. And will be indispensable tomorrow.


SONY
Broadcast

Sony is a registered trademark of Sony Corp.

Circle (72) on Reply Card

Audio Tape

for professionals

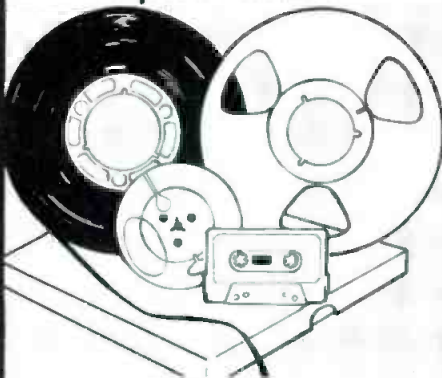

REEL TO REEL TAPE
Ampex, 3M. All grades.
On reels or hubs.

CASSETTES, C-10—C-90
With Agfa, TDK tape.

LEADER & SPLICING TAPE

EMPTY REELS & BOXES
All widths, sizes.

Competitive!
Shipped from Stock!

Ask for our recording supplies catalog.

Polyline Corp. 312/298-5300
1233 Rand Rd. • Des Plaines, IL 60016

15

Circle (73) on Reply Card

Conference replay

dent; Jack Valenti, president of the Motion Pictures Association of America; and Rep. Robert Kastenmeir, (D-WI), made up the star panel of the convention, "Cable



Herman Land, president of INTV, addressing the convention.

Copyright Compromise: Reality or Fantasy," which did little to dispel the confusion that still surrounds the compromise activities of the broadcast industry and the cable industry.

By any measurement, however, the Independent TV Association convention was a success, and independent operators were optimistic and enthusiastic about the future despite the dark clouds of cable and pay cable lingering just over the horizon.

As Herman Land, president of the INTV association said, "This convention marks the arrival of the Independent TV stations as a force in the TV world."

Land noted an increase of more than 100 attendees over 1981; a 40% increase in distribution membership over last year, basically due to the association's decision to allow screenings at the convention for the first time; and an increasing interest on the part of new stations to join the association. Next year, Land said, INTV will hold its convention Feb. 6-9 at the Galleria Plaza Hotel, Houston, TX.

□



CIRCULAR WAVEGUIDE TRANSMISSION LINE

WLFL, Channel 22, Raleigh, NC and WFTS, Channel 28, Tampa, FL are already enjoying the greater efficiency and lower cost of Circular Waveguide. For more information on how you can increase your efficiency with the innovative new transmission line, call us at 603/624-4351.



MICRO COMMUNICATIONS INC.

Circle (74) on Reply Card

REPAIR PCB'S ANYWHERE.

With the NEW Pace Micro!

Perform power desoldering and soldering anywhere. Depot.



Service center.

Mobile van. On-site.

Anywhere!

Operates on AC or 12 VDC.

Write or call today for a FREE brochure.

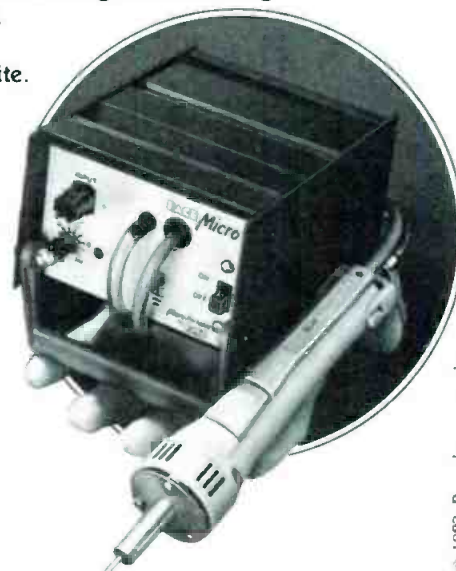

PAGE
Micro Portable


Systems for PCB Repair Anywhere™

9893 Brewers Court
Laurel, Md. 20707, U.S.A.
(301) 490-9860.
Telex 87446.

© 1982, Pace, Incorporated

Circle (117) on Reply Card

On the other hand, our routing switchers handle channel growth very nicely.

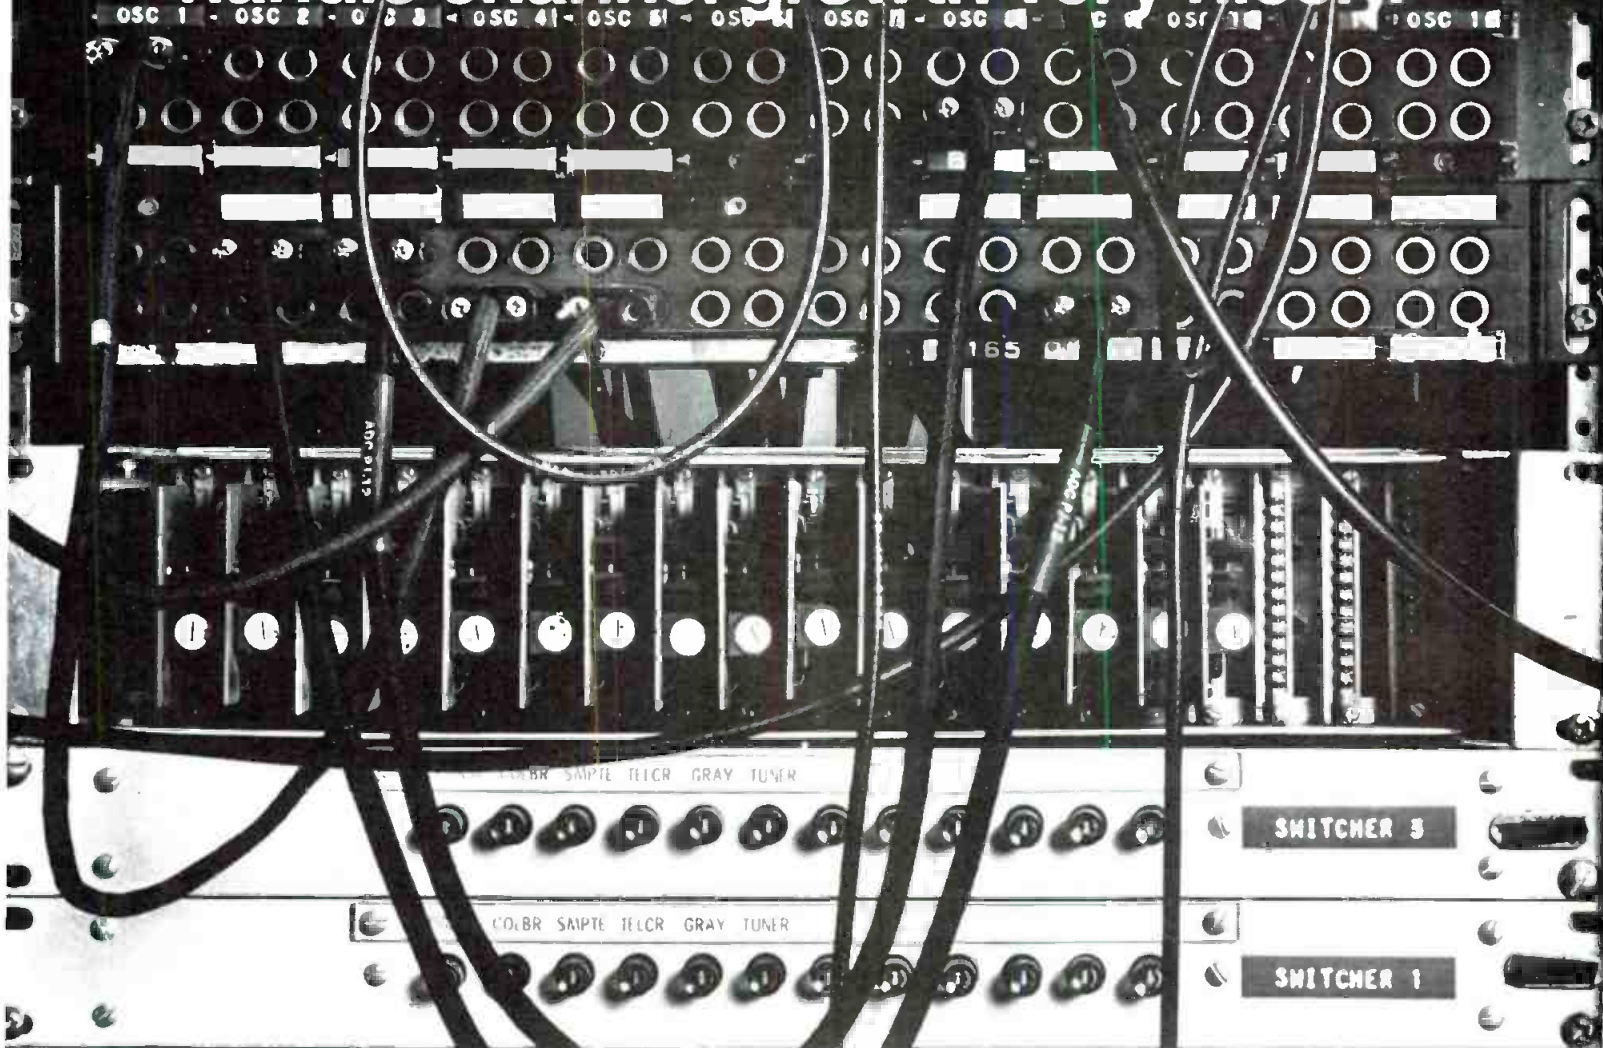

A patch panel will work just fine in your system. If you plan to limit yourself to only ten channels.

But in the fast moving world of cable-vision, more than likely you'll be programming a lot more than ten.


That's where 3M Routing Switchers come in.

Because our switchers allow you to start small, and expand gradually. As your needs grow.

Without the bulky wire mess and inconvenience of a patchwork routing system.

They allow for more VTR's, quick and easy switching, as well as multi-channel programming.

The routing switchers that grow as your needs grow.

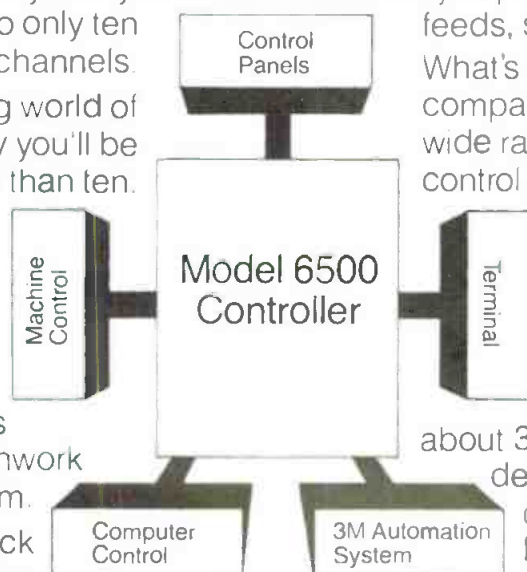

And they're perfect for switching in network feeds, satellite relays, and live remotes. What's more, 3M Routing Switchers are compact and fully electronic. They offer a wide range of capabilities. From simple control panels like thumbwheel, touchpad, universal pushbutton, and LED pushbutton, to completely automated, computer-controlled systems. From 15 x 12 to 40 x 40 and larger.

For more information about 3M Routing Switchers, or a custom design consultation for your studio, call collect 612-736-1032. Or write: Professional Audio Video Equipment/3M, Building 223-5E/ 3M Center, St. Paul, MN 55144.

3M hears you...

Circle (75) on Reply Card

3M

The Bogen Mini Fluid Head. A Maxi Performer that rolls 'em without rock.



Measuring just 5" x 5" x 5" (excluding handle), this lightweight, fluid-damped type tripod head accommodates a wide range of cine/video cameras. It pans smoothly a full 360°, tilts 45° up and 90° down, with a safety detent at -45° and features separate pan and tilt locks.

To find out more about Bogen's full line of cine/video support equipment, just contact your local dealer or write: Bogen Photo Corp., 100 So. Van Brunt St., P.O. Box 448, Englewood, NJ 07631-0448.

bogen

**Lester Bogen doesn't sell anything
he wouldn't buy himself.**

Bogen Photo Corp
100 So. Van Brunt St. P.O. Box 448, Englewood, N.J. 07631

PLEASE SEND ME MORE INFORMATION ON
BOGEN CINE/VIDEO HEADS AND TRIPODS.

Name _____

Street _____

City _____

State _____

Zip _____

BE 4/82

Circle (76) on Reply Card

"Tomorrow's Television" SMPTE TV conference

By Carl Bentz, technical editor, and Bill Rhodes, editorial director

- Feb. 5-6, 1982
- Opryland Hotel
Nashville, TN
- 651 attendees
- 24 exhibitors
41 booths

Although attendance was down from last year's SMPTE Television Conference, registration figures tallied about 651 participants. The exhibition hall included 24 booths with equipment related to the conference program. Several new equipment items were unveiled. The technical papers given by leaders in the industry were the highlight of the conference. Following a general theme of *Tomorrow's Television*, the papers fell into four categories: new TV technology, multichannel audio for television, digital control of TV equip-

ment, and high definition television.

The Friday luncheon speaker, Robert Wussler, executive vice president of Turner Broadcasting, was well-received. "Your contributions to technological advancement have transformed what was only a futuristic dream a decade ago into the greatest growth industry in the world," he said.

New equipment shown at the conference included the Ikegami EC-35 electronic cinematography camera with accessories and the Sharp XC-700 camera with a digital CO-AX control system from Cinema Products. For-A Corporation of America introduced the TC-10 background and title colorizer in the VICA booth. Grass Valley Group demonstrated new software for its E-MEM and video switcher systems.

Harrison Systems displayed the new TV-3 TV audio mixing console. Thomson-CSF, which said that its first two Graphics V systems were currently being installed in stations, used a



Robert Wussler: "Many of you are responsible for the tremendous growth in communications today. Your contributions to technological advances have transformed what was only a futuristic dream a decade ago into the greatest industry in the world."



Donald Fink (standing) was one of the many attendees who addressed questions to speakers during the SMPTE 16th Annual Television Conference.



1-800-251-1009

Duplication data. Faster than a speeding bullet.

Wait no longer for the information you need. Our toll-free number is your duplication hotline for fast answers, estimates, and advice.

Use it anytime for instant access to our high-caliber staff. VHS,

Beta, $\frac{3}{4}$ ", and 1" formats. Any quantity. Our prices are on target; our quality unsurpassed. Custom jobs welcomed. Dependable drop-ship service at your request.

Fire a call our way today.

**COMWORLD
VIDEO SERVICES**



9000 East Church Street
Brentwood, Tennessee 37027
1-800-251-1009
In Tennessee, call
1-615-373-0819 collect.
Circle (77) on Reply Card

NOW, ONE MICROPHONE CAPTURES IT ALL.

The Sennheiser Telemike Electret Microphone System.

Its unique modular design provides all the flexibility and precision of a collection of separates—from omni to super cardioid, spot to shotgun, telescopic boom to tie-clip lavalier.

All, at a fraction of the price of comparable separates.

And all, with the most advanced electret technology available: our unique back-electret.

See your Sennheiser dealer for details. And capture it all.

All components available separately or as a package.




SENNHEISER

ELECTRONIC CORPORATION
10 West 37th Street, New York, N.Y. 10018
(212) 239-0190

©1981, Sennheiser Electronic Corporation (N.Y.)

Circle (78) on Reply Card

HIGH PERFORMANCE LOW POWER FM

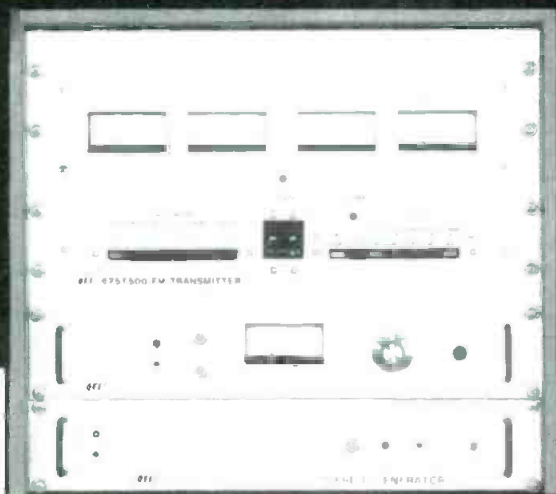

Power levels from 10 watts to 500 watts—500 watt transmitter shown.

Commercial or educational, mono or stereo—even SCA! QEI low power transmitters give you the highest performance in their class. They're 100% solid state for reliability, synthesized for versatility and fully protected against high VSWR for peace of mind. Call or write for details today

QEI Corporation

Rt. 73, Kresson, NJ 08053
609 767-8052



Circle (79) on Reply Card

SMPTE replay

SMPTE exhibitors

The exhibiting companies at the recent SMPTE TV Conference are listed below.

Use these reader service numbers to obtain more information.

Amperex Electronic Corporation	225
Ampex Corporation	226
Camera Mart	227
Commercial Electronics Inc. (CEI)	228
Chyron Corporation	229
Cinema Products Corporation	*
Digital Video Systems	230
Fortel	231
Fujinon	232
Grass Valley Group	233
Harrison Systems	234
Hitachi Denshi America	235
Image Video Ltd.	236
MCI/Quantel	237
NEC America	238
Rupert Neve	239
Sony Corporation of America	240
Studer/Revox	241
Telease	242
Thomson-CSF Broadcast	243
3M Company	244
Utah Scientific	245
VICA	246
Vital Industries	247

*For information, write: Cinema Products, 2037 Granville Ave., Los Angeles, CA 90025.

videotape sampler to show some of the system capabilities and assured interested individuals that a system would be on display at the NAB convention in Dallas. For information from exhibitors, see the listing of companies associated with this article.


Interested individuals were also given the chance to meet Abe Rolnick, newly appointed president of Digital Video Systems (see February 1982 **BE** Business News regarding DVS' new growth and financing program), and Neil Vander Dussen, recently appointed president of the new Sony Broadcast Products Company (see March 1982 **BE** Business News regarding the Sony Corporation of America reorganization). Interviews with Rolnick and Vander Dussen are found in this issue of **BE**.

The program included 31 technical papers grouped into four sessions. Most of the papers are being printed in special book form and will be available in April. Some early copies are scheduled to be sold at NAB-'82/Dallas. ☐

FIVE DAY DELIVERY!

"A NEW IMPROVED METHOD OF SELECTION"

WRITE
or
CALL
for
FREE BROCHURE
CATALOG
5DD-79

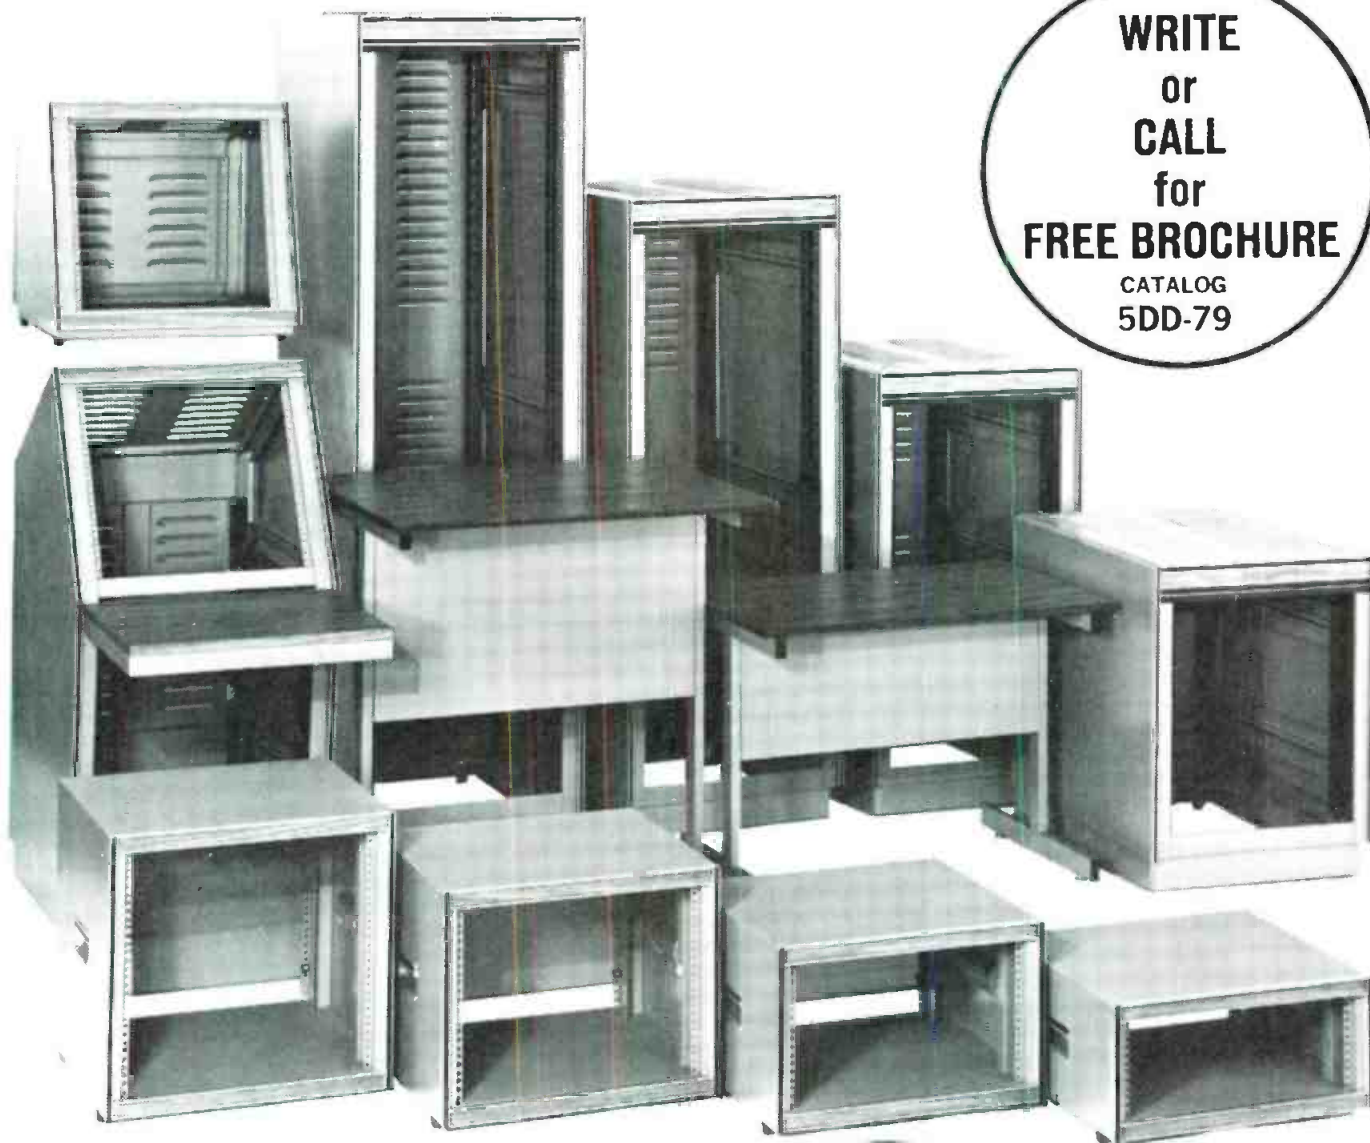

**COMPUTER
PERIPHERAL
FURNITURE**

STANTRON[®]

DIVISION OF
WYCO METAL PRODUCTS

**MODULAR
ELECTRONIC
CABINETS**

6914-6918 BECK AVENUE, NORTH HOLLYWOOD, CALIFORNIA 91605
(213) 875-0800 **TWX 910-499-2177**

Circle (80) on Reply Card

April 1982 *Broadcast Engineering* 69

Designed for
**Multi-purpose
Performance!**



MILES AIR™

This entirely new range of quality headsets has been designed to meet the need for a custom headset suitable for a variety of communication situations. The ability to custom order allows for a very wide range of earphone receiver impedances, resulting in a high quality, versatile, lightweight, robust and fully repairable headset.

Write or call today for more information.

Miles Air Products Ltd.

240 Birmingham Street Toronto,
Ontario Canada M8V 2C8
(416) 251-1705



Circle (81) on Reply Card

HDTV study group focuses on realism

By Blair Benson, TV technology consultant, Norwalk, CT

High definition television was a highlight of the recent SMPTE television conference. "Tomorrow's Television." HDTV attracted a lot of interest and engineering activity, made evident by a discussion among 82 engineers from around the world attending the meeting of the HDTV study group chaired by Donald Fink. The meeting convened the day before the conference.

Detailed studies being conducted on

the feasibility and parameters of a new system were reported on by the members of the group. The objective is to create a greater feeling of presence and realism for the viewer by the use of more detailed pictures displayed in a wider aspect ratio on a large screen, accompanied by high quality stereophonic sound.

The major accomplishment during the meeting was the recruitment of volunteers for four subgroups charged

REGISTER TODAY FOR THE SECOND ANNUAL WOSU BROADCAST ENGINEERING CONFERENCE

Sponsored by Ohio State University
and

BROADCAST magazine
engineering

July 20 through July 22

Speakers to include

Bill Rhodes, Editorial Director, Broadcast Engineering magazine
Don Markley, Consulting Engineer
John Reiser, FCC
Irby Tallant, FCC
Dick Cassidy, V.P. Engineering, NPR
Walley Johnson, Director ABES

Seminar Cost: Only \$99.00 for three days (\$90 if paid by March 31)

For more details and information on room rates, call or write:

Here's a partial list of topics and papers to be covered:

Antenna Fundamentals
Basic DA's
DA Maintenance
DA Proofs
Antennas, FM and TV

John Battison
Director of Engineering
Ohio State University/WOSU
2400 Olentangy River Road
Columbus, Ohio 43210
Phone: 614-422-9678

Circle (82) on Reply Card

Price, Performance and Features Pushed Us to THE EDGE

KVIE-TV Gets More for Their Dollar

We were surprised that we could get all the features THE EDGE™ has to offer at a price way below the competition. It's a real value."

Michael Wall, Director of Engineering, Sacramento, California

Price Waterhouse Likes the Human Touch

"THE EDGE is easy for anyone to operate, no matter what his experience. This is important to me because it means operators can focus all their energy on creativity."

Harry Larson, Director of Audio Visual Operations, New York City

South Carolina ETV: Running Smoothly

With only five cables, we were up and editing with THE EDGE. It was so portable we took it on remotes. And there is a smooth interface between our VTR's and THE EDGE."

Glen McKinney, Broadcast Engineering Supervisor,
Columbia, South Carolina

CMX Means a Great Deal says Videosmith

"The name CMX on an editing system says it all for me. I know I'm getting maximum performance for my money."

Ron Smiley, General Manager, Philadelphia

WLVT-TV Technically Impressed

CMX did some thinking before they introduced THE EDGE. Not only is down time minimal, but the built in diagnostics help me identify a trouble spot before it becomes a major problem."

Harry Richards, Director of Engineering,
Bethlehem, Pennsylvania

Trans Northern Protected Against Obsolescence

"The modular nature of THE EDGE enables us to expand and update. That means we can plug in the latest technical advances and also keep up with our customers' expectations for state of the art equipment."

Bob Nudo, Sales and Marketing, Hollywood

It's clear that these innovators in television technology representing the ever-expanding world of videotape editing recognize the total value of THE EDGE, the medium-scale computer-assisted editing system from CMX. That's why it keeps winning over experts like these every day.

Let us lead you to THE EDGE.




Circle (84) on Reply Card

Orrox Corporation
3303 Scott Blvd., Santa Clara CA 95050
(408) 988-2000 Telex 910-388-0554

CMX
ORROX
The World Standard for Editing

**If we had set out to give you only
the features our competition gives you,
this is where we'd be today.**

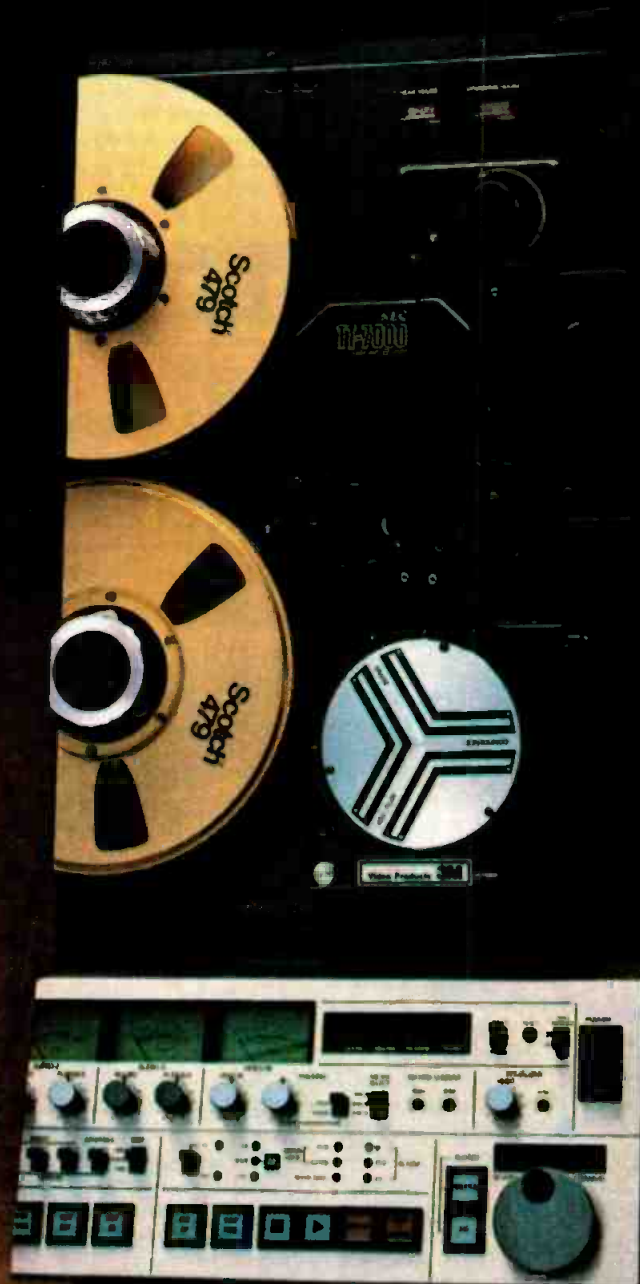

Most VTR units give you only a fraction of the features you might want from a video tape recorder. So we didn't stop where our competition did. We kept on adding features. Until we developed the most versatile 1" machine on the market.

Compare the 3M TT-7000 VTR and NTC-10 Time Base Corrector to the competition. Nobody puts together more of the features you want than 3M. And once you see our unit, we think you'll agree that buying anything else is like getting half a machine.

The 3M TT-7000 Video Tape Recorder gives you:

- Autotrack following (ATF), with multipoint sampling, 1/4 reverse through 2X forward, plus preset slo-mo speeds and direction (optional).
- Video and sync confidence heads.
- Three channel audio confidence heads.
- Video sync channel.
- All DC motor and servo tape transport.
- Play start after scanner lock.
- Spot peels in any combination.
- 19" rack mountable with full dust cover.
- Front panel plug-in modules.
- Frame accurate insert and assemble editing.
- Dual tape timer with zero memory.
- Tape speed override on front panel.
- Stop tone and cue-up (0, 3, 5, 7 sec. preroll).
- Contact closure and TTL external interface.
- Variable speed forward/reverse shuttle.
- Still frame jog.
- Autochroma and color framing.
- Audio 3 record in play mode (built-in speaker).
- Instant stop action from play or slo-mo (with ATF option).
- Instant audio bias level adjust.
- Video level calibrate marker.
- Preset/Manual tracking select on front panel.
- Fixed precision rabbited drum tape guide.

- And low RF, high temperature and low voltage alarms.

Our Time Base Corrector comes complete with its own list of standard features:

- Sixteen line correction window.
- Ten bit quantizing.
- Four times subcarrier sampling.
- 65 dB signal-to-noise ratio.
- Velocity compensation.
- Digital one line drop out compensator.
- Compact size (8 3/4" high by 17 1/2" deep by 18 1/2" wide).
- 45 pounds total weight.
- Portable cabinet or rack mountable.

- And front panel plug-in modules.

Add it all up, and you've got the most complete VTR/TBC package on the market. For a free demonstration, call (612) 733-7914 or write 3M Professional Audio/Video Equipment, Bldg. 223-5S, 3M Center, St. Paul, MN 55144. Get the picture.



**3M means business.
And the time
to act is now.**

3M hears you...

3M

Circle (85) on Reply Card

to investigate the areas of psychophysical considerations, component hardware, production techniques and transmission.

Systems

Renville McMann, president of Thomson-CSF Laboratories in the

United States, opened the Saturday afternoon session with an enthusiastic endorsement for the early development and adoption of worldwide standards for a hierarchy to support compatible systems. He suggested a progressively scanned frame rate higher than the present 24 for film and 30 for

525-line television, and a widescreen format with an aspect ratio of 3:5 or possibly wider. For transmission by satellite, because bandwidth capacity is proportional to power, the present transponder power limits the transmission bandwidth to 20MHz.

An alternative would be to use digital transmission with bandwidth compression. However, this would entail the use of expensive receiver decoders. Consequently, McMann favors FM transmission, with the use of bandwidth reduction deferred until experience has been gained with conventional techniques. For HDTV display systems, he expects theater presentation to pose the greatest problem, and to be solved initially by the use of motion picture film transferred from television.

Charles Sandbank and M. Moffat of the BBC proposed an HDTV system compatible with present 625-line standards, wherein the high frequency luminance and stereo sound would be transmitted in a 6 to 10MHz band above the 5.5MHz PAL spectrum. On the other hand, for a new, non-compatible standard they recommended the choice of a frame rate greater than 100Hz in order to minimize aliasing.

In his discussion of camera and display system variants in a future HDTV system, Charles Rhodes, of Tektronix, proposed a more efficient use of spectrum than that of the present NTSC system by employing time-division multiplexing of time-compressed chrominance components in the horizontal-blanking period. The luminance signal would be time-compressed, as well, to accommodate the chrominance signals. Two components would be alternated every other line by the use of a line store. The wider band color component would be accommodated by the omission of every other horizontal sync and blanking pulse.

A somewhat similar 625-line system was proposed by T.S. Robson of England's Independent Broadcasting Authority. In this system, the luminance and chrominance signals are time-compressed to 40 and 20μsec, respectively, compared to 48 and 12μsec for the Rhodes proposal. Line alternation of the color components, similar to that by Rhodes, is proposed. The advantages of the system, according to the IBA are as follows:

- a 5dB chrominance signal-to-noise improvement in FM transmission

THE TOWER

ROHN

UNR-Rohn
Division of UNR Industries, Inc.
5718 West Plank Road, P.O. Box 2000
Peoria, Illinois 61656
U.S.A.

Circle (86) on Reply Card

When accuracy Counts...Count on Belar for AM/FM/TV MONITORS

BELAR
AM MODULATION MONITOR

BELAR CALL ARNO MEYER (215) 687-5550
ELECTRONICS LABORATORY, INC.
LANCASTER AVENUE AT DORSET, DEVON, PA. 19333 • BOX 826 • (215) 687-5550

Circle (88) on Reply Card

We wrote the book on Time Code.



Time Code Pioneers. Before we wrote The Time Code Book, we helped establish SMPTE Time Code standards and engineered the first SMPTE Time Code Generators and Readers. The first to make SMPTE Code really work, our leadership has been recognized and awarded.

Innovation, A Way Of Life. Now, we've introduced the first microprocessor-based equipment enabling you to utilize Vertical Interval Time Code (VITC). Because it's one thing to earn a reputation, it's another to maintain it.

And again, we're contributing to a standard. Further participation with SMPTE helped establish a proposed recommended practice for VITC, and our equipment is designed to make the most of its capabilities. With VITC every field/frame is identified and the code is in the video picture, permitting you to read the code in still frame while freeing the audio track normally used for time code.

At Technology's Leading Edge. Like all EECO Video Products, our VITC Generators and

And now it's yours free.

Readers are innovated for performance, providing quality, reliability and precision at competitive prices. And our Readers allow you to extract VITC at wind speeds.

15 Years Of Industry Involvement. Supported and serviced by our factory, EECO Video Products are distributed worldwide by Ampex Corporation and in the Southwest by Hoffman Video Systems.

Ask For Our Free Time Code Booklet. For the whole time code picture—Serial and VITC—ask for The Time Code Book, from the people who wrote the book. Write or call. EECO Incorporated, 1601 East Chestnut Ave., P.O. Box 659, Santa Ana, CA 92702-0659 Phone: 714/835-6000.

EECO
Incorporated

Circle (89) on Reply Card

by avoiding the triangular noise degradation of a 4.43MHz color sub-carrier;

- elimination of cross-color and cross-luminance degradation;
- extension of luminance bandwidth; and
- conformance with WARC Regulations 1 and 3 for 12GHz satellite transmission.

IBA plans to demonstrate the system at the International Broadcast Convention in September in England.

Equipment

NHK described the design and performance features of the videotape record recording and playback system used for its HDTV experiments and demonstrations. A Sony type C 1-inch

helical machine was modified to provide the bandwidth and low noise characteristics necessary to be equal to or better than good quality 35mm motion picture film.

The major changes were the use of component, rather than composite, color signal recording, and the conversion to two video signal heads, rotating at twice normal speed. One head records the complete luminance video signal, including sync; and the second narrower head, the two chrominance signals using time-sharing techniques. Because the heads do not record a continuous signal during each rotation, the signals are time-compressed before recording and time-expanded after playback demodulation and processing. Cobalt-doped, iron-oxide tape is used at a tape speed of 97.6cm/sec and a writing speed of 51.7m/sec, 4-times and 2-times, respectively, that of type C. The luminance channel bandwidth is 20MHz and the signal-to-noise ratio 41dB. The figures for the chrominance channel are 5.5MHz and 47dB respectively.

Production

In cooperation with NHK and CBS, several HDTV segments were produced and recorded by Francis Coppola and Zoetrope Studios, Glen Larson Productions and 20th Century-Fox, and the CBS Television Network, for use in demonstrating the practical broadcasting application of the NHK system and equipment. The demonstrations are described in another article soon to be published in **Broadcast Engineering**.

The field and studio experiences in producing these segments were described by Richard Green of CBS. The shows were the Tournament of Roses on New Years Day, the Rams-Redskins football game, the ABC weekly series "Fall Guy," and specially produced "Six Shots and Double Suicide" from Zoetrope Studios. Green found that the equipment was rugged, reliable and required no special staging or lighting techniques.

The editing decisions were made off-line on the CBS ½-inch Betamax system using cassettes recorded simultaneously with the HDTV tapes. The HDTV tapes were conformed by assembly editing on modified type C HDTV equipment. Green, in his closing comments, echoed those of McMan. He recommended that the industry proceed with the generation of standards for studio production, worldwide. □

OUR FAMILY PLAN. Now you can choose from a whole family of dbx compressor/limiters to match your budget and application. All feature our Over Easy® compression curve for inaudible transition into compression. True RMS detection for the most natural sound. Patented VCAs for precise low distortion control of audio levels. That's the plan. Now join the family. See your dbx Pro dealer, or write for information.

*Manufacturer's suggested retail price.



Over Easy® Compressor/Limiters

dbx, Incorporated, Professional Products Division,
71 Chapel St., Newton, Mass. 02195 U.S.A.
Tel. (617) 964-3210, Telex: 92-2522. Distributed in
Canada by BSR (Canada) Ltd., Rexdale, Ontario.

dbx®

Circle (90) on Reply Card

Want MORE Information on Advertised Products?

Just refer to the Bingo # beneath each ad. Circle the appropriate number on the Reader Service Card in the back of this issue.

Complete the remaining information and mail!

New Gould portable video monitor/oscilloscope lets you select by number any line of composite video.

Meet our new OS3350/5. It's the first-ever NTSC 525-line waveform monitor, complete picture monitor, and 40 MHz oscilloscope combined in a single, portable package.

Through an onboard time-base generator, it lets you examine each of the composite video signal's 525 lines—one at a time. PAL plug-in available.

Or you can display complete pictures, highlighting any line selected for inspection to show the relationship between waveform and picture.



And finally, our OS3350/5 functions as a general-purpose 40 MHz, 5mV/cm dual-trace scope.

Our compact monitor/oscilloscope is suited for testing and troubleshooting TV, CATV, CCTV, video recorder/playback and other equipment in mobile TV, microwave repeater, broadcast station, institutional, military, plant and production-line applications.


For more information, contact Gould Inc., Instruments Division, 3631 Perkins Ave., Cleveland, OH 44114. For brochure, call 800/331-1000. In Oklahoma, call collect 918/664-8300.



Electronics & Electrical Products

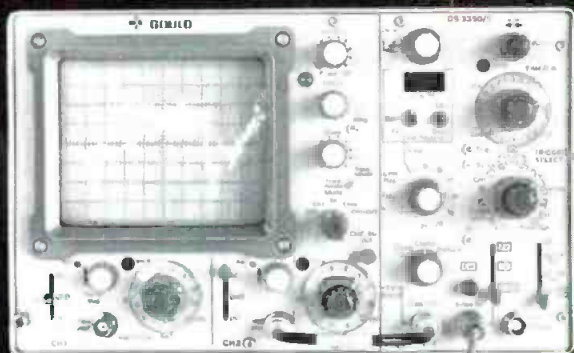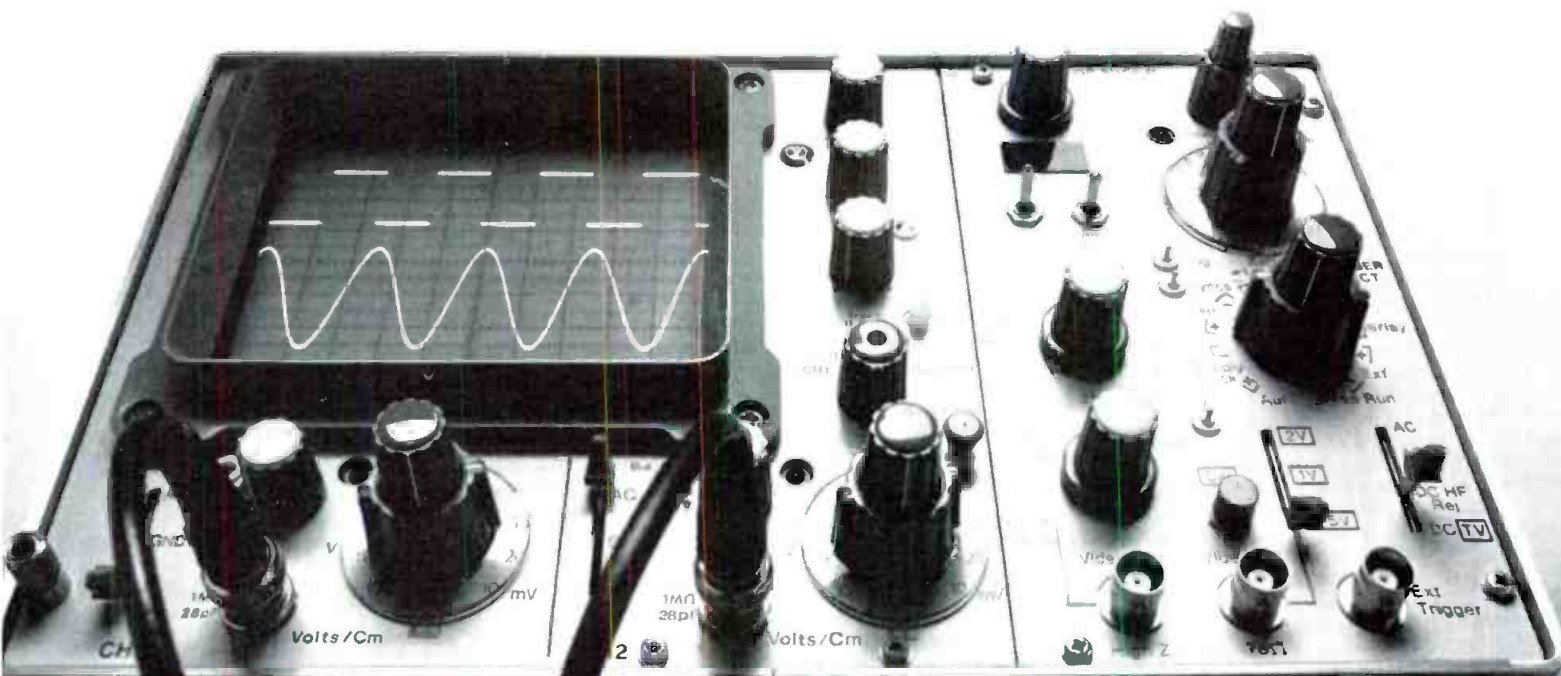

Gould's monitor/oscilloscope can look at a video signal line-by-line...

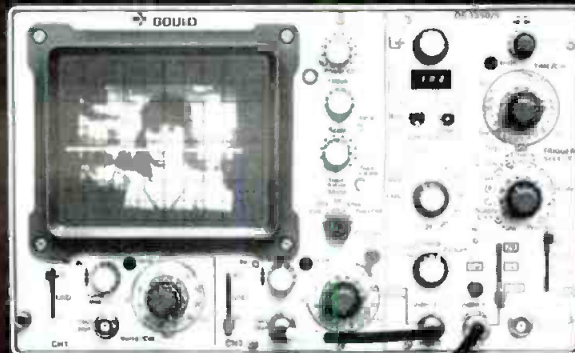

Or it can display the complete picture, with a bright line indicating the line under examination.

Circle (91) on Reply Card

FitzCo
SOUND, INC.

**AAE "Concept One"
AUTOMATION**

AKG

AMPEX

AUDIOARTS

ENGINEERING

BGW/TANNOY

HANNAY REELS

IVIE

EVENTIDE

LEXICON

NEUTRIK

SENNHEISER

TECHNICS

VEGA

WIREWOKS

FITZCO SOUND, INC.

**204 N. Midkiff
Midland, Texas 79701
(915) 684-0861**

Circle (92) on Reply Card

FREE 32pg Catalog & 50 Audio/Video Applic.

PHONO, MIC, PWR SUPP. EQ.
TRANS. ACN, TAPE, VIDEO, LIVE, OSC

Stereo Mono Pwr Ampl

8-in 2-out, 12-in 4-out, 16-in 4-out

Video & Audio Dist. Ampl. TV Audio & Recd Prod Consoles

OPAMP LABS INC (213) 934-3566
1033 N Sycamore Av LOS ANGELES CA, 90038

Circle (93) on Reply Card

HEAD RE-LAPPING

Worn cartridge and reel to reel heads re-contoured and re-lapped for original performance. Other products for the magnetic recording industry. Send for free brochure.

R.K. Morrison Co.
819 Coventry Road • Kensington, CA 94707
(415) 525-9409

Circle (94) on Reply Card

conversations

BE had the opportunity at the recent SMPTE conference to interview Abe Rolnick, newly appointed president of Digital Video Systems, and Neil Vander Dussen, recently appointed president of the Sony Broadcast Products Company. The following is a summary of these interviews, which cover the individual and company goals of these two executives.



Rolnick



Vander Dussen

Abe Rolnick was recently appointed president of Digital Video Systems. Rolnick was formerly with AES, a supplier of word processing equipment. John D. Lowry, former DVS president, now chairman of the board, made this appointment as part of the transition program the company is undergoing. (See BE February 1982.)

BE: How does your background apply to Digital Video Systems?

Rolnick: I've built companies the size of John Lowry's DVS, or smaller, into multimillion dollar businesses.

Continued on page 90

Neil R. Vander Dussen was recently appointed as president/chief executive officer of the new Sony Broadcast Products Company. Vander Dussen comes to Sony after 25 years with RCA, most recently serving as executive vice president of RCA's diversified businesses. He also has held positions with the Broadcast Systems and Commercial Communications Systems divisions. Vander Dussen is originally from the greater Kansas City area.

BE: What are the overall business philosophies associated with you

Continued on page 92

Kahn Communications, Inc. is pleased to announce that the following leading stations have installed, or plan to install, Kahn AM Stereo Exciters:

New York
WABC* (FCC Tests)
WNBC**

Baltimore
WFBR** (FCC Tests)

Pittsburgh
KDKA* (FCC Tests)

Philadelphia
WFIL* (FCC Tests)

Washington, D.C.
WMAL*
WGMS**

Houston
KILT**
KULF**

Dallas
KAAM**

Miami
WVCG**
WGBS**

Orlando
WDBO**

Columbus
WCOL**

Denver
KIMN**

Atlanta
WQXI**

Birmingham
WSGN**
WATV**

Memphis
WHBQ**

Charlotte
WBT**

Richmond
WRVA**

Savannah
WSGA**

Chicago
WLS*
WMAQ**
WGN**

Boston
WBZ*
WHUE**

Salt Lake
KSL**

Logan
KVNU**

Tulsa
KVOO**

Kansas City
KCMO* (FCC Tests)
KMBZ**

Seattle
KIRO**
KJZZ**
KAYO**

Eugene
KUGN**

Greensboro
WBIG**

Rochester
WBBF**

Syracuse
WFBL**

Phoenix
KOY**

Canada
CHED* (DOC Tests)
CKY** (DOC Tests)
CKXL**
CKLG**
CJJD** (CHAM)
CHAB**

Los Angeles
KHJ* (FCC Tests)
KDAY**

San Francisco
KFRC* (FCC Tests)
KNBR**

San Antonio
KTSA* (FCC Tests)

St. Louis
WIL**

Omaha
WOW* (FCC Tests)

Ft. Wayne
WOWO*

Ft. Smith
KFSA**

Charleston
WKAZ**
WCSC**

Hartford
WTIC**

New Haven
WELI**

Worcester
WFTQ**

Paducah
WKYX**

Bristol
WFHG**

Toledo
WSPD**

Grand Rapids
WOOD**

Milwaukee
WEMP**

Mexico
XTRA* (Govt Tests)
XEHL* (Govt Tests)
XEOY* (Govt Tests)

* Units already at station.

** Stations who granted us permission to announce their plans to equip.

Kahn Communications, Inc. • 839 Stewart Avenue • Garden City, N.Y. 11530 • (516) 222-2221

Circle (118) on Reply Card

THE CASE FOR SURVIVAL.

Here's a custom case specifically engineered to protect your valuable equipment.

EXCALIBUR cases are

- Rugged—the case that can take it.
- Dependable—the case you can always count on.
- Strong—the case for the long haul.

Choose from the finest materials and hardware available. Built to your specs, or you may consult with our designers regarding your particular needs.

Write or call today for your EXCALIBUR Survival Kit.



EXCALIBUR

12427 Foothill Blvd., Lake View Terrace, CA 91342 (213) 899-2547
Telex: 910-494-1233

Circle (95) on Reply Card

Low power

By Harry Martin, Washington, DC

The prospects for early establishment of the more than 1000 new LPTV stations hoped for last year is bleak because of FCC budgetary constraints and the inability of the agency to devise a plan for station allocation that would be expeditious and legal, according to speakers at the 3-day LPTV '82 conference held in late January in Washington, DC. Twelve hundred LPTV applicants, would-be applicants and other attendees heard

speaker after speaker say that LPTV is on the way; but, because of regulatory delays, its development will be much slower than originally expected.

The problem is that the FCC now has more than 7000 pending LPTV and translator applications to process, but has neither the manpower (at this writing, only two FCC engineers are doing LPTV/translator work), nor the computer needed to begin the task. And, no additional money to improve the situation will be available until the end of the year. Until then, the FCC's LPTV staff, such as it is, will continue to process applications manually at the rate of two or three per day.

Compounding the problem is the fact that a substantial number of the 7000 applications now on file have not

The author is a partner in the law firm of Midlen, Reddy, Begley & Martin.

WANT A HIGH QUALITY THREE SATICON TELECINE CAMERA AT A LOW PRICE?

Ask about the Comex KY 1900T telecine camera system



POST OFFICE BOX 17011
DULLES INTERNATIONAL AIRPORT
WASHINGTON, D.C. 20041

TELEPHONE:
(703) 471-4215
(703) 661-8132
OR
TELEX:
248892 COMX UR

Circle (96) on Reply Card

Discover the ~~best~~ worst kept secret in wireless mic's—NADY SYSTEMS


The word is out!

After only a few years on the market Nady wireless mic's are already the only choice of the top pop and rock entertainers. Now the expanded Nady line is rapidly becoming the choice in wireless in video and film production.

What's the secret? Nady Systems' U.S. Patent #4,215,431 — the biggest breakthrough in wireless mic performance ever. Sure, others claim to be the best, but only Nady Systems delivers the proof so obviously in any A-B comparison. Discover for yourself Nady Systems' full line of superior wireless mic's and wireless intercom systems. Discover for yourself matchless performance that is surprisingly affordable.

Nady Low Noise circuitry is covered by U.S. Patent 4,215,431.

NADY SYSTEMS, INC. • 1145 65th ST. • OAKLAND, CA 94608

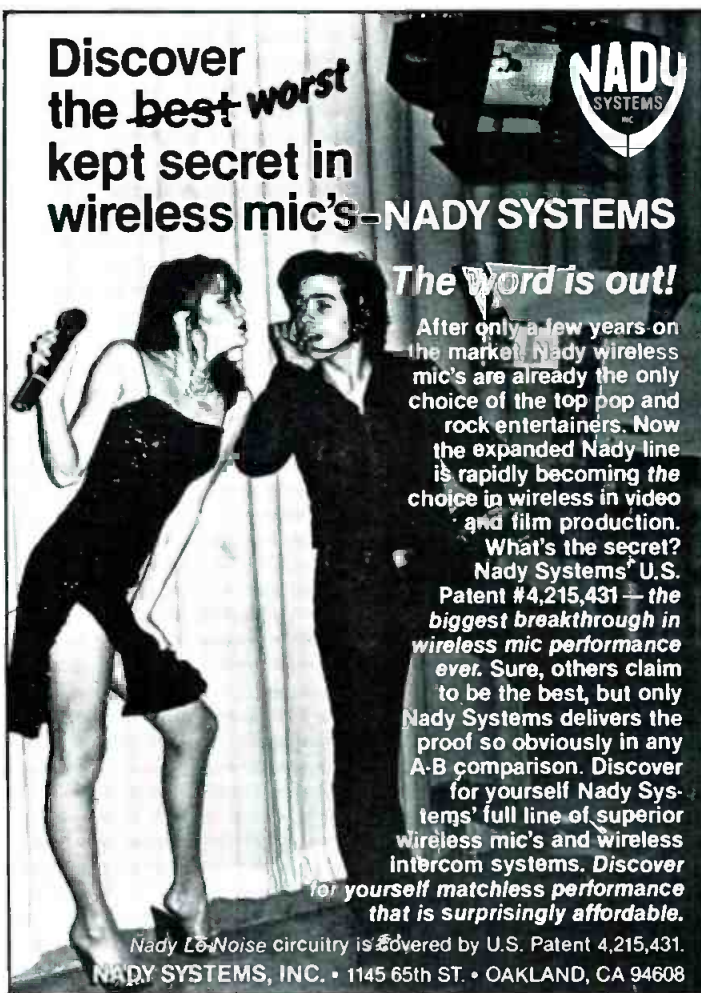

Circle (97) on Reply Card

TV outlook

yet been put on cut-off lists. Once they are, it is expected that thousands of additional competing applications will be filed. Further, a substantial proportion of the applications that have reached cut-off already have drawn competing proposals. Because the FCC has rejected Congress' lottery scheme as unworkable, it is conceivable that the FCC will be faced with the task of resolving many hundreds, if not thousands, of cases involving mutually exclusive LPTV applications through its existing hearing processes.


Given the considerable time and expense involved for even a routine comparative hearing, it is not realistic to hope that the FCC can dispose of its LPTV backlog in this fashion. The

FCC would probably have to hire 50 to 100 new administrative law judges and reviewing attorneys to decide the new cases. But, with reductions in force ("RIFs") involving 300 staff jobs in the offing for fiscal 1983, it is unlikely that any new judges or lawyers will be hired by the FCC in the near future.

In spite of these grim realities, the tenor of the conference was upbeat. Its organizers were successful in bringing previously divergent LPTV constituencies together under a common banner. Applicants, equipment suppliers and regulators looked alike in the red, white and blue I'm for LPTV buttons handed out at the hotel.

Although many participants in the conference were sobered by the

SPILL COFFEE IN OUR FADERS!

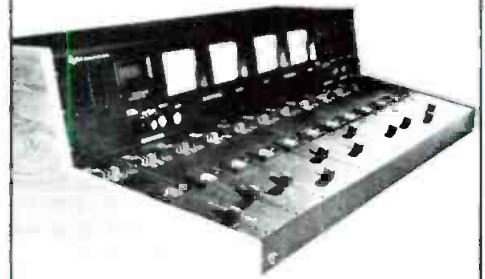

Our revolutionary new slide faders, made by P&G, literally deflect dust, dirt and spills to keep our boards running smoothly and quietly. Just one more way Logitek keeps you out front, year-in, year-out!

CALL TOLL-FREE 800-231-5870
(Texas call collect 713-782-4592)

We'll tell you about our full line of top-quality consoles, preamps, amplifiers and accessories!

Logitek

Electronic Systems, Inc.

3320 BERING DRIVE □ HOUSTON TEXAS 77057

Circle (98) on Reply Card

Your image is on the line.

Barco's broadcast color monitors put your image on the line—clearly.

With the CM-33B 13" and CM-51B 19" monitors you can choose from a medium, standard, or high resolution delta dot tube. Your choice. But all three assure the broadcaster a color critical picture that lets you know exactly what is going out on line.

The medium resolution CM-33B offers a phosphor

triad pitch of .43 millimeters and the CM-51B .47 millimeters. Other features include • Switchable underscan/overscan, • RG off switch for easy set-up, • Color temperature switch.

All models are fully modular and are designed for general purpose applications. The CM-33B is ideal for ENG/EFP applications and the CM-51B is perfect for studio use.

We know your image is on the line. Barco's worldwide reputation for quality is sure to enhance your image.

Available from Elector, U.S. distributor of Barco communications products.

In the U.S.
Elector U.S.
5128 Calle del Sol,
Santa Clara, CA 95050
Phone: 408/727-1506
Telex: 0236/0172335

In Canada
Elector & Optical Systems Ltd.
31 Progress Court,
Scarborough
Ontario M16 3V5
Phone: 416/439-9333
Telex: 021/06525431



BARCO

Circle (99) on Reply Card



THE \$250,000 CART MACHINE.

by Ray M. Kohfeld, President, Ramko Research

PhaseMaster, The industry's most advanced broadcast reproduction system.

From the beginning of the PhaseMaster cart machine project more than two years ago, we were convinced there was an electronic solution to the problem of stereo phase stability. Consistent stereo reproduction and machine-to-machine compatability could be solved. We believed that for many crucial system parameters, performance could be achieved in a cart system that would meet or exceed the best reel-to-reel machines.

What we didn't realize however, is that the development of the "ultimate" cart machine would cost over a quarter of a million dollars and take thousands of man-hours to accomplish. We finally achieved what we were after—no, what you were after—but not without some very trying times.

Early on, the goals were clear.

By employing leading-edge technology throughout each area of the tape system, we felt that the PhaseMaster could out-perform everything in the audio chain. Right on through the transmitter. The signal-to-noise, distortion and wow and flutter performance criteria had to rival reel-to-reel specs while retaining all the conveniences and benefits of the standard plastic tape cart. The major problems of tape skew and guidance had to be overcome in order to deliver a system which would, once and for all, take care of phase problems. This problem was judged by us to be absolutely critical for proper and consistent stereo reproduction. FM now, and AM just around the corner.

The final goal we set for ourselves was to design a cart system that offered automatic machine-to-machine compatability—an important benefit that to our knowledge no other reel-to-reel, cartridge machine or add-on processing

system offers. We believe that it is a significant factor for the broadcaster to be able to pickup anyone's cart at random, record it on any PhaseMaster and then play it back on any PhaseMaster; the program material being precisely locked in-phase. Whatever the phasing of the original source, the signals will be automatically and faithfully reproduced. Ultimately, tape skew, chatter or even head misalignments would no longer be a problem.

Side-to-side stereo shift; holes in the mono mix or worse yet, reception; audio modulation due to tape chatter from the cart; major problems that we've lived with for years. You waste valuable time trying to get around it, cart manufacturers would like you to believe that it's solved in their carts, programming and management don't want to hear about it, and your audiences reach for the dial when your station doesn't sound good because of it.

To have introduced another cart ma-

chine that didn't solve all these persistent problems would have been negligent. To say the least, another mouse-trap. As we've stated, the goals were clear from the onset, but not the solution(s).

Our attempts at phase correction: shortcuts aren't our way of doing things.

When we first looked at the problem, there existed only one other means of phase correction. This is an electromechanical approach which adjusts head alignment for each cart prior to the initial recording. Although this is certainly an improvement over what had existed (nothing), we felt it had many shortcomings. It can't correct phasing in real-time, the compatibility factor is not high enough, it's overly complex—subject to breakdowns, and it adds valuable, additional time to a producer's already busy schedule of production.

What about stereo matrix?

Another approach which initially offered some technical promise at the outset was stereo matrixing. We went down this road early and discovered that a matrix system not only added unwanted electronic noise (something we were taking great pains to get rid-of) but it did very little to accomplish our goal of machine-to-machine compatibility. These fundamental drawbacks are inherent in this design approach and we eventually discarded it after many attempts to make it do things it just couldn't do.

Cross-correlation and signal injection: not the answers either.

After discarding the stereo matrix approach, we researched the viability of mixing timing signals onto the Left and Right audio tracks. This was closer to what we had in mind but detracted from the end result in that the audio had to be reprocessed which naturally degraded the high quality audio we were aiming for.

The third technique investigated was a cross correlation scheme that is essentially a form of probability theory with user adjustments. This also was eventually dismissed because of its inability to second-guess many complex waveforms and the necessity to readjust for various types of program material.

Although all of these approaches have some merit and have since shown up in the marketplace, the individual shortcomings were too much of a compromise of the promises to ourselves that we could do it better. Much better.

The answer! Perfect phase correction via the Q-track.

The elegantly simple and totally unique answer to the phase-stability problem came because of persistence and, at times, downright obstinance to not accept anything less than what we set out to achieve: picture perfect phase accuracy and stability—an ultimate, real-time correcting solution to the biggest problem the cart system serves up to every broadcaster.

The phasing (or more accurately, time base) correction system in the new PhaseMaster cart machines takes a sample of the upper (Left) audio channel, encodes it and then records it on the cue track without interference to any other information. Upon playback, the encoded signal is reconstructed and compared to its mate on the upper track so that we now have two identical signals to compare with each other. This has been the key. We are now able to compare apples to apples. Dissimilar information normally found in Left and Right audio is no longer a limiting factor. After these two identical signals are compared by a clever signature-determining circuit, a control signal is developed. Any time-base differences between these signals are applied via control signals to timing circuitry in both the Left and Right audio for correction. The result? Phase correction in real-time...measured in microseconds. The heads, the tape or both can be severely out-of-whack and the PhaseMaster's phase compensating electronics don't care. The audio can be complex, sinusoidal or recorded only on one track.

You can record your program material on any PhaseMaster Record/Play machine and rest assured that it will reproduce exactly like the original source no matter if it be across the hall or across the world.

Control instrumentation technology helped us find the solution and we're now preparing for patent application.

Compatibility with your present system.

The new PhaseMaster also offers you compatibility with all your present, previously recorded carts. An easy transition can be made at your own pace without having to rerecord your station's entire library. To state it simply, PhaseMaster now gives you a professional R/P system without the drawbacks you've grown accustomed to.

Last, but not least, the best mechanical design you've ever seen.

The deck is a $\frac{5}{8}$ " casting for stability, with a stainless steel cover plate for

wear-resistance and EMI shielding. A crystal-controlled D.C. servo motor insures timing accuracy to within $\pm 0.05\%$ and, practically no heat generation. The speeds are field selectable: $3\frac{3}{4}$, $7\frac{1}{2}$, and 15 ips.

Your carts are securely held in position by the edges to prevent distortion, using spring-loaded rollers. Insertion and withdrawal is smooth and positive-feeling. The machined head stack is rock stable, and we've included internal illumination for periodic inspections and maintenance. There are no microswitches to break or jam—and never any start-up wow because the motor is started by an optical sensor as you begin to insert the cart. To keep damaging heat away from the tape, the capstan is ceramic. And bearings have a longer life because the motor doesn't need to run continuously due to the cart sensing design and the ability of the motor to reach full speed by the time the cart is fully inserted. The pinch roller is engaged by an adjustable air-damped solenoid with a teflon coated plunger for friction-free, quiet operation.

On the PhaseMaster R/P machine you get front panel switch selectable inputs; integral diagnostics for faster, easier maintenance; three cue tones are standard. An automatic $4\frac{1}{2}$ digit timer is standard. Left/Right audio plus phase analysis solid-state meters, motor "out-of-speed" and "already played" indicators are standard, too.

With the kind of performance we didn't compromise.

We've set new standards for wow and flutter: .04-.07%. The amplifier's signal-to-noise is -65dB utilizing dynamic noise reduction without companding or expansion. Frequency Response is ± 1.0 dB. And, of course, there's balanced I/O's and a +25dBm output capability.

It's been worth the wait.

We call it the \$250,000.00 cart machine. That's what we invested on our bottom line to engineer a system that you can have for less than \$1,400.00.*

Call us collect at (916) 635-3600 or contact your Ramko sales rep for more information and a schedule of when you can have a free, two week trial of PhaseMaster—the industry's most advanced broadcast reproduction system.

*PhaseMaster playback machine. Prices subject to change without notice.

Engineered For Your Bottom Line.



Ramko Research, 11355-A Folsom Blvd., Rancho Cordova, California 95670 (916) 635-3600

LPTV outlook

magnitude of the regulatory and budgetary problems blocking speedy institution of the new service, most agreed that solutions can and must be found to solve these problems. Furthermore, the level of enthusiasm for low power shared by all who attended LPTV '82 focused the entire Washington telecommunications community on LPTV issues at a crucial moment. The conference was held on the eve of the FCC's consideration of final rules for the new

service. If there were any remaining doubts about whether LPTV would win a permanent place in the FCC's regulatory scheme before the conference, the presence of 1200 LPTV hopefuls in Washington ended those doubts.

The freeze

The FCC is concerned about the processing delays that face LPTV applicants. In order to stop the flood of new proposals and make it possible to begin processing some LPTV applications, the commission last spring instituted a freeze on the filing of new

applications. The main exception to the freeze permits the filing of applications for areas that receive TV service from less than two regular commercial stations.

On February 9, 1982, a cut-off list was published that listed 300 new LPTV applications that meet the freeze exceptions. The applications on the list that did not draw competing applications are now eligible for grant. At this point, no one knows how many (if any) of the 300 survived cut-off. New cut-off lists for freeze-exception areas will be published periodically to facilitate the grant of as many LPTV construction permits as possible in the shortest possible time. Although this process holds some promise of getting LPTV off the ground, it will work only for rural areas where there is no competition for LPTV frequencies.

MX'd (mutually exclusive) applicants face substantial delays regardless of whether their proposals meet the freeze exceptions. This is because, absent a lottery, the law requires that the comparative hearing process mentioned above be used to decide among conflicting proposals. At LPTV '82, Molly Pauker, the FCC staffer principally responsible for drafting the new rules, advised applicants who find themselves in MX situations to "get out and deal." Certainly, the incentive to settle conflicts through merger and buy-out agreements will be great when MX'd applicants realize that the FCC is never going to be provided with sufficient resources to resolve LPTV conflicts through hearings.

There still is hope that a lottery for MX'd applications eventually will be approved. Congressman Wirth (D-CO), chairman of the House subcommittee with principal responsibility for overseeing FCC activities, recently issued a statement strongly critical of the agency for not adopting lottery procedures. Also, the FCC's LPTV problems have become an important issue to many other congressmen and senators because of pressure from constituents caught in the logjam. Once the dust settles from the FCC's decision to reject Congress' lottery plan, there is a good chance that new attempts will be made by Congress and the FCC to devise a workable system.

FCC Commissioner Ann Jones, who delivered the keynote address at LPTV '82, predicted the following LPTV developments:

- Commission approval of the establishment of the new service would come in March 1982.
- Petitions to reconsider one or more parts of the order adopting LPTV rules would follow and not be re-

DELTA does it accurately



TCA-10/20-EXR Dual Scale Remote Output
On/Off and Hi/Lo Switching.

RF Ammeter Systems

- MEETS FCC REQUIREMENTS OF 2% ACCURACY •
- MINIMUM MODULATION EFFECT •
- ALL COMPONENTS CAN BE GROUNDED FOR SAFETY •
- ON/OFF SWITCH FOR GREATER LIGHTNING PROTECTION •
- PATENTED TEMPERATURE COMPENSATED RECTIFIER CIRCUIT •
- WIDE TEMPERATURE RANGE -40°F to $+150^{\circ}\text{F}$ •

The Delta series of TCA RF Ammeter systems utilize a toroidal current transformer (TCT) to obtain a sample voltage proportional to the RF current flowing in a conductor. This sample is then connected to a special temperature compensated rectifier circuit via a 50 ohm coaxial cable. The rectifier converts the RF sample voltage to a DC current to drive an indicating instrument.

Every TCA system is calibrated at our laboratory at an RF frequency in the broadcast band—corelated to the National Bureau of Standards. Correction curves are supplied when more than 2% accuracy is required.

We have a wide range of models, scales and optional items which are illustrated and explained in our RF Ammeter Products catalog. Just call or write us for more information.

DELTA ELECTRONICS



5730 GENERAL WASHINGTON DRIVE
P.O. Box 11268 • ALEXANDRIA, VIRGINIA 22312
TELEPHONE: 703/354-3350 TWX: 710-832-0273

Circle (101) on Reply Card

solved for several months, perhaps a year.

- In the meantime, the FCC would begin to develop a computer program for sorting out the applications now on file. This process, the commissioner said, would take at least a year.
- Also this year, the FCC will pick a new 15-member task force to attack the backlog. The task force will be in place by year's end.
- The freeze on new applications will not be lifted until 1985 or 1986, because it will take at least that long to process the applications now on file.
- Without a lottery, the freeze on new applications may not be lifted until after 1986.
- Initial processing—to begin after the planned computer system is in place and after all presently pending applications are cut-off—will most likely begin with applications proposing a first or second local service. Thus, rural areas will be the first to receive service.

Jones also expressed her view that there should be no limitations on who can own LPTV stations. She hopes to see new satellite-connected LPTV networks created and believes restrictions on the number of stations one party can hold will stand in the way.

Form 301

A useful suggestion surfaced at a panel discussion after Jones' speech. Someone in the audience pointed out that there still are many vacant UHF assignments in various mid-sized US cities. Because the FCC's rules permit regular TV stations operating on such assigned frequencies to employ transmitters with TPO's as low as 100W, there is no reason low power applicants should not refile their proposals as standard TV proposals on FCC Form 301. This idea offers the following advantages:

- LPTV processing delays could be avoided.
- Cable TV systems are required to carry local TV stations, but not LPTV stations.
- Regular TV stations are protected from interference from LPTVs, while LPTVs are secondary and must accept any interference caused by a new regular TV station.
- The FCC seems to be proceeding toward deregulation of TV, which means STV probably will be permitted on TV stations in small markets, and logging and public service program requirements will be relaxed.
- The facilities of regular stations can be improved so that regional coverage is possible, once that becomes an affordable option. On the other

hand, LPTVs will always be limited to small coverage areas.

Of course, applicants for regular facilities face expensive and time-consuming hearings if competing proposals are filed. But this is true for LPTV applicants, too.

Private lottery

One final note from the conference: It appears that someone, either the organizers of the conference (who plan a new LPTV trade association), or another enterprising group, will organize a private lottery and arbitration service to deal with LPTV ap-

plications. Under such a plan, all applicants MX'd for the same facilities would agree to submit their applications to the independent arbiter who would determine, through a lottery or some other mutually agreeable method, who the winner would be. Losers could receive their expenses and be able to try their luck elsewhere. Most important, the FCC would be presented with a *fait accompli* and could make an immediate grant. This may offer the only method of relieving anxiety among LPTV applicants in what is proving to be a frustrating first year for the new service. □



You can tell by its special styling and dynamic panel layout that the new Wilkinson WX3000 FM exciter is something to get excited about! And when you hear the results after installing it in or with your FM transmitter you'll really get excited.

Crisp, clean sound. Low, low distortion. S/N ratio that makes it truly quiet. Synthesized tuning for over 2000 channels. Stabilized output. And adjustable RF power output to 30 watts.

Pick up the WX3000 and pick up the performance of your station. You'll find out what a real value it is when you hear its price.

SPECIFICATIONS:

- Audio Frequency Response: ± 0.2 dB, 30Hz-100kHz
- Total Harmonic Distortion: 0.2% or less (0.1% typical)
- Intermodulation Distortion: 0.2% or less (0.1% typical)
- S/N Ratio: -70dB or greater below 75kHz deviation @ 400 Hz (Measured with 75 usec de-emphasis)
- Stereo Separation: 42 dB or greater (47 dB typical)
- Frequency Stability: ± 300 Hz
- Audio Inputs: 1 Composite, 2 SCA
- RF Output Level: 30 watt (adjustable) 50 ohm, BNC connector
- Metering: Analog—All Critical Circuitry LED Bar Graph—Modulation
- Remote Controllable: Yes

Call or write for complete data sheet, or circle the number.

Wilkinson

Wilkinson Electronics, Inc. / A Television Technology Company
5970 West 60th Avenue / Arvada, CO 80003 / Tel: (303) 423-1652

Circle (102) on Reply Card

April 1982 **Broadcast Engineering** 85

NEW! Book VIDEOTAPE EDITING

Videotape Editing-Communications With Pictures And Sound answers every videotape editing question: When to (and when not to) use a dissolve or wipe? How to cut? How to sweeten complex sync role editing and audio editing? How to affect the mood and pace of a show? Why and how to perform computer editing without losing creative control? It even takes the mystery out of time code and user bits.

Beginning editors, experienced pros, film editors, and media managers will all appreciate **Videotape Editing**. This new book is your guide through the world of computer assisted videotape editing.

Videotape Editing-Communications With Pictures And Sound By Michael D. Sletter
• 165 pp. • 144 illus. • 6" X 9" • Hardbound
\$32.20 (\$34.00 in U.S.)

Order Today!

Brochure Available

(312) 364-1900 Ext. 825

Major Credit Cards Accepted

SE

Swiderski Electronics Inc.

Audio Video Engineers

200 Greenwood Ave. • 516 Grove Village IL 60007

Circle (103) on Reply Card

SAVE TIME

For fast, accurate service, please remove the Peel-Off Label (which is used to address your magazine) and affix it to the Reader Service Card, the Address Change Card, or to any correspondence you send us regarding your subscription.



INNOVATIONS FROM ABROAD

Pro video from British manufacturers

By Michael J. Adams, British correspondent, United Kingdom

As the information becomes available, **Broadcast Engineering** will bring you *Innovations from Abroad*, highlighting new equipment from manufacturers in other countries. Many of these manufacturers may not have US representatives at this time. For your convenience, however, reader service numbers have been included in the text. Use them if you need more information.

The Professional Video Show '81 at London's Wembley Conference Centre last November took the place of the Video Tradex international exhibition. The change in title and approach reflects the expansion in program production for videocassette or disc and cable distribution. The exhibition was aimed at end users in broadcasting, program distribution, industrial communications and training programs. A continuing reduction of the gap between broadcast and non-broadcast was evident.

Flying spot telecine

The Transcan Video 168H professional flying spot telecine features instant changeover from 16 to Super 8mm film with switchable color standards for 625 PAL or SECAM and 525 NTSC. The system can reproduce color or mono contrasts up to 150:1 for improved picture quality. Joystick manipulated differential controls adjust black/white, balance and gamma parameters. The resulting coarse and fine gamma range is approximately 0.8 to 2.0. Black/white balance changes allow operational changes for any color variation in the film.

The 168H system is gentle with film, yet provides fast forward and reverse search modes. Speed control permits viewing at any TV standard, variable speeds and stop frame viewing. A raster positioning control matches the equipment to the film frame, rather

than making the film match the equipment.

Circle (200) on Reply Card

Camera tubes

The English Electric Valve Company exhibited some of its professional electro-optical tubes and a new hand-held TV camera. The studio grade Leddicons provide 30, 25 and 17mm formats. One highlight was the P8400 series with its built-in potentiometer-controlled integral light bias. Other features are the low capacitance target contact for improved signal-to-noise ratio; an anti-microphonic mesh assembly; ultra-high resolution photo layers; and a 1-inch scan format for improved geometry and registrations. For the 3/4-inch format users, the P8161 Leddicon is ideal for CCTV, ENG and EFP applications. The smaller format couples high resolution, precise geometry and long life.

Circle (201) on Reply Card

CCD camera



EEV also presented a working model of the P4300 hand-held monochrome camera. Its P8600 charge-coupled-device (CCD) image sensors provide an image area of 8.5 x 6.4mm with an image element format of 576H x 385V. The camera contains all driver, sync pulse and video processing circuits to allow production of a 625-line CCIR-compatible composite

Pick a number from 9 to 52!

You've just chosen the ideal DC voltage to phantom-power these new ATM electret microphones.

AT8501

ATM11R

ATM10R

ATM31R

ATM91R

Introducing four "universal" phantom-powered electret microphones. Designed to work from external power, internal regulation automatically handles any voltage from 9 to 52 VDC without adapters, switches, or rewiring. Just plug in and enjoy. With current drain a mere 0.3 mA at 9 volts (4 mA at 12-52V) a 9V battery lasts thousands of hours, not just the 60 or 70 hours typical of other mikes.

When your power supply isn't available, or isn't enough, use ours. The new AT8501 Dual Battery Supply holds two 9V batteries. One to use, and one in reserve. Instant switchover and test LED eliminates guesswork. And spares are as near as the closest shopping center. Neat!

But convenience and versatility are just two of the advantages of the new ATM models. All-new electronics provide plenty of headroom inside the microphone with no more than 1% THD even when used in acoustic fields of 141 dB SPL. Which sets new standards for clean sound even close-up to big brass or inside a powerful drum kit.

And the sound you hear is wide-range and *musical*. Presence without peaks. Highs to 20,000 Hz but without a raspy "edge." Yet despite their responsiveness, these new ATM microphones have the "Road Tough" reliability proved so often on stage and in the studio.

Before you add another microphone, compare our sound, our convenience, our reliability, and our cost. Write for literature and list of nearby ATM microphone specialists. Get great sound...right from the start! AUDIO-TECHNICA U.S., INC., 1221 Commerce Drive, Stow, Ohio 44224. (216) 686-2600.

Circle (121) on Reply Card

www.americanradiohistory.com

audio-technica®

NOW! CONTINENTAL'S 1 KW AM



Pulse width modulation in an efficient 1 kW package; efficiency and reliability of a tube-powered final; clear, crisp sound of transformerless modulation; ready for AM stereo. Switch-mod system allows maximum modulation level at all power levels while providing cost-effective operation.

Write for brochure on 314R-1:
Continental Electronics Mfg. Co.
Box 270879 Dallas, TX 75227
(214) 381-7161

Continental Electronics 

Circle (105) on Reply Card

Listen, if you want a
great compact 5 channel
Stereo Mixer with
economy, dependability,
versatility & performance,
you can't beat the Russco
Studio / Master 505S.

But dear,
I already have a mixer.



Write for Catalog with full specs.

RUSSCO
ELECTRONICS INCORPORATED

5690 E. Shields Ave., Fresno, Calif.
U.S.A. 93727 Phone (209) 291-5591

Circle (106) on Reply Card

Innovations

video signal. Without the lens or battery, the camera body weighs only 2 pounds. A separate video monitor is required.

Circle (202) on Reply Card

Intercom system

The Bradbury Group specializes in ancillary equipment for broadcast. On display was the model 310 series studio talk-back/intercom system. One of two system designs places all active circuit boards in remote units. Modules for these systems include a voltage controlled amplifier, logic control and speech decoder cards, an audio tone generator, an audio distribution amplifier, a 1x12 matrix amplifier and an 8-input matrix card.

Circle (203) on Reply Card


Shuttered TV camera

The J.D. Jackson Electronics high speed TV system was developed under a British Ministry of Defense contract. It is capable of recording on magnetic tape for up to 110 minutes at 200 pictures per second with the exposure time of each limited to 400µsec by a shutter system. A triggered flash with an open shutter reduces the effective exposure to about 10µsec of high intensity flash is used, to 2µsec for close-up work with short duration flash. The camera uses Amperex lead-based camera tubes with an anti-comet tail gun, bias light pipe, antihalation disc and small area target contact. Outstanding resolution, signal-to-noise ratio, key lag and highlight handling performance are valuable in high speed work. Highlights to 10% of the picture height and a brightness 32 times a normal peak white produce no trailing or blooming effects. A compressed gray scale is reproduced within the highlight area.

Circle (204) on Reply Card

Pan/tilt head

W. Vinten exhibited a complete range of lightweight camera mountings. The Avocet ENG/EFP pan/tilt

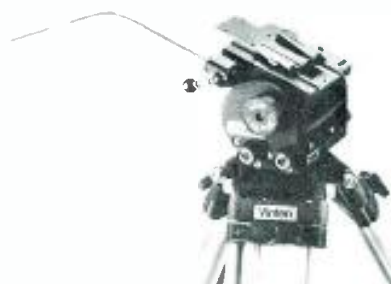

Avocet ENG-EFP pan/tilt head

head incorporates a lubricated friction system for smooth movement and a sophisticated balance mechanism with a 180° tilt range. The Teal studio pedestal allows smooth elevation and crabbing for cameras from 12 to 120 pounds. Also featured were the Portaped pneumatic tripod and the Dolphin crane arm, recent entries into the industry.

Circle (205) on Reply Card

Video kaleidoscope

Chromascope P-135 from CEL Electronics is a video synthesizer. This video kaleidoscope can produce a constantly changing design of abstract, multicolored images. External video sources, cameras or VTRs may be included in the patterns. Additionally, patterns may be superimposed onto external signals. The system offers a mixer-fader, a sequence timer and a modification timer. Patterns can be held indefinitely; sequenced, faded or blended, as required. Shapes, textures and colors may be externally modulated with music for a varied light form working in time-to-frequency structures. Video, monitoring facilities, RGB outputs and RF signals are provided.

Circle (206) on Reply Card

High resolution CRT

The Electronic Visuals EV6151B color picture monitor retains the electronics of the EV6000 series but employs a new picture tube. The new screen resolution to 9MHz uses EBU-phosphor chromaticities for PAL usage. Electronic Visuals also showed their recently introduced PAL and NTSC waveform monitor and vector scope line.

Circle (207) on Reply Card

Electronic traveling matte

The Electrocraft Consultants Chroma-Matte is an electronic equivalent of the photographic traveling matte, overcoming many problems experienced in chroma-keying. Linear matting techniques allow 3-dimensional work, where hair, smoke or transparent and defocused objects are used as part of the foreground with their shadows retained on the new background. The matte signal is derived from primary blue or green, using RGB information from the background of the foreground subject. At RGB level, the matte signal is balanced out of the foreground signal, encoded and returned to the Chroma-Matte for final linear adding to the new encoded background signal. □

Circle (208) on Reply Card

new products

Instrumentation system

The Tektronix TM5000 series IEEE-488 standard automated instrumentation system offers measurement of almost every parameter involved in a complete proof of performance procedure. Although aimed primarily at the equipment manufacturer, networks or large scale broadcasters could reduce the drudgery of system tests to within a minute at sign-on.

Circle (270) on Reply Card

Production switcher

The ISI model 904 video production switcher provides 10 video inputs (blackburst/colorizer included) to a 6-bus system. Two independent mix/effects units each offer 16 patterns with hard and variable soft or bordered wipe transitions.

Circle (271) on Reply Card

Decoder

The Gray Engineering Laboratories model VID-125 VITC decoder performs a dual function by decoding both a cue-track SMPTE longitudinal edit code and a vertical interval time code present on a composite video signal (VITC).

Circle (272) on Reply Card

Remote control panel

The UltiMatte-4 offered by the Vlahos-Gottschalk Research Corporation operates on a linear principle, reproducing all foreground information seen by the TV camera, including smoke, dust and hair.

Circle (273) on Reply Card

Headsets

Clear Com's CH-41/42 cameraman's headsets employ a rugged, dynamic microphone and a dynamic to carbon transistorized in-line unit that provides 5dB more output level than a carbon mic.

Circle (274) on Reply Card

Compression driver


The JBL 2425 high frequency compression driver, a device for high power sound reinforcement and custom studio monitor installations, incorporates a unique ferrite magnet structure for extended frequency response with minimal distortion and

greatest efficiency.

Circle (275) on Reply Card

Demodulator terminals

The Modulation Associates Stereo SAT, which permits reception of program audio services on Westar III, is fully compatible with all current single channel per carrier demodulators in use by major radio networks on Westar III.

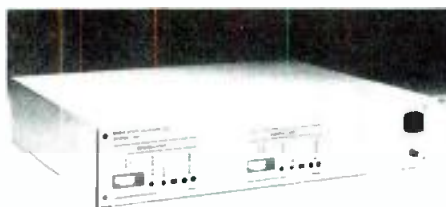

Circle (276) on Reply Card

ENG adapters

Total Spectrum Manufacturing's Mono-Brace, suited for use with long focal length lenses, adds to camera stability and relieves strain caused by many hours of supporting the camera and lens on your shoulder. TSM's Lite/Mike adapter, available for all ENG cameras, enables quick, convenient mounting of portable lights and/or microphones.

Circle (277) on Reply Card

Lighting systems

The LTM Cable MicroLight (CML) and Micro Set Lighting (MSL) systems provide control and precision in lighting of closeup photography, miniatures, special effects and commercial product shots.

Circle (278) on Reply Card

Video generator

The Jatex VGEN time code display, video black, and color bar generator uses the company's Scene-dex time code, which has four digits and is written as audible tones on an unused sound track of videotape.

Circle (282) on Reply Card

Audio production package

The MCI Broadcast Audio Production Package includes the MCI JH-600 series recording console, an 8-track 1-inch recorder, and an 8-track 1-inch stereo recorder. □

Circle (283) on Reply Card

PORTA-BRACE™ "GRIP"
THE ALL-PURPOSE CART

CALL FOR CATALOG
OF CARTS, CASES, & BACKPACKS

 K and H Products, Ltd.
Box 246, North Bennington
Vermont 05257 802-442-9118

Circle (112) on Reply Card

SENNHEISER
The Special Continues
MD-421 \$208 MD-441 \$289
HD-400 \$34 HD-414 \$50
Quantity Breaks Available
MICROPHONICS
P.O. Box 37 Brooklyn N.Y. 11204
212-438-6400

Circle (113) on Reply Card

COSTA BABALIS, P. Eng.
BROADCAST MEDIA AND STUDIO SYSTEMS
Consulting and Installations,
including Turnkey operations.
CAN. 514/861-7448 Box 67, Snodon
U.S. 800/325-8957 Montreal, QUE.
Canada H3X 3T3

Circle (114) on Reply Card

**Your 'equipment
for sale' ad
gets quick
results.
Advertise
in BE's
classifieds.**



**Zeppelin®
wind screen**

The Zeppelin Wind Screen insures rumble-free sound recording under windy conditions. Your video recorded sound will be virtually studio-clean despite noisy air movement. The Zeppelin aerodynamic design screens the microphone, filtering the wind, allowing the sound in. Although extremely lightweight, the Zeppelin is nearly indestructible and can be boom mounted or hand held with the Anti-Rumble Shock Mount. There are Zeppelins available to house Sennheiser 816, 416 and K3U; AKG CK-8 and CK-9; Schoeps and other similar microphones.

alan gordon enterprises inc.
1430 N. Cahuenga Blvd., Hollywood, CA 90028
Telephone: (213) 466-3561 • (213) 985-5500
TWX: 910-321-4524 • Cable: GORDENT

Circle (109) on Reply Card



**C Band
Satellite
Uplink
Station**

Complete Uplink Electronics
-System with Varian dual TWT
400 W power amplifier and solid
state driver. Frequency
range 5.925 to 6.425 GHz.
Includes Up/Down con-
verter, Demod/Demux
units and receiver. All
equipment mounted in
19" racks. Meets all
ICSC specifications.
Manufacturer: Califor-
nia Microwave.



**Radio-Research
Instrument Co., Inc.**
2 Lake Avenue Extension
Danbury, CT 06810
Tel: 203-792-6666
Tlx: 962444 Radar Dury

Circle (110) on Reply Card

Conversations

Rolnick continued from page 78

With AES, a world leader in word processing equipment, I was one of the founders. My role was largely that of operations and daily management. Under my direction, AES grew from one million to 170 million dollars in a period of eight years. When I left them, I had a staff of more than 200 engineers working for me, plus marketing people and production managers, in several plants. Typical volumes, where we did a production plan or process layout, were in terms of units per minute.

With DVS I see myself as bringing a little bit of professionalism to the company. It has gone through an entrepreneurial phase and is now in a developmental phase. It needs a different kind of person to run it. AES had a million dollars to work with when I started. We had a product in concept, but no distribution organization. DVS is a bit further advanced. It has a distribution organization with some products. It's a reasonable starting point.

BE: Will you be working with engineering and design at all?

Rolnick: I could, over time, as I get more familiar with the broadcast technology. I'm familiar with digital, screen-based editing, as it applies to words, letters, forms and numbers. We'll see how we can use it in terms of the same base of editing, how it applies to this technology and this market. I don't expect my main objective to be involved in the design area, however.

BE: With you as president, will John Lowry still be involved in equipment design, considering that nearly all the current DVS products are products of his work?

Rolnick: I don't find a problem with that at all. He doesn't intend to treat this investment in DVS in a way that he can now go off and do something else. John is primarily responsible for all of our products. I have great respect for his knowledge in the business.

BE: What direction do you think new products will take?

Rolnick: Our direction in products will have to be more and more user friendly. The more sophistication, the fewer complex lines of activity necessary to support the product. You have to aim at the lowest common denominator of the users. In terms of the technical know-how, it's necessary to succeed.

By the end of the coming year, there are a number of designs that have to have finalization states, so we can get them finished and to market to enable us to take a new direction. To build the engineering department into a super engineering department will be a major investment for a while. We plan to double it this year. Right now our engineering department is too small. It's too small in terms of what we can possibly do and in terms of opportunities and the time windows I think we have to meet to make commercial successes of some of the ideas that John Lowry has.

BE: Might we expect an entry into graphics?

Rolnick: For graphics you need the framestore synchronizer. The rest is just adding a PDP11/23 or something and getting some software. I won't say that tomorrow we're going to start a project to do that, but it's not out of the realm of possibilities. The technology base is there and that's what excited me about Digital Video Systems. It serves well as a good building foundation.

BE: There is a US hesitancy toward implementing Teletext. Prestel or the various other systems. They seem to be a success in England, yet we seem to be waiting for the French Antiope. Do you understand that delay and might DVS be involved in the textual technology?

Rolnick: Prestel, specifically, is not a commercial success. In times where companies are paying 18 to 20% interest, money is tight. Everybody wants to make a market share right now, to be profitable and live through this tough economic time. To take on ventures that have not proven themselves yet in other countries. I can see the hesitancy clearly.

In Canada, the government is the big mover behind projects, not private

industry. If it were not for the government, I think we would be not so far advanced. I don't see us making a major console input or making data bases, but I won't rule anything out. For the horizons I see for the company, it's not there.

BE: Are there any problems associated with manufacturing in Canada and shipping into the United States?

Rolnick: As an exporting company most of our products are sold outside Canada. It's mostly a matter of filling out papers. We have brokers who handle it every day. Canada, as a nation, exports a great deal of equipment. I've only been with the company a month and already I've met two brokers who want the business. The American authorities are easy to work with.

BE: What about the cost of manufacturing in Canada?

Rolnick: There are two advantages. One is the labor rate. Translated back to US dollars, it is lower than the US labor rates. At one time the Canadian dollar was five cents more than the US. Now it's 80%, 20 cents less. There's no major issue there.


On any activity that is labor intensive, you can save money. From the point of view of components, most of the parts originate somewhere in the United States. Yes, there's a few dollars that appear to stick in customs brokers' fingers as things fly back and forth, but we make it up by taking the differential between Canadian and US dollars for labor. The manufacturing costs are comparable. The real difference is in the productivity of the employees and that's a matter of selection.

You've got to look upon yourself as a company with two choices. You can grow or you can die. Anywhere in between is impossible. If you're not growing, by definition, you're dying in electronics. You have to work hard and put the money into engineering to allow for the continuing product lines. I think you'll see an unusually large percentage of our dollars going toward meeting the engineering budget. We are not budgeting for off-the-wall profits. We want to build the technology base. Where the usual case is 6 to 8% of revenues reverted back

into engineering, we will be above 10%. As a result, in the foreseeable future there will not be huge profits for the investors.

BE: You have just left a position that was very successful. Are there any qualms about starting over again with DVS?

Rolnick: Every job has different challenges. It is all in what makes you happy. If you can get job satisfaction, you can come home at night and feel you had a reasonable day and contributed something—that's all that matters when everything is said and done. I try to do my best everyday. And I can't do any more. That's it. If I come home frustrated, but in my heart

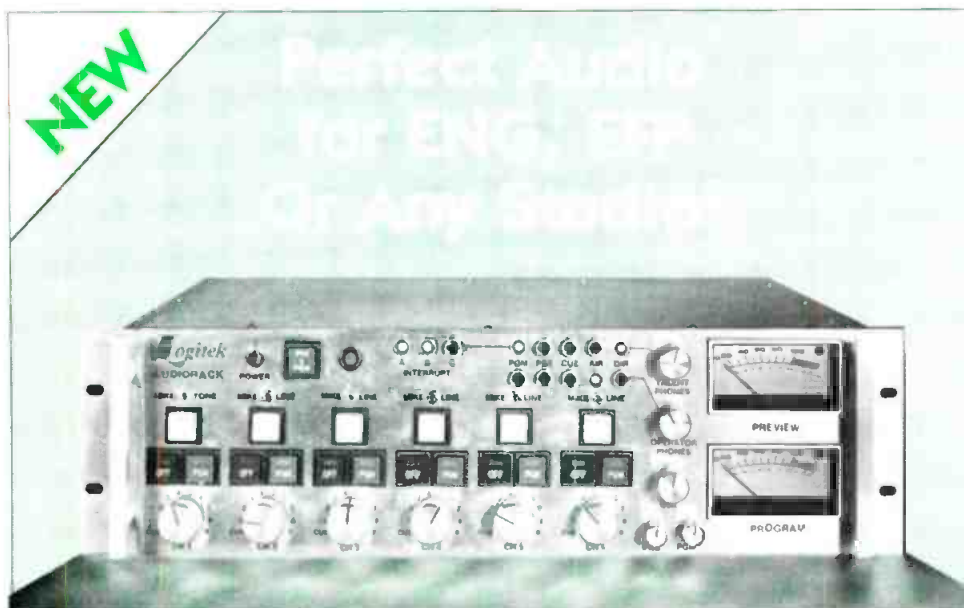

The **Logitek** AUDIORACK

- A complete, air-quality console in a 19" rack mount
- Full metering plus peak leds
- Dual-source monitoring, cue, talk back
- Isolated distribution outputs
- Optional 12, 24, 28 VDC supplies

**CALL US TOLL-FREE AT
800-231-5870**

(Texas, Alaska, Hawaii call collect 713-782-4592)

Logitek Electronic Systems, Inc.

3320 BERING DRIVE • HOUSTON, TEXAS 77057 • (713) 782-4592

Circle (111) on Reply Card

April 1982 **Broadcast Engineering** 91

Conversations

Rolnick continued

I've done the best I can that day and there was no more I could have given—no additional concept, idea or activity I could undertake that day—I sleep very well.

BE: How is DVS going to progress with you at the helm?

Rolnick: If I can succeed, and I think I can, I'll make a major company out of DVS, the world class company that I'd like to make out of it. The objectives, short term, are to improve the product that we have today, finish off many of the concepts that are trends in design, and generally improve the reliability and quality of our products. Long term, we'll put money into engineering and come up with an aggressive product line. From there, we'll build a good sales and manufacturing organization. □

Vander Dussen
continued from page 78

coming on board at Sony, the revamping of Sony Corporation of America and the purchase of MCI? What does this mean as far as Sony's thrust in the marketplace, worldwide and nationwide?

Vander Dussen: A number of years ago, Sony recognized the potential and importance of the broadcast market in the United States and other countries. A decision was made to invest heavily in new product development and in establishing organizations in each country to properly support the products in terms of service and followup. The organization has had a dramatic growth in the last three to four years. We believe that growth has occurred because the products we've introduced have met a market need. Investment in sales, support, service, engineering—all those things that go along with a product—have been expanded in parallel with the new product growth, so the total, presented to the users, was something that people wanted to buy.

Our philosophy and policies are not different now. They are to continue to do what we have been doing, but to try to do it even better; to continue to expand our investment in engineering; to try to take advantage of the many new technologies that are so rapidly developing; and to try to understand

from the people here what they want the equipment to do so we can end up with a product that meets the need for a price that the user can afford.

The establishment of a broadcast products company will give a stronger organization to do an even better job of those things. We will have the management and the people to understand what the users want so we can make sure that our research centers in the United States and Japan properly understand and can spend their engineering expertise to develop those products. Also, when the products are available, we will have the marketing, service and followup organizations to do a job we're proud of and that we can present to our customers with honesty and integrity.

BE: Will we see an increase in equipment production in the United States?

Vander Dussen: Sony, a worldwide company, will not sit back and wait until the market is willing to buy its products. Its philosophy is to invest in that market in terms of facilities and people, to prove that they deserve to be accepted as part of that marketplace. The investment comes first; the acceptance later. That investment that Sony makes in each of the major countries includes being part of that country. Sony Corporation of America is a company that is part of America. We have had manufacturing plants here for many years. We have the technology center, a tape manufacturing facility and a speaker manufacturing plant. We manufacture some of our broadcast products here. On a limited scale we will be doing more of that. In the past, now and in the future, we will be even more a part of this country in that involvement, yet relying certainly on the technological advances we have in Japan, too. Being able to take advantage of both, being able to take advantage of this country's assets and the Japanese assets and putting them together will do a better job of serving the market that we're going to address. It's that simple.

MCI will retain its identity, because they are an excellent company. They are recognized in the industry, and we don't want to lose that.

The problem is not the philosophy. The problem is having outstanding people that can implement the policy and make it responsive to those

general directions and do the kind of job that we and our users can not only be satisfied with, but also consider to be excellent.

BE: Having manufacturing facilities in a country would seem a tremendous boost in terms of the company image in that country. But in terms of economics, is there a break in import/export duties for a company with manufacturing facilities in both places?

Vander Dussen: Yes and it varies by country. That is a consideration. Other considerations have to do with how can we have the best price advantage, depending on where equipment is manufactured. The rest is taken into consideration as Sony looks at each area. But beyond that, the top management of Sony recognizes that the privilege of being an accepted supplier in an area is also an obligation to be a responsive manufacturer in part of that community. That is one of Sony's important attitudes and strengths. We want to be not just a supplier in the industry, but we want to be part of that industry as a manufacturer that recognizes local obligations as well. I don't want to imply that we won't continue to manufacture part of our products in Japan—because certainly we will—but there will be an ever increasing recognition and aggressive program to see what the alternatives are and how we can do more locally as well; how can we do those things that make sense for both the country we're in and for our ability to meet requirements of the marketplace.

BE: Are any further expansions in the United States being considered?

Vander Dussen: We will be expanding our operations to meet our commitments, but at this point I cannot say exactly what they would be. Certainly Sony is going to look at all areas of opportunity. One thing that's exciting to us is the recognition that there are so many opportunities now and those are going to be growing. We have so many capabilities that could address various segments of this market. And we are in a position where we can understand, choose, invest and then be successful in different areas. It's an opportunity we are looking forward to with excitement. □

AM stereo

Continued from page 16

however, the FCC declined to select one of the five incompatible transmission systems contending for approval as the industry's technical standard. The commissioners left that decision to the marketplace.

"Harris has decided to enter the market aggressively despite its belief that the FCC should have decided the issue. The company will mount a campaign to convince broadcasters and the public that its stereo system is the best."

Gene T. Wicker, vice president and general manager, Harris Broadcast Division, Quincy, IL, said his sales department "is holding 150 contingent orders from AM stations for stereo systems, some placed as early as two years ago. Now that the FCC has flashed the green light we will seek to convert those to firm orders and to book new ones."

"Harris was the only transmitter manufacturer to submit a stereo system to the FCC. The other contenders produced receivers or components. The company is the largest transmitter maker in the country, supplying more than half of all the AM and FM transmitters installed by American broadcasters last year."

"Harris said its patented stereo systems is the only one that maintains the same bandwidth as current monaural systems. This reduces the possibility of out-of-band interference among stations, a requirement stressed by the FCC. The company also said its system provides excellent audio quality, is compatible with existing monaural radio sets, and gives stations essentially the same coverage area for stereos they now enjoy with mono."

Although Harris is obviously committed to penetrating the AM stereo market, behind the scenes there is still doubt and concern. In an exclusive interview, Gene Edwards, vice president of marketing, Harris Corporation, said that people at his organization are extremely disappointed that the FCC could not settle the issue by selecting a single technical standard for AM stereo.

"Harris supported the FCC's adoption of a single-system concept on the basis that we felt that it would serve the best interest of the consumer, broadcaster and equipment manufacturer," Edwards said. "In our opinion, the marketplace approach is utterly unrealistic and is not in the best interest of all concerned."

"However, we would support a marketplace decision if all the FCC-licensed AM broadcast stations were allowed to vote by ballot on the system of their choice. We believe that this would resolve the problem for the broadcaster on what equipment to install and for the consumer who must invest in the correct receiver."

Kahn/Hazeltine

Leonard Kahn, when contacted concerning the FCC decision on AM stereo, expressed concurrence and delight. "We've been waiting 22 years to be allowed to enter the marketplace," he said. "It's something we believe in."

To supplement his remarks, he sent **BE** the following formal statement issued by the Hazeltine Corporation, Commack, NY:

"Stereo radio broadcasts using the Kahn/Hazeltine System are expected to begin almost immediately after the effective date of the FCC's authorization. Hazeltine and Kahn Communications stated that more than 40 AM radio stations in the United States already have the Kahn/Hazeltine system stereo transmission equipment installed for broadcasting or planned for installation."

Winsted

THE PERFECT MATCH
for your video equipment



SYSTEM/85

MODULAR
VIDEO
CONSOLES

A new generation of professional modular systems, developed by Winsted for use with the Sony "800 and Type 5" series video equipment.

MODEL 85-20

These rugged 19" EIA modular units offer easily assembled welded and bolted stability. Units assemble in any configuration to suit your needs. The basic module is expandable to any size system with add-on-units.

FOR FULL-LINE CATALOG of the most complete line of customized videoproduction equipment, call or write:

THE WINSTED CORPORATION
8127 Pleasant Ave. So., Minneapolis, MN 55420 • 612-888-1957

PHONE TOLL-FREE **1-800-328-2962**

Circle (107) on Reply Card

PRE-WIRED

AUDIO PATCHFIELDS

Eliminates Tiresome Christmas Tree Blocks



- EASIER TO INSTALL • EASIER TO USE
- EASIER TO PAY FOR

FARRTRONICS MANUFACTURES QUALITY INTER-COM SYSTEMS, AUDIO PATCHFIELDS, DISTRIBUTION AMPLIFIERS AND AUDIO CONSOLES.

Ask for our customer list.



151 BENTLEY ST., UNIT 1, MARKHAM, ONTARIO, CANADA
L3R 3X9, (416) 475-6720

Write for our free folder of Product Data


Circle (108) on Reply Card

from VIDEO AIDS



THE BURST PHASE METER

THIS:

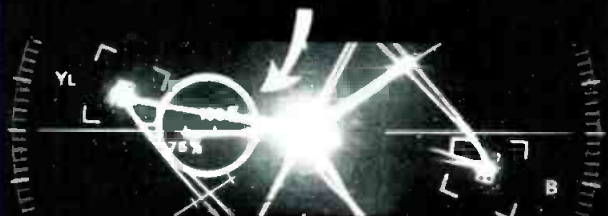

OR THIS:



- Backlighted meter continuously reads out color burst phase (and optional H phase).
- Alerts busy control room/ENG personnel to disastrous color shifts on chroma key and fade dissolves.
- Also helps on initial system timing setup by direct measurement of color burst phase.
- You can get 2 or 3 burst phase meters for the cost of an additional vector scope.
- Hundreds in use in broadcast and industry.



Call collect for more information and the number of your local dealer: (303) 443-4950

VIDEO AIDS OF COLORADO
1930 Central Avenue • Boulder, Colorado 80301

Circle (115) on Reply Card

AM stereo

Leonard Kahn, originator of the system, said these stations, including all music stations of the ABC, NBC, RKO, Westinghouse, Meredith, Lin and Bonneville broadcasting groups, cover virtually all major population centers in the United States. Kahn said he looked forward to a rapid buildup of demand for both radio receivers and additional transmission equipment for the Kahn/Hazeltine system.

"Transmission equipment for the Kahn/Hazeltine system will be available from Kahn Communications, Garden City, NY, which is planning its production schedules to meet expected orders for such equipment from AM broadcasters.

"Hazeltine Corporation and its wholly-owned subsidiary, Hazeltine Research, are making available to receiver manufacturers non-exclusive licenses under United States and corresponding foreign patents covering inventions of Leonard Kahn and Hazeltine that are used in receivers for the Kahn/Hazeltine AM stereo system.

"It was noted that the Kahn/Hazeltine system has been extensively tested in actual commercial broadcasting in the United States under FCC experimental authorization, and also in Canada and Mexico."

Regarding AM stereo's reception in the consumer market, Kahn said, "If it's handled right, receiver manufacturers will be convinced that this is the time to change the image of AM from a second rate service to a quality service. It's a perfect time. There's no reason why the public should not be allowed a choice between quality AM and quality FM."

When asked about receiver availability, Kahn said that sets could be available in six to eight months for his system. "I'm hoping that the receiver manufacturers will come through with quality AM receivers, and the stereo circuitry is not that expensive," he said. "In fact, we've had a breakthrough in cost reduction of our type of decoder that makes it particularly attractive in quantity production."

Magnavox

When contacted about its position on the FCC ruling for a marketplace decision on AM stereo, Magnavox was ready with the following statement:

"NAP Consumer Electronics Corporation accepts the FCC decision to authorize the transmission of stereophonic broadcasting signals by all the proposed systems. We are ready to present the Magnavox system to the marketplace, and we are confident that it will receive swift product acceptance among broadcasters, radio receiver manufacturers and consumers.

"Working with Continental Electronics Manufacturing Company, we have designed and developed a stereo exciter that is ready for quantity production. In association with Belar Electronics Laboratory, we have designed a broadcast monitor for the Magnavox AM stereo system. Our signals can be on the air and enjoyed by the listening public in a very short time.

"We are planning another extensive display of our system at the upcoming NAB convention in Dallas in April. We also believe that the Magnavox AM Stereo system is the only proposed system for which integrated circuit chips are available for use in receivers to recognize its pilot and decode its stereo signals. Therefore, low cost receivers for the Magnavox System

could be available within a year for both the home and automotive markets.

"We are naturally disappointed that our system was not the only system authorized, especially because in April 1980, almost two years ago, the FCC decided to select a single system and preliminarily chose our system. We are convinced, however, that the marketplace will prefer the Magnavox system and will confirm the FCC's original choice."

Motorola

Leaders at Motorola were also ready with a formal statement immediately after the FCC ruling:

"An official of Motorola expressed confidence that Motorola's AM stereo system will be selected by the marketplace as the best system for a national standard in AM stereo broadcasting.

"Martin Cooper, vice president and corporate director of research and development at Motorola, said the company is committed to assuring the broadcasting industry that at the earliest data possible it will produce exciters and monitors, as well as decoder chips for AM receivers.

"The Motorola system, technically called Compatible Quadrature Modulation (or C-QUAM for short), was one of five stereo systems competing for recognition as a national standard by the FCC. The FCC has examined and evaluated the merits of these systems for the past four years but, because it did not determine which system would best serve the US market, decided to allow all systems to compete in the marketplace.

"Our submissions to the FCC and public testing have proved the superiority of Motorola's C-QUAM over other approaches. The quality and performance are measurably better than the others, and costs to the consumer are equal or lower.

"Motorola has maintained throughout the long evaluation period that the FCC should decide which of the systems would best serve the public. The company's position has been that a marketplace decision would slow introduction of AM stereo to the public and could substantially increase costs to the consumer. Because the FCC has chosen to let the marketplace make the ultimate decision, Motorola will aggressively attempt to get its AM stereo system accepted by the industry and public.

"Present AM broadcast stations in the United States can adapt to the Motorola system by adding an exciter and a monitor. First deliveries of this equipment will occur within about six months, and AM receivers equipped to receive these stereo broadcasts should be available shortly thereafter.

"Motorola will manufacture certain integrated circuit components necessary for the reception of its AM stereo signals as well as AM stereo receivers for automobiles. Production details are currently under review.

"Existing monaural receivers will be virtually unaffected by the use of the Motorola system. Tests and exhaustive theoretical analysis of the C-QUAM system have shown it will provide the American public the optimum combination of characteristics for monaural and stereo broadcast in the AM band."

Frank Hilbert, engineering manager at Motorola, pointed out some of the realities to be faced in this AM stereo battle. "Take the decoders alone," he said. "It costs the semiconductor firms more than \$100,000 to tool up to produce the IC decoder chip circuitry for AM stereo.

Perfect Timing SMPTE

TIME CODE READERS THAT YOU CAN AFFORD

ES251-Six digit SMPTE Time Code Reader displaying Hours Minutes and Seconds. Reads at play back speed.

Momentary hold switch permits "freezing" of time displayed.

Releasing hold switch updates display to correct time. **\$295**



ES252-Exactly like ES251, but displays Minutes, Seconds and Frames. **\$300**

ES253-Eight digit reader displays Hours Minutes Seconds and Frames.



Reads at play back speed, has "freeze" control. **\$454**

ES254-BI-DIRECTIONAL, MULTI-SPEED

(1/20 to 20 times). eight digit reader with "freeze" control. On loss of code displays last valid code read. **\$675**

AND FOR OFF-LINE EDITING **ES255** SMPTE IN/VIDEO OUT

ES255 is an eight digit, multi-speed bi-directional SMPTE reader which adds the SMPTE input to your video. You can now "burn" the time code into the video portion of your tape or feed a monitor directly. **\$995**



Write, Wire or Call: (213) 322-2136
142 Sierra Street, El Segundo, CA 90245

"I need three waveform monitors that can be rack mounted. And they've got to be portable, too."



**HITACHI
HEARD YOU.**



You want three waveform monitors that fit side by side in a standard 19" rack mount.

But you also want to be able to slip one out easily when you need to go on location.

Well, Hitachi heard you. And is out front once again in meeting your needs with our new V-099 waveform monitor.

The cost? You can get three of these monitors for about what you'd expect to pay for two of our competition's monitors with this one's features.

And look at these features. The V-099 has a bright (2 kV) 3 1/2" rectangular CRT. It can be operated on AC or from an external DC source, with optional battery pack, when you want to go on the road.

For more information on the V-099 and the rest of the broadest and most advanced line of broadcast and professional video equipment in the business, you know who to get a hold of. Hitachi Denshi America, Ltd., 175 Crossways Park West, Woodbury, NY 11797, (516) 921-7200. Offices also in Chicago, Los Angeles, Atlanta, Cincinnati, Dallas, Denver, Seattle and Washington, D.C.

Circle (116) on Reply Card

AM stereo

That's negligible for the accepted system leading to millions of sets bought by the public.

"But, AM stereo is tough, and many receiver manufacturers don't know what they are in for. It requires a rather heavy development expense, which is a hurdle that some of us are already over. Motorola's current plans call for third-quarter availability of decoder chips, but that schedule can be accelerated if the industry so demands."

NAB

The National Association of Broadcasters, serving more than 4700 radio and 660 TV stations, was also quick to issue a formal statement. Vincent T. Wasilewski, president of the NAB, issued the following in response to the FCC vote on AM stereo broadcasting:

"From the outset, the NAB has led the effort for swift adoption of AM stereo.

"Although we are on record urging the FCC to choose a single standard, the commission, on reflection, has decided otherwise and has voted to throw it open to the marketplace.

"This association will concentrate every effort to equip broadcasters with the technical and marketing information necessary to aid them in converting to stereo transmission, if they so desire.

"Both the American public and AM broadcasters only profit by stereo broadcasting if consumer demand is present, and that is predicated on availability. Our efforts will now shift toward ensuring that AM stereo becomes a marketplace reality."

NRBA

The position of the National Radio Broadcasters Association has been clear for a long time: AM stereo is needed, and the FCC should decide on a single system to assure the future of AM stereo. The NRBA has objected strongly to a marketplace decision on AM stereo, contending that it could lead to total chaos. And that, in turn, could erase any benefit to the AM broadcaster and to the public.

Closing remarks

No industry-wide consensus from broadcasters is possible at this early date, but there are indicators of how they feel. Many stand ready to begin almost at once to install and use the system of their choice. And, we've talked to broadcasters who have strong personal preferences as to the system they want to see emerge as victor. ABC, for example, expects to go the way of independent sideband, as planned all along. However, a formal announcement to this effect awaits an endorsement by top management.

Unless the FCC reverses itself again, the battle is shaping up for a potentially fierce struggle in getting a national standard accepted for AM stereo.

But, there is a simple solution within the grasp of the FCC, even with its situation of being technically understaffed. With five systems accepted, and with the years of testing by broadcasters behind AM stereo, a marketplace decision is available by simply letting AM broadcasters vote, station-by-station, for the system they prefer. The system obtaining the maximum vote then becomes the national standard.

Such a vote could be gathered quickly, and computer tabulated. The cost would be peanuts, the future of AM stereo would be assured, and it would be a US broadcaster's decision, not that of some external source. □

ad index

ADM Technology Inc. IFC
 American Video CE-24
 Ampex Corp. 7, 28-29
 Anixter Bros Inc. CE-17
 Antenna Development & Mfg.
 Inc. CE-28
 Audio & Design Recording 6
 Audio-Technica US Inc. 87
 Automation Techniques CE-30
 Costa Babalis, P. Eng. 89
 Belar Electronics Inc. 74
 Beston Electronics Inc. 27
 Bogen Photo Corp. 66
 Broadcast Electronics Inc. 57
 CMX Orrox 71
 Central Dynamics Corp. 39
 Cetec Vega 40
 Cine-60 Inc. 32
 Cobb Cable Mfg. & Supply . . . CE-27
 Comex Corp. 80
 Comsonics Inc. CE-9
 Comtech Data Corp. CE-25
 Comtec Data Corp. CE-25
 ComWorld Video Services 67
 Continental Electronics Mfg. Co. . 88
 dbx, Inc. 76
 Datametrics Inc. 41
 Delta Electronics 84
 Discom Satellite Systems . . . CE-32
 Drop Shop Ltd. CE-28
 Dynatech Data Systems CE-21
 EECO Inc. 75
 ESE 95
 Echo Science Corp. 9
 Elector 81
 Electro Voice Inc. 10
 Elephant Industries CE-5
 Eventide Clockworks 22
 Excalibur Industries 80
 Farrtronics Ltd. 93
 Fidelipac Corp. 26
 Fitzco Sound Inc. 78
 Fortrel Inc. 33-34
 Fort Worth Tower Co. CE-15
 Gillaspie & Associates Inc. . . CE-13
 Alan Gordon Enterprises Inc. . . 90
 Gould Inc. 77
 HF Signalling Inc. 38
 Clifford B. Hannay & Son 56
 Harris Corp. 8, 15
 Hitachi Denshi America
 Ltd. 3, 37, 96
 Ikegami Electronics USA Inc. . . 31
 K&H Products Ltd. 89
 Kahn Communications Inc. . . . 79
 Laird Telemedia CE-14
 Leader Broadcast Systems . . . CE-11
 Leitch Video Ltd. 25
 Lerro Electrical Corp. 51-54

Logitek Electronic Systems
 Inc. 81, 91
 3M Scotchcart 42-43
 3M Professional A/V . . . 49, 65, 72-73
 M/ACOM Prodelin Inc. CE-7
 McCurdy Radio Industries Ltd. . IBC
 Maxell Corp. 45
 Micro Communications 64
 Microdyne Corp. 61
 Microphonics 89
 Midwest Corp. 11
 Miles Air Products 70
 Monroe Electronics Inc. 44
 R. K. Morrison Co. 78
 Nady Systems 80
 O'Connor Engineering Labs . . CE-29
 Opamp Labs Inc. 78
 Pace Electronics 64
 Peirce-Phelps Inc. 13
 Pinzone Communications . . . 1, CE-3
 Polyline Corp. 64
 Potomac Instruments 58
 Project Packaging Inc. CE-19
 Q.E.I. Corp. 68
 Quantum Audio Labs 60
 Radio-Research Instrument
 Co. 90
 Ramko Research 82-83
 Real World Technology 46
 Reel-O-Matic CE-22
 Rohde & Schwarz Sales Co. . . . 50
 Ross Video CE-31
 Russco Electronics Mfg. Co. . . . 88
 SatCom Technologies Inc. 5
 Schneider TV Lenses 4
 Sennheiser Electronics Corp. . . 68
 Shure Brothers 23
 Sigma Electronics Inc. 38
 Sitler's Supplies Inc. 44
 Sony Corp. of America 62-63
 Spar Aerospace Ltd. CE-26
 Spectra Computer Systems 16
 Standard Communications Corp. . 59
 Standard Tape Lab Inc. 50
 Stantron div Wyco Metal 69
 Swiderski Electronics 86
 Tektronix Inc. 17, 18-19
 Television Equipment Associates
 Inc. 14
 Telex Communications Inc. 24
 UNR Rohn 74
 US JVC Corp. 47
 Video Aids of Colorado 94
 Video Data Systems 35
 Vital Industries Inc. 55
 W.O.S.U. 70
 Ward-Beck Systems Ltd. BC
 Wilkinson Electronics Inc. 85
 Winsted Corp. 93

BROADCAST engineering Is the #1 Broadcast Magazine

#1

in Circulation
 35,060 BPA-audited
 recipients—over
 4,200 more than the nearest
 competitor.

#1

in Advertisers
 458 total in 1981—over 100
 more than the nearest
 competitor.

#1

in Exclusive Advertisers
 178 total in 1981—over 80
 more than the nearest
 competitor.

#1

in Advertising Growth
 Up 155 pages in 1981—53.5
 more than the nearest
 competitor.

#1

in Market Share Growth
 Up 3.36% in 2 years.
 1.88% in 1981—Over 1.5%
 more than the nearest
 competitor.

#1

in Inquiry Generation
 Over 100,000 total inquiries
 in 1981. The eighth year
 in a row!

#1

in Cost Per Thousand
 At \$60.09, still the industry's
 lowest CPM by nearly 8/M.

BROADCAST
engineering

P.O. Box 12901
 Overland Park, KS 66212
 913/888-4664



YABP

V BPA

An Interpersonal Electronics Group Publication

Also Publishers of

video
systems

Radio y Televisión

广播工程

ELECTRONIC
Serving & Technology

professional services

VIR JAMES P.C.
CONSULTING RADIO ENGINEERS
Applications and Field Engineering
Computerized Frequency Surveys
4940 E. 39th Ave.
Phone: (Area Code 303) 393-0468
DENVER, COLORADO 80207
Member AFCCE & NAB

RALPH E. EVANS ASSOCIATES
CONSULTING COMMUNICATIONS ENGINEERS
216 N. Green Bay Road
Suite 208
Thiensville, WI 53082
Phone: (414) 242-6000 Member AFCCE

MIDWEST ENGINEERING ASSOCIATES
Consulting Engineers
150 Wesley Rd.,
Creve Coeur, IL 61611,
309-698-3160.
Member AFCCE

SMITH and POWSTENKO
Broadcasting and Telecommunications
Consultants
2000 N Street, N.W.
Washington, D. C. 20036
(202) 293-7742

NELSON (702) 384-7811
L. E. NELSON CORP.
LIGHTING FACILITY DESIGN CONSULTANTS
1209 PARK CIRCLE LARRY E. NELSON
LAS VEGAS, NEVADA 89102 President

D. L. MARKLEY
& Associates, Inc.
CONSULTING ENGINEERS
206 North Bergen
Peoria, Illinois 61604
(309) 673-7511
Member AFCCE

caraworld in:
AM • FM • TV
Translators/Low-Power TV
Directories
Allocation Studies/Antenna Design
1302 18th St., N.W., Suite 502
Washington, D.C. 20036
(202) 296-4790

CHARLES F. KOCHER, P.E.
Consulting Radio and TV Engineer
Allocation Engineering
Antenna Systems
27235 Berkshire Drive
Southfield, Michigan 48076
(313) 357-2304
Member AFCCE

STEIGER, HURRAY & ASSOCIATES INC.

Broadcast Technical Consultants
ANTENNA SYSTEM SPECIALISTS
6816 Westview Drive
Cleveland, OH 44141
(216) 526-7187

R. L. HOOVER
Consulting Telecommunications
Engineer
11704 Seven Locks Road
Potomac, Maryland 20854
301-983-0054
Member AFCCE

McCLANATHAN & ASSOCIATES, INC.
Consulting Engineers
APPLICATIONS & FIELD ENGINEERING
TURNKEY INSTALLATIONS - RADIO & TV
DIRECTIONAL ANTENNA DESIGN
P.O. Box 750
PORTLAND, OREGON 97207
Phone: 503/246-8080 Member AFCCE
TWX 910-464-6112/Front!

RADIO ENGINEERING CO.
Box 4399 RR-1, Santa Ynez, CA 93460
CONSULTANTS
ALLOCATIONS, INSTALLATIONS, FIELD
ANTENNA & TYPE ACCEPTANCE MEASUREMENTS
NORWOOD J. PATTERSON
President (805) 688-2333

**BROADCAST ENGINEERING
SERVICE COMPANY**
TV-FM-AM Field Engineering -
Emergency, Maintenance - Turnkey Installation -
System Design - Survey and Critique -
Interim Maintenance or Chief Engineer
B E S COMPANY
100 Star Trail New Port Richey Fla 33553 813-868 2989

Radiotechniques

RADIO CONSULTING ENGINEERS
STATION DESIGN AND SERVICE
ELECTRONIC PRODUCT DESIGN
Edward A. Schober, P.E.
402 Tenth Avenue Haddon Heights NJ 08035
(609) 546-1841

BROMO
COMMUNICATIONS
Broadcast Technical Consultants
P.O. Box M St Simons Island, GA 31522
(912) 638-5608
Computer designed applications - Field Engineering
Frequency Measuring Service

Why not run your business card
here?
Only \$32.00 per insertion.
Frequency discounts available.
Call 913/888-4664

BROADCAST engineering

Advertising Sales Offices
NEW YORK, NEW YORK
Joe Concert,
Phone: (212) 888-1977
Anita K. Gold
Phone: (212) 888-7696
630 Third Ave., Eighth Floor
New York, NY 10017

KANSAS CITY, MISSOURI
Jan Winters,
P.O. Box 12901, Overland Park, KS 66212
Phone: (913) 888-4664

LOS ANGELES, CALIFORNIA
Herbert A. Schiff,
3055 Wilshire Blvd., Suite 630
Los Angeles, CA 90010
Phone: (213) 387-0639

LONDON, ENGLAND
John Ashcraft & Co., John Ashcraft
12 Bear Street
Leicester Square, London WC2H 7AS
England
Phone: 930-0525
Telex: 895-2387

AMSTERDAM, HOLLAND
John Ashcraft & Co., John J. Lucassen
Akerdijk 150A, 1171 PV-Badhoevedorp,
Holland
Phone: 0-2968-6226
Telex: 11640

TOKYO, JAPAN
Sumio Oka
International Media Representatives, Ltd.,
2-29, Toranomon 1-chome, Minato-ku
Tokyo 105, Japan
Phone: 502-0656

TAIWAN, R.O.C.
Antony Liu
Long Life Advertisement Agency Co.
P.O. Box 36-1094
8F-3.50 sec 5
Naking E Road
Taipei, Taiwan
Telephone: (02) 760-2468
Telex: 25923 Fondland
Cable: Longad Taipei

NORWOOD, AUSTRALIA
Williamson & Associates Pty. Ltd.
P.O. Box 419
Norwood 5067, Australia
Phone: 42-7074

Your 'equipment
for sale' ad
gets quick
results.
Advertise
in BE's
classifieds.

classified

Advertising rates in Classified Section are 60 cents per word, each insertion, and must be accompanied by cash to insure publication.

Each initial or abbreviation counts a full word. Minimum classified charge, \$10.00.

For ads on which replies are sent to us for forwarding (blind ads), there is an additional charge of \$5.00 per insertion, to cover department number, processing of replies, and mailing costs.

Classified columns are not open to advertising of any products regularly produced by manufacturers unless used and no longer owned by the manufacturer or distributor.

TRAINING

ELECTRONICS DEGREE by correspondence. Earn A.S.E.T., then B.S.E.T. Free catalog. Grantham College of Engineering, 2550 South La Cienega, Los Angeles, California 90034 1-82-tfn

FCC GENERAL RADIOTELEPHONE operators license through cassette recorded lessons at home plus one week seminar in Boston, Washington, Detroit or Philadelphia. Our twentieth year teaching FCC license courses. Bob Johnson Radio License Preparation, 1201 Ninth, Manhattan Beach, Calif. 90266, Telephone (213) 379-4461 8-81-tfn

SERVICES

ONE STOP FOR ALL YOUR PROFESSIONAL AUDIO REQUIREMENTS. Bottom line oriented. F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32506. 7-71-tf

HELIAX-STYROFLEX. Large stock - bargain prices - tested and certified. Write for price and stock lists. Sierra Western Electric, Box 23872, Oakland, Calif. 94623. Telephone (415) 832-3527. 1-73-tf

VIF INTERNATIONAL will remanufacture your Ampex or Scully (Ashland/Bodine) direct drive capstan motor for \$200. Average turn around time - 2-3 weeks. For details write P.O. Box 1555, Mtn. View, CA 94042, or phone (408) 739-9740. 1-82-6t

TRANSMITTER TUBES REPROCESSED - Save 40 to 50%. 3CX2500, 4CX5000, 4CX15000 and many others. Write for details. FREELAND PRODUCTS CO., 3233 Conti St. N.O., La. 70119. (504) 822-9222. 6-79-tfn

BROADCAST CRYSTALS for AM, FM and TV transmitters, frequency change, repair or replacement of oven types, also vacuum types where needed. High quality products and better delivery. Don't be without a spare crystal. Over 30 years in this business. Eidson Electronic Co., Box 3751, Temple, Texas 76501. Phone (817) 773-3901 4-82-eom

MISCELLANEOUS FOR SALE

VIDEO T-SHIRTS. TV DESIGNED, preshrunk T-Shirts. Our four designs are: "ENG" and Reg. Chart, "GLITCH", "RESOLUTION" and chart, and "VIDEO PEOPLE DO IT IN SYNC" \$8.50 each and \$2 handling. Send check and size to: AARLO ENTERPRISES, 109 MINNAST, SUITE 254, SAN FRANCISCO, CA 94105. 8-81-tfn

USED FIDELIPAC CARTRIDGES. \$35.00 per 100, \$250.00 per 1000. CART MART, Box 50003, Fort Worth, TX. 76105 9-81-6t

RAZOR BLADES. Single Edge. RALTEC, 25884B Highland, Cleveland, OH 44143 12-81 12t

EQUIPMENT FOR SALE

COMPLETE PRODUCTION CO.: 2 Hitachi SP20 cameras, Ford van, Panasonic G2 editing system, six other VTR's, switcher, audio BD, lights, cables and all accessories \$45,000. Phone 317-872-0611. Ask for Lyman. 4-82-1t

MANUFACTURING VIDEO CARRIERS: Small company, ready for expansion. \$62,000 income. Also mfg. T.V. wall brackets, bicycle racks and metal sign posts. Located Phoenix, Arizona. For info, call 602-264-9919 or write Safe-Town Realty & Trust Co., 1809 W. Indian School Rd., Phoenix, AZ, 85015. 4-82-1t

FOR SALE: SPARTA 605B, 5 KOLOWATT FM transmitter, recently removed from service with only 13693.1 hours. In perfect running condition. Comes with automatic power control, full set of tubes & Sparta exciter. Engineer will aid in installation if travel expenses are paid. Dependable standby or Class A transmitter. Call our technician at (915) 563-4413. 4-82-1t

MARCONI MARK VII CAMERAS - \$5000.00 and up, operating cameras, parts, service, leases. TV101 cable. Guy Spiller 804-276-5110. 4-82-1t

COMPLETE AUTOGRAM AUTOMATION SYSTEM, \$4000 value, make offer. You must see to appreciate. Scully 255 automation reproducer, stereo 2-trak 7.5 ips, Automated/Control Design Kartel 2400R random access with record capability. Best reasonable offer will be accepted on all three items. David Green Broadcast Consultants Corp., Box 590, Leesburg, VA 22075, 703-777-8660. 4-82-2t

Beautiful 1/4" REMOTE VIDEO/AUDIO 1980 Production Van, fully customized with, A/C, 5KW Gen, Switcher, TBC, WFM, 2 recorders, 8 monitors, KNOX CG, 2 CCU-(2) Ky-2000 cameras, Tripods, sound lights, etc. Huge inventory, excellent condition. \$150,000 value for \$75,000. 305-896-9700 for info. 4-82-1t

USED BROADCAST TELEVISION EQUIPMENT. Hundreds of pieces wanted and for sale. Please call System Associates to receive our free flyer of equipment listings. (213) 641-2042. 1-82-6t

TUBES, HIGH POWER, SPECIAL PURPOSE WANTED: 304TL, 4CX1000A, 4-1000A's, 5CX1500, etc. Also some receiving types, 53, 7F7, 7N7, 6HU8, etc. DCO, 10 Schuyler Ave., No. Arlington, N.J. 07032. (201) 998-4246, (800) 526-1270. 3-83-3t

RE-BUILT BROADCAST EQUIPMENT in stock ready to ship. Broadcast Products, Box 846, Ft. Pierce, Florida 33454. (305) 466-0000. 3-82-2t

(2) **HITACHI FP-1212,** 3-tube cameras with extended red tubes & 16-160 F1.8 Fujinon lenses in excellent condition. Used only in studio. Broadcast plumbicons, less than 1,000 hrs., no spots. 50-foot cables, extender boards, \$12,000 or best offer. (3) **Houston Fearless cradle heads** (250 lb. cap.) 2 with dual handles, in excellent condition, plus 1 more head needing parts. (3) **Houston Fearless heavy-duty** (400 lb. cap.) Field tripods in excellent condition (quick-set Gibraltar equivalent), plus one more with missing foot. (4) **Houston Fearless dollies** for above in excellent condition. \$2,000 or best offer. **WRITE: EMORY MEDICAL TELEVISION NETWORK,** 69 Butler St., S.E., Atlanta, GA 30303. PH: (404) 588-3556. 3-82-2t

PANASONIC 1/4" EDIT SYSTEM. NV-9200 & 9500 VCR's, A-950 Controller and CVS-504B TBC. Additional Equipment Available. (312) 975-3389. 4-82-1t

MICROWAVE ASSOC. MA12G system with 4' dishes. Some wave guide. \$13,000. Call Randy Johnson. (904) 356-6077 4-82-2t

420 FT. SELF-SUPPORTING GALVANIZED TOWER still standing in desert climate, excellent condition - as is, where is (Las Vegas, Nevada). Best Offer. **LISTEC KRESTEL CAMERA CRANE,** like new, w/field tires, 1 year old, used in studio. \$17,500 or best offer. **ISI 821 MASTER CONTROL SWITCHER,** 20 X 2 (PST, PGM) w/auto transition, keyer, clock, AFV plus 6 input breakaway/over/under audio system. Make Offer. Contact. General Manager, KVBC TV, P.O. Box 44169, Las Vegas Nevada 89116. (702) 649-0500. 4-82-2t

GRASS VALLEY 1600-7K SWITCHER: 24 Input, 8 Bus., 3 ME's, Analog Borderline on all ME's and Downstream Keyer. RGB and Encoded Chroma Keyers, Machine Preroll System, Quad Split, Dual Power Supply System. New Condition. Call Lou Bell. KNTV. (408) 286-1111 4-82-1t

EQUIPMENT FOR SALE (CONT.)

USED EQUIPMENT BARGAINS: RCA TT-10 AL 11KW transmitter. RCA TT-35 CH w/driver & diplexer just removed from service. 3 1/2" and 6 1/4" transmission line, with fittings and hangers. GE PE-240 film camera with Eastman multiplexer, projectors; CVS 500B TBC; Envirozone air filters; Collins 2.5KW FM model 831 D/310Z-2 4 years old, low time; Gates FM1B, with 3 yr. old Sparta SS exciter. Good condition. Call Ray LaRue, Quality Media Corp., (800) 241-7878. In GA (404) 324-1271. 4-82-1t

REMOTE PRODUCTION CRUISER: Beautiful Crown chassis, carpeted, full AC, camera platform on roof, 1600 mi. on diesel & drive train, good tires and brakes, includes (3) GE PE-350 cameras, working well, 10:1 & 2-18:1 lenses, motorized reels & TV-81 cables, Grass Valley sync & line gear, new color prog. monitors, 12X6 prod sw'r w/effects, 8X2 GE audio, well designed & professionally built. Other cameras available if preferred. \$150,000.00. Call Ray LaRue, Quality Media Corp., (800) 241-7878. In GA (404) 324-1271. 4-82-1t

VTR'S RCA TR-70, FULL CAVE, SS rec amps, DOC; (3) RCA TR-60 record only units 1000 hrs. Total time each; Ampex 1200B Amtec Colortec and Chroma, Vel Comp, RCO, DOC; Ampex VR 3000 with metering and charger, IVC 870. Call Ray LaRue, Quality Media Corp., (800) 241-7878. In GA (404) 324-1271. 4-82-1t

COLOR CAMERAS - NEW: Special purchase brand new Thompson CSF MC-301, 3 tube Saticon cameras with 14:1 Fujinon F1.7 lens, 1.5" viewfinder, AC supply \$9,000.00 studio accessories available. Call Ray LaRue, Quality Media Corp. (800) 241-7878. In GA (404) 324-1271. 4-82-1t

COLOR CAMERAS - USED: (1) Norelco LDH-1; (1) GE PE-350; (3) GE TE-201, good operating condition; Hitachi, FP1020/JVC 2600 battery belts charger - AC supply 1000 hrs. total. Toshiba/GBC CTC-7X, minicam, plumbs. Call Ray LaRue, Quality Media Corp., (800) 241-7878. In GA (404) 324-1271. 4-82-1t

WANTED TO BUY

INSTANT CASH FOR BROADCAST EQUIPMENT: Urgently need: Transmitters, AM-FM-TV, film chains, audio consoles, audio video recorders, microwave; towers; WX radar; color studio equipment. Call Ray LaRue or Bill Kitchen, Quality Media Corp., (800) 241-7878. In GA, (404) 324-1271. 4-82-1t

\$500 REWARD FOR UHF TRANSMITTERS: For information which leads to our purchase of any UHF TV Transmitter. Call Ray LaRue or Bill Kitchen (800) 241-7878. In GA, (404) 324-1271. 4-82-1t

WANTED: FM TRANSMITTER 3 to 10 KW. Good condition; 3 to 5 years old. Please call B.J. Howell, KFOX Radio, Inc., (213) 374-9796. Write 123 Torrance Blvd., Redondo Beach, CA 90277. 4-82-1t

INTERIOR MODULES FOR OLD COLLINS 212-F-1 console including power supply; Volumax 400 peak controller; old Magnecord tape decks; RCA 44 ribbon mike; RCA ribbon mike desk stand; old roundback carts KVXL, Box 4, Bisbee, Arizona 85603. 3-82-1t

AM AND FM TRANSMITTERS to 5kW wanted. Any condition considered. 805/646-2356. 832 County Dr., Ojai, CA 93023. 3-83-2t

WANTED: Pre-1928 radio equipment and tapes. August J. Link, Surcom Associates, 305 Wisconsin Ave., Oceanside, CA 92054, (714) 722-6162. 3-76-1f

HIGHEST PRICES PAID for 112 Phase Monitors and for clean, 12 year old or less, 1 KW and 10 KW AM Transmitters. All duty and transportation paid. Surplus Equipment Sales, 2 Thorncliffe Park Dr., Unit 28, Toronto, Canada M4H 1H2, 416-421-5631. 2-79-tfn

INSTANT CASH FOR TV EQUIPMENT: Urgently need transmitters, antennas, towers, cameras, vtrs, color studio equipment. Call toll free 800-241-7878. Bill Kitchen, Quality Media Corporation (in Georgia call 404-324-1271). 6-79-tfn

WANTED: Radio Transcriptions 16" E.T.'s any Eddy Arnold or other Country 15" or 12" Transcriptions. Will consider others. Interested in Radio Station Libraries to purchase, all speeds of records. Boyd Robeson, 2425 W. Maple, Wichita, Kansas 67213, (316) 942-3673, 722-7765 Ev. 9-80-tfn

WANTED: USED RECORDING EQUIPMENT of all ages and varieties Mics, outboard, etc. Dan Alexander, (415) 441-8936. 1-82-6t

Use BE
classified ads


tv engineer

We're Looking For Just The Right Person . . .

to handle a variety of TV studio responsibilities. We know that discovering a well-skilled Engineer is not an impossible task . . . but coming across a dedicated, take-charge individual is a rare find indeed! So, we're willing to take a good hard look at your credentials, but more importantly, we'll want to talk with you to see if we share that special chemistry that will make your employment with us a positive professional experience for all concerned.

You'll need a background of at least 2 years' hands-on experience with $\frac{3}{4}$ " VTR color plumbicon camera systems, digital electronics and associated test equipment.

In return for your commitment to our TV facilities, we offer you visible rewards . . . professional independence . . . a salary that is an accurate reflection of your abilities . . . and, many personal benefits - including medical/dental/life insurance. For a prompt and confidential review, please send us your resume or a letter outlining your experience.



**KETTERING MEDICAL
CENTER**

3535 Southern Boulevard
Kettering, Ohio 45429

Equal Opportunity Employer M/F

TELEVISION HELP WANTED - TECHNICAL: \$40,000 + FIRST YEAR GUARANTEED. Our company has grown so quickly in the past 5 years, we are in desperate need of a very special person who knows broadcast equipment intimately and has aggressive sales ability. We are diversifying into other areas and need someone to take over the equipment sales division. Responsibilities include sales of new and used broadcast equipment and further development of equipment sales division as business demands. We are a first rate company and believe in paying top dollar for the right person. Call Bill Kitchen, Quality Media Corp., (800) 241-7878. 9-80-TFN

ENGINEERING AND TECHNICAL SALES POSITIONS

We specialize in the placement of Technical Engineers with Television Stations, Cable TV, Satellite Programmers & Networks, Pay TV, Manufacturers, Industrial TV, CCTV, Production Houses & Dealers. Also, technical sales with Manufacturers & Dealers. All levels, positions & locations nationwide. Employers pay all fees - confidential, professional. Over \$3,000,000.00 in Salaried Positions Placed. Employee & Employer inquiries invited.

PHONE/RESUME - Alan Kornish (717)287-9635

KEY SYSTEMS

106 new bridge center, kingston, pa. 18704

For
Better
Results
Use
The
Reader
Service
Card

Se Necesita Director Técnico: La revista RADIO Y TELEVISION necesita un Director Técnico que tenga la habilidad de escribir y leer fluentemente el inglés y español para traducir terminología técnica. También debe tener amplios conocimientos sobre equipo de radiodifusión y teledifusión. Enviar las solicitudes conjuntamente con antecedentes profesionales y requisitos de salario a: Publisher, Radio y Televisión, P.O. Box 12901, Overland Park, Kansas 66212.

**A NEW CAREER
IN FUTURE TECHNOLOGY
GROUP W SATELLITE
COMMUNICATIONS**

The technological leader in satellite communications is offering excellent career opportunities to broadcast maintenance engineers. As a diversified satellite communications company, openings are available for maintenance engineers experienced in studio installation, studio maintenance, ENG/ETP maintenance, and satellite earth station maintenance. GWSC offers an excellent compensation and benefits program. Begin your career in the future, now, by sending your resume including salary history in confidence to:

Group W. Satellite
Communications
41 Harbor Plaza Drive
P.O. Box 10210
Stamford, CT 06904

Attn: Bill Johnson
Mngr. Tech. Opns.

M/F — GWSC is an equal
opportunity employer.

WANTED, VIDEO TECHNICIAN, maintenance experience required. ENG experience preferred. Great opportunity for Operations Engineer, doing some maintenance to move into a maintenance oriented position. Live and work in a warm resort community. Contact: John Ross, Chief Engineer, KIII-TV, Corpus Christi, TX, (512) 854-4733. 3-82-21

MAINTENANCE ENGINEER FOR AM AND TV station wanted. FCC license and two years maintenance experience required. Salary: \$20,000 to \$24,000 D.O.E. Contact: Chief Engineer, Bethel Broadcasting, Inc., P.O. Box 468, Bethel, Alaska 99559. Bethel Broadcasting, Inc. is an Equal Opportunity Employer. 3-82-21

VIDEO ENGINEER—IMMEDIATE OPENING: Award winning Boston production house has an immediate opening for a top-notch video engineer. Heavy emphasis on commercial production. Maintenance and management experience a desired plus. Excellent salary and benefits package. Call (617) 329-4080 or write to: President, Videocom, Inc., 502 Sprague Street, Dedham, MA 02026. 3-82-21

KILT-FM, HOUSTON, HAS IMMEDIATE OPENING for Assistant Chief Engineer who will be totally responsible for the daily studio operation. Individual must be capable of routine maintenance and troubleshooting of wide range of studio equipment. RPU's, STL, and monitoring equipment with minimum supervision. FCC license required for RPU maintenance. Above average salary with excellent company benefits including group insurance, retirement plan, and much more. E.O.E. Contact Dan Woodard, C.E., 500 Lovett Blvd., Houston, TX 77006. (713) 526-3461. 4-82-11

HANDS-ON CHIEF — proficient in areas of: RF, Digital, Ampex Quad, RCA telecine, BVU, Vidifont. New facility in pleasant Mid-Atlantic area. Salary commensurate with experience. Send resume to Dept. 561, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. AA, EOE/MF. 4-82-11

ARAMCO

MEDIA COORDINATOR

**Enjoy a more challenging career and
earn up to 40 percent more.
Join Aramco in Saudi Arabia.**

Aramco is the largest oil-producing company in the world. Because of the scope of our projects, we need a highly qualified professional to coordinate our vast media production and operations department.

Basically you'll utilize, maintain, troubleshoot and upgrade electronic broadcast and telecast systems. This involves providing maintenance for the broadcast and production equipment; procuring company broadcast media supplies; coordinating the planning and negotiating of media procurement contracts for community and Aramco construction camp theaters.

You'll supervise a 22-person division of the media department involved in various functions including administrative, technical and engineering. Primary contacts will be with management in planning, budgeting, engineering and technical training support work.

Required is a bachelor's degree and 10 years' experience in the technical aspects of broadcast, including the ability to solve specialized broadcast systems problems to minimize loss of production.

Excellent compensation and benefits

Aramco offers outstanding incentives: a competitive base salary, cost-of-living differential and a very attractive expatriate pay premium. Plus comfortable housing, abundant recreation, excellent schools, bachelor and family status and 40 days' paid vacation to travel the world.

Interested? Call our 24-hour line any day: (713) 750-6965. If you wish, call toll-free: 1-800-231-7511 between 7:30 A.M. and 4 P.M., Monday-Friday, Central Time. Or send your resume in full confidence to: Aramco Services Company, B2008-2, P.O. Box 4531, Houston, Texas 77210.

CHALLENGE BY CHOICE

ARAMCO
SERVICES COMPANY

HELP WANTED (CONT.)

CHALLENGING POSITION AT TOP WASH., D.C. AM/FM

Immediate Assistant Chief Engineer opening requiring first class FCC license and min. 1 year broadcast experience. Studio equipment maintenance experience desired. Call and send resume to:

Richard Silvera
Greater Media, Inc.
P.O. Box 859
East Brunswick, NJ 08816
(201) 247-6161



GREATER MEDIA, INC.

EQUAL OPPORTUNITY/AFFIRMATIVE ACTION EMPLOYER

HELP WANTED (CONT.)

ENGINEERS, TV Systems Engineers, Electronic Technicians, Technical Supervisors, Maintenance. Immediate openings. Experienced. Full time. Full benefits, plus Pension. Excellent salary plus commissions. Send resume to Technical Operations, Inc., P.O. Box 840, New Hyde Park, N.Y. 11040, or call Personnel Mgr. (516) 352-2238. 9-80-tfn

DIRECTOR OF ENGINEERING—STATE ETV NETWORK: Duties include direct supervision of staff of 28 operating, 4 VHF, 1 UHF transmitters, 1 translator, 10 station microwave interconnection system, and a network origination center. Experience should include system design in addition to management of operation, maintenance, and installation of production and transmitting equipment. Salary range of \$17,940-\$23,452. Contact: Personnel, AETN, Box 1250, Conway, AR 72032. 4-82-11

CHIEF ENGINEER, LONG ISLAND AM-FM: Excellent opportunity to grow and learn. Good salary. Resort living. Resume to Barry Grant, WRCN, P.O. Box 666, Riverhead, NY 11901 or call (516) 727-1570. 4-82-21

HELP WANTED (CONT.)

MAINTENANCE ENGINEER—Videotape post production company in beautiful Pacific Northwest has immediate opening. Good pay and benefits. Contact Mike at (206) 623-5934. 4-82-21

ENGINEERING SUPERVISOR for top market TV-VHF station in Northeast. Experience in both operations and maintenance, plus strong management experience to direct and supervise technicians in a union environment. EE degree desired. MUST have good knowledge of analog and digital circuits, and experience with audio, video and RF. Send resumes in confidence to Broadcast Engineering, Dept. 562, Broadcasting Engineering P.O. Box 12401, Overland Park, KS 66212

TOP RADIO ENGINEER sought to maintain new transmitting plant and to build new studios. Must take a disciplined approach to maintenance, record keeping, and new construction. Top salary. KQDS, Box 6167, Duluth, Minnesota 55806. 4-82-21

VIDEO MAINTENANCE TECHNICIAN. Responsible for the maintenance, troubleshooting and repair of video equipment and systems. Requires good working knowledge of electro and mechanical operating principles of video reel-to-reel and cassette records, camera chains, MATV and other supportive equipment that make up a B/W and color TV studio and distribution systems. Qualifications: Graduate from technical school, minimum of 2 years maintenance experience. Stop by for an interview 9 AM - 11:30 AM Mon.-Fri. or call 353-2380 for an appointment. Boston University, Office of Personnel, 19 Deerfield St., Boston, MA 02215. (Outside Boston area send resume or call collect.) An Equal Opportunity Employer. 4-82-11

ENGINEER, SENIOR at television transmitters. Council Bluffs, Iowa. Salary range \$20,342-\$25,500. Supervision of engineers at two UHF transmitter sites. Maintain equipment for maximum performance. Requirements: FCC license and 4 years experience maintaining UHF transmitter. Phone (515) 281-4498 for application and job description. Contact: Personnel Office, IOWA PUBLIC BROADCASTING NETWORK, P.O. Box 1758, Des Moines, Iowa 50306. EOE/M-F. 4-82-11

TV MAINTENANCE TECH. ENGINEER: Experience with IVC 9000's, Ampex Quads, CMX Systems. Analog electronic animation equipment valuable. Career opportunity for someone with broad experience in maintenance planning and supervision. Salary commensurate with experience. Write in confidence to Dolphin Productions, Inc., 140 East 80 Street, New York, N.Y. 10021. 2-82-31

MAJOR PRODUCTION FACILITY IN FLORIDA, is offering top salaries to experienced Maintenance Engineers. Work in a modern new facility with state-of-the-art equipment. Contact: Robert Hemsky, Chief Engineer, (1-305-920-0800), 2040 Sherman Street, Hollywood, Florida 33020. 2-82-31

SYSTEM DESIGN ENGINEER—CCTV. Must be able to specify, design, supervise installation and de-bug top quality industrial CCTV systems. Experience required. **SYSTEM ENGINEER—AUDIO VISUAL and PROFESSIONAL AUDIO.** Hands on experience with audio/visual equipment a must. Digital knowledge helpful but not required. Responsibilities include complete job oversee and client interface. Both positions provide paid health, life insurance, vacation, etc. Please call collect 201-288-6130. AVTEC Industries, Inc., Teterboro, N.J. 9-81-tfn

POSITION WANTED

SEEKING TECHNICAL POSITION in south central Pennsylvania or northern Maryland. Associates Degree in electronics. 1st Class Phone with Radar Endorsement. For resume write P. Braun, 311 Sandy Ct., RD 4, Hanover, PA 17331. 4-82-11

BUSINESS OPPORTUNITIES

HIGH QUALITY 1" video production company seeking association with 1" editorial house, preferably in southeast United States. Union to benefit both parties through immediate expansion plus interchange of services and ideas. Dept. 560, Broadcast Engineering, P.O. Box 12901, Overland Park, KS 66212. 4-82-11

Broadcast Equipment Development & Systems Engineers

Engineers who believe they have the technical and creative potential to belong in the forefront of broadcast technology are invited to consider the exceptional career advantages of these positions on our award-winning New York City-based development and systems engineering teams.

Our continuing growth, constantly-evolving projects of increasing complexity, and enviable record of stability, offer those qualified the strongest potential for long-term professional and personal advancement. Working, with some of the industry's foremost specialists in a truly state-of-the-art environment, you will focus on the development of innovative equipment design and systems for forward-looking broadcast needs.

To qualify, you must have an Engineering degree plus some communications engineering experience—with an equipment manufacturer, broadcaster or related company—in one of these areas:

- Videotape Recording
- Editing Devices
- Digital TV Techniques
- Audio, Video, and RF Systems

Forward resume in strict confidence, INCLUDING SALARY HISTORY and REQUIREMENTS, to: Engineering Placement Manager, CBS Inc., 51 West 52nd Street, New York, New York 10019.

CBS

Men & Women of all Races Desired.

For dependable, quality audio, make sure all the parts get along.

All metalwork is of welded, heavy-gauge steel construction with durable, textured epoxy paint. Dark blue finish.

McCurdy turntables are engineered for broadcast use, incorporating rugged construction, specialized features and weighted, isolating shock mounts.

Convenient housings in matching woodwork are available in a range of sizes for cart machines, auxiliary equipment and jackfields.

This modular stereo audio console (SS8670) is available in 16, 20 and 22 channel standard versions. Custom designs can be produced to meet specific requirements. The control panel is made of mar-resistant, heavy gauge, vinyl-coated steel strips, set into aluminum extrusions.

Sloping, front-hinged mounting panels are available for all popular reel tape machines.

High quality woodwork and trim is custom built to your specifications. Choose from solid oak or walnut.

Let McCurdy put it all together!

Technical harmony is essential to clear professional audio. All the components have to get along before the system can deliver its full potential.

At McCurdy, we strongly believe in technical harmony. It's the basis on which we've built all our dependable, quality audio systems for over 30 years. And because McCurdy can supply the complete system, we can guarantee that it will work together and work right.

Whatever the audio requirement, a McCurdy system can fill the need with quality components. Take our consoles for example . . . from standard versions to custom models, we cover the complete range of audio applications. Or our turntables . . . the only turntable systems designed specifically for broadcast. And all McCurdy audio systems are available with various tape configurations, turrets and/or jackfields.

Let McCurdy put together a complete audio system for your broadcast application. McCurdy components get along so well, you'll agree they were made for each other. And the result of that is technical harmony . . . the best audio possible!



MCCURDY RADIO INDUSTRIES
TORONTO (416) 751-6262
CHICAGO (312) 640-7077

In Our 4th Decade of Service
to the Broadcast Industry

Circle (1) on Reply Card

The dawning of a new era in wide screen sound technology by Ward-Beck

16-60 ft. tracks of virtually unlimited lengths to provide the ultimate in custom
wide screen sound systems for today's imaginative film producer.
Special needs are fully accommodated in this highly sophisticated console
at the PATHE Film Studios in Toronto.
For final mixing it accepts the creative talents of up to three sound
engineers working together as one.



First by Design.

Ward-Beck Systems Ltd., 841 Progress Avenue, Scarborough, Ontario, Canada M1H 2X4.
Tel: (416) 438-6550.

Ward-Beck Systems Inc., 6900 East Camelback Road, Suite 1010, Scottsdale, Arizona 85251.

www.americanradiohistory.com