

## METHODS OF RATING DIESEL FUELS

P. H. SCHWEITZER

*School of Engineering, The Pennsylvania State College, State College, Pennsylvania*

*Received July 16, 1937*

### I. MECHANISM OF THE DIESEL COMBUSTION KNOCK

The Diesel process is frequently described as injecting liquid fuel into highly heated air, the fuel igniting instantly upon its entrance into the cylinder. If this description were accurate, there would be no combustion knock in Diesel engines, generally speaking. The introduction of the fuel into the cylinder is a gradual process, if for no other than mechanical reasons. The injection extends over a period of 20 to 35 crank degrees, sometimes more, seldom less. During this period the introduction of the fuel is more or less uniform. If the ignition were instantaneous, the rate of pressure rise would follow the rate of injection and be moderate. Combustion knock, on the other hand, always is accompanied by a very rapid pressure rise.

However, the process described is upset by the ignition lag. The fuel injected does not ignite instantaneously. The significance of the delay period is discussed in another paper (9) of this symposium. For us it will suffice to say that the longer the delay the more violent the subsequent ignition and the more severe the combustion knock.

Almost every factor that causes a spark-ignition engine to knock makes the compression-ignition engine run more smoothly (45). In both cases the knock is caused by the autoignition of a considerable portion of the charge, but while in a spark-ignition engine it is ordinarily the last portion of the charge which autoignites, in the compression-ignition engine combustion is initiated by autoignition. This explains the different behavior of the two types of engines.

Consequently fuels of paraffinic base, consisting mostly of saturated straight-chain hydrocarbons, are the smoothest and most desirable fuels for Diesel engines, while cracked fuels and also straight-run aromatics burn roughly, benzene being about the worst of all. Gasoline antiknocks have the reverse effect in Diesels (37), while proknocks, consisting mostly of mild detonants like ethyl nitrate, added even in a small percentage reduce the Diesel knock remarkably. This is explained by the fact that paraffin fuels and ethyl nitrate ignite after a comparatively short delay and

do not permit the accumulation of a considerable amount of combustible charge in the cylinder.

## II. HISTORY OF DIESEL FUEL TESTING

Rieppel (43), in 1907, as one of the earliest research workers on the behavior of liquid fuels in compression-ignition engines, recognized that no relation existed between the flash point or burning point of a fuel and its ability to ignite spontaneously inside an engine cylinder.

Holm (23), in 1913, investigated autoignition temperatures in oxygen by allowing oil globules to drop to a porcelain crucible cover heated inside a vertical tube furnace swept through by a stream of oxygen.

Constam and Schlaepfer (13) continued the investigation with increased accuracy, but they could not share Holm's opinion that the spontaneous ignition temperature was of decisive influence on the suitability of fuel oils for Diesel engines.

A simple and successful autoignition temperature tester operating with air under atmospheric pressure was developed by Moore (36) in 1919, which has been perfected by Wollers and Ehmcke in the Krupp laboratories (51). In Jentsch's modification of the open crucible, the oxygen feed is closely controlled.

Compressed air in a bomb was used by Tausz and Schulte (50) and atomization of the fuel added by Hawkes (16), Neumann (39), Foord (15), Holfelder (22), and Michailovra (33). These investigations have shown that self-ignition temperature depends to an enormous degree on the delay period and to an appreciable degree on the air pressure, density, air-fuel ratio, material of the crucible, and atomization of the fuel. By agitating the air in the bomb Neumann (39) obtained self-ignition temperatures that were much higher than those for stagnant air, except for very short ignition lags, when the reverse was true.

The above investigations rated Diesel fuels in somewhat similar order and have shown that paraffinic fuels have lower self-ignition temperatures than aromatic or naphthenic fuels. But the order of magnitude of the time lag in simple bomb tests was a multiple of 1/10 second, compared to a few thousandths of a second obtained in compression-ignition engines. In recently constructed bombs, however, using high pressure, turbulence, and fuel atomization, ignition lags were measured (33) that are comparable with those obtained in engines.

In 1923 Hesselman (18) described a method for measuring ignition lag, which he used on his engine. In 1931 Le Mesurier and Stansfield (29) gave results of tests to determine the difference in behavior of a wide range of fuels in several compression-ignition engines, and showed that, in any given engine, the combustion knock was broadly related to the delay which occurred between the moment of injection and the beginning of rapid

pressure rise, which they measured essentially in the same way as Hesselman. Different engines seemed to have only slightly different relative effects on the fuels tested.

In the same year Boerlage and Broeze (6) published their results on an engine-test method of rating Diesel fuels. The tests were made in a relatively slow speed engine by the throttling method, and each fuel was rated in terms of the blend of cetene and mesitylene which matched it in ignition lag. The tests have shown surprisingly good correlations, indicating not only that the method is dependable but also that differences between engines and running conditions were of relatively slight effect upon the rating.

In January, 1932, Pope and Murdock (40) reported on their tests made with a modified C.F.R. knock-testing engine. In these tests the engine was of the variable compression type, and the rating was based on the lowest compression ratio at which the samples of fuel would just ignite under controlled temperature conditions. While running the engine under such borderline conditions did not prove practical, with a "motored engine" the critical compression ratio method gave very useful results.

In July, 1932, Boerlage and Broeze (7) proposed that ratings in ignition quality be made in terms of "cetene numbers", using cetene and alpha-methylnaphthalene as primary standard. In 1935 the A.S.T.M. (1) replaced cetene in this country by cetane for a standard reference fuel of high ignition quality.

Until recently ignition lag determinations were made from indicator diagrams. In 1932 Boerlage and Broeze (7) described an inertia lag meter, and a year later (8) reported cetene ratings performed with a modified Midgley type bouncing pin. The "knockmeter delay method" which has been most widely used in this country is an outgrowth of this method, and was developed by T. B. Rendel (41) in coöperation with the Waukesha Motor Company, the builders of the converted C.F.R. engine which has been tentatively adopted for Diesel fuel rating.

In 1933 Schweitzer, Dickinson, and Reed (46) proposed the use of a predetermined ignition lag, to be obtained by a corresponding adjustment of the compression ratio, for rating. In 1935 Hetzel and Schweitzer (20) replaced the bouncing pin by a magnetic pick-up, which flashed the neon lamp of a protractor through an electronic relay.

One of the first empirical equations based on physicochemical data, and indicative of the ignition quality of the fuel, was proposed in 1931 by Butler (11) and called "Ignition index:"

$$\text{Ignition index} = (1 - \text{specific gravity}) \frac{\text{specific gravity}}{\text{dispersion}} \\ \times \text{average boiling point (}^\circ\text{F.)}$$

The specific gravity and dispersion are to be taken at 100°F. This was superseded in 1934 by the Diesel index of Becker and Fischer (4),—a formula involving gravity and aniline point which has subsequently become rather popular.

In the same year Moore and Kaye (35) proposed the viscosity-gravity number, which has been modified by Hill and Coates (21); this formula contains only viscosity and gravity.

One year later Jackson (26) proposed the boiling point-gravity number, which uses the 50 per cent distillation point and gravity in a formula.

In 1935 Heinze (17) proposed as an index the parachor of Sugden (49),  $p = S^2/D$ , where  $S$  = surface tension and  $D$  = specific gravity. When  $p$  is plotted against the molecular weight, characteristic straight lines are obtained, one for each class of hydrocarbons, which correlates well with the cetane rating.

The U.O.P. (Universal Oil Products) characterization factor, proposed by Hubner and Murphy (25) in 1935, includes the same factors as the boiling point-gravity number in a different combination.

As a further refinement in 1937 Hubner (24) introduced the ignition quality number, which is obtained by multiplying the Diesel index by the 50 per cent distillation point.

Marder and Schneider's (32) formula based on the boiling point index and Kreulen's (28) "ring analysis" are the most recent contributions along this line.

### III. SCALE FOR EXPRESSING RATING

No matter what testing method is adopted for measuring ignition quality, it is essential to determine the manner in which the rating of the fuel shall be expressed. This problem is only loosely related to the method of rating. Using the engine rating, one way to express the rating would be to use the measured factor for scale, as the ignition lag in degrees, the lowest usable compression ratio, the required compression ratio to produce a predetermined ignition lag, the maximum rate of pressure rise, and others.

Another way to express the rating is based on two standard reference fuels, one of high and the other of low ignition quality. The test fuel is matched with a blend of the two reference fuels mixed in such proportion that its ignition quality (in the arbitrary scale of the test) is equal to that of the reference blend. The rating of the fuel is then expressed as the percentage concentration of the reference fuel of high quality.

This second method can be used with any testing method that may be adopted,—bomb, physicochemical, or engine tests,—and it offers certain distinct advantages. Rating expressed in a reference fuel scale is no doubt less affected by the instrument factors. But the deciding consideration

in the adoption of the cetene (later cetane) scale was the preceding experience with gasoline knock rating. In the early period that was expressed by Ricardo's H.U.C.R. (highest useful compression ratio), but that gave way first to the toluene equivalent and later to the octane number. Technologists accustomed to the octane number were quick to adopt the cetene number when it was proposed by Boerlage and Broeze.

The selection of the reference fuels required, however, a careful study. For reproducibility they should be pure substances of a known chemical composition, which are stable in storage. For range they should possess higher and lower ignition quality, respectively, than any fuel to be tested. For validity they should possess a chemical constitution and physical

TABLE 1  
*Properties of cetane and alpha-methylnaphthalene*

PROPERTIES	CETANE*	ALPHA-METHYL-NAPHTHALENE†
Specific gravity 60/60 °F.....	0.778	1.018
Flash point, closed cup, °F.....	230+	214
Pour point, °F.....	+65	+50
Viscosity, SSU at 100°F.....	38	37
Distillation range, °F.		
Initial boiling point.....	516	450
10 per cent.....	532	456
50 per cent.....	534	438
90 per cent.....	536	460
End point.....	543	482
Aniline point, °F.....	204.0	Miscible

\* As supplied by E. I. du Pont de Nemours and Company.

† As supplied by Reilly Tar and Chemical Company.

properties (viscosity and volatility) not much different from those of the normal fuels. Finally, they should be available at a reasonable price.

The reference fuels which were adopted by the A.S.T.M. as most satisfying these requirements are cetane,  $C_{18}H_{34}$ , and alpha-methylnaphthalene,  $C_{11}H_{10}$ . The properties of these substances are given in table 1.

Table 1 shows that the properties of these hydrocarbons are in line with those petroleum fuels which are used most in high-speed compression-ignition engines. The ignition quality of cetane is about equal to that of cetene,  $C_{18}H_{32}$ , but it is claimed that it is more stable in storage.

Since June, 1935, when the A.S.T.M. recommended its use, the cetane scale has become practically universal in this country as a measure of ignition quality. In Europe the use of the cetene number scale has been continued to date.

## IV. THREE GROUPS OF TEST METHODS

*A. Bomb tests*

The primary objective with the crucible and bomb tests was to determine the self-ignition temperature of the fuel. It has been observed that fuels of high self-ignition temperature either fail to ignite at all in the engine, or if they do ignite there is a long delay with a corresponding combustion knock. So self-ignition temperature was taken for a measure of ignition quality. The Moore apparatus uses an open porcelain crucible heated in a furnace or solder bath into which drops of oil are admitted while the temperature of the crucible is raised by small increments until the fuel autoignites. This method was simple and well adapted to laboratory practice. It was found (29, 6, 5, 4), however, that the self-ignition temperatures obtained with such an apparatus lie too close together and, furthermore, they do not rate fuels in the same order as their engine behavior. This should not surprise us, if we realize that temperature is just one of the many factors that determine autoignition. Others are chamber pressure, air motion, fuel drop size, fuel-air ratio, and time lag of ignition. Bridgeman and Marvin (10) have shown that even the size and material of the crucible influenced the self-ignition temperature.

Subsequent efforts have been directed at creating conditions in an ignition bomb similar to those in the engine, and improved ignition testers have been evolved. Such recent variants as Holfelder's (22) and Michailovra's (33) inject finely atomized sprays into heated dense air, agitated to simulate turbulence, and measure the delay of the ignition. The results obtained are comparable to and correlate well with engine tests. By the time the bomb has reached this perfection it has become so complicated that it now offers no advantage either in first cost or in ease of operation over the test engine.

The ideal that self-ignition temperature as a characteristic property of the fuel would determine its ignition behavior did not materialize. Whether or not a fuel drop ignites at a certain temperature depends a great deal on how long the drop is exposed to that temperature and, furthermore, the time sensitivities of the various fuels are different. The determination of the maximum or minimum ignition temperatures, which correspond to zero or infinite time lags, respectively, is of theoretical interest, but the existence of neither of them has yet been proved.

*B. Engine tests*

The success of the gasoline knock-testing engine encouraged the search for a method that looks for an answer on Diesel fuel quality in the engine itself. The possibility of using the gasoline knock-testing engine unaltered suggested itself. From the reverse behavior of the fuel in spark-ignition

and compression-ignition engines it was not unreasonable to expect that Diesel fuels would rank in the reverse order as their octane numbers or directly as their "heptane numbers". One practical drawback to this method has been the difficulty of carbureting heavy oils and the trouble these oils cause in the engine by gumming, coking, crankcase dilution, etc. Dumanois (14) overcame these difficulties by mixing 15 per cent Diesel fuel with reference gasoline. The knock rating of such mixtures in the gasoline knock-testing engine was found to correlate fairly well with the behavior of the heavy oil in the Diesel engine. But at the same time the tests have shown (25) that it is too much to hope for a perfect reciprocity in a spark-ignition and compression-ignition engine that would justify the universal adoption of the gasoline-testing method for Diesel fuels. If a larger margin of error is admissible this simple method of rating Diesel fuels is recommended.

There is no apparatus that simulates the compression-ignition engine conditions as much as a compression-ignition engine itself. The use of a compression-ignition engine for testing the ignition quality of fuels started in 1931 and attained considerable momentum recently. A variety of methods have been used by Le Mesurier and Stansfield (29), Boerlage and Broeze (6), Pope and Murdock (40), Joachim (27), Rendel (41), and Schweitzer and Hetzel (47). In principle, however, all of these agreed. The ignition quality as such is not measured by any engine test, but is only determined indirectly on the basis of the behavior of the fuel in the test engine in regard to such characteristics as combustion knock, ignition lag, rate of pressure rise, starting, or misfiring.

A valid objection to engine test methods is that the results they give have no *theoretical* significance, and can not be expressed in terms of ordinary physical units. However, in view of the great *practical* significance of fuel rating, this objection can be set aside as it was set aside in the case of knock rating of gasolines.

Another objection that has been raised against this type of testing is that its practical significance is limited to the type of engine with which the tests have been performed. Doubts regarding the general nature and applicability of the ratings obtained by engine tests have been largely dispersed by investigations performed on a great number of engines by Boerlage and Broeze (6), Stansfield (48), Joachim (27), MacGregor, and Good (31). The results have shown (46) that (1) with few exceptions, for which the reasons are clear, all engines rate fuels in substantially the same order; (2) the results obtained in any engine are not unduly sensitive to the engine factors such as amount of fuel, type of spray, injection timing, etc. These statements are rather general and do not apply equally to all types of engine tests that have been proposed, but accumulated evidence tends

to indicate that the behavior of Diesel engines with regard to cetane rating is much more uniform than the behavior of spark-ignition engines with regard to octane rating.

### 1. Test engine

Broadly speaking, any engine is suitable for fuel testing. This fact was recognized by the Institute of Petroleum Technologists (25a) by permitting the use of any engine for the determination of fuel ignition quality. In this country the converted C.F.R. engine, built by the Waukesha Motor

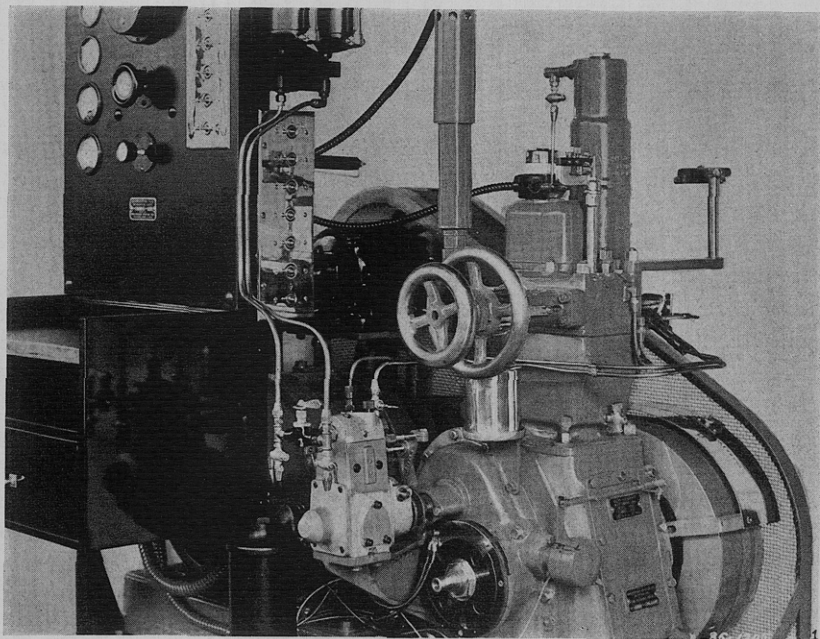


FIG. 1. C.F.R. engine for Diesel fuel testing developed by the Waukesha Motor Company

Company, has been used almost universally for fuel testing. The engine is shown in figure 1 and the cross section of the head in figure 2. It is a  $3\frac{1}{2}$ " x  $4\frac{1}{4}$ ", one-cylinder, four-cycle engine with a swirl type combustion chamber provided with an adjustment plug which permits changing the compression ratio between 6:1 and 28:1. An induction type generator supplies the load and maintains the speed constant. Otherwise the engine is conventional except that it is provided with heaters for the intake air, cooling water, and lubricating oil which permit keeping these at a pre-determined value.



The chief advantage of the Waukesha type of test engine is its variable compression ratio. An engine with a fixed compression ratio can only test fuels of a limited range, while the variable compression ratio not only enables the engine to burn a wide range of fuels but by suitable adjustment the engine can be made sensitive to the ignition quality of the test fuel.

## 2. On the selection of a suitable ignition index

In testing the ignition quality of fuels in an engine the fuels are compared on the basis of some suitable index such as knock, pressure, ignition lag, etc. The engine as a testing instrument cannot be expected to measure the ignition quality of a fuel in physical units. But a rating can be based on engine tests if the engine is able to indicate that one fuel has a higher ignition quality than another. With the use of the cetane scale the engine

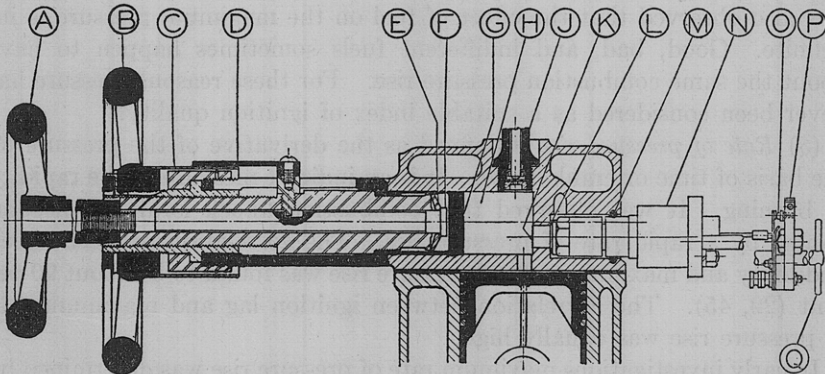


FIG. 2. Diesel variable compression plug. Optical delay method. Cross section of cylinder head showing mechanism for varying volume of combustion chamber.

test is boiled down to answering the simple question: Are the ignition qualities of two given fuels equal? If not, which is higher?

Several criteria can be used for answering this question. Those that have received wider attention are (1) combustion knock, (2) pressure rise, (3) rate of pressure rise, (4) ignition lag, (5) misfire, and (6) computed combustion knock. These will be discussed briefly:

(1) *Combustion knock* is a factor with which the user is directly concerned. It can be judged from a casual inspection of the running engine. The aural observation, however, is too inaccurate to serve as a basis for test. Le Mesurier and Stansfield (29) compared fourteen Diesel fuels on the basis of audibility of combustion knock estimated by ear. In the Junkers engine, which had an integral combustion chamber, the comparative rating of the fuels was the same at any speed between 300 and 1000

R.P.M. On the other hand, in the McLaren-Benz engine, which is of the precombustion chamber type, the order of merit changed with the speed.

Another difficulty with audibility tests is that it is not always easy to discriminate between combustion knock and other engine noises. To eliminate the latter difficulty and also the personal element in sound estimation, Carpenter and Stansfield (12) developed the strobophonometer, which measures the noise of a certain phase of the cycle by means of a mechanically driven selector and a suitable microphone. The noise readings obtained with this instrument correlated fairly well with ignition lag measurements and rate of pressure rise measurements.

(2) *Pressure rise* is frequently used as a measure of engine roughness. The maximum explosion pressure cannot be used as a measure of roughness (6), because an increase in intake air pressure increases the maximum pressure but at the same time makes the engine run more smoothly. It was also observed that the effect of fuel on the maximum pressure is indefinite. Good, bad, and indifferent fuels sometimes happen to have about the same combustion pressure rise. For these reasons pressure has never been considered as a suitable index of ignition quality.

(3) *Rate of pressure rise* is defined as the derivative of the pressure on the basis of time or crank angle. It is an indirect measure of the rapidity of burning. It was observed that combustion knock is always accompanied by a rapid rate of pressure rise. The correlation between shock audibility and maximum rate of pressure rise was found to be about 90 per cent (29, 45). The correlation between ignition lag and maximum rate of pressure rise was equally high.

In early investigations maximum rate of pressure rise was determined by drawing tangents to crank angle base indicator cards. The observation was made that if the M.R.P.R. (maximum rate of pressure rise) is less than 30 lb. per square inch per degree of crank motion, the operation is smooth. The engine is liable to knock if the M.R.P.R. is above 50 lb. per degree and is almost certain to knock if the rise exceeds 100 lb. per degree crank angle.

At present instruments are available which give the maximum rate of pressure rise directly, instead of deriving it from a pressure curve. By using an electromagnetic pick-up in connection with a diaphragm in the cylinder head, the flexing of the diaphragm which follows the pressure generates voltage in proportion to the flexing (flux-cutting) velocity. This voltage can be impressed on a cathode ray oscillograph and the M.R.P.R. scaled as the maximum deflection of the light point on the screen.

The Sunbury knock indicator (3), which has been introduced recently for knock rating gasolines, is using this principle. Here the magnified

output of the magnetic pick-up is fed into a damped millivoltmeter and the reading is a measure of the average rate of pressure rise. The use of this instrument for Diesel fuel testing deserves serious consideration.

(4) *Ignition lag* is the time interval between the point of injection and the point of ignition. It has been used as the preferred index of ignition quality since the investigations of Le Mesurier and Stansfield (29) and of Boerlage and Broeze (6) have established the close relations that exist between ignition lag and fuel quality as evidenced by combustion knock and difficulty of starting. The shorter the ignition lag of the fuel, the more quietly the engine runs and the more easily it starts if other conditions are the same. The principle of most current methods of measuring ignition quality is to match the sample fuel with a reference fuel which has the same ignition lag in a standard test engine under standard operating conditions or in the user's engine under the user's normal operating conditions.

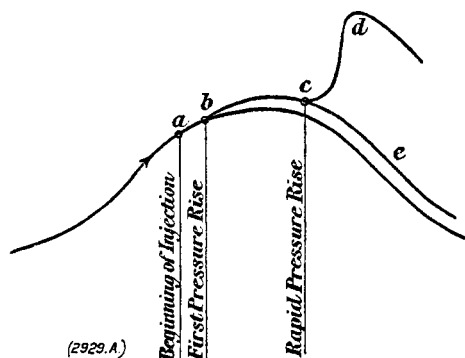


FIG. 3. Definition of point of ignition (Boerlage and Broeze)

The ease with which the ignition lag can be measured was no doubt a factor in its adoption for testing. In spring-loaded nozzles the beginning of the injection coincides with the beginning of the valve lift and can be determined very accurately by electrical means if the valve stem is accessible, as it usually is. The ignition point, on the other hand, was obtained from the indicator card, which regularly shows a readily noticeable pressure rise where ignition sets in.

While in most cases the determination of the ignition point from the indicator diagram offers no difficulty, in cases like that shown in figure 3 a more exact definition is needed. Ignition point is frequently defined as the point where the pressure rises above the compression pressure (point b, figure 3). Boerlage and Broeze (6) are of the opinion, however, that the ignition point so defined is not significant of the knock or of the ignition quality of the fuel. They advocate the use of the first *appreciable* pressure

rise (point c, figure 3) as ignition point. Hetzel (19) has, in fact, shown by oscillograms that by successively decreasing the compression ratio the point of appreciable pressure rise occurred later and later while the point of *initial* pressure rise was the same. Ignition point has also been variously defined as the time of first flame formation as detected by the human eye on a photographic film (22) or by a photocell (44), but for routine testing this is probably still less significant, as incandescence is of no immediate concern.

For the purpose on hand the definition of Boerlage and Broeze seems the most appropriate, although it is realized that in certain cases it must be arbitrarily decided when the rate becomes "appreciable."

(5) *Misfire* occurs if the compression ratio is not high enough to cause ignition. Since fuels of low ignition quality misfire at higher compression

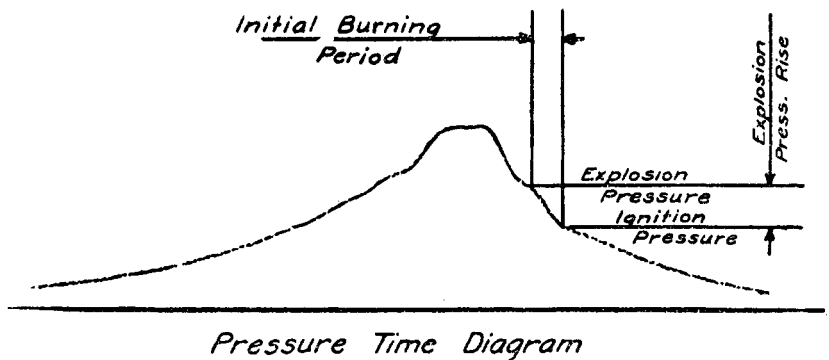


FIG. 4. Definition of compound combustion knock (Joachim)

$$c.k. = \frac{(\text{explosion pressure rise})^2}{\text{initial burning period} \times 10^4}$$

ratios than fuels of high ignition quality, misfire can and is being used as an index of ignition quality. In using the cetane scale the procedure again consists of matching the sample fuel with a reference fuel which misfires under identical conditions. A misfiring condition may be brought about by various methods. In a running engine one may reduce the compression ratio (if it is a variable compression engine), or decrease the intake air pressure (by throttling), or retard the injection timing, or decrease the jacket water temperature to the point at which misfiring occurs. The other alternative is motoring the engine with injection shut off until it reaches stable temperature. Then the ignition is turned on. If no ignition takes place the compression ratio (or the other factors) is raised until ignition does take place. The borderline of misfiring is thus determined.

Two methods involving misfiring have become popular for fuel testing.

The C.C.R. (critical compression ratio) method (40) is using a motored engine, and the test is sometimes referred to as the starting test, as it simulates starting conditions. The throttling method throttles the intake air of a running engine until the engine misfires. This method sometimes is referred to as the altitude test. Both of these misfiring tests give a high correlation with the ratings obtained by the delay methods.

(6) *Computed combustion knock* has been introduced by W. Joachim (27) and is defined as the product of the "explosion pressure rise" and the rate of pressure rise which takes place during the "initial burning period" (see figure 4). Its numerical value is obtained by the formula

$$\text{Computed knock} = \frac{(\text{explosion pressure rise})^2}{\text{initial burning period} \times 10^4}$$

where explosion pressure rise is expressed in pounds per square inch and initial burning period in degrees crank angle. The formula has merit, and remarkably good correlation has been shown (31) between it and ratings obtained with conventional methods. Its chief disadvantage is that the "initial burning period" is seldom sharply defined and is frequently difficult to determine (34).

### 3. Three requirements of a good testing method

Any satisfactory testing method has to satisfy three requirements: (1) convenience, (2) reproducibility, and (3) validity.

For convenience a testing method is preferred which is quick and simple, and does not require elaborate instrumentation and numerous delicate adjustments.

It is only a truism that a good testing method *should* give reproducible results. It is no less a truism that a properly standardized test cannot but give reproducible results. The essence of the matter, however, is that it is not desirable or even possible to standardize a great number of factors to an absolute accuracy, with no tolerance permitted. If slight variations in some factors cause a great variation in the test result, the reproducibility is poor. The same term is applied if the test result is affected by factors the control of which is difficult or impossible. The term "reproducibility" is used in this sense in this discussion.

"Validity" means that the results of the test are representative and give exactly the information the observer is seeking. If the observer is interested in the wear resistance of a metal, the Brinell hardness test is valid, but a test of tensile strength is not. It is not easy to determine the validity of a test on ignition quality, because we have no exact definition of what ignition quality is. It is generally understood that Diesel fuels of high ignition quality start more easily, run more smoothly, and begin

to misfire later than fuels of low ignition quality. But there is no conclusive evidence that these three things mean one and the same thing and, for that matter, we do not even know what any one of them means. The fact that has been established by numerous investigations is this: If by any arbitrary tests a group of fuels is ranged in the order of their resistance to misfire, then in the order of their ease of starting, then in the order of their smoothness of running, the three orders will be not exactly, but substantially, the same. It also has been shown that engines of various types and sizes rate the fuel in substantially the same order. These observations form the justification of the ignition quality testing. But not every test shows equally good correlation. The validity of a testing method will be considered high if its correlation is high with other tests and tests on other engines. The behavior of the fuels in service engines is considered most significant from the standpoint of validity.

To judge the various fuel-testing methods that have been proposed they are to be examined as to the extent to which they satisfy the three basic requirements of convenience, reproducibility, and validity. Some of these can be decided even without considering the details of the particular testing technique.

Tests based on the audible knock have not been used to any extent in routine testing because they are inconvenient. No simple measuring instrument is available for the purpose.

Tests using the maximum pressure or combustion pressure rise for index of ignition quality must be ruled out on the lack of validity.

Maximum rate of pressure rise, on the other hand, correlates fairly well with valid indices, and the test can be made conveniently with simple instruments. While this type of test has not yet been proposed formally we have given considerable attention to it. As a result, the author's opinion is that the weakness of the M.R.P.R. test is its poor reproducibility.

For perfect reproducibility the engine and operating conditions have to be standardized with any testing method. But a desirable ignition index is one that is most sensitive to fuel quality and least sensitive to engine factors, particularly to those that are difficult to control.

The more important engine factors are as follows: engine speed, jacket temperature, inlet air temperature and pressure, compression ratio, combustion chamber shape, injection timing, injected fuel quantity (load), and nozzle opening pressure. Of these, injection timing seems to give the most trouble.

On many engines the injection timing can be controlled and read, on some it can be controlled but not read, and on some others it can be neither controlled nor read. Test engines as a rule permit setting the injection point at will, but an error of up to  $0.5^\circ$  can be committed easily. When

changing from one fuel to another of different viscosity or gravity, the injection advance angle changes with unchanged injection setting. For these reasons an index of ignition quality which is not unduly sensitive to injection timing is clearly preferred.

#### 4. Effect of injection timing

Injection timing in an engine is controlled ordinarily by the fuel injection pump, but the beginning of pump delivery should not be taken as the beginning of the injection. The actual injection, corresponding to the

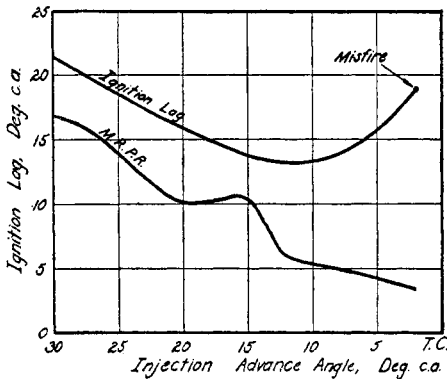


FIG. 5

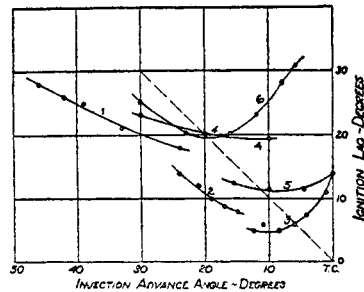


FIG. 6

FIG. 5. Effect of injection timing on ignition lag and maximum rate of pressure rise (arbitrary scale)

FIG. 6. Effect of injection timing on ignition lag in various types of engines. Curve 1, open combustion chamber, slight air swirl (Dicksee); curve 2, divided combustion chamber, moderate air flow (Dicksee); curve 3, divided combustion chamber, vigorous air flow (Dicksee); curve 4, open combustion chamber, negligible air flow, Bosch pump (N.A.C.A.); curve 5, open combustion chamber, negligible air flow, N.A.C.A. pump (N.A.C.A.); curve 6, open combustion chamber, negligible air flow, earlier N.A.C.A. pump (N.A.C.A.).

exit of the first drop of fuel from the spray nozzle, always takes place later, the injection lag varying with the injection tube length, engine speed, fuel viscosity, injection quantity, etc. Therefore a fixed pump injection does not mean a constant injection timing. The injection point may vary 5 degrees crank angle or more according to engine speed, fuel viscosity, injection quantity, etc.

The effect of the injection advance angle on the maximum rate of pressure rise is erratic. Figure 5 is an example, where the wavy line shows the maximum rate of pressure rise in an arbitrary scale and the heavy line the ignition lag in degrees crank angle. When the injection is advanced

from top center to 12 degrees before top center the M.R.P.R. rises, because the combustion approaches constant volume conditions. But at the same time the ignition delay period is also advanced, coming closer and closer to the high temperature zone near top center and becoming shorter and shorter. The shorter ignition lag reduces the amount of vaporized fuel accumulated at the moment of ignition and tends to reduce the rate of pressure rise. Indeed, if the injection is advanced beyond 17 degrees, the latter effect predominates and the M.R.P.R. falls. If the injection is advanced still farther, the ignition delay period is ahead of the hot top center zone, and consequently the M.R.P.R. increases again because of the excessive ignition lag.

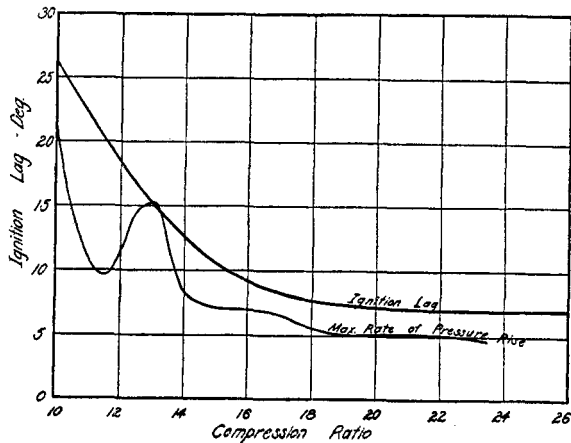


FIG. 7. Effect of compression ratio on ignition lag and maximum rate of pressure rise

The effect of the injection timing on the M.R.P.R. is complex. It will be noted that the latter jumps suddenly between 12 and 14 degrees before top center, which is the customary injection timing.

Figure 5 refers to a turbulent chamber engine. In non-turbulent engines the variation of the M.R.P.R. with injection timing is still more erratic (46) (figure 11). If M.R.P.R. were used as an index of ignition quality, the injection advance angle would have to be held within close limits.

Of course ignition lag is also affected by the injection timing but to a much lesser degree, as is seen in figure 5 and also in figure 6, which are reproduced from another paper (46). With the normal injection advance the ignition lag is close to its minimum and therefore insensitive to slight variations in timing.

The maximum rate of pressure rise shows a similarly erratic behavior with regard to compression ratio. In figure 7 the wavy line is the M.R.P.R.



at an arbitrary scale and the heavy line is the ignition lag in degrees crank angle, as they vary when the compression ratio is varied from 10:1 to 24:1, while ignition always takes place at top center. When the compression ratio is about 12:1, three different compression ratios correspond to a single M.R.P.R.

Experiments have shown that the validity of the M.R.P.R. index is also poor. N.A.C.A. tests (38) revealed cases where a change in air flow caused ignition lag and combustion knock to decrease and at the same time the rate of pressure rise to increase. It has also frequently been observed that an increase in intake air pressure or temperature increases the M.R.P.R., although at the same time ignition lag and combustion knock go down.

At extreme conditions the M.R.P.R. index fails to respond. We have measured the ignition lag and M.R.P.R. of the primary standard reference fuels at 24:1 compression ratio, 200°F. intake air temperature, and 9 in. of mercury supercharge. The results are tabulated in table 2. The table

TABLE 2

*Measurement of ignition lag and M.R.P.R. of the primary standard reference fuels 24:1 compression ratio; 200°F. intake air temperature; 9 in. of mercury supercharge*

FUEL	CETANE NUMBER	IGNITION LAG		M.R.P.R.	AUDIBLE KNOCK
		Degrees crank angle	Milli-seconds		
Cetane.....	100	4.8	0.9	21	Very smooth
Alpha-methylnaphthalene....	0	8	1.48	25	Very rough
Straight-run Mid-Continent gas oil.....	55	5	0.93	20	Very smooth

shows that under conditions that are extremely favorable to combustion the difference between the best and the poorest fuel is still very pronounced to the ear and quite pronounced in ignition delay but fades away in the maximum rate of pressure rise.

Ignition lag is a convenient index of ignition quality when determined with the instrumentation to be described later. The reproducibility of the results is satisfactory if ordinary precaution is exercised. The recent report of the Volunteer Group for Compression-Ignition Fuel Research (2) showed an average deviation of 1.7 cetane numbers for twelve fuels and twenty-two laboratories using delay methods. This will, no doubt, be further reduced with improved instrumentation.

The validity of the results obtained with the ignition lag method cannot be decided conclusively as yet, but reports available (6, 48, 31, 37, 2) indicate that it is of a high order.

Misfiring is a most convenient ignition index inasmuch as it needs hardly

any instrumentation. It is simple to throttle the intake air on any engine until misfiring occurs. Of course the range of fuels that can be tested in this way is rather narrow, unless the compression ratio is varied. The objection to this type of test is that an engine running a great deal on the borderline of misfiring deposits so much soot that frequent cleaning is necessary. This is obviated by the C.C.R. method, which uses a motored engine and allows injection only during a few revolutions. The lowest compression ratio at which firing takes place is the ignition index.

There is, however, a certain conflict in the C.C.R. method between convenience and reproducibility. To obtain reproducible results, the heat and the residual gas condition of the engine must be strictly identical. A trial injection, however, upsets the equilibrium, whether it results in firing or not. Therefore an extremely rigorous routine must be maintained which involves considerable loss of time incurred during the waiting periods. These difficulties were greatly relieved by a special injection control device designed by MacGregor (30), which automatically by-passes thirty out of every thirty-two injections.

With regard to validity the record of the misfiring method is better than fair (48), but the motored engine seems to be somewhat behind the running engine as far as correlation with the delay rating is concerned. The recent Volunteer Group Report (2) showed that the C.C.R. ratings were generally 2 to 3 cetane numbers higher than the ratings by the delay method except for the doped fuels which were shown up poorly by the C.C.R. method. Since the cylinder walls are cooler and the ignition lag is nearly 180 degrees, the C.C.R. test may represent starting conditions rather than those of a running engine.

Not much can be said in favor of the "computed combustion knock" in regard to convenience. It involves a laborious evaluation of indicator cards. No data are available to estimate its reproducibility. Its validity is of a high order, according to recent reports (37), as it gives good correlation with ignition lag ratings for both doped and undoped fuels.

### *C. Physicochemical methods of fuel rating*

More space has been given to engine ratings because they alone are considered authentic, but physicochemical methods of fuel rating are also of interest.

The most popular indices in use are (1) the Diesel index with the formula

$$\text{Diesel index} = \frac{\text{A. P. I. gravity} \times \text{aniline point}}{100}$$

(2) the viscosity-gravity index with the formula

$$G = 1.082A - 0.0887 + (0.776 - 0.72A) \log \log (KV - 4)$$

where  $A$  = viscosity-gravity index,  
 $G$  = specific gravity at 60°F., and  
 $KV$  = kinetic viscosity at 100°F. in millistokes,  
 and ( $\beta$ ) the boiling point-gravity index with the formula

$$G = A + (68 - 0.703A) \log B.P.$$

where  $A$  = boiling point-gravity index,  
 $G$  = A.P.I. gravity at 60°F., and  
 $B.P.$  = 50 per cent distillation point in °C.

The correlation of these chemical indices between themselves and with engine tests has been investigated by Hubner and Murphy (25), Schweitzer and Hetzel (47), Yamazaki and Ôta (52), and the U. S. Naval Experiment Station (37). Applied to petroleum products all three indices give fairly good correlation with engine tests, but they generally fail on doped fuels or oils of vegetable origin. Specifically the addition of a small per cent of ethyl nitrate increases the cetane number of a 50 cetane fuel about 8 cetane numbers per 1 per cent of ethyl nitrate added (37), but the change in all three chemical indices occurs in the wrong direction.

Nevertheless the physicochemical indices fill a useful place, as they permit estimation of the ignition quality of the present commercially available fuels from simple physical and chemical data that are either available or can be determined with little trouble. None of the present indices is, however, good enough to take the place of the engine testing when accuracy is essential. Another consideration is that fuels which are now in use may not be typical in the future. The use of dopes, hydrogenation, polymerization, oils of coal and vegetable origin, and other unforeseen developments may so change the Diesel fuel picture that no empirical rating can be relied upon.

#### V. DEVELOPMENT OF TESTING TECHNIQUE

The discussion in the foregoing section attempted to explain why the variety of methods available for testing the ignition quality of Diesel fuels has narrowed down to a few alternatives of the engine delay method. All of the methods that enjoy some recognition at present are based on the ignition lag index. The differences are minor and concern technique and instrumentation. A description of four of these methods—the indicator, the knockmeter delay, the Socony-Vacuum, and the Penn State method—is sufficient to cover the field.

(1) *The indicator method* is still the most popular in Europe. The ignition lag is determined from an indicator card on which by a special device the beginning of the injection is marked. The marking device is ordinarily actuated by the needle valve stem. If under identical engine setting the

sample fuel gives an ignition lag equal to that of a certain reference blend, the concentration of the high reference fuel is the rating. The reproducibility of the indicator method is about 3 cetane numbers. The chief disadvantage of the method is its inconvenience; it is too laborious for routine testing.

(2) *The knockmeter delay method* has been used predominantly by the Volunteer Group for Compression-Ignition Fuel Research, after the procedure had been worked out, principally by T. B. Rendel. It uses the converted C.F.R. engine and an instrumentation shown schematically in figure 8. The apparatus includes a neon lamp which rotates with crankshaft speed, a contactor actuated by the opening of the nozzle to flash the neon lamp to indicate the time of injection, a protractor to show the

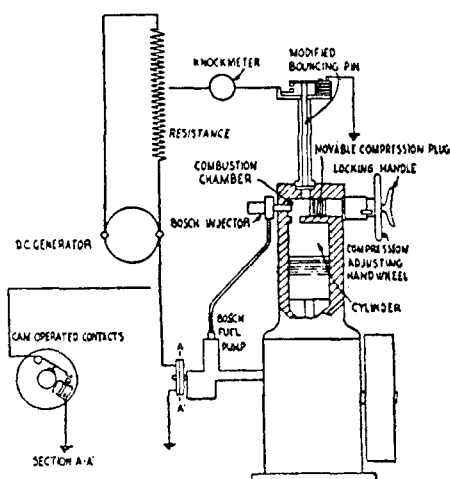


FIG. 8. Schematic circuit used with the knockmeter delay method

angular position of the flash, a modified bouncing pin which rests on a diaphragm in the cylinder head and which upon bouncing separates two contact points and interrupts the flow to the knockmeter, a knockmeter which is a heavily damped thermocouple type voltmeter, and a mechanical interrupter on the end of the fuel pump shaft to start the flow of current through the knockmeter. A direct current is passed through the interrupter, bouncing pin and knockmeter circuit and the dial indication is read. Two reference fuels, one giving slightly greater and one a slightly smaller knockmeter reading, are found by trial, and the unknown fuel is given a rating by interpolation.

The underlying principle is good. The knockmeter provides a convenient averaging if the injection or ignition points are erratic. In its

present form the method is highly standardized; the procedure is printed in Appendix I (see page 138).

The convenience and reproducibility of this method are adversely affected by the use of the bouncing pin. The friction between pin and barrel and the arcing between the contact points causes irregular action, unless a multiplicity of adjustments listed in the procedure is continuously attended to.

The use of the knockmeter is not as advantageous as it might at first seem. The integrating effect is of advantage if there is much spread in the ignition point of the successive cycles as with spark-ignition engines, but in a clean and properly operating Diesel engine the cycles repeat remarkably well and the spread in the ignition point is insignificant. However, the heavily damped knockmeter slows up the testing considerably (45). In changing fuels flushing of the line is discouraged because the absence of firing of only a few seconds puts the knockmeter hand off the scale, but with resumed firing equilibrium conditions are resumed very slowly.

In spite of these shortcomings the reproducibility of the knockmeter delay method is quite satisfactory. From the last report of the Volunteer Group (2) the average deviation of the knockmeter delay ratings was 1.8 cetane numbers. If, nevertheless, the same report recommends that "... the bouncing pin type of instrumentation should be definitely discarded in favor of the balanced diaphragm or the magnetic pick-up type," the recommendation is based more on the inconvenience than on poor reproducibility.

(3) *The Socony-Vacuum method*, devised by C. H. Schlesman, uses a balanced pressure diaphragm in place of the bouncing pin, but otherwise uses the same engine operating conditions as the bouncing pin delay method. The following description is from the report of the Volunteer Group (2).

"An insulated contact is placed on the tip of the injector feeler pin. A slight rise of the valve makes a contact which starts an electric current flow. A balanced pressure diaphragm is placed in the bouncing pin hole in the engine head. Pressure on top of the diaphragm is arbitrarily maintained at fifty pounds above compression pressure by connection to a CO<sub>2</sub> bottle. Combustion pressure causes contact to be made which stops the before-mentioned electric current flow. The successive delay times or current times are averaged by means of a special type condenser and a vacuum tube voltmeter. The start of injection is visibly indicated by a neon flasher and flywheel pointer which shows the injection time in degrees on a flywheel protractor for each cycle.

"Details of the apparatus may be obtained from the Socony-Vacuum Oil Corporation. Comments of those who have used the apparatus are very favorable in regard to ease of handling and the results compare well among themselves and also with averages by the bouncing pin delay method."

While the Socony-Vacuum method is no doubt superior to the knock-meter delay method in convenience, in reproducibility it is a little inferior, showing an average deviation of 2.1 cetane numbers from the "true" values.

(4) *The Penn State method* was devised by Hetzel and Schweitzer (20). In this method the bouncing pin was replaced by an electromagnetic pick-up, such as is used for phonographs and radio speakers of the magnetic type. A short stiff wire resting on the diaphragm transmits the motion of the diaphragm to the armature of the pick-up. The electromotive force generated in the coil surrounding the armature is used to control the operation of a thyatron tube. When the velocity of the diaphragm is high, as at the time of ignition, the thyatron relay trips and causes a neon lamp to flash. The timing of the flash is read on the protractor.

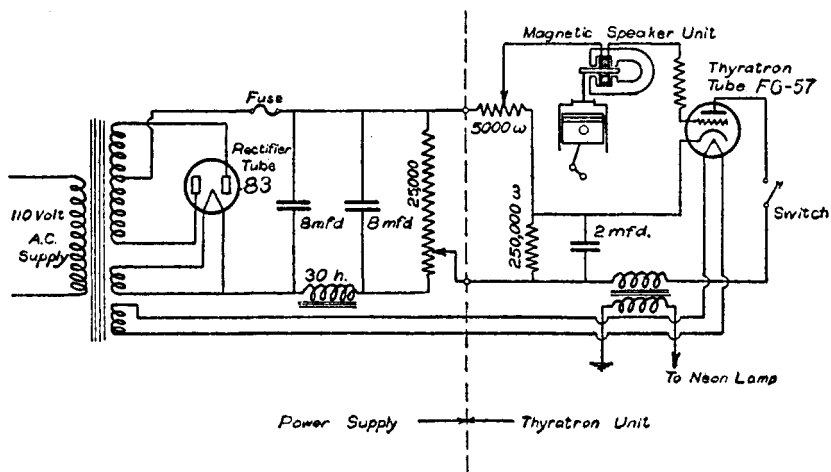


FIG. 9. Circuit of Hetzel and Schweitzer's magnetic pick-up ignition indicator

The circuit is shown in figure 9. The current generated in the coil reduces the negative voltage on the grid of the thyatron tube, thereby causing it to conduct, and permits a condenser to discharge. The current thus passing to the plate of the tube goes to a coil, which in turn sends a flash through the neon lamp. The neon lamp flashes once in every cycle, at the moment the velocity of the pick-up motion reaches a predetermined magnitude. At any other time the voltage generated is insufficient to trip the thyatron relay, and the neon lamp remains dark.

A pick-up identical with the one described is mounted on the end of the needle valve stem and indicates the injection. A small neon lamp of the low voltage type is connected to each pick-up and mounted on the fly-wheel, which is provided with a stationary angle scale for reading the position of the neon flashes to an accuracy of 1/10th of a degree.

The mechanism of the pick-up is practically frictionless. No electric contacts are used, and therefore troubles with arcing and pitting are eliminated. The wire and armature have a high natural frequency, so that they follow faithfully the motion impressed upon them. Both pick-ups are claimed to be insensitive to rough handling and to the manner in which they are mounted.

The technique followed in conjunction with the magnetic pick-ups is known as the "fixed ignition lag method." The injection timing is kept at, say, 18 degrees crank angle before top center. Ignition is always to occur at top center exactly. For low cetane fuel the required compression ratio to produce top center ignition (after 18 degrees ignition lag) is high; for high cetane fuels it is low. By moving the adjustable plug the compression ratio is adjusted until the neon lamp indicates ignition at top center.




Fig. 10. Calibration curve of the required compression ratio versus cetane number

If the R.C.R. (required compression ratio) of the test fuel is equal to that of the reference blend, the ignition qualities of both are equal. Absolute matching may not be easy to obtain, but the unknown fuel can always be bracketed between two reference fuels and the rating approximated by interpolation.

If a number of samples are to be tested in one day, the use of a calibration curve is economical. By testing a number of the reference blends and noting the R.C.R. for each blend, a curve of R.C.R. versus cetane number is plotted on cross section paper. By determining the R.C.R. of the unknown fuel and marking it on the calibration curve, its cetane number can be read. Figure 10 is a typical calibration curve obtained under the operating conditions listed in Appendix II. For approximate rating a permanent calibration curve can be used. For accurate rating, however, a "day curve" or bracketing is necessary.

The advantages claimed for the Penn State method are the speed and accuracy with which the tests are performed and the simple reliable appa-

ratus which is used. All of the waiting associated with the other methods is eliminated, so that eight fuels can be rated in an hour, as compared with twelve per day rated by the indicator method (6) or one per hour rated by the knockmeter method (42). The Volunteer Group Report listed the reports of eight laboratories using the Penn State method and its modifications. The average deviation of these from the "true" ratings is calculated as 1.42 cetane numbers, which is less than that of any other method used.

#### VI. STANDARDIZATION OF OPERATING CONDITIONS

Although the ignition lag methods are not very sensitive to operating conditions, better reproducibility is attained if the operating conditions are standardized. A list of operating conditions recommended by Hetzel (19) is printed in Appendix II.

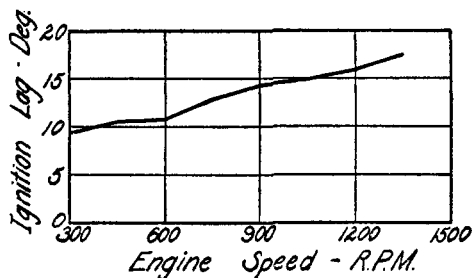


FIG. 11. Effect of engine speed on ignition lag

In selecting operating conditions under which the tests are to be conducted, the following three requirements should be satisfied as far as possible: (1) the conditions chosen should be typical of usual commercial engine practice, (2) they should be easy to maintain in the test engine, and (3) such values should be chosen that slight variations from the standard value will have a minimum effect on the results of the test.

Figure 11 shows that the effect of engine speed on ignition lag is small and its effect on rating probably negligible. A test speed of 900 R.P.M. is satisfactory.

Hetzel has found (19) that the effect of jacket water temperature on the ignition lag is quite pronounced, but the ratings obtained with 210°F. and 328°F. jacket water temperature seldom differed by more than 1 cetane number. A temperature of 210°F. is recommended, as it is easy to maintain with evaporative cooling.

Hetzel made a similar observation about the intake air temperature. Ratings obtained with 100°F., 150°F., and 200°F. air temperature seldom differed by more than 1 cetane number. Therefore the Volunteer Group standard of 150°F. is acceptable, although higher than is found in practice.



The effect of the lubricating oil temperature has never been investigated.

For ignition point, top center was found highly satisfactory, because it makes ignition pressure rise distinct and easy to identify. Incidentally, with ignition at top center ignition lag is about minimum (see figure 6), therefore a deviation in injection timing will cause minimum deviation in ignition lag. Hetzel investigated the effect of the ignition point ( $-4^{\circ}\text{C.}$  to  $+2^{\circ}\text{C.}$ ) on both the ignition lag and rating and found the former to be small and the latter negligible.

For ignition lag Hetzel recommends 18 degrees, as against 11 degrees recommended by the Volunteer Group and 15 degrees recommended by W. G. Ainsley. In the selection the following considerations deserve attention.

The ratings themselves are practically independent of the ignition lag used in the tests performed with the fixed ignition lag method. Hetzel tested sixteen fuels with 10, 12, 14, 16, and 18 degrees ignition lag each. The maximum deviation from the mean was always less than 1 cetane number and the average deviation was only 0.36 cetane number. The disadvantage of the short ignition lag is that low cetane fuels require very high compression ratios for testing. The disadvantage of the 18 degrees ignition lag is that it is longer than the usual ignition lag in commercial engines. Hetzel's compression ratios were, however, unnecessarily high, because he used unnecessarily small injection quantities. More will be said about this later. With the proper injection quantities a standard ignition lag of 15 degrees seems very acceptable. In testing fuels of 30 cetane number or less, the ignition lag may be increased to 18 degrees and the results will still be comparable.

The nozzle valve opening pressure is tied up with the nozzle and the injection line. It may be anything between 1200 and 2500 lb. per square inch, provided the injection is regular. Double injections make testing difficult. Hetzel obtained regular injections with  $1300 \pm 100$  lb. per square inch with a Bosch nozzle DM30S3 and a  $\frac{1}{16}$  in. x 25 in. tube. For a given nozzle and tube the proper opening pressure can be determined by indicating the needle lift with a pick-up and oscillograph. In the range mentioned the ignition lag is independent of the opening pressure.

Fuel quantity injected per cycle has a greater effect on ignition lag than was suspected. Figure 12 shows the relation for a 55 cetane number fuel. Hetzel chose a fuel quantity as small as 20 mm.<sup>3</sup>, "because this is sufficient to give regular injections, but is not so much as to produce violent combustion when poor fuels are burned." However, at low compression ratios the ignition lag is very sensitive to the injected fuel quantity, especially if the latter is small. This by itself is a disadvantage. The tentative standard of the Volunteer Group is 13 cc. per minute or 29 mm.<sup>3</sup> per injec-

tion. Figure 12 shows that injection quantity should be increased at least to that amount which would bring it closer to the flat non-sensitive region. It also has the further advantage that it would reduce the required compression ratio and make the ignition lag standard of 15 degrees more attractive. Of course an increased injection quantity requires more frequent cleaning of the engine.

The potentiometer settings should be such as to give earliest indications of injection and ignition, respectively. In exceptional cases it is possible to obtain "combustion flash" on compression alone, therefore as a precaution the ignition potentiometer setting should be checked so that with injection cut off no flash occurs. With ignition at top center the combus-

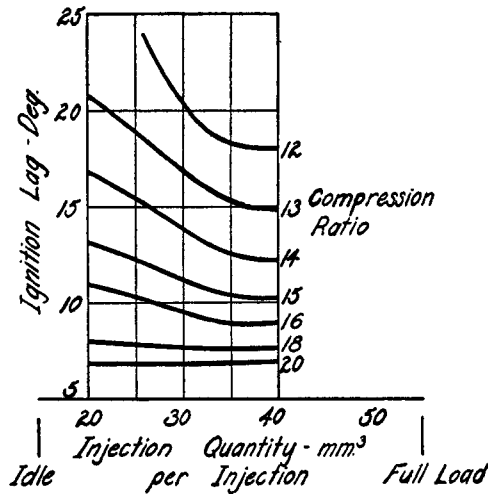


FIG. 12. Effect of injection quantity on ignition lag

tion pressure rise is so rapid that the ignition lag read is almost independent of the potentiometer setting and no precise adjustment is necessary.

#### VII. PRESENT STATUS OF DIESEL FUEL TESTING, TECHNICALLY AND COMMERCIALY

In this country the working out of a method for testing Diesel fuels on ignition quality is in the hands of the Volunteer Group for Compression-Ignition Fuel Research, in which all major oil companies are represented. Under the chairmanship of T. B. Rendel this organization has worked hard for two years to solve the problem, and it is near to its goal now. It is predicted that within a short time this group will be prepared to submit to the A.S.T.M. a tentative standard for adoption.

There is universal agreement that Diesel fuels be rated for ignition

quality in an engine on the basis of their ignition delay and that the rating be expressed in terms of cetane numbers. There is almost universal agreement that the high turbulent Diesel conversion of the C.F.R. engine shall be used for testing. Although the non-turbulent type of engine has an advantage for fuel testing in being more sensitive to ignition quality, this is outweighed by the fact that the popular high-speed Diesel engines in this country are of the turbulent type.

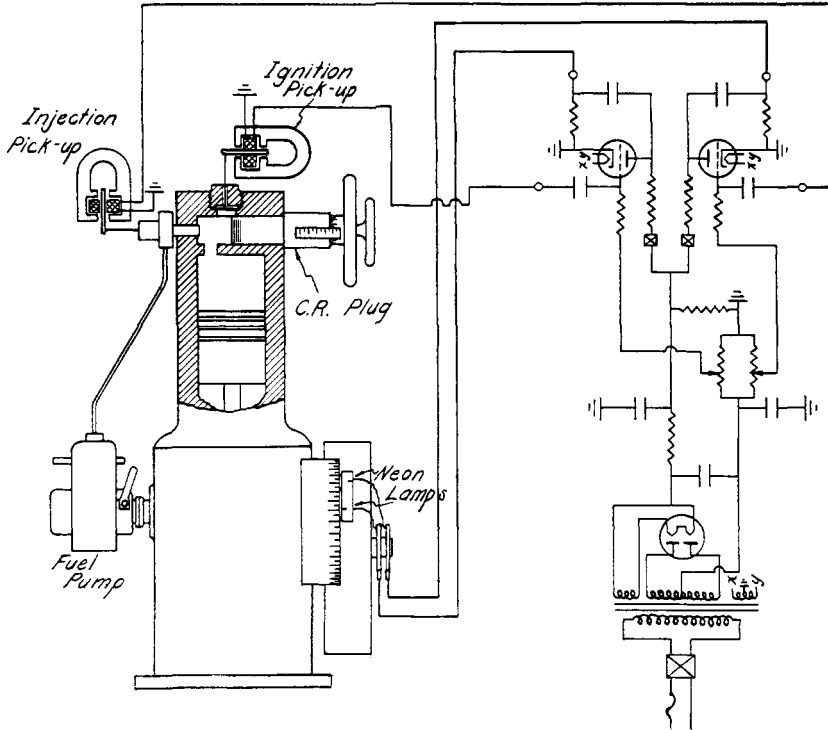


FIG. 13. Schematic wiring diagram of the Aminco-Penn State ignition lag indicator

The only item still left open is the exact type of instrumentation, but even therein considerable progress has been made lately. The bouncing pin has been definitely discarded in favor of the balanced diaphragm or magnetic pick-up type of instrumentation. The latter type has been simplified and made more convenient by the American Instrument Company. The American instrument employs the simplified wiring shown in figure 13, designed by R. L. Alcorn, Jr., and J. S. Chandler, and an improved protractor in which the injection neon lamp and ignition neon lamp are displaced by 15 degrees (an 18 degree offset can also be used). If the

compression ratio is properly adjusted for the fuel, the two neon flashes appear as a single luminous line.

Figure 14 shows the pick-ups mounted on the C.F.R. engine, while figure 15 shows the encased electronic relay, weighing 7.5 lb.

In Europe the Diesel fuel testing is largely in the hands of the Institute of Petroleum Technologists. The Institute agrees with the American Volunteer Group in the principle of engine method based on ignition delay,

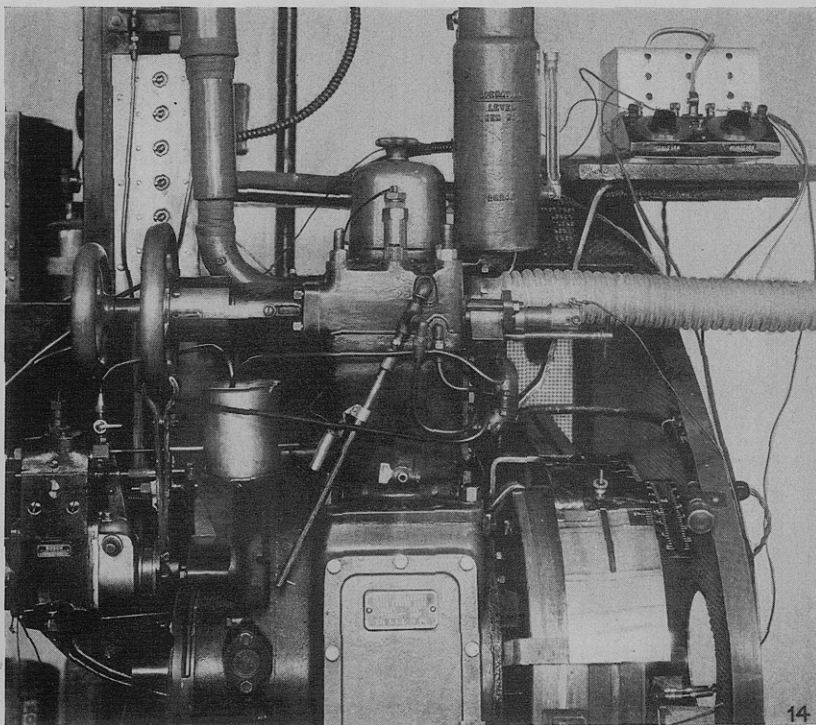


FIG. 14. Aminco-Penn State ignition lag indicator mounted on a C.F.R. Diesel fuel-testing engine

but leaves open to the tester the choice of engine and the instrumentation. According to the I.P.T. plan the ratings are reported in ignition numbers, obtained by expressing the percentage of the high ignition quality reference fuel in the low ignition quality reference fuel, divided by ten and reporting to the nearest half number. The I.P.T. discourages the use of primary reference fuels (cetene), and favors the use of secondary reference fuels on account of the more consistent results obtained thereby on a variety of types of engines. The Volunteer Group, however, does not

consider it practical to adopt secondary reference fuels over a long period of time and favors the use of primary reference fuels such as cetane and alpha-methylnaphthalene.

It is notable that while Diesel fuel testing is more advanced in this country than abroad, in the use of Diesel fuels we are far behind. This refers to automotive application, especially to trucks and busses.

In England, France, and Germany the majority of large trucks and busses produced in the last couple of years are equipped with Diesel engines, while in this country only a fraction of 1 per cent is so equipped. The chief incentive for the use of the Diesel engine abroad is its economy: the fuel

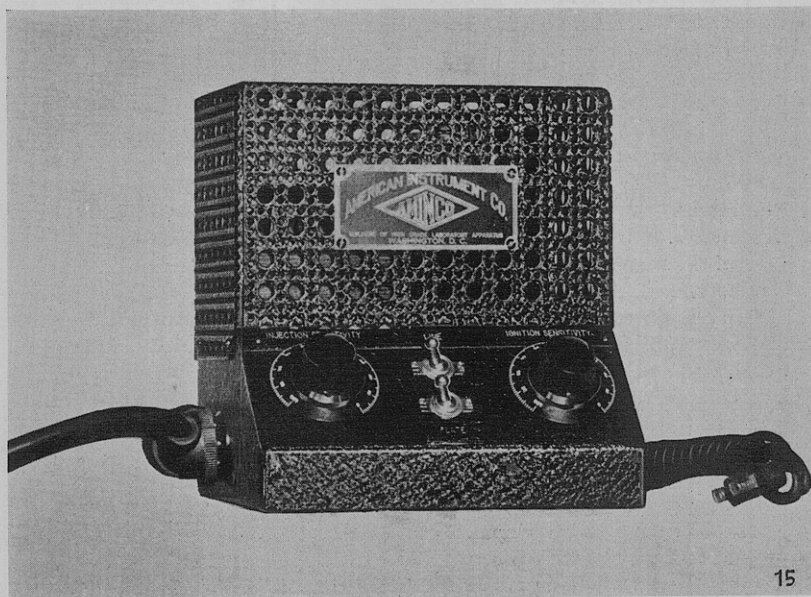


Fig. 15. Electronic relay of the Aminco-Penn State ignition lag indicator

mileage is roughly double, and, furthermore, there is considerable difference in the price of Diesel fuel and gasoline. In this country gasoline is cheap and the introduction of the Diesel engine correspondingly slow. The one exception is the tractor field, where one prominent builder is turning out Diesel tractors at the rate of about a thousand a month.

The present consumption of Diesel fuel in the U. S. is roughly estimated at 30 million barrels per year and is rapidly rising. Under these circumstances the commercial significance of Diesel fuel testing is expected to grow, even if it may not quite reach the commercial significance of the octane rating. The possible introduction of successful Diesel fuel dopes will greatly increase the demands on ignition quality rating.

## REFERENCES

- (1) American Society for Testing Materials: Minutes of the Meeting of the Coordinating Subcommittee on Diesel Fuel (a subcommittee of Technical Committee C of D-2) at White Sulphur Springs, June 19, 1935.
- (2) BAXTER, C. H., AND RENDEL, T. B.: Report of the Volunteer Group for Compression-Ignition Fuel Research; paper presented at the Meeting of the Society of Automotive Engineers, May 4-9, 1937.
- (3) BEALE, E. S. L., AND STANSFIELD, R.: The Sunbury Knock Indicator; paper presented at the Meeting of the Society of Automotive Engineers, May, 1937.
- (4) BECKER AND FISCHER: S. A. E. Journal **35**, 376 (1934).
- (5) BECKER, A. E., AND STACEY, H. R.: Measurement of Ignition Qualities of Diesel Fuels; Paper No. 211, World Petroleum Congress, London, 1933.
- (6) BOERLAGE, G. D., AND BROEZE, J. J.: Engineering **132**, 603-6, 687-9, 755-6 (1931).
- (7) BOERLAGE, G. D., AND BROEZE, J. J.: S. A. E. Journal **31**, 283 (1932).
- (8) BOERLAGE, G. D., AND BROEZE, J. J.: Knock Rating for High-speed Compression Ignition Engine Fuels; Paper No. 111, World Petroleum Congress, London, 1933.
- (9) BOERLAGE, G. D., AND BROEZE, J. J.: Chem. Rev. **22**, 61 (1938).
- (10) BRIDGEMAN, O. C., AND MARVIN, C. F., JR.: Ind. Eng. Chem. **20**, 1219 (1928).
- (11) BUTLER, W. H.: Fuels for Automotive Diesels; paper presented at the Meeting of the Society of Automotive Engineers, June, 1931.
- (12) CARPENTER, R. E. H., AND STANSFIELD, R.: Combustion in Heavy Oil Engines; paper presented at the Meeting of the North East Coast Institute of Engineers and Shipbuilders, February 26, 1932.
- (13) CONSTAM AND SCHLAEPFER: Z. Ver. deut. Ing. **57**, 1489 (1913).
- (14) DUMANOIS, P.: Compt. rend. **196** (April 3, 1933).
- (15) FOORD, F. A.: J. Inst. Petroleum Tech. **18**, 533 (1932).
- (16) HAWKES, C. J.: Engineering **110**, 749 (1920).
- (17) HEINZE, R.: Braunkohle **34**, No. 38, 639 (1935).
- (18) HESSELMAN: Z. Ver. deut. Ing. **67**, 650 (1923).
- (19) HETZEL, T. B.: The Development of Diesel Fuel Testing; Penn. State Coll. E. E. S. Bull. No. 45 (1936).
- (20) HETZEL, T. B., AND SCHWEITZER, P. H.: Automotive Ind. **73**, 202 (1935).
- (21) HILL, J. B., AND COATS, H. B.: Ind. Eng. Chem. **20**, 641 (1928).
- (22) HOLFELDER: Forschungsheft No. 374, Beilage zu Forsch. Gebiete Ingenieurw. **6**, Sept.-Oct. 1935; translation in Natl. Advisory Com. Aeronaut. Tech. Mem. 790.
- (23) HOLM, H.: Z. angew. Chem. **26**, 273 (1913).
- (24) HUBNER, W. H.: S. A. E. Journal **40**, 40 (1937).
- (25) HUBNER, W. H., AND MURPHY, G. B.: Natl. Petroleum News **28**, No. 4, 22, 24-6, 28, No. 5, 25-8 (1935).
- (25a) Institute of Petroleum Technologists: Ignition Quality of Diesel Fuels, issued November, 1936.
- (26) JACKSON, E. A.: Oil Gas J. **33**, No. 44, 16 (1935).
- (27) JOACHIM: Diesel Power **13**, No. 5, May, 1935.
- (28) KREULEN, D. J. W.: J. Inst. Petroleum Tech. **23**, No. 162, 253 (1937).
- (29) LEMESURIER, L. J., AND STANSFIELD, R.: J. Inst. Petroleum Tech. **17**, 387 (1931).

- (30) MACGREGOR, J. R.: Discussion presented at the Summer Meeting of the Society of Automotive Engineers, June, 1934.
- (31) GOOD, R. F.: S. A. E. Journal **40**, No. 6, 232 (1937).
- (32) MARDER, M., AND SCHNEIDER, P.: *Automobiltech. Z.* **40** (April 25, 1937).
- (33) MICHAÏLOVRA: *Compt. rend. acad. sci. U. R. S. S. [N.S.]* **2**, No. 4, 96 (1936); translation in *Natl. Advisory Com. Aeronaut. Tech. Mem.* 813.
- (34) MOORE, C. C., JR.: S. A. E. Journal **40**, 251 (June, 1937) (discussion).
- (35) MOORE, C. C., JR., AND KAYE, G. R.: *Oil Gas J.* **33**, No. 26, 108 (1934).
- (36) MOORE, H.: *J. Inst. Petroleum Tech.* **6**, 186 (1919-20).
- (37) Navy Department, Bureau of Engineering: Report E on Diesel Fuel Investigation, 1937 (available in mimeographed form).
- (38) *Natl. Advisory Com. Aeronaut. Tech. Note* 418.
- (39) NEUMANN: *Z. Ver. deut. Ing.* **70**, 1076 (1926).
- (40) POPE, A. W., JR., AND MURDOCK, J. A.: S. A. E. Journal **30**, 136 (1932).
- (41) RENDEL, T. B.: *Proceedings of the Eighth Oil Power Conference; Penn. State Coll. Tech. Bull. No. 20*, p. 93 (1934).
- (42) RENDEL, T. B.: S. A. E. Journal **38**, No. 6, 225 (1936); Report of Volunteer Group for Compression-Ignition Fuel Research.
- (43) RIEPPEL: *Z. Ver. deut. Ing.* **51**, 613 (1907).
- (44) ROSE, R. A., WILSON, G. C., AND BENEDICT, R. R.: S. A. E. Journal **39**, 459 (November, 1936).
- (45) SCHWEITZER, P. H.: *Proceedings of the Sixth Oil Power Conference; Penn. State Coll. Tech. Bull. No. 16*, p. 73 (1932).
- (46) SCHWEITZER, P. H., DICKINSON, H. A., AND REED, M. J.: Status of Diesel Fuel Oil Standardization in the United States; Paper No. 78, World Petroleum Congress, London, 1933.
- (47) SCHWEITZER, P. H., AND HETZEL, T. B.: S. A. E. Journal **38**, No. 5, 206 (1936).
- (48) STANSFIELD, R.: The Ignition Quality of Fuels, etc.; Paper No. 77, World Petroleum Congress, London, 1933.
- (49) SUGDEN, S.: *J. Chem. Soc.* **125**, 1177 (1924).
- (50) TAUSZ AND SCHULTE: *Z. Ver. deut. Ing.* **78**, 577 (1934).
- (51) WOLLERS AND EHMCKE: *Krupp Monatsh.* **2**, 1 (1921).
- (52) YAMAZAKI, K., AND ÔTA, S.: *J. Fuel Soc. Japan* **14**, 134 (1935).

## APPENDIX I

TENTATIVE STANDARD OPERATING CONDITIONS AND PROCEDURE FOR DELAY PERIOD  
METHOD OF RATING DIESEL FUELS

## I. OPERATING CONDITIONS

1. Engine speed	900 ± 3 R.P.M.
2. Cylinder	High turbulence variable compression Diesel cylinder
3. Jacket temperature	Constant within ±1°F.; limits 205-212°F.
4. Cooling liquid	Distilled water
5. Inlet air temperature	150 ± 2°F.
6. Crankcase lubricating oil	S. A. E. 30
7. Oil pressure	25-30 lb. per square inch
8. Valve clearance	{ Intake 0.008 in. cold Exhaust 0.010 in. cold

9. Injection advance.....	10°BTDC (constant)
10. Injection pressure.....	1500 ± 50 lb. per square inch (opening pressure)
11. Fuel quantity.....	13.0 ± 0.5 cc. per minute
12. Injector cooling—water temperature.....	100 ± 5°F.
13. Injector specifications.....	Bosch DN30S3
14. Injection pump specifications.....	Bosch PE1B50A302/3S97, port closing at 0.075'' ± 0.005'' lift from base circle
15. Fuel line—tank to pump.....	3/8'' copper tubing
16. Fuel line—pump to injector.....	1/4'' O.D.; 1/8'' I.D.; length 36 in.
17. Fuel tank height.....	25'' ± 1'' from bottom of tank to pump inlet
18. Knockmeter generator voltage.....	120 ± 1 volts

## II. PROCEDURE

### A. Starting and stopping the engine

While the engine is being turned over by the electric motor, the fuel by-pass valve on the injector is closed, and the compression ratio is increased until the engine begins to fire.

To stop the engine, the fuel by-pass valve on the injector is opened and the electric motor then switched off.

### B. Checking injection pump for port closing

The pump plunger port should close when the plunger has traveled up 0.075'' ± 0.005'' from the base circle of the cam. This setting is important, as it influences the injection rate. To check the port closing see paragraph #14 under "Installation Instructions." This adjustment is made in the factory and should not require resetting unless it has been tampered with.

### C. Injection pressure setting

Remove injection pump cover and with injection line pressure gauge connected and injector arranged to spray into the air operate the pump plunger with a screw driver used as a lever. With the pressure gauge set at 1500 lb. per square inch adjust the pressure on the injector spring until equal quantities of fuel spray from the gauge and injector. The opening pressure of the injector will then be the same as indicated on the gauge.

### D. Injector indicator setting

1. Loosen the contact spring carrier clamp nuts and adjust until the spring leaf just touches the injector pin. Then set the clamp nuts to provide  $\frac{1}{2}$  turn initial tension on the spring.

2. Adjust the gap between the contact points to 0.004''.

### E. Bouncing pin preliminary static setting

Make static bouncing pin setting as follows:

1. Set gap between pin and arm 0.005'' with gap adjusting screw.
2. Bear down lightly on the end of the contact arm spring so that the arm is held on its seat. Adjust the spring tension screw until the screw just touches the spring. Then increase the tension by turning the screw down five notches.



#### *F. Final compression ratio and bouncing pin adjustment*

After the engine has reached equilibrium the compression ratio and bouncing pin setting at which an unknown fuel is rated are determined as follows:

1. Adjust the compression ratio about two compression ratios above that at which definite misfiring occurs.
2. With the engine firing, close the bouncing pin gap between pin and arm by turning the adjustment screw up until two distinct lines appear ahead of the "bump" on the optical indicator diagram. (This indicates that the bouncing pin arm is deflected by the compression pressure before combustion.)
3. With the engine firing, increase the bouncing pin gap between pin and arm by turning the adjustment screw down until the double line on the optical indicator just coincides with the base line. (This indicates that the bouncing pin arm is not moved by compression pressure, but is deflected the moment compression pressure is exceeded by combustion.)
4. Observe the angle at which combustion starts. The correct angle of combustion for making a rating is  $1^\circ$  after top dead center. Readjust compression ratio until this condition is obtained.
5. After a change in compression ratio, readjust the bouncing pin as outlined in paragraphs 2 and 3 above.
6. If the indicated angle of injection after the final bouncing pin setting has shifted more than  $\frac{1}{2}^\circ$ , readjust the compression ratio and pin as outlined above.
7. Check the regularity of the bouncing pin on the neon tube indicator. If the angle of combustion fluctuates more than  $\pm 1^\circ$ , adjust the bouncing pin tension screw by trial until steady readings are obtained.

#### *G. Adjustment of contact breaker*

The make and break points in the knockmeter circuit should be adjusted for an  $8^\circ$  contact period, as determined on the neon tube indicator. This can also be indicated on the knockmeter and should produce a reading of 80 to 100 on the scale when the generator voltage is 120 and the engine is not firing. The breaker timing should be adjusted to make contact approximately  $2^\circ$  before top dead center as indicated on the neon tube indicator. Check this setting on the knockmeter with 120 generator voltage. A knockmeter reading of 50 should be obtained with the engine firing when combustion occurs at  $1^\circ$  after top dead center. Advance or retard the breaker until such a knockmeter reading is obtained.

#### *H. Cetane number determination*

The cetane number of a fuel is ascertained by comparing the delay (as measured with the knockmeter) for the fuel with those for various blends of the reference fuels until two blends differing in delay by not more than the equivalent of 8 cetane numbers are found, one of which has a longer delay and the other a shorter delay period than the sample. The reference fuel which would exactly match the sample is computed by interpolation from the knockmeter scale readings of the fuels.

An alternate series of knockmeter readings is taken on the test fuel and reference fuel blends. After changing from one fuel to the other, 5 minutes must be allowed to insure the complete change over, since there is a comparatively large volume of fuel in the pump and line.

At least three alternate series of readings should be taken on each fuel, and if the average knockmeter reading of the fuel sample is higher than that of the reference fuel blend, the test should be repeated with a blend containing decreased proportion

of the high cetane number of reference fuel. The test is continued in this manner until the knockmeter reading for the sample is definitely higher than for one blend and lower than for another blend of the reference fuels.

#### I. Precision of results

The cetane number should be reported in the nearest whole number to the exact rating as computed by interpolation from the knockmeter readings.

#### J. Miscellaneous notes and suggestions

1. *Clean* fuel must be used. It is suggested that the fuel be filtered through thin chamois leather into the fuel tanks.

2. The fuel lines and fuel pump must be thoroughly flushed of air before starting the engine. After the engine is running better results are obtained by switching quickly from one fuel to another *without flushing the fuel pump*, and allowing 5 minutes for the change over.

3. When changing fuels in the tanks, it is very necessary to flush thoroughly the line to the switch valve until a solid fuel stream is obtained from the bleed drain.

4. The fuel injection timing should be shown continually on the spark quadrant and any deviation from  $10^\circ$  before top dead center must be corrected before each knockmeter reading is taken.

## APPENDIX II

### RECOMMENDED PROCEDURE FOR DIESEL FUEL TESTING BY THE FIXED IGNITION LAG METHOD

#### I. OPERATING CONDITIONS

1. Engine speed . . . . .  $900 \pm 30$  R.P.M.
2. Jacket temperature . . . . . Boiling point of water constant within  $\pm 1^\circ\text{F}$ .
3. Inlet air temperature . . . . .  $150 \pm 0.5^\circ\text{F}$ .
4. Lubrication oil temperature . . . . .  $150 \pm 10^\circ\text{F}$ .
5. Injection advance . . . . . 18 deg. B.T.C.
6. Ignition . . . . . At top center exactly
7. Nozzle opening pressure\* . . . . .  $1300 \pm 100$  lb. per square inch
8. Fuel quantity . . . . . 0.020 cc. per injection  $\pm 10$  per cent
9. Potentiometer . . . . . To give earliest indication of injection and ignition, respectively

#### II. PROCEDURE

1. The engine is motored for approximately 5 minutes while the air and water heaters and the thyatron tube warm up.

2. The by-pass valve in the nozzle is then closed, the injection timing adjusted, and the compression ratio set to give reasonably smooth running while the engine warms up. The engine should run under power for at least 20 minutes in order to attain equilibrium temperature conditions of the engine and of the crankcase oil.

---

\* For Bosch nozzle DN30S3 and a 1/16 in. x 25 in. tube. If a different nozzle or tube is used the injection pressure should be so chosen as to give uniform injections with a sharp beginning and a single principal opening.

3. Injection timing is adjusted by the pump timer until the neon lamp flashes at 18 degrees before top center. The ignition indicator is then switched on, and the compression ratio is varied until the neon flash indicates ignition at top center. The scale reading of the compression ratio adjusting plug is then recorded. Following that, the compression ratio is increased until ignition takes place several degrees before top center, and again decreased until ignition is indicated at top center and the scale reading of the compression ratio adjusting plug is again recorded. This is repeated so that altogether two determinations are made with increasing and two with decreasing compression ratios. The average of the four readings is then used to determine the required compression ratio for that fuel. The R.C.R. is calculated by the formula  $R.C.R. = 1 + 18/H$ , where H is the average of the four micrometer readings of the adjustable plug.

4. When switching from one fuel to another, the pump suction space is flushed for approximately 5 seconds, then, while the injection tube and nozzle are being purged of the fuel previously used, the other tank is drained, flushed, and filled with the next fuel to be tested.

5. After testing a series of blends of the two reference fuels, the volumetric percentage of the high cetane fuel in the low cetane fuel is plotted against the corresponding R.C.R. values. The R.C.R. of the sample fuel is placed on the curve which determines the rating of the sample fuel. If the sample fuels are tested first, the R.C.R. of some of the reference blends which are outside of the range of the sample fuels need not be determined. If the approximate ratings of the fuels are known in advance, the preferred procedure is to test the fuels, including the reference fuels, in the order of their ignition quality. This combines the good features of bracketing, with curvilinear interpolation, and also directly compares fuels of similar or identical ignition quality so that relative merit may be more surely ascertained.

#### DISCUSSION

T. B. RENDEL (Shell Petroleum Corporation, Wood River, Illinois): Three years ago a small group, known as the Volunteer Group for Compression-Ignition Fuel Research, was formed to study and eventually to standardize a method for rating the ignition quality of Diesel fuels. This group has pursued its work actively and has submitted three reports. The most recent of these reports was presented to the Society of Automotive Engineers and the American Society for Testing Materials, giving the results of the past eighteen months' work. In this report it is concluded that results of the past eighteen months' work indicate fairly definitely that a direct matching method on the basis of ignition delay is the best from the point of view of reproducibility and validity, and that therefore some sacrifice in simplicity and speed of testing must be made. In this connection it is to be remembered that the octane number test, after several years of development and with a far greater commercial incentive behind it, sometimes requires about 45 minutes for determination and is still liable to errors of 1 or 2 octane numbers.

Progress in methods of instrumentation has advanced considerably. It is recommended that the bouncing pin type of instrumentation should

be definitely discarded in favor of the balanced diaphragm or the magnetic pick-up type. Further work in a larger number of laboratories is desirable before definitely standardizing on this point. The cetane number is, however, not apparently affected outside the limit of error of the determination.

It is therefore recommended that Diesel fuel be rated for ignition quality on the basis of its cetane number, as determined by an ignition delay method on the high turbulent Diesel conversion of the C.F.R. engine, the exact type of instrumentation for recording the delay to be left to the option of the user pending further work of the Volunteer Group.

The Volunteer Group has investigated Professor Schweitzer's mechanical pick-up type of instrument and is favorably impressed with its operation; coöperative work is now in hand with this instrument. Work is also planned on the correlation with actual service engines. In this connection, it is very encouraging to note that cetane rating is apparently insensitive to the type of engine and operating conditions, which in turn indicates that correlation with service engines is not far off.