



## Erratum

## Erratum to “Preparation and characterization of Pt direct deposition on polypyrrole modified Nafion composite membranes for direct methanol fuel cell applications”

[Chem. Eng. J. 133 (2007) 113–119]

Lei Li<sup>a,\*</sup>, Yongming Zhang<sup>a</sup>, Jean-Francois Drillet<sup>b</sup>, Roland Dittmeyer<sup>b</sup>, Klaus-Michael Jüttner<sup>b</sup>

<sup>a</sup> Shanghai Jiaotong University, School of Chemistry and Chemical Technology, Dongchuan Road 800, Shanghai 200240, China

<sup>b</sup> Karl Winnacker-Institute, DECHEMA e.v., Theodor-Heuss-Allee 25, D-60486 Frankfurt am Main, Germany

The publisher regrets that in the above article Fig. 4 was printed incorrect. The correct version of Fig. 4 appears below. In addition, the author also wants to modify some words about the comment of this picture.

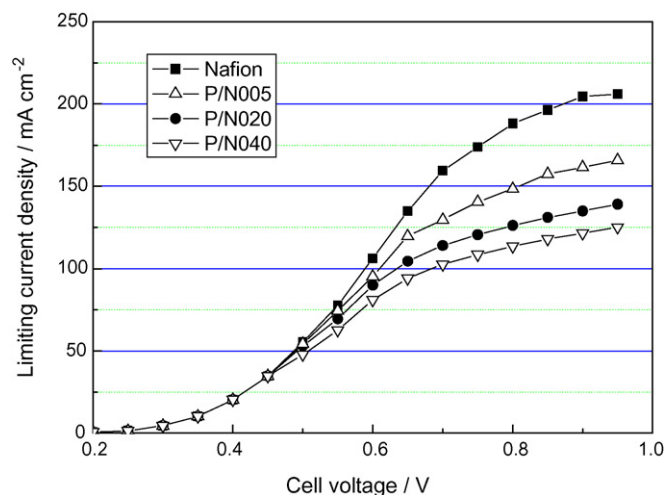


Fig. 4. Methanol permeation measurement of PPy/Nafion composite membranes at 80 °C in DMFC configuration.

In page 116, “Fig. 4 shows LSVs between 100 and 900 mV at a 1 mV s<sup>-1</sup> sweep rate for Nafion 117 and P/N composite membranes” would be changed to “Fig. 4 shows LSVs between 200 and 950 mV at a 1 mV s<sup>-1</sup> sweep rate for Nafion 117 and P/N composite membranes”.

In page 117, “In the kinetically controlled region (400–550 mV)” would be change to “In the kinetically controlled region (300–450 mV)”.

DOI of original article: [10.1016/j.cej.2007.02.008](https://doi.org/10.1016/j.cej.2007.02.008).

\* Corresponding author. Tel.: +86 21 34202613; fax: +86 21 54742567.

E-mail address: [lilei0323@yahoo.com.cn](mailto:lilei0323@yahoo.com.cn) (L. Li).