

CONTACT TRANSMISSION OF WAVE MOTION BETWEEN TWO SOLIDS WITH AN INITIAL GAP

J. R. BARBER

Department of Mechanical Engineering and Applied Mechanics, University of Michigan, Ann Arbor, MI 48109, U.S.A.

MARIA COMNINOU

Department of Civil Engineering, University of Michigan, Ann Arbor, MI 48109, U.S.A.

and

JOHN DUNDURS

Department of Civil Engineering, Northwestern University, Evanston, IL 60201, U.S.A.

(Received 24 August 1981)

Abstract—The paper treats the transmission of wave motion from one solid to another when the bodies are initially separated by a small gap. If a pulse of elastic waves strikes the surface of one of the solids and the amplitude of the pulse is large enough, the solids can come into contact and interact locally. The dynamic interaction is treated using Coulomb's friction law, and a method is presented for finding the slip and stick zones in the contact region when the incidence angle of the pulse is subcritical. Unusual results are encountered for large friction coefficients.

INTRODUCTION

In treating the reflection and transmission of elastic harmonic waves between two solids that can separate, it is discovered that the solids must be pressed together for a continuing interaction[1]. If this is not done, the solids move apart during the early stages of the process, and a continuously maintained train of incident waves sees a free surface. The early part of the interaction can be studied, however, by analyzing a pulse of finite extent. In such cases it is not required that the solids be pressed together and, in fact, interaction is possible even if there is small initial gap between them.

In a previous paper[2], a solution was given for the problem of an elastic pulse striking the frictional interface between two half spaces and producing localized regions of separation and slip between the bodies. In this paper we consider the related problem for which a localized region of contact between two otherwise separated bodies propagates along the interface due to the action of an incident pulse in one of them. The problem is illustrated in Fig. 1. The two half spaces are initially separated by a uniform gap d and the upper solid has a tangential velocity u to the right as shown. A P or SV pulse strikes the interface at an angle of incidence θ_0 and produces P and SV pulses reflected at angles θ_1 , θ_2 . If some interaction occurs between the

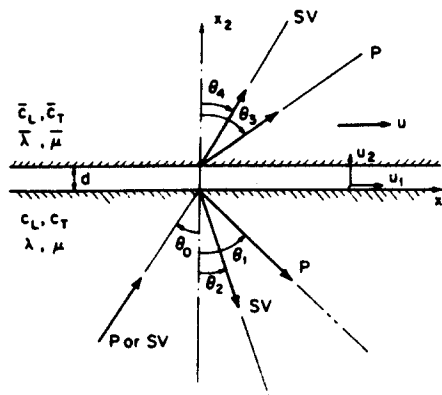


Fig. 1. Incident, reflected and refracted waves at the interface with an initial gap d .

bodies, we also anticipate the development of refracted P and SV pulses in the upper solid at angles θ_3 , θ_4 respectively.

The velocities of P and SV waves are denoted by c_L , c_T respectively and we use bars to distinguish the properties of the upper body. The angles are related by the equation

$$\frac{\sin \theta_0}{c_0} = \frac{\sin \theta_1}{c_L} = \frac{\sin \theta_2}{c_T} = \frac{\sin \theta_3}{\bar{c}_L} = \frac{\sin \theta_4}{\bar{c}_T} \quad (1)$$

and the disturbance due to the pulse propagates to the right along the surface of the lower body at velocity

$$v = c_0/\sin \theta_0. \quad (2)$$

As in [2], we restrict attention to those values of θ_0 for which v is supersonic with respect to both solids, i.e. eqn (1) defines real values for all the angles θ_i .

METHOD OF SOLUTION

As in [2], we solve the problem by superposition of two parts, but here the initial solution corresponds to the situation where there is no interaction between the half spaces, i.e. we find the reflected pulses on the assumption that the surface of the lower body is free of tractions. This is a classical problem [3] and need not be considered here. The pulse will cause local displacements u_1 , u_2 at the free surface which are stationary with respect to the dimensionless moving co-ordinate

$$\eta = k_0(x_1 \sin \theta_0 - c_0 t). \quad (3)$$

The wave number k_0 can be regarded as the reciprocal of a characteristic length for the pulse. In other words, a bulge or depression runs along the free surface at velocity v , its shape being described by the displacement $u_2(\eta)$.

If the maximum height of this bulge is less than d , the free surface solution is the final solution of the problem and the half spaces do not interact. However, the interesting case is that in which contact occurs. A corrective solution must then be superposed to satisfy the physical conditions of the problem and eliminate the interpenetration predicted by the free surface solution alone.

The gap between the bodies is

$$g_0(\eta) = d - u_2(\eta) \quad (4)$$

and we define the gap opening velocity for the free surface solution

$$G_0(\eta) = \frac{\partial g_0}{\partial t} = -c_0 k_0 \frac{\partial g_0}{\partial \eta}. \quad (5)$$

There is also a corresponding slip velocity

$$H_0(\eta) = u - \frac{\partial u_1}{\partial t}. \quad (6)$$

A positive value of H_0 corresponds to the upper body slipping to the right over the lower body.

THE CORRECTIVE SOLUTION

In the corrective solution, equal and opposite tractions are applied to the two surfaces to satisfy appropriate conditions on displacements in contact zones. This solution is developed in [2] from the results for a moving point force [4].

If $N(\eta)$, $S(\eta)$ are the corrective normal and tangential tractions respectively, the corresponding corrections to the gap opening and slip velocities are

$$G(\eta) = -[\lambda_2 N(\eta) - \lambda_1 S(\eta)] c_L / \mu \tag{7}$$

$$H(\eta) = -[\lambda_3 S(\eta) + \lambda_1 N(\eta)] \frac{c_L}{\mu} \tag{8}$$

where

$$\lambda_1 = \frac{\mu}{\sin \theta_1} \left[\frac{(1 + 2m_1 m_2 - m_2^2)}{\mu R} - \frac{(1 + 2\bar{m}_1 \bar{m}_2 - \bar{m}_2^2)}{\mu \bar{R}} \right], \tag{9}$$

$$\lambda_2 = \frac{\mu}{\sin \theta_1} \left[\frac{m_1(1 + m_2^2)}{\mu R} + \frac{\bar{m}_2(1 + \bar{m}_2^2)}{\mu \bar{R}} \right] \tag{10}$$

$$\lambda_3 = \frac{\mu}{\sin \theta_1} \left[\frac{m_2(1 + m_2^2)}{\mu R} + \frac{\bar{m}_2 e(1 + \bar{m}_2^2)}{\mu \bar{R}} \right] \tag{11}$$

and

$$m_1 = \cot \theta_1; \quad m_2 = \cot \theta_2; \quad \bar{m}_1 = \cot \theta_3; \quad \bar{m}_2 = \cot \theta_4 \tag{12}$$

$$R = (1 - m_2^2)^2 + 4m_1 m_2; \quad \bar{R} = (1 - \bar{m}_2^2)^2 + 4\bar{m}_1 \bar{m}_2.$$

The normal traction N is taken positive if tensile, while S is positive when it acts to the right on the lower body. Notice that G , H are influenced only by the local values of N , S . The coefficients λ_2 , λ_3 are positive, but λ_1 may be of either sign and vanishes for identical materials.

BOUNDARY CONDITIONS

If the free surface solution predicts interpenetration (i.e. $g_0(\eta) < 0$ for some η), we anticipate the development of adhesive or slip contact regions. The tractions in these regions can be determined from physical conditions leading to equalities, e.g. that the gap is zero in a contact zone, whereas the extent of the zones is determined from physical constraints leading to inequalities, e.g. that normal tractions must be non-tensile.

STICK

In a stick zone, the gap is zero and there is no slip. Thus

$$\dot{g}(\eta) = G_0(\eta) + G(\eta) = 0, \tag{14}$$

$$\dot{h}(\eta) = H_0(\eta) + H(\eta) = 0. \tag{15}$$

Substituting for G , H from (7) and (8) and solving for S , N , we find

$$S(\eta) = \frac{\mu}{c_L} \left[\frac{\lambda_2 H_0 - \lambda_1 G_0}{\lambda_1^2 + \lambda_2 \lambda_3} \right], \tag{16}$$

$$N(\eta) = \frac{\mu}{c_L} \left[\frac{\lambda_1 H_0 + \lambda_3 G_0}{\lambda_1^2 + \lambda_2 \lambda_3} \right]. \tag{17}$$

The permissible extent of the stick zone is determined by the conditions that normal tractions must be non-tensile

$$N \leq 0 \tag{18}$$

and the tangential tractions must lie in the range

$$|S| \leq -fN \quad (19)$$

where f is the coefficient of friction. In fact, (18) is included within (19) and can be disregarded. We assume Coulomb friction with equal static and kinetic coefficients.

Substituting (16) and (17) into (19), we find

$$|\lambda_2 H_0 - \lambda_1 G_0| \leq -f(\lambda_1 H_0 + \lambda_3 G_0) \quad (20)$$

and hence

$$|\lambda_2 H_0 \operatorname{sgn} \lambda_1 - |\lambda_1| G_0| \leq -f|\lambda_1| H_0 \operatorname{sgn} \lambda_1 - f\lambda_3 G_0. \quad (21)$$

In view of the absolute value, (21) is equivalent to two inequalities which simplify to

$$H_0 \operatorname{sgn} \lambda_1 \leq \gamma_2 G_0, \quad (22)$$

$$H_0 \operatorname{sgn} \lambda_1 \geq \gamma_1 G_0; \quad \gamma_1 > 0, \quad (23)$$

$$H_0 \operatorname{sgn} \lambda_1 \leq \gamma_1 G_0; \quad \gamma_1 < 0, \quad (24)$$

where

$$\gamma_1 = \frac{1 + \frac{\lambda_3}{|\lambda_1|} f}{f - f}; \quad \gamma_2 = \frac{1 - \frac{\lambda_3}{|\lambda_1|} f}{f + f} \quad (25)$$

and

$$\hat{f} = \lambda_2 / |\lambda_1|. \quad (26)$$

Notice that the algebraic sign of γ_1 is the same as that of $(\hat{f} - f)$ which was found to critically influence the nature of the solution in [2]. We also note that γ_2 may be of either sign, but $|\gamma_2| \leq |\gamma_1|$. The special case of zero friction corresponds to $\gamma_1 = \gamma_2 = 1/\hat{f}$.

SLIP

In slip zones, the gap is zero and eqn (14) still applies, and hence

$$\lambda_2 N - \lambda_1 S = \mu G_0 / c_L \quad (27)$$

from (7).

The condition for slip with Coulomb friction is

$$S = -fN \operatorname{sgn} \dot{h} \quad (28)$$

We define *conforming slip* as that for which $\lambda_1 \dot{h} > 0$ and hence

$$S = -fN \operatorname{sgn} \lambda_1 \quad (29)$$

Solving (27) and (29) for S , N , we find

$$S(\eta) = -\frac{\mu f G_0 \operatorname{sgn} \lambda_1}{c_L (\lambda_2 + |\lambda_1| f)} \quad (30)$$

$$N(\eta) = \frac{\mu G_0}{c_L (\lambda_2 + |\lambda_1| f)} \quad (31)$$

and the slip velocity is

$$\dot{h}(\eta) = H_0 - \gamma_2 G_0 \operatorname{sgn} \lambda_1 \tag{32}$$

from eqns (8), (30), (31) and (25).

It follows that conforming slip is only permissible if

$$H_0 \operatorname{sgn} \lambda_1 > \gamma_2 G_0 \tag{33}$$

and the requirement of non-tensile tractions imposes the further condition

$$G_0 \leq 0 \tag{34}$$

from (31).

In non-conforming slip $\lambda_1 \dot{h} < 0$ and we find

$$S(\eta) = \frac{\mu f G_0 \operatorname{sgn} \lambda_1}{c_L(\lambda_2 - |\lambda_1|f)} \tag{35}$$

$$N(\eta) = \frac{\mu G_0}{c_L(\lambda_2 - |\lambda_1|f)} \tag{36}$$

$$\dot{h}(\eta) = H_0 - \gamma_1 G_0 \operatorname{sgn} \lambda_1 \tag{37}$$

Hence, non-conforming slip is only possible if

$$H_0 \operatorname{sgn} \gamma_1 < \gamma_1 G_0 \tag{38}$$

and the requirement $N \leq 0$ leads to the further condition

$$G_0 \leq 0; \quad \gamma_1 > 0; \tag{39}$$

$$G_0 \geq 0; \quad \gamma_1 < 0. \tag{40}$$

SEPARATION

In a separation zone there are no corrective tractions and hence the free surface velocities G_0, H_0 are unchanged. The physical condition for separation is that the gap $g(\eta)$ be positive. Notice, however, that when separation starts we must have G_0 positive. Thus, a transition from contact to separation can only occur when $G_0 \geq 0$ and the reverse transition when $G_0 \leq 0$.

GRAPHICAL REPRESENTATION

The use of these results in the solution of particular problems is best demonstrated graphically. The first step is to solve the free surface problem for the lower body to find the functions $G_0(\eta)$ and $H_0(\eta)$. We then plot the expressions $\gamma_1 G_0$ and $\gamma_2 G_0$ as functions of η to divide the diagram into regions representing the ranges of the controlling inequalities.

Hence, by plotting the function $H_0 \operatorname{sgn} \lambda_1$ on the same figure we can determine in which regions stick, slip and separation will occur.

$$\gamma_1 > 0$$

We first consider the more common case $\gamma_1 > 0$ (see[2]). Figure 2(a) shows $\gamma_1 G_0, \gamma_2 G_0, H_0 \operatorname{sgn} \lambda_1$ for a typical example corresponding to the free surface displacement of Fig. 2(b). Notice that if the pulse raises a bulge (as it must do if contact is to occur) the gap opening velocity will be negative on the right side of the bulge and then positive, since the disturbance moves from left to right.

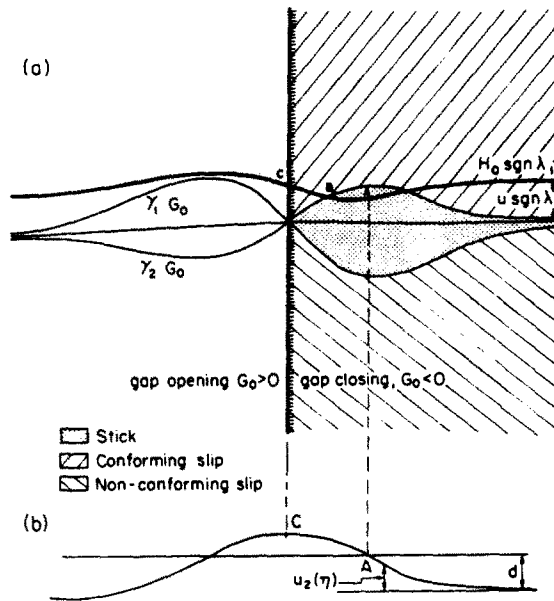


Fig. 2(a). Graphical determination of slip and separation zones for a typical example, $\gamma_1 > 0$. (b) Distortion at a free surface due to the incident pulse of (a).

The diagram is shaded in accordance with the inequalities defining the conditions for stick and slip. For example, stick is only permitted in the range $\gamma_2 G_0 \geq H_0 \text{sgn} \lambda_1 \geq \gamma_1 G_0$ and this only exists for $G_0 < 0$ since $\gamma_1 \geq \gamma_2$ when $\gamma_1 > 0$. These inequalities define the region between the two lines $\gamma_2 G_0$, $\gamma_1 G_0$ in the right part of Fig. 2(a) as shown.

For the particular example illustrated we reason as follows:

Contact will not occur to the right of A (Fig. 2b), since the corrective solution has no effect ahead of the disturbance. We identify the corresponding point A in Fig. 2(a) and note that it falls in the stick region, so the contact is initially adhesive and remains so until B. Conforming slip commences at B and persists to C where there is a transition to separation.

Notice that for $\gamma_1 > 0$, separation must always start when G_0 passes through zero i.e. at the maximum point of the free surface bulge—since neither stick nor slip is permitted for $G_0 < 0$.

Away from the pulse, G_0 tends to zero, but H_0 tends to the global slip velocity u which is here regarded as a prescribed quantity. The value of u will depend upon the way in which the bodies are supported. The limiting value $u = 0$ arises if both bodies are prevented from moving tangentially. The curves for G_0 , H_0 are then similar, passing through zero at the same value of η and hence the contact will consist of either all slip or all stick. The tangential traction transmitted in the contact zone will generally add up to a tangential force which must be resisted by the support.

Another limiting case of interest is that in which the bodies are unconstrained tangentially so that no net tangential force is transmitted between them. In this case we have to choose u to make the sum of the tangential tractions zero.

If the coefficient of friction f is zero, it follows from eqns (25) that $\gamma_1 = \gamma_2 = 1/\hat{f} > 0$. The effect on Fig. 2(a) is to make the two lines $\gamma_1 G_0$, $\gamma_2 G_0$ coincide, eliminating the stick region as we would expect. The solution then proceeds as before. Contact must occur between A and C but it will be either conforming or non-conforming slip depending on the value of $H_0 \text{sgn} \lambda_1$. Separation occurs everywhere to the left of C.

$$\gamma_1 < 0$$

Figure 3(a,b) shows an example for the case $\gamma_1 < 0$ ($f < \hat{f}$ and $\gamma_2 > \gamma_1$). As in [2], the inequalities are not mutually exclusive—stick and non-conforming slip are both possible for $H_0 \text{sgn} \lambda_1 < \gamma_1 G_0$, $G_0 > 0$ and the separation point is indeterminate. We emphasize that the solution is not unique in the sense that no physical principles are violated by assuming that separation starts at any arbitrary point to the left of B or indeed that separation never occurs

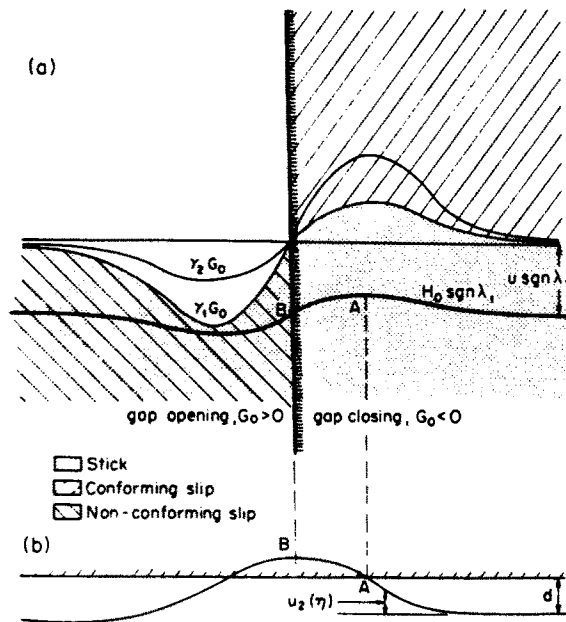


Fig. 3(a). Determination of slip and separation zones for $\gamma_1 < 0$. (b) Free surface distortion for (a).

and the gap remains closed. However, the solution in which separation starts at B might be preferred in that it gives a smoothly opening gap, i.e. the initial value of g is zero. Furthermore, if a small irregularity in one of the surfaces causes local separation to the left of B , it will be perpetuated, since the gap continues to grow. By contrast, a similar gap developed to the right of B will close again since $G_0(\eta) < 0$. In this sense, contact to the left of B could be regarded as unstable.

The corrective solution, the extent of the slip and stick zones and the contact tractions depend on the incident pulse only through the functions $G_0(\eta)$ and $H_0(\eta)$ describing the relative motion of the surfaces in the free surface solution. Such relative motion could be produced by other means—notably if the bodies are curved and roll over each other with microslip so that the contact region moves along the interface at velocity v . This problem is treated in a companion paper [5].

Acknowledgement—Support by the National Science Foundation through the grant CME 8019281 is gratefully acknowledged.

REFERENCES

1. M. Comninou and J. Dundurs, Reflexion and refraction of elastic waves in presence of separation. *Proc. R. Soc London* **A386**, 509 (1977).
2. M. Comninou, J. R. Barber and J. Dundurs, Disturbance at a frictional interface caused by a plane elastic pulse. *J. Applied Mechanics*, in press.
3. J. D. Achenbach, *Wave Propagation in Elastic Solids*. North Holland, Amsterdam (1973).
4. A. C. Eringen and E. S. Suhubi, *Elastodynamics*, Vol. II, p. 582. Academic Press, New York (1957).
5. J. R. Barber and M. Comninou, Rolling of elastic cylinders with friction at supersonic speed. *Int. J. Solids and Structures* **18**, 783 (1982).