

ON THE USE OF THE REACH-BACK CHARACTERISTICS METHOD FOR CALCULATION OF DISPERSION

JINN-CHUANG YANG AND EUAN-LUNG HSU

Department of Civil Engineering, National Chiao Tung University, Hsinchu, Taiwan 30049, R.O.C.

SUMMARY

The Holly–Preissmann two-point finite difference scheme (HP method) has been popularly used for solving the advection equation. The key idea of this scheme is to solve the dependent variable (i.e. the concentration for the pollutant transport problem) by the method of characteristics with the use of cubic interpolation on the spatial axis. The interpolating polynomials of higher order are constructed by use of the dependent variable and its derivatives at two adjacent grid points. In this paper a new interpolating technique is introduced for incorporation with the Holly–Preissmann two-point method. The new method is denoted herein as the Holly–Preissmann reach-back method (HPRB) and allows the characteristics to project back several time steps beyond the present time level. Through stability analyses it has been observed that the increase of the reach-back time step numbers for the characteristics indeed reduces the numerical damping and dispersive phenomena. A schematic model has been constructed to demonstrate the merits of this new technique for the calculation of the pure advection and dispersion equations. Numerical experiments and comparisons with analytical solutions which support and demonstrate this new technique are presented.

KEY WORDS Advection Diffusion Numerical simulation

INTRODUCTION

In predicting the pollutant transport in a one-dimensional channel flow by using numerical simulation, one has to be very careful to avoid the possible diffusion and dispersion induced numerically. Holly and Preissmann¹ have presented an excellent method for the calculation of advection in one and two dimensions. This method is the well known Holly–Preissmann two-point method (HP method) which is based on the construction of higher-order interpolating polynomials between the dependent variable and its derivatives for two adjacent points on the spatial axis. In comparison with some other existing schemes it has been found that the HP method gives fewest numerical dispersion and diffusion problems. In particular, for the case of transport in a coastal area where the transport phenomenon is dominated by advection rather than diffusion, the numerical damping can be minimized to the greatest extent by using the HP method to compute the advection. Therefore it has been very popular to apply the HP method to solve the mass transport equation.

In fact, the HP method is a kind of characteristics method in which only one characteristic is considered. When one looks at the unsteady flow problems solved by the characteristics method, it is seen that many investigators have improved the characteristics method by including various better and more attractive features: some have extended the characteristics outwards in distance, e.g. References 2–4; others have extended them backwards in time, e.g. References 5 and 6. Each extension has its own appropriate interpolation scheme and its accompanying improvements and

merits. A similar concept of extending the characteristics outwards in space or backwards in time has also been applied to the HP method for solving the advection equation by Yang and Wang⁷ and Yang and Hsu⁸ respectively. The main aim of the former paper is to extend the original Holly–Preissmann method for solving the dispersion equation under the condition $Cr > 1$ (Cr is the Courant number). The latter paper presents a scheme using time line interpolation instead of spatial interpolation for the Holly–Preissmann method.

In this paper a concept similar to the temporal reach-back scheme presented by Lai⁹ is applied to the HP method. The key feature of this scheme is that the characteristic is allowed to project back beyond the present time level for spatial interpolation. Error analyses in terms of damping and dispersive factors for the HPRB method are investigated and compared with those for the HP method. In fact, the HP method is a special case of the HPRB method in which no reach-back characteristics are considered. The solutions for the linear advection equation solved by the use of the HPRB method are compared with those solved by the HP method and with the analytical solution.

For the advection–diffusion (i.e. dispersion) problem the split operator algorithm is used to compute the advection and diffusion separately but successively in one time step. For the advection portion, as mentioned previously for the purpose of comparison, both the HPRB and HP methods are used in this paper. For the diffusion portion the well known Crank–Nicholson method is used. A schematic model is constructed to demonstrate and evaluate the applicability of this new technique.

REVIEW OF HP METHOD

For the one-dimensional case the pure advection equation of concentration C of a contaminant can be written as

$$\frac{\partial C(x, t)}{\partial t} + u(x, t) \frac{\partial C(x, t)}{\partial x} = 0, \quad (1)$$

where x is the distance along the positive direction of flow, t is the time, $u(x, t)$ is the time-dependent flow velocity (assumed to be directed in the positive x -direction) and $C(x, t)$ is the concentration at any point and time. Equation (1) can also be stated as

$$\frac{DC(x, t)}{Dt} = 0 \quad (2)$$

along

$$\frac{dx}{dt} = u(x, t). \quad (3)$$

Integration of the above equations yields

$$C_h = C_f \quad (4)$$

along

$$x_h - x_f = \int_{t_f}^{t_h} u(x, t) dt. \quad (5)$$

When $u(x, t) = \text{constant} = u_0$,

$$x_h - x_f = u_0 \Delta t. \quad (6)$$

The schematic diagram of the characteristics trajectory is shown in Figure 1. C_h is the unknown

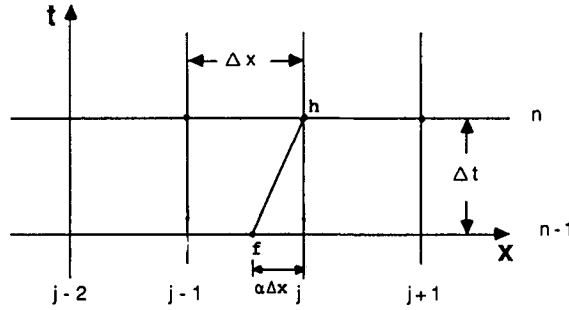


Figure 1. Schematic grid diagram for HP method

concentration for grid point h at time level n , which is to be solved. C_f is the concentration for grid point f at time level $n-1$, in which concentrations for all grid points are known.

Holly and Preissmann¹ developed a two-point fourth-order method for evaluating C_h . They introduced C_{j-1} , C_j and their spatial derivatives CX_{j-1} , CX_j at the present time level as dependent variables to construct a cubic interpolation polynomial over the interval $(j-1, j)$:

$$C_h = C_f = a_1 C_{j-1}^{n-1} + a_2 C_j^{n-1} + a_3 CX_{j-1}^{n-1} + a_4 CX_j^{n-1}, \quad (7)$$

where a_1 - a_4 are coefficients which can be found in Holly and Preissmann's paper¹ and will be restated in the following section; j and $j-1$ indicate the computation points; n indicates the time level. The newly introduced variables CX_{j-1} and CX_j have to be advected also. By following a similar procedure to that described above, CX_h can be obtained as

$$CX_h = CX_f = b_1 C_{j-1}^{n-1} + b_2 C_j^{n-1} + b_3 CX_{j-1}^{n-1} + b_4 CX_j^{n-1}, \quad (8)$$

where b_1 - b_4 are coefficients which can again be found in Holly and Preissmann's paper¹ and will be restated in the following section also.

DESCRIPTION OF NEW METHOD

As mentioned previously, when the concentrations are known only at fixed grid points, referring to Figure 1, interpolation is usually required to calculate the unknown concentration for the characteristics. Instead of the HP spatial interpolation technique described previously, the present method is to let the characteristics project back beyond the present time level for the spatial interpolation as indicated in Figure 2. The similar interpolating function can be expressed as

$$C_p = C_q = a_1 C_s^{n-m} + a_2 C_o^{n-m} + a_3 CX_s^{n-m} + a_4 CX_o^{n-m}, \quad (9)$$

where C^{n-m} and CX^{n-m} denote the concentration and its derivative with respect to space at time level $n-m$ as indicated in Figure 2; m is the reach-back number; s and o represent any two adjacent points which the characteristics foot on the spatial axis falls in between. The coefficients a_1 - a_4 are expressed as

$$a_1 = \alpha^2(3-2\alpha), \quad a_2 = 1-a_1, \quad a_3 = \alpha^2(1-\alpha)\Delta x, \quad a_4 = -\alpha(1-\alpha)^2\Delta x,$$

where α is the interpolation parameter which is the decimal portion of mCr and is self-explanatory from Figure 2; Cr is the Courant number. A similar argument to that for deriving equation (8) has also to be taken into account here. The derivative of concentration also has to be advected.

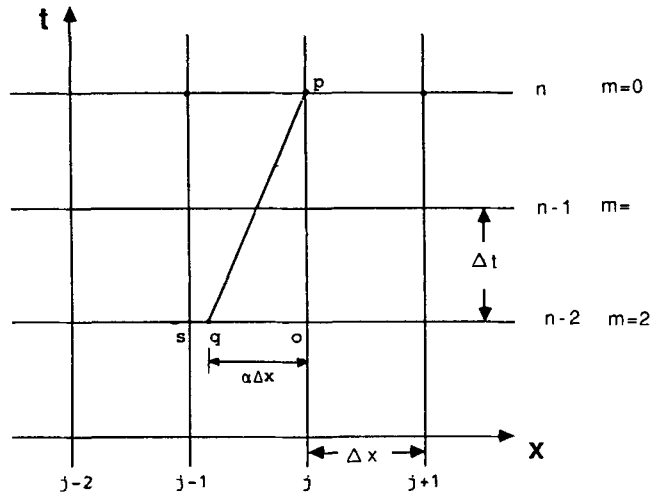


Figure 2. Schematic grid diagram for HPRB method

Therefore CX at point p can be obtained as

$$CX_p = CX_q = b_1 C_s^{n-m} + b_2 C_o^{n-m} + b_3 CX_s^{n-m} + b_4 CX_o^{n-m}, \tag{10}$$

where

$$b_1 = 6\alpha(\alpha - 1)/\Delta x, \quad b_2 = -b_1, \quad b_3 = \alpha(3\alpha - 2), \quad b_4 = (\alpha - 1)(3\alpha - 1).$$

Equations (9) and (10) complete the calculation of pure advection of the concentration and its derivative for one time step. This scheme is of fourth-order accuracy. The coefficients a_1 - a_4 and b_1 - b_4 are identical to those of the original Holly-Preissmann method and are unchanged by the process of allowing the characteristics to project back beyond one time step.

ERROR ANALYSIS

The accuracy of the scheme can be investigated through the analysis of the errors in the calculation of pure advection of a simple sine wave. An error analysis is performed to provide quantitative information by using the von Neumann method,¹⁰ which assumes the solution can be described as a linear sinusoidal wave.

The error analysis results in two quantities, the damping factor R_1 and the wave speed factor R_2 . R_1 is the modulus of the complex ratio of numerical solution to actual solution after one time step. R_2 is the ratio of numerical wave speed to actual wave speed after one physical wave travel time.

From the advection equation (1) a Fourier series solution is assumed. When it is written for the grid points the solution can be expressed as

$$C(x, t) = \sum_{k=1}^{\infty} C_k \exp[i(\sigma_k x + \beta_k t)], \tag{11}$$

where $\sigma = 2\pi/L$ (L is the wavelength) and $\beta = 2\pi/T$ (T is the wave period). By focusing on the k th term and substituting into equations (9) and (10) one can obtain the relations

$$C_k \{ \exp(i\beta_k m \Delta t) - a_1 \exp[-i\sigma_k(r+1)\Delta x] - a_3 \exp(-i\sigma_k \Delta x) \} + CX_k \{ -a_2 \exp[-i(r+1)\sigma_k \Delta x] - a_4 \exp(-i\sigma_k \Delta x) \} = 0, \tag{12}$$

$$CX_k \{ \exp(i\beta_k m \Delta t) - b_2 \exp[-i\sigma_k(r+1)\Delta x] - b_4 \exp(-i\sigma_k \Delta x) \} \\ + C_k \{ -b_1 \exp[-i(r+1)\sigma_k \Delta x] - b_3 \exp(-i\sigma_k \Delta x) \} = 0, \quad (13)$$

where r is the integer portion of mCr , Δt is the time interval and Δx is the space interval. The eigenvalues are determined by setting the coefficient determinant to zero. By letting

$$\varphi = \exp(i\beta_k \Delta t) \quad \text{and} \quad \phi = \exp(-i\sigma_k \Delta x),$$

one can obtain

$$\varphi^{2m} - \varphi^m \phi^r [(a_1 + b_2)\phi + a_3 + b_4] + \phi^{2r} (a_1 b_2 \phi^2 + a_3 b_2 \phi + a_1 b_4 \phi + a_3 b_4) \\ - \phi^{2r} [b_1 a_2 \phi^2 + (b_3 a_2 + b_1 a_4)\phi + b_3 a_4] = 0. \quad (14)$$

The complex amplification factor φ , which can be solved from the above equation, provides insight to the stability and numerical dispersive character of the numerical scheme; φ can also be expressed as

$$\varphi = \zeta (\cos \theta + i \sin \theta), \quad (15)$$

where ζ is the amplitude of φ and θ is the degree of φ . Then the amplification factor R_1 and the dispersive factor R_2 for one time step can be obtained as

$$R_1 = |\zeta|, \quad (16)$$

$$R_2 = \theta I / 2\pi Cr, \quad (17)$$

where $I = L/\Delta x$.

Figures 3(a)–3(e) show the amplitude portraits for $Cr = 0.1, 0.25, 0.5, 0.75$ and 0.9 respectively. Each figure shows a comparison of the results for reach-back numbers $m = 1, 2, 3$ and 4 . In fact, the case for $m = 1$ is identical to the HP method. From all of these figures one can deduce a general tendency, namely the values of R_1 and R_2 approach unity when no damping occurs as the reach-back number m increases. For $Cr = 0.25$ (Figure 3(b)) the value of R_1 for $m = 4$ is equal to unity; this is so because the characteristic intercepts the grid point at time level $m = 4$. Similarly, for $Cr = 0.5$ (Figure 3(c)) one can observe that $R_1 = 1.0$ when $m = 2$ and 4 ; and for $Cr = 0.75$, R_1 is equal to unity when $m = 4$ as shown in Figure 3(d). This should also be true for the phase portraits shown in Figures 4(a)–4(d). In particular, it is known that for $Cr = 0.5$ the value of R_2 will always be equal to unity for any value of m . Therefore the phase portrait for $Cr = 0.5$ is not shown here.

In addition, Figures 3(a)–3(e) indicate that the resolution for R_1 increases as the reach-back number increases. Similarly, Figures 4(a)–4(d) show this consistent tendency for the phase portraits. If this is the case, then it becomes very important for one to determine how large a reach-back number should be used. From several test cases and the results discussed above it seems that the reach-back number $m = 4$ should be sufficient. Using a larger value of reach-back number gives an insignificant improvement in resolution. In addition, difficulties in setting up the initial conditions may arise when a large reach-back number is used.

SOLUTION FOR DISPERSION EQUATION

The linear dispersion equation can be expressed as a combination of pure advection and diffusion. The equation can be written as

$$\frac{DC}{Dt} = \nu \frac{\partial^2 C}{\partial x^2} \quad \text{along} \quad \frac{dx}{dt} = u_0, \quad (18)$$

where ν is a diffusion coefficient.

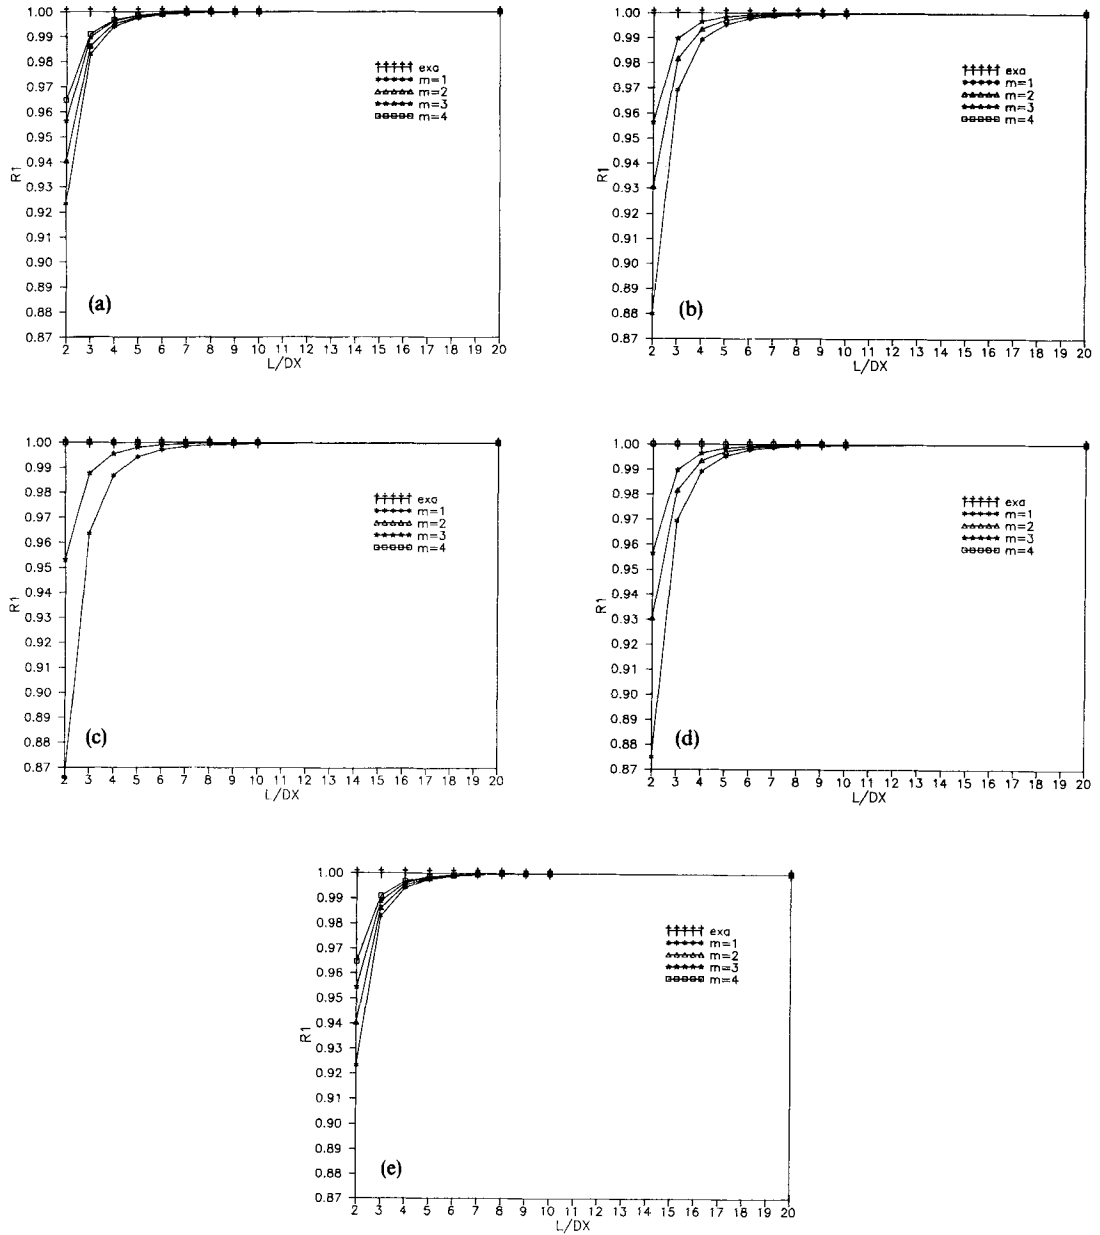


Figure 3. Amplitude portraits for various Cr and reach-back number m :

- (a) $Cr=0.1$;
- (b) $Cr=0.25$;
- (c) $Cr=0.5$;
- (d) $Cr=0.75$;
- (e) $Cr=0.9$

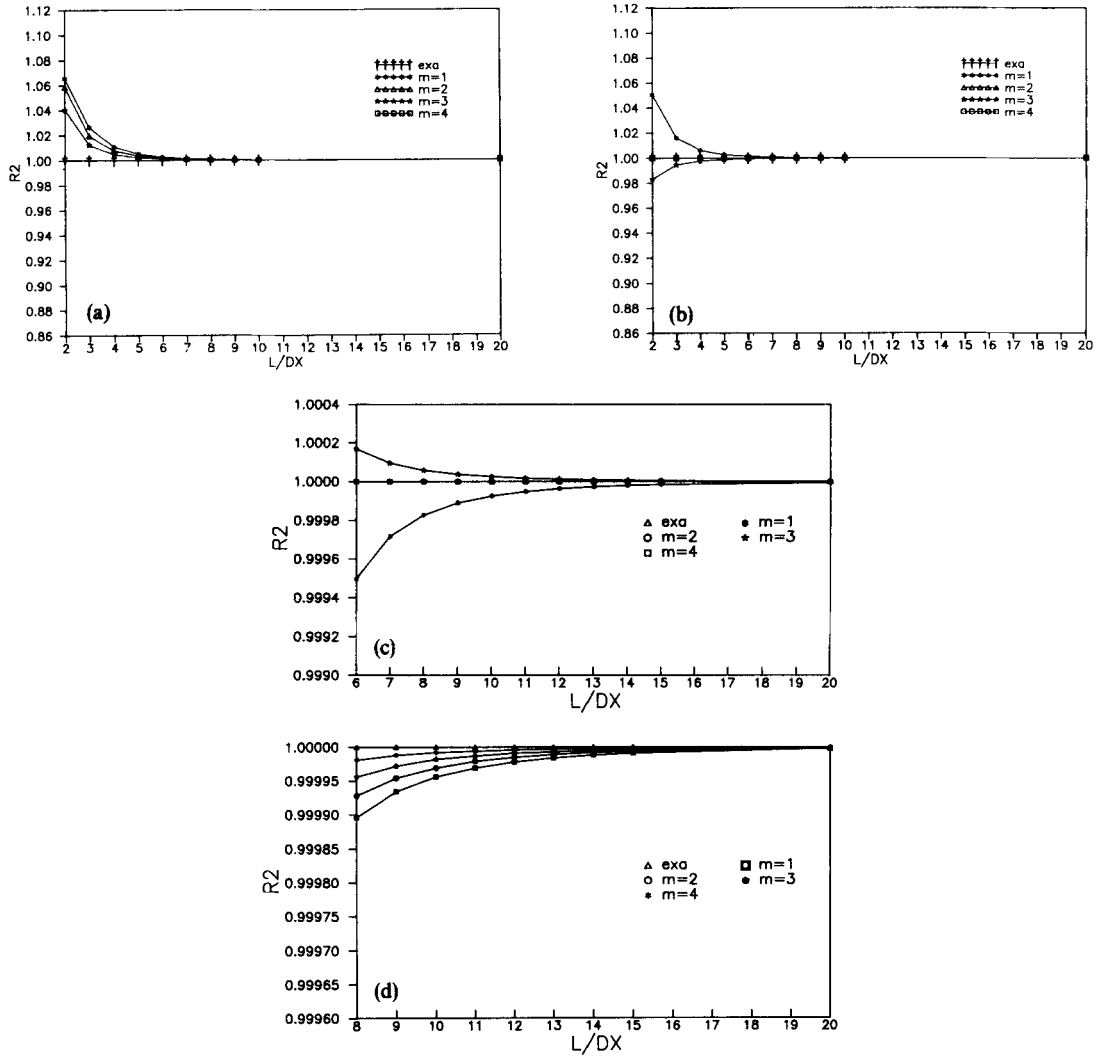


Figure 4. Phase portraits for various Cr and reach-back number m .

- (a) $Cr = 0.1$;
- (b) $Cr = 0.25$;
- (c) $Cr = 0.75$;
- (d) $Cr = 0.9$

This equation can be solved by decomposition into pure advection and pure diffusion using a split operator method.¹ The advection can first be solved by the HPRB method as described in the previous section. The concentration and its derivative after the advection are denoted as C_j^n and CX_j^n . Then the diffusion portion can be computed by use of the Crank–Nicholson method, which can be expressed as

$$C_j^n - C_j^s = \frac{\psi v \Delta t}{\Delta x^2} (C_{j+1}^n - 2C_j^n + C_{j-1}^n) + \frac{(1-\psi)v \Delta t}{\Delta x^2} (C_{j+1}^{n-1} - 2C_j^{n-1} + C_{j-1}^{n-1}), \quad (19)$$

where ψ is a weighting factor. For the calculation in the next section $\psi = 0.5$ is used.

By the same argument as that stated in the advection portion, one has to diffuse the term CX . The expression for the diffusion of CX can be written as

$$CX_j^n - CX_j^{n-1} = \frac{\psi v \Delta t}{\Delta x^2} (CX_{j+1}^{n-1} - 2CX_j^{n-1} + CX_{j-1}^{n-1}) + \frac{(1-\psi)v\Delta t}{\Delta x^2} (CX_{j+1}^{n-2} - 2CX_j^{n-2} + CX_{j-1}^{n-2}). \quad (20)$$

From equations (19) and (20) the concentration C and its derivative CX after the diffusion process at the next time step t^n can be obtained. This completes the calculation for the dispersion equation.

DEMONSTRATION AND EVALUATION

Calculation of pure advection

The pure advection of a Gaussian concentration distribution for different velocities, i.e. for different Courant numbers Cr , with constant Δt and Δx , has been computed. The distribution of mean position 3000 m and standard deviation 200 m is defined on the regular grid $\Delta x = 200$ m. Upstream and downstream boundary conditions are assumed to be $C = 0$ and $CX = 0$ respectively. Test cases with $Cr = 0.1, 0.25, 0.5$ and 0.9 are simulated for time $t = 70000, 28000, 14000$ and 8000 s respectively. When a reach-back number m greater than unity is used, other schemes may be

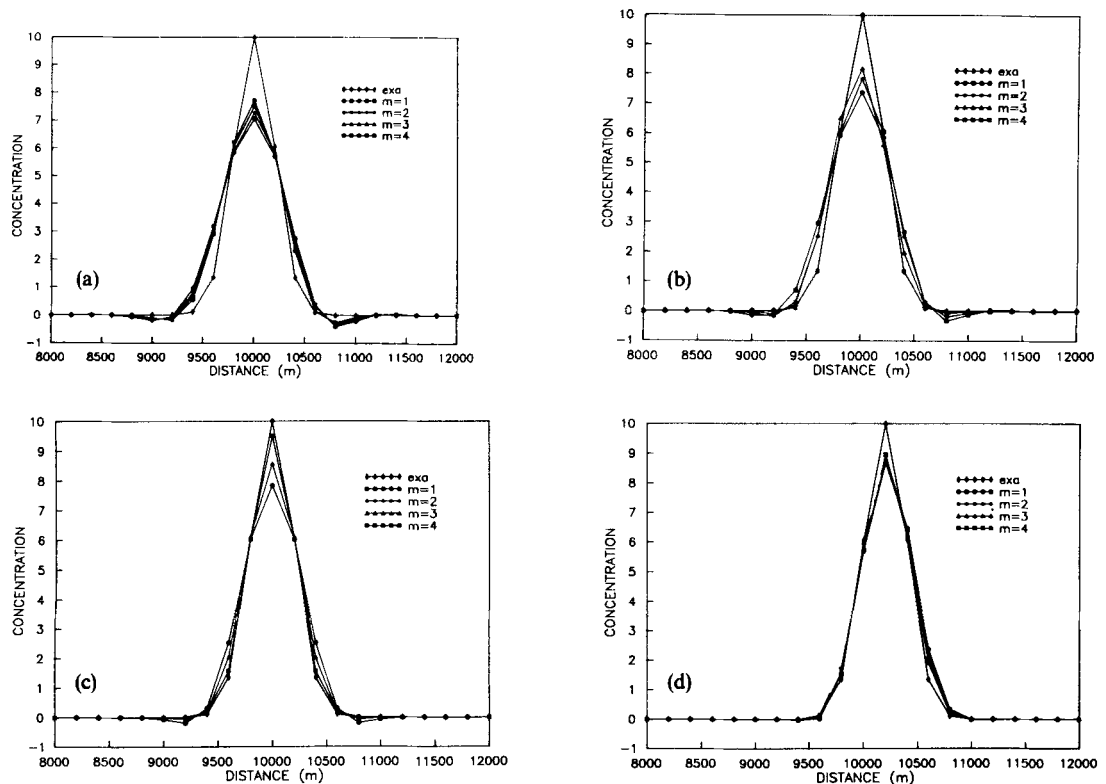


Figure 5. Comparison of analytical solution and numerical solution by HPRB method for advection equation:

- (a) $Cr = 0.1$, $t = 70000$ s;
- (b) $Cr = 0.25$, $t = 28000$ s;
- (c) $Cr = 0.5$, $t = 14000$ s;
- (d) $Cr = 0.9$, $t = 8000$ s

needed to set up the initial conditions. For those cases studied herein the HP method is used to establish the initial condition.

The results computed by the use of HPRB with various reach-back numbers and the analytical solution are shown in Figures 5(a)–5(d). In fact, when $m=1$ the HPRB method is identical to the original HP method. From Figure 5(b) it can be seen that the solution for $Cr=0.25$ and $m=4$ is identical to the analytical solution. This situation was explained previously because the characteristic falls exactly on the grid point, hence no error exists. The same situation can be found in Figure 5(c) for $Cr=0.5$ when $m=2$ and 4. From these test simulations it can be concluded that the results get better, i.e. closer to the exact solution, as the reach-back number m increases. However, when the characteristic closes to the grid point, such as is the case for $Cr=0.9$ (Figure 5(d)), the effect due to the increase of m will not be so significant. This should be obvious since the exact solution will be obtained when the characteristic falls on the grid point.

Calculation of dispersion

A Gaussian distribution and the same boundary conditions as mentioned previously are used for the calculation of the dispersion. Cases with $Cr=0.1, 0.25, 0.5$ and 0.9 are studied for reach-back numbers $m=1, 2, 3$ and 4. The diffusivity used for these studies is $0.1 \text{ m}^2 \text{ s}^{-1}$. The results for all of the test cases are shown in Figures 6(a)–6(d). From these results it can again be seen that an

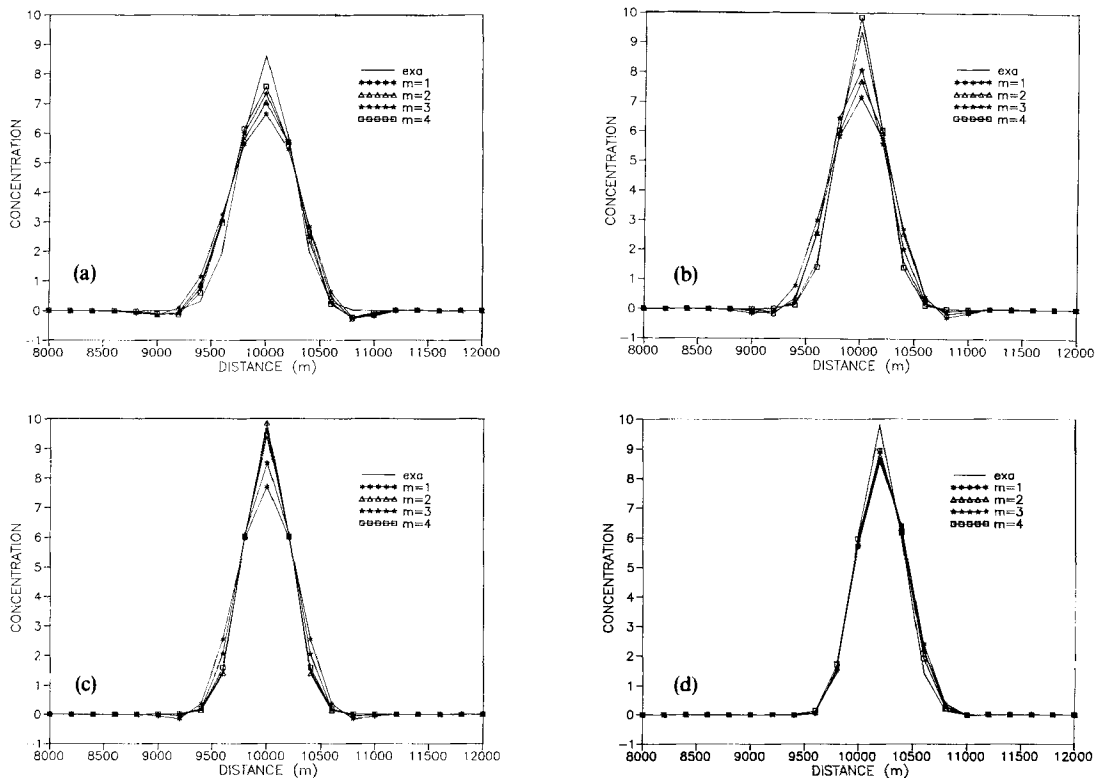


Figure 6. Comparison of analytical solution and numerical solution for dispersion equation:

- (a) $Cr=0.1, t=70000 \text{ s}$;
- (b) $Cr=0.25, t=28000 \text{ s}$;
- (c) $Cr=0.5, t=14000 \text{ s}$;
- (d) $Cr=0.9, t=8000 \text{ s}$

increase in reach-back number gives better results, but again the improvement will not be obvious when the characteristic approaches the grid point, such as is the case $Cr = 0.9$ (Figure 6(d)).

CONCLUSIONS

The Holly–Preissmann two-point fourth-order scheme has been a very popular and successful scheme for computation of the advection equation. On the basis of the main framework of the HP method, in this paper a new interpolation technique taking into account the reach-back characteristics is introduced. From the stability analysis and the demonstration of the test simulation, one finds that for the advection problem an increase in reach-back number can reduce the numerical diffusion and dispersion problems. When the characteristic projects back exactly on the grid point, the result computed is identical to the exact solution. The dispersion equation is solved by the split operator algorithm. The advection portion is calculated by using the HPRB scheme and the diffusion portion is computed by using the Crank–Nicholson scheme. For the weak diffusion case presented in this paper, the effect due to the increase of the reach-back number is quite convincing. Furthermore, on the basis of the numerical experiments and the demonstration presented, the reach-back number $m = 4$ seems to be sufficient for accurate calculation. In practice, the higher the reach-back number used, the better are the results that can be obtained. The use of $m = 4$ is a compromise which already gives a significant improvement in solution accuracy without introducing problems in initiating the calculation.

ACKNOWLEDGEMENTS

The authors would like to express their appreciation for the funding support from the National Science Council of Taiwan and for the assistance in the drawing preparation by Mr. Jen-Chung Lee.

APPENDIX: NOTATION

a_1 – a_4	coefficients for the interpolation polynomials
b_1 – b_4	coefficients for the interpolation polynomials
C	concentration
CX	concentration derivative with respect to space
I	dimensionless spatial discretization, $L/\Delta x$
j	computation point
k	component of sinusoidal wave
L	length of sinusoidal wave
m	integer denoting reach-back number
n	time level index
R_1	damping factor
R_2	dispersive factor
T	wave period
t	time
u	velocity
x	distance along the flow direction
Δx	space increment
Δt	time increment
ν	diffusivity
σ	$2\pi/L$

β	$2\pi/T$
ϕ	$\exp(i\sigma_k \Delta x)$
φ	$\exp(i\beta_k \Delta t)$
ζ	amplitude of φ
θ	degree of φ
ψ	weighting factor

REFERENCES

1. F. M. Holly Jr. and A. Preissmann, 'Accurate calculation of transport in two dimensions', *J. Hydraul. Div. ASCE*, **98**, 1259–1277 (1977).
2. F. F. M. Chang and D. L. Richards, 'Deposition of sediment in transient flow', *J. Hydraul. Div. ASCE*, **97**, 837–849 (1971).
3. A. E. Vardy, 'On the use of the method of characteristics for the solution of unsteady flows in networks', *Proc. 2nd Int. Conf. on Pressure Surges*, BHRA, Fluid Engineering, Cranfield, 1977, pp. 15–30.
4. D. C. Wiggert and M. J. Sundquist, 'Fixed-grid characteristics for pipeline transients', *J. Hydraul. Div., ASCE*, **103**, 1403–1416 (1977).
5. E. B. Wylie, 'Inaccuracies in the characteristics method', *Proc. 28th Ann. Hydraulic Specialty Conf.* ASCE, Chicago, IL, 1980, pp. 165–176.
6. D. E. Goldberg and E. B. Wylie, 'Characteristics method using time-line interpolations', *J. Hydraul. Eng., ASCE*, **109**, 670–683 (1983).
7. J. C. Yang and J. Y. Wang, 'Numerical solution of dispersion equation in one dimension', *J. Chin. Inst. Eng.*, **11**, 379–383 (1988).
8. J. C. Yang and E. L. Hsu, 'A new technique for numerical solution of dispersion equation', *J. Hydraul. Res., IAHR*, **28**(4), in press.
9. C. Lai, 'Comprehensive method of characteristics models for flow simulation', *J. Hydraul. Eng., ASCE*, **114**, 1074–1097 (1988).
10. J. Von Neumann and R. D. Richtmyer, 'A method for the numerical calculations of hydrodynamic shocks', *J. Appl. Phys.*, **21**, 232 (1950).