



Experimental study on interfacial area transport in vertical upward bubbly two-phase flow in an annulus

Takashi Hibiki^{a,b}, Rong Situ^b, Ye Mi^b, Mamoru Ishii^{b,*}

^a *Research Reactor Institute, Kyoto University, Kumatori, Sennan, Osaka 590-0494, Japan*

^b *School of Nuclear Engineering, Purdue University, West Lafayette, IN 47907-1290, USA*

Received 29 January 2002; received in revised form 22 July 2002

Abstract

In relation to the development of the interfacial area transport equation, axial developments of local void fraction, interfacial area concentration, and interfacial velocity of vertical upward bubbly flows in an annulus with the hydraulic equivalent diameter of 19.1 mm were measured by the double-sensor conductivity probe. A total of 20 data were acquired consisting of five void fractions, about 0.050, 0.10, 0.15, 0.20, and 0.25, and four superficial liquid velocities, 0.272, 0.516, 1.03, and 2.08 m/s. The obtained data will be used for the development of reliable constitutive relations, which reflect the true transfer mechanisms in subcooled boiling flow systems.

© 2002 Elsevier Science Ltd. All rights reserved.

Keywords: Interfacial area transport; Two-fluid model; Void fraction; Interfacial area concentration; Double-sensor conductivity probe; Gas–liquid bubbly flow; Multiphase flow

1. Introduction

In relation to the modeling of the interfacial transfer terms in the two-fluid model, the concept of the interfacial area transport equation has recently been proposed to develop the constitutive relation on the interfacial area concentration [1]. The interfacial area concentration change can basically be characterized by the variation of the particle number density due to coalescence and breakup of bubbles. The interfacial area transport equation can be derived by considering the fluid particle number density transport equation analogous to Boltzmann's transport equation [1]. The interfacial area transport equation can replace the traditional flow regime maps and regime transition criteria. The changes in the two-phase flow structure can be predicted mechanistically by introducing the interfacial area

transport equation. The effects of the boundary conditions and flow development are efficiently modeled by this transport equation. Such a capability does not exist in the current state-of-the-art nuclear thermal–hydraulic system analysis codes like RELAP5, TRAC and CAT-HARE. Thus, a successful development of the interfacial area transport equation can make a quantum improvement in the two-fluid model formulation and the prediction accuracy of the system codes.

The strategy for the development of the interfacial area transport equation consists of (1) formulation of the interfacial area transport equation, (2) development of measurement techniques for local flow parameters, (3) construction of data base of axial development of local flow parameters, (4) modeling of sink and source terms in the interfacial area transport equation, and (5) improvement of thermal–hydraulic system analysis codes by implementing the interfacial area transport equation. The present status of the above subdivided projects was extensively reviewed in the previous paper [2]. In the first stage of the development of the interfacial area transport equation, adiabatic flow was the focus, and the interfacial area transport equation for the adiabatic flow was

* Corresponding author. Tel.: +1-765-49-4587; fax: +1-765-494-9570.

E-mail addresses: hibiki@rri.kyoto-u.ac.jp (T. Hibiki), ishii@ecn.purdue.edu (M. Ishii).

Nomenclature

a_i	interfacial area concentration	S_{ph}	sink or source term in interfacial area concentration due to phase change
$a_{i,0}$	interfacial area concentration at inlet	t	time
$a_{i,eq}$	interfacial area concentration under conditions of no phase change and equilibrium of bubble coalescence and breakup rates	v_g	interfacial velocity obtained by effective signals
D	diameter of round tube	z	axial coordinate
D_H	hydraulic equivalent diameter	<i>Greek symbols</i>	
D_{Sm}	Sauter mean diameter	α	void fraction
j_g	superficial gas velocity	α_C	void fraction at channel center
$j_{g,N}$	superficial gas velocity reduced at normal condition (atmospheric pressure and 20 °C)	α_p	void fraction at void peak
j_l	superficial liquid velocity	$\Delta\rho$	density difference
n	exponent	ν_l	kinetic viscosity of liquid phase
n_0	asymptotic exponent at $\langle\alpha\rangle = 0$	ζ	interfacial area concentration change due to bubble coalescence or breakup
P	pressure	σ	interfacial tension
P_0	pressure at inlet	ψ	factor depending on bubble shape ($1/36\pi$ for a spherical bubble)
R	radius of outer round tube	<i>Mathematical symbols</i>	
R_0	radius of inner rod	$\langle \rangle$	area-averaged quantity
Re_l	Reynolds number of liquid phase	$\langle \langle \rangle \rangle$	void fraction weighted cross-sectional area-averaged quantity
r	radial coordinate	$\langle \langle \rangle \rangle_a$	interfacial area concentration weighted cross-sectional area-averaged quantity
r_p	radial coordinate at void peak		
S_j	sink or source term in the interfacial area concentration due to bubble coalescence or breakup, respectively		

developed successfully by modeling sink and source terms of the interfacial area concentration due to bubble coalescence and breakup. In the next stage, subcooled boiling flow would be the focus, and a preliminary local measurement for interfacial area concentration was initiated for subcooled boiling water flow in an internally heated annulus [3]. To develop the interfacial area transport equation for boiling flows in the internally heated annulus, sink and source terms due to phase change should be modeled based on rigorous and extensive boiling flow data to be taken in the annular channel, and sink and source terms due to bubble coalescence and breakup modeled previously should be evaluated separately based on adiabatic data to be taken in the same channel. If necessary, previously modeled sink and source terms [2] should be modified.

From this point of view, this study aims at measuring axial development of local flow parameters of vertical upward air–water bubbly flows in an annulus by using a double-sensor conductivity probe. The annulus test loop is scaled to a prototypic BWR based on scaling criteria for geometric, hydrodynamic, and thermal similarities [3]. It consists of an inner rod with a diameter of 19.1 mm and an outer round tube with an inner diameter of 38.1 mm, and the hydraulic equivalent diameter is 19.1 mm. Measured flow parameters include void fraction,

interfacial area concentration, and interfacial velocity. A total of 20 data sets are acquired consisting of five void fractions, about 0.050, 0.10, 0.15, 0.20, and 0.25, and four superficial liquid velocities, 0.272, 0.516, 1.03, and 2.08 m/s. The measurements for each flow condition are performed at the four axial locations: axial locations non-dimensionalized by the hydraulic equivalent diameter = 40.3, 61.7, 77.7, and 99.0. The data obtained from the double-sensor conductivity probe give near complete information on the time-averaged local hydrodynamic parameters of bubbly flow to model the sink and source terms of the interfacial area concentration. The data set obtained in this study will eventually be used for the development of reliable constitutive relations, which reflect the true transfer mechanisms in subcooled boiling flow systems.

2. Experimental

An experimental facility is designed to measure the relevant two-phase parameters necessary for developing constitutive models for the two-fluid model in subcooled boiling. It is scaled to a prototypic BWR based on scaling criteria for geometric, hydrodynamic, and thermal similarities [3]. The experimental facility, instru-

mentation, and data acquisition system are briefly described in this section [3].

The two-phase flow experiment was performed by using a flow loop constructed at Thermal-Hydraulics and Reactor Safety Laboratory in Purdue University. Fig. 1 shows the experimental facility layout. The water supply is held in the holding tank. The tank is open to the atmosphere through a heat exchanger mounted to the top to prevent explosion or collapse and to degas from the water. There is a cartridge heater inside the tank to heat the water and maintain the inlet water temperature. A cooling line runs inside the tank to provide control of the inlet water temperature and post-experimental cooling of the tank. Water is pumped with a positive displacement, eccentric screw pump, capable of providing a constant head with minimum pressure oscillation. For the adiabatic air–water flow experiment, porous spargers with the pore size of $10\ \mu\text{m}$ are used as air injectors. For a future adiabatic steam–water flow experiment, the air injectors will be removed. The water,

which flows through a magnetic flow meter, is divided into four separate flows and can then be mixed with air before it is injected into the test section to study adiabatic air–water bubbly flow. The test section is an annular geometry that is formed by a clear polycarbonate tube on the outside and a cartridge heater on the inside. The polycarbonate tube is 38.1 mm inner diameter and has a 3.18 mm wall thickness. The overall length of the heater is 2670 mm and has a 19.1 mm outer diameter. The heated section of the heater rod is 1730 mm long. The maximum power of the heater is 20 kW and has a maximum surface heat flux of $0.193\ \text{MW}/\text{m}^2$. The heater rod has one thermocouple that is connected to the process controller to provide feedback control. The heater rod can be traversed vertically to allow many axial locations to be studied with four instrument ports attached to the test section. For the adiabatic air–water flow experiment, the heater is switched off. At each port there is an electrical conductivity probe to measure local flow parameters such as void fraction, interfacial area

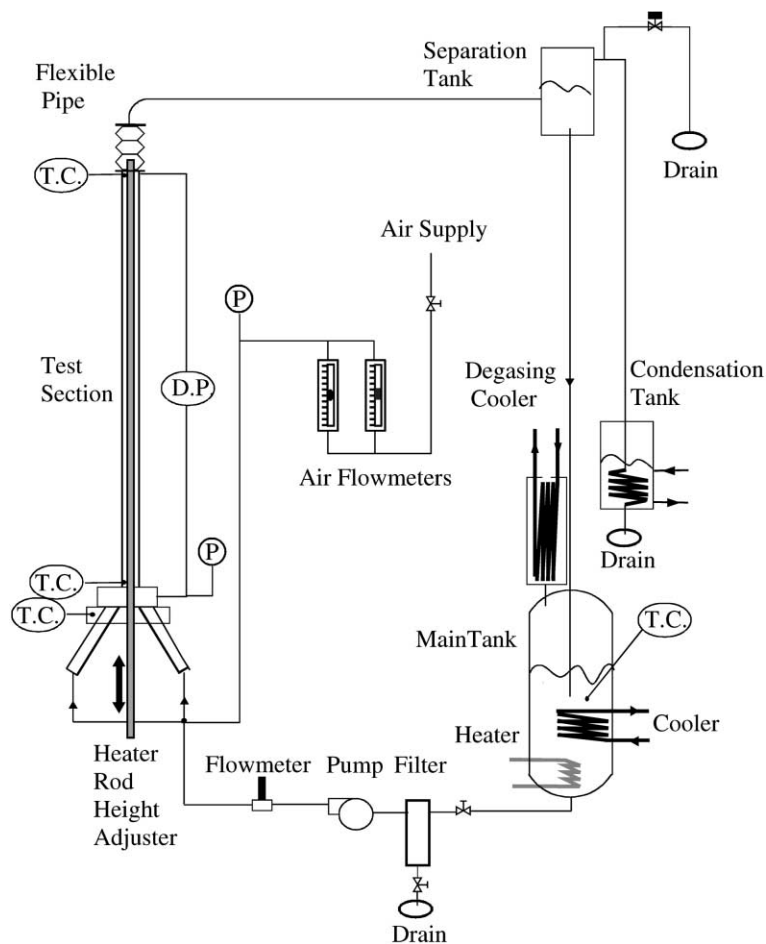


Fig. 1. Schematic diagram of experimental loop.

concentration, and interfacial velocity. A pressure tap and thermocouple are placed at the inlet and exit of the test section. A differential pressure cell is connected between the inlet and outlet pressure taps. The two-phase mixture flows out of the test section to a separator tank and the gas phase is piped away and the water is returned to the holding tank. The loop can also be operated with a diabatic steam–water flow in a future study.

The flow rates of the air and water were measured with a rotameter and a magnetic flow meter, respectively. The loop temperature was kept at a constant temperature (20 °C) within the deviation of ± 0.2 °C by a heat exchanger installed in a water reservoir. To avoid the influence of surface-active contaminants on flow parameter measurements, a quick experiment was made right after flushing the flow loop with quality-controlled water carefully and introducing new water into the flow loop. The local flow measurements using the double-sensor conductivity probe were performed at four axial locations of $z/D_H = 40.3, 61.7, 77.7,$ and 99.0 , and 10 radial locations from $r/(R - R_0) = 0.05$ to 0.9 . Since the starting point of heating corresponded to about $z/D_H = 35$, the axial location of the first measuring port was determined to be $z/D_H = 40.3$. Unfortunately, the axial measuring locations might not be ideal for an adiabatic air–water flow experiment. Thus, not large interfacial area transport between $z/D_H = 40.3$ and 99.0 might not be observed. The details of the double-sensor conductivity probe methodology can be found in the previous paper [4]. It should be noted here that the double-sensor conductivity probe may not work for the interfacial area concentration and interfacial velocity measurements in the vicinity of the wall. The data of the interfacial area concentration and interfacial velocity in the vicinity of the wall can be corrected by assuming the power-law profile of the interfacial velocity. The details of the correction method can be found in the previous paper [5]. The flow conditions in this experiment are tabulated in Table 1. The area-averaged superficial gas velocities in this experiment were roughly determined so as to provide the same area-averaged void fractions among different conditions of superficial liquid velocity, namely $\langle \alpha \rangle = 0.050, 0.10, 0.15, 0.20,$ and 0.25 .

In order to verify the accuracy of local measurements, the area-averaged quantities obtained by integrating the local flow parameters over the flow channel

were compared with those measured by other cross-calibration methods such as a γ -densitometer for void fraction, a photographic method for interfacial area concentration, and a rotameter for superficial gas velocity. Good agreements were obtained between the area-averaged void fraction, interfacial area concentration and superficial gas velocity obtained from the local measurements and those measured by the γ -densitometer, the photographic method and the rotameter with averaged relative deviations of $\pm 12.8, \pm 6.95$ and $\pm 12.9\%$, respectively [5]. The benchmark experiments for the double-sensor probe were also performed in an acrylic vertical rectangular flow duct in air–water two-phase mixture. Local flow parameters measured by an image processing method were compared with those by the double-sensor probe methods. The relative percent difference between the two methods was within $\pm 10\%$ [4]. Based on these results, it can be thought that the measurement accuracy of local flow parameters would be within $\pm 10\%$.

3. Results and discussion

3.1. Local flow parameters

3.1.1. Phase distribution pattern

Fig. 2 shows the behavior of void fraction profiles measured at $z/D_H = 40.3$ (upper figures) and 99.0 (lower figures) in this experiment. The meanings of the symbols in Fig. 2 are found in Table 1. As can be seen from Fig. 2, various phase distribution patterns similar to those in round tubes were observed in the present experiment, and void fraction profiles were found to be almost symmetrical with respect to the channel center, $r/(R - R_0) = 0.5$. Significant differences between the phase distributions at $z/D_H = 40.3$ and 99.0 were not observed. The phase distribution patterns may be governed by the flow field and the bubble size. The bubble size is governed by the interfacial area transport due to bubble coalescence, breakup, expansion and shrinkage. The interfacial area transport stages may roughly be classified into three stages such as (1) the interfacial area transport governed by coalescence and breakup of primary bubbles near a test section inlet, (2) the interfacial area transport governed by coalescence and breakup of secondary bubbles and (3) the interfacial area transport governed by bubble expansion or shrinkage where bubble breakup and coalescence come to be an equilibrium state. According to previous experimental results in round tubes [6,7], significant interfacial area transport occurred in the stage (1) ($z/D_H \leq 15$) and gradual interfacial area transport occurred in the stage (2) ($15 < z/D_H \leq 60$). Thus, it can be thought that the flow in the annulus almost reached to a quasi-fully-developed flow.

Table 1
Flow conditions in this experiment

$\langle j_r \rangle$ (m/s)	$\langle j_{g,N} \rangle$ (m/s)				
	●	▲	■	▼	◆
0.272	0.0313	0.0506	0.0690	0.0888	0.105
0.516	0.0406	0.0687	0.103	0.135	0.176
1.03	0.0683	0.130	0.201	0.400	0.489
2.08	0.108	0.215	0.505	0.651	0.910

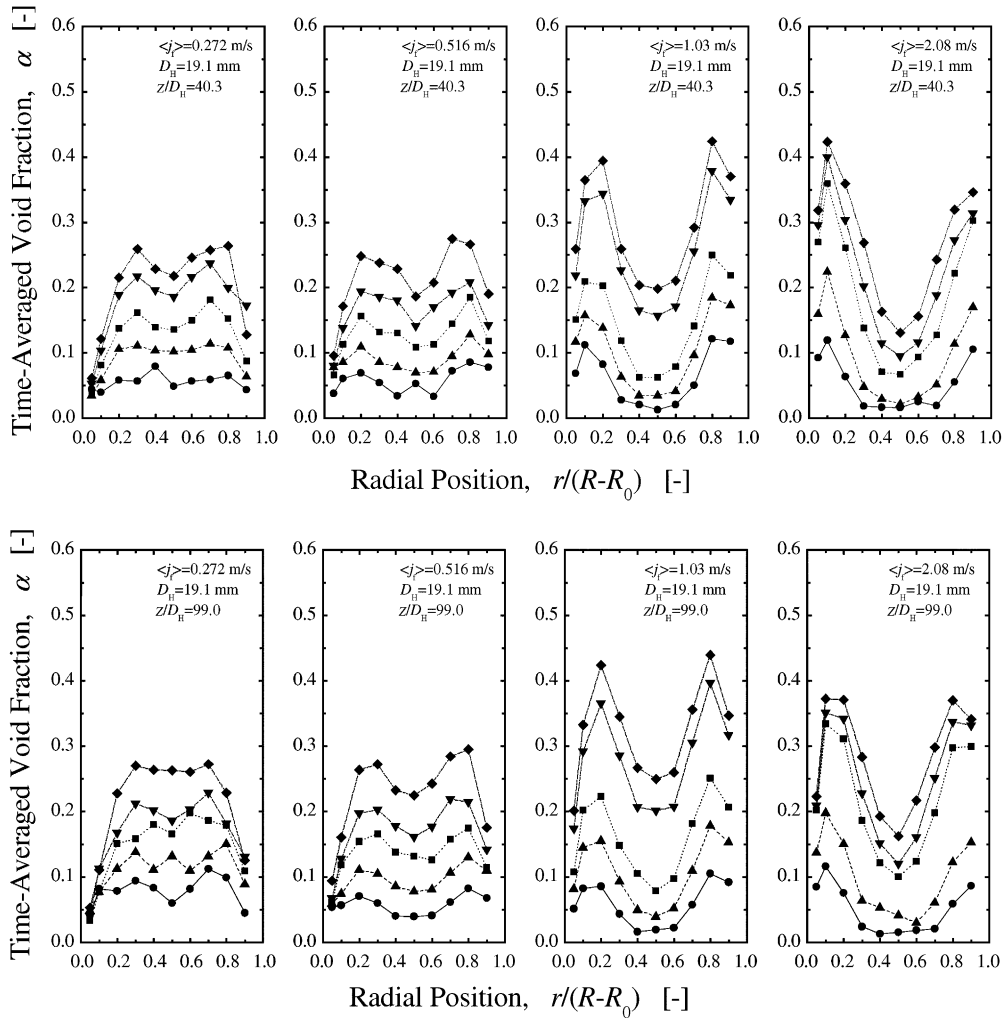


Fig. 2. Local void fraction profiles at $z/D_H = 40.3$ and 99.9 .

Serizawa and Kataoka classified the phase distribution pattern into four basic types of the distributions, that is, “wall peak”, “intermediate peak”, “core peak”, and “transition” [8]. The wall peak is characterized as sharp peak with relatively high void fraction near the channel wall and plateau with very low void fraction around the channel center. The intermediate peak is explained as broad peak in void fraction near the channel wall and plateau with medium void fraction around the channel center. The core peak is defined as broad peak around the channel center and no peak near the channel wall. The transition is described as two broad peaks around the channel wall and center. In Fig. 3, non-dimensional peak void fraction (upper figures) and peak radial position (lower figures) measured at $z/D_H = 99.0$ are plotted against the area-averaged void fraction as a parameter of the superficial liquid velocity. The non-dimensional void fraction at the peak is defined

as $(\alpha_P - \alpha_C)/\alpha_P$, where α_P and α_C are the void fractions at the peak and the channel center, respectively. $(\alpha_P - \alpha_C)/\alpha_P = 0$ and 1 indicate no wall peak and very sharp wall peak, respectively. The non-dimensional radial position at the peak is defined as $r_P/(R - R_0)$ or $1 - r_P/(R - R_0)$ for the peak appeared at inner side ($r/(R - R_0) \leq 0.5$) or outer side ($r/(R - R_0) \geq 0.5$) of the channel, respectively, where r_P is the peak radial position. It should be noted here that there is uncertainty of one radial step in the peak position and the resulting uncertainty in peak void fraction. However, an approximate trend on the effect of the non-dimensional peak void fraction and the non-dimensional peak position on the area-averaged void fraction can be observed in Fig. 3.

As the superficial liquid velocity increased, the radial position at the void fraction peak was moved towards the channel wall. The increase in the superficial liquid

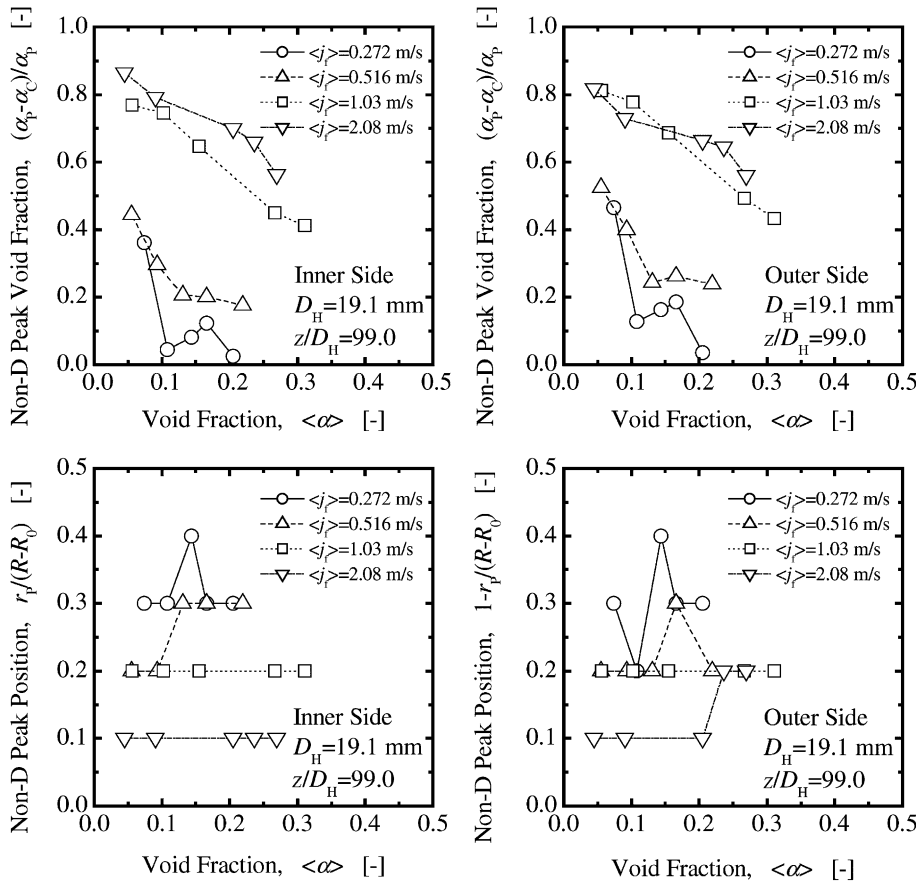


Fig. 3. Dependence of peak void fraction and radial position on void fraction and superficial liquid velocity.

velocity also augmented the void fraction at the peak and made the void fraction peak sharp. On the other hand, in the present experimental condition, the increase in the void fraction did not change the radial position at the void fraction peak significantly, and decreased the non-dimensional void fraction at the peak, resulting in the broad void fraction peak. As general trends observed in the present experiment, the increase in the superficial liquid velocity decreased the bubble size, whereas the increase in the void fraction increased the bubble size, see Fig. 4. In Fig. 4, the bracket of $\langle \rangle$ means the area-averaged quantity. It was pointed out that the bubble size and liquid velocity profile would affect the void fraction distribution. Similar phenomena were also observed by Sekoguchi et al. [9], Zun [10], and Serizawa and Kataoka [8]. Sekoguchi et al. [9] observed the behaviors of isolated bubbles, which were introduced into vertical water flow in a 25×50 mm² rectangular channel through a single nozzle. Based on their observations, they found that the bubble behaviors in dilute suspension flow might depend on the bubble size and the bubble shape. In their experiment, only distorted ellip-

soidal bubbles with a diameter smaller than nearly 5 mm tended to migrate toward the wall, whereas distorted ellipsoidal bubbles with a diameter larger than 5 mm and spherical bubbles rose in the channel center. On the other hand, for the water velocity lower than 0.3 m/s, no bubbles were observed in the wall region. Zun [10] also obtained a similar result. Zun performed an experiment to study void fraction radial profiles in upward vertical bubbly flow at very low average void fractions, around 0.5%. In his experiment, the wall void peaking flow regime existed both in laminar and turbulent bulk liquid flow. The experimental results on turbulent bulk liquid flow at Reynolds number near 1000 showed distinctive higher bubble concentration at the wall region if the bubble equivalent sphere diameter appeared in the range of 0.8 and 3.6 mm. Intermediate void profiles were observed at bubble sizes either between 0.6 and 0.8 mm or 3.6 and 5.1 mm. Bubbles smaller than 0.6 mm or larger than 5.1 mm tended to migrate towards at the channel center. Thus, these experimental results suggested that the bubble size would play a dominant role in void fraction profiles. Serizawa and Kataoka [8] also gave an

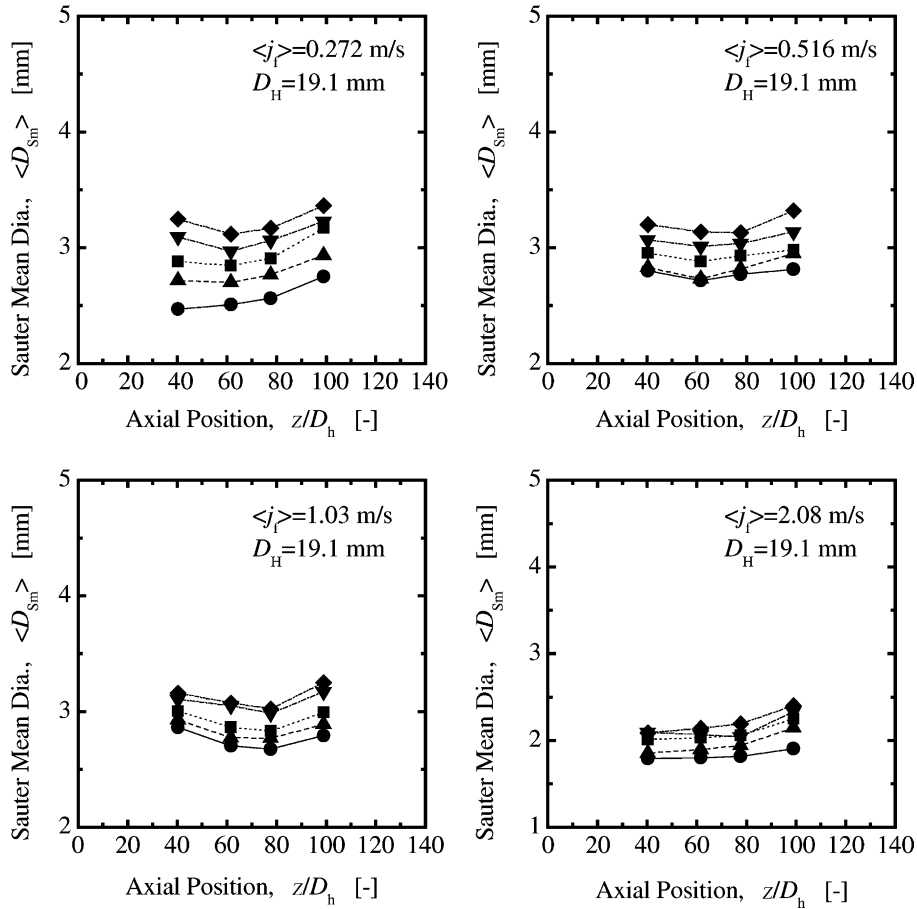


Fig. 4. Axial development of area-averaged Sauter mean diameter.

extensive review on the bubble behaviors in bubbly-flow regime.

Fig. 5 shows a map of phase distribution patterns observed at $z/D_H = 99.0$ in this experiment. The open symbols of circle, triangle, square, and reversed triangle in Fig. 5 indicate the wall peak, the intermediate peak, the transition, and the core peak, respectively. Since Serizawa and Kataoka [8] did not give the quantitative definitions of the wall and intermediate peaks, the classification between the wall and intermediate peaks in the present study were performed as the wall peak for $(\alpha_p - \alpha_c)/\alpha_p \geq 0.5$ and the intermediate peak for $(\alpha_p - \alpha_c)/\alpha_p < 0.5$. The solid and broken lines in Fig. 5 are, respectively, the flow regime transition boundaries predicted by the model of Taitel et al. [11] and the phase distribution pattern transition boundaries, which were developed by Serizawa and Kataoka [8] based on experiments performed by different researchers with different types of bubble injections in round tubes ($20 \leq D \leq 86.4$ mm). Phase distribution patterns observed at $z/D_H = 99.0$ did not agree with the Serizawa–Kataoka’s map [8]

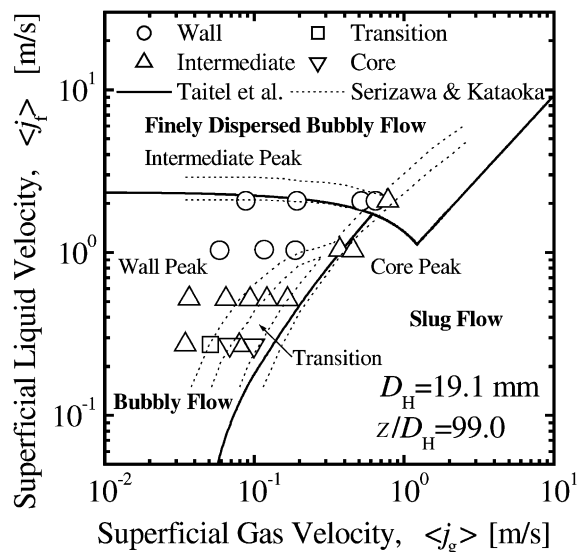


Fig. 5. Map of phase distribution patterns.

at low superficial liquid velocities. As can be seen from Fig. 2, the void fraction profiles for $\langle j_r \rangle = 0.272$ m/s, were almost uniform along the radius with relatively steep decrease in the void fraction close to wall. This may be attributed to strong mixing due to bubble-induced turbulence, since it would dominate the flow in such a low flow condition. The strong mixing and partly recirculation would make the void fraction profile flatter. The similar void fraction peak was observed in the previous experiment using a 50.8 mm diameter pipe [7]. In the experiment, for $\langle j_r \rangle = 5.00$ m/s, not the intermediate peak suggested by the Serizawa–Kataoka's map [8] but the flat peak characterized as uniform void fraction profile along the channel radius with relatively steep decrease in the

void fraction near the wall was observed. The shear-induced turbulence would dominate the flow in such a high flow condition. It was considered that the reason for the phase distribution might be due to a strong bubble mixing over the flow channel by a strong turbulence. Thus, low and high liquid velocity regions may be considered to be bubble-mixing dominant zone, where the void fraction profile is uniform along the channel radius with relatively steep decrease in the void fraction near the wall. Thus, based on the phase distribution pattern, bubbly flow region may be divided into four regions: (1) bubble-mixing region where the bubble-induced turbulence is dominant, (2) region where the wall peak appears, (3) region where the core peak appears, and (4) bubble-

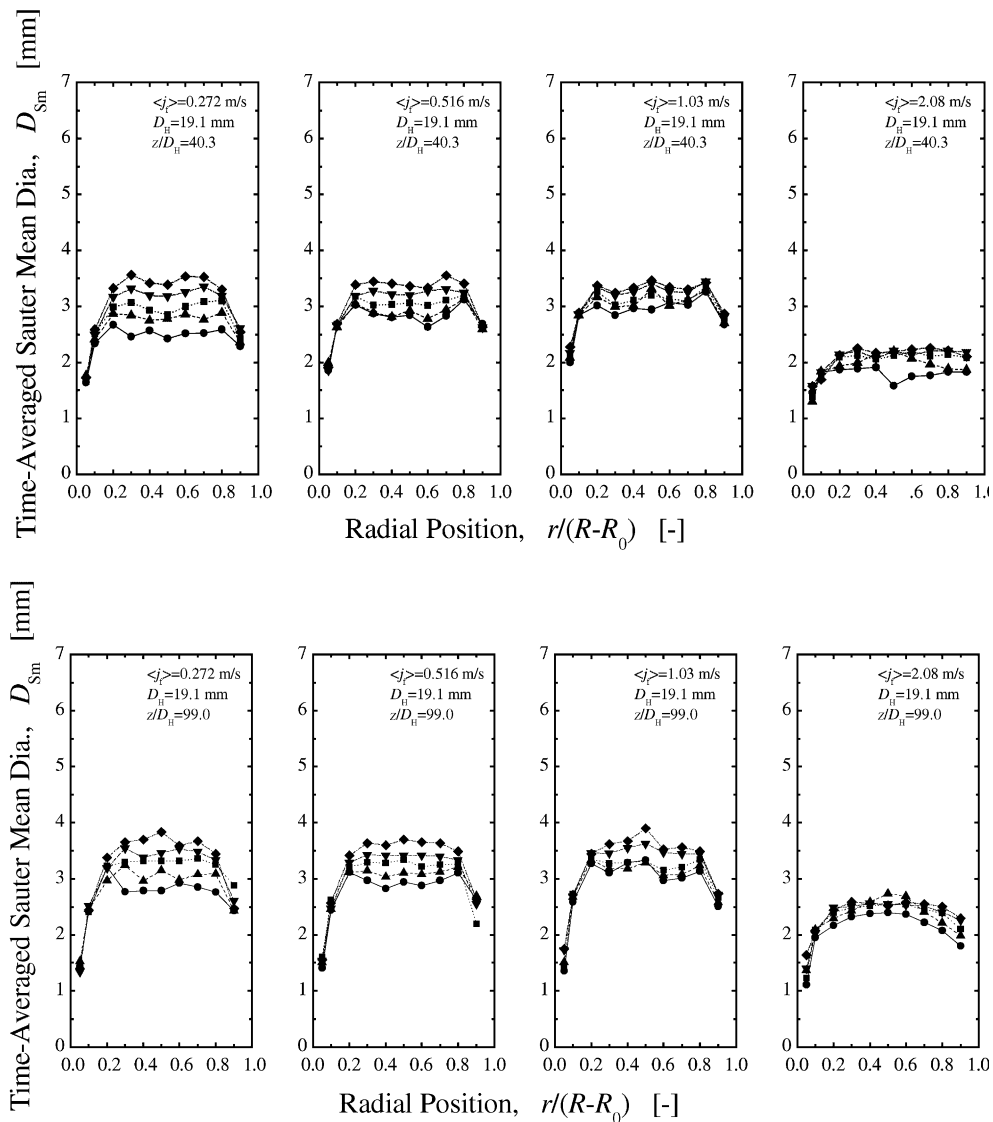


Fig. 6. Local Sauter mean diameter profiles at $z/D_H = 40.3$ and 99.9 .

mixing region where the shear-induced turbulence is dominant. The regions (1), (2), (3), and (4) are roughly located at low void fraction and low liquid velocity ($\langle \alpha \rangle \leq 0.25, \langle j_l \rangle \leq 0.3$ m/s), low void fraction and medium liquid velocity ($\langle \alpha \rangle \leq 0.25, 0.3$ m/s $\leq \langle j_l \rangle \leq 5$ m/s), high void fraction ($\langle \alpha \rangle \geq 0.25$), and low void fraction and high liquid velocity ($\langle \alpha \rangle \leq 0.25, \langle j_l \rangle \geq 5$ m/s), respectively. Various transition phase distribution patterns would obviously appear between two regions. Intermediate peak and transition categorized by Serizawa and Kataoka may just be the transition between regions (4) and (2) or (3), and the transition between regions (1) and (2) or (3), respectively.

3.1.2. Void fraction

As described, significant differences between the phase distributions at $z/D_H = 40.3$ and 99.0 were not observed, since the flow might almost reach to a quasi-fully-developed flow at $z/D_H = 40.3$. However, some changes in void fraction profiles may be noted as fol-

lows. As shown in Fig. 2, for $\langle j_l \rangle = 0.272$ m/s, broad core peak with plateau around the channel center and intermediate peak were found for low (\bullet, \blacktriangle) and high ($\blacksquare, \blacktriangledown, \blacklozenge$) void fraction regions, respectively, at the first measuring station of $z/D_H = 40.3$. As the flow developed, the plateau observed for low void fraction region (\bullet, \blacktriangle) tended to be narrower. On the other hand, as the flow developed, two peaks observed for high void fraction region ($\blacksquare, \blacktriangledown, \blacklozenge$) tended to move towards the channel center and to be merged into one core peak. For $\langle j_l \rangle = 0.516$ m/s, intermediate peak was observed at the first measuring station of $z/D_H = 40.3$. As the flow developed, the void fraction profiles were not changed for low void fraction region (\bullet, \blacktriangle), but the trough of the void fraction profiles observed around the channel center came to be shallower for high void fraction region ($\blacksquare, \blacktriangledown, \blacklozenge$). The similar tendency was observed for $\langle j_l \rangle = 1.03$ m/s. For $\langle j_l \rangle = 2.08$ m/s, wall peak was observed at the first measuring station of $z/D_H = 40.3$. As the flow developed, the void fraction profiles were not

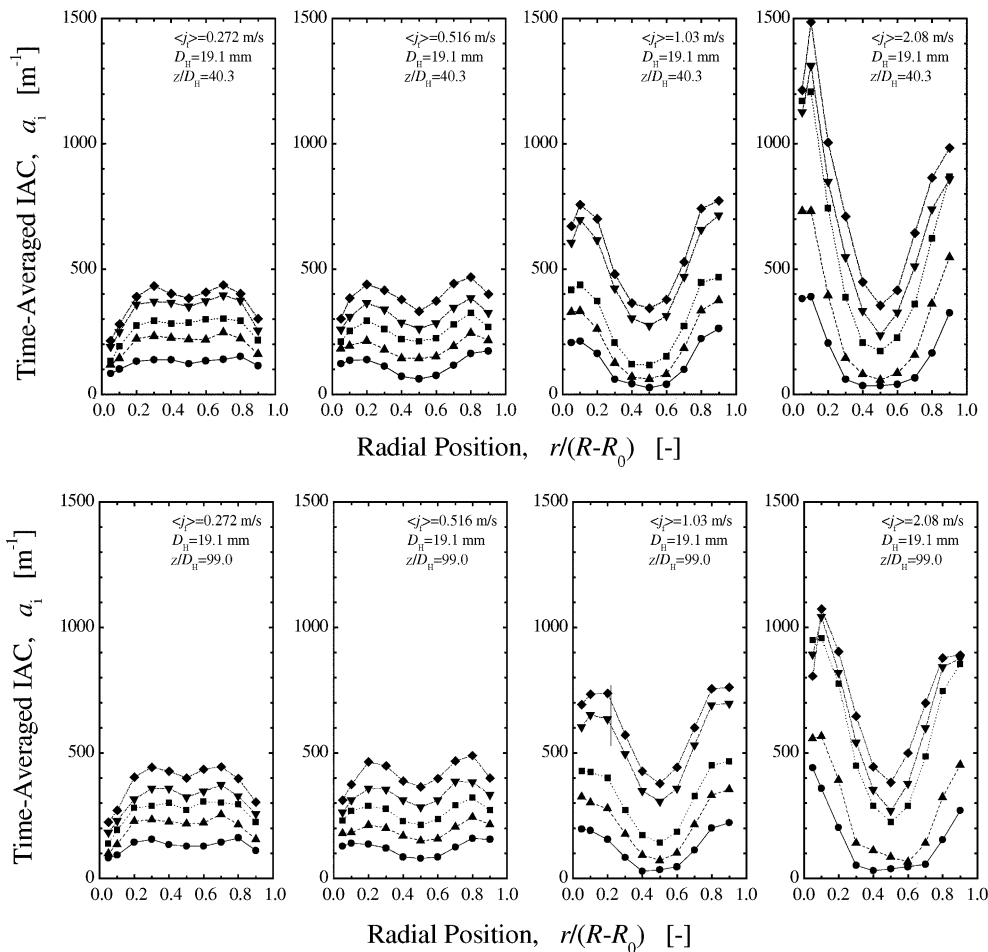


Fig. 7. Local interfacial area concentration profiles at $z/D_H = 40.3$ and 99.9.

changed. For $\langle j_f \rangle = 0.272, 0.516, \text{ and } 1.03 \text{ m/s}$, the bubble diameter was about 3 mm, which was close to a critical bubble size of 3.6 mm pointed out by Zun [10], which gave the boundary between the wall and intermediate peaks. The bubble size was likely to determine the direction of the bubble migration. Thus, in these cases, bubbles tended to move towards the channel center gradually. For $\langle j_f \rangle = 2.08 \text{ m/s}$, the bubble diameter was about 2 mm, enabled the bubbles to stay near the channel wall, resulting in insignificant axial change of the void fraction distribution.

3.1.3. Sauter mean diameter

Fig. 6 shows the behavior of Sauter mean diameter profiles, corresponding to that of void fraction profiles in Fig. 2. Fig. 4 also shows the axial development of area-averaged Sauter mean diameters, $\langle D_{sm} \rangle$, obtained by the area-averaged void fraction and interfacial area concentration with $\langle D_{sm} \rangle = 6\langle \alpha \rangle / \langle a_i \rangle$. The meanings of the symbols in Figs. 4 and 6 are found in Table 1. The Sauter mean diameter profiles were almost uniform along the channel radius with some decrease in size near

the wall, $r/(R - R_0) \leq 0.1$ and $0.9 \leq r/(R - R_0)$. Only a part of a bubble can pass the region close to the channel wall, resulting in apparent small Sauter mean diameter. The profiles were not changed significantly as the flow developed, although the bubble size increased up to 10–20% along the flow direction mainly due to the bubble expansion (see Fig. 6).

3.1.4. Interfacial area concentration

Fig. 7 shows the behavior of interfacial area concentration profiles, corresponding to that of void fraction profiles in Fig. 2. Fig. 8 also shows the axial development of area-averaged interfacial area concentrations, $\langle a_i \rangle$, obtained by integrating local interfacial area concentration over the flow channel. The meanings of the symbols in Figs. 7 and 8 are found in Table 1. As expected for bubbly flow, the interfacial area concentration profiles were similar to the void fraction profiles. Since the interfacial area concentration would directly be proportional to the void fraction and the Sauter mean diameter was almost uniform along the channel radius, the interfacial area concentration pro-

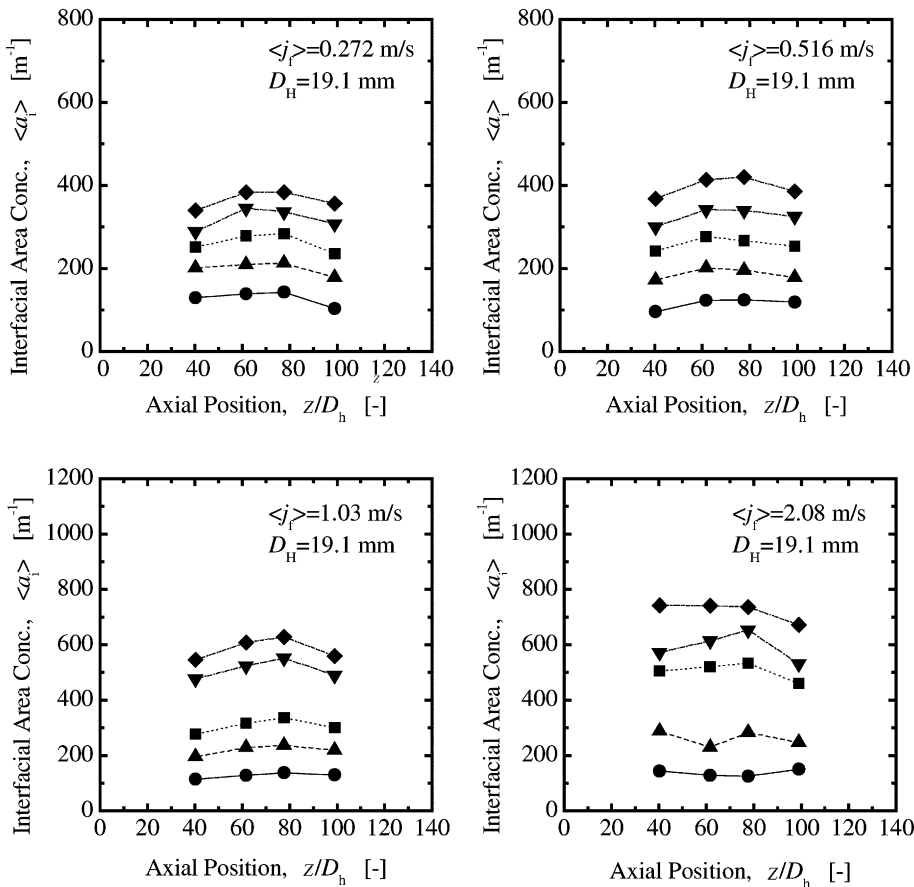


Fig. 8. Axial development of area-averaged interfacial area concentration.

files displayed the same behavior as their respective void fraction profiles.

3.1.5. Interfacial velocity

Fig. 9 shows the behavior of interfacial velocity profiles, corresponding to that of void fraction profiles in Fig. 2. Fig. 10 also shows the axial development of void-fraction-weighted area-averaged interfacial velocities, $\langle\langle v_g \rangle\rangle$, obtained by integrating local interfacial velocity over the flow channel. The meanings of the symbols in Figs. 9 and 11 are found in Table 1. As expected, the interfacial velocity had a power-law profile. The void-fraction-weighted area-averaged interfacial velocities were not changed along the flow direction. The

local interfacial velocities can be fitted by the following function.

$$v_g = \frac{n+1}{n} \langle\langle v_g \rangle\rangle \left\{ 1 - \left| \frac{2r - (R - R_0)}{R - R_0} \right| \right\}^{1/n}, \quad (1)$$

where n is the exponent. As shown in Fig. 9, measured interfacial velocities could be fitted by Eq. (1) reasonably well except for $\langle j_f \rangle = 2.08$ m/s and higher void fraction. Fig. 11 shows the dependence of the exponent characterizing the interfacial velocity profile on the void fraction, $\langle \alpha \rangle$, or the superficial liquid velocity, $\langle j_f \rangle$. As the area-averaged void fraction increased, the exponent increased gradually, resulting in flatter interfacial velocity profile. As the superficial liquid velocity increased, the

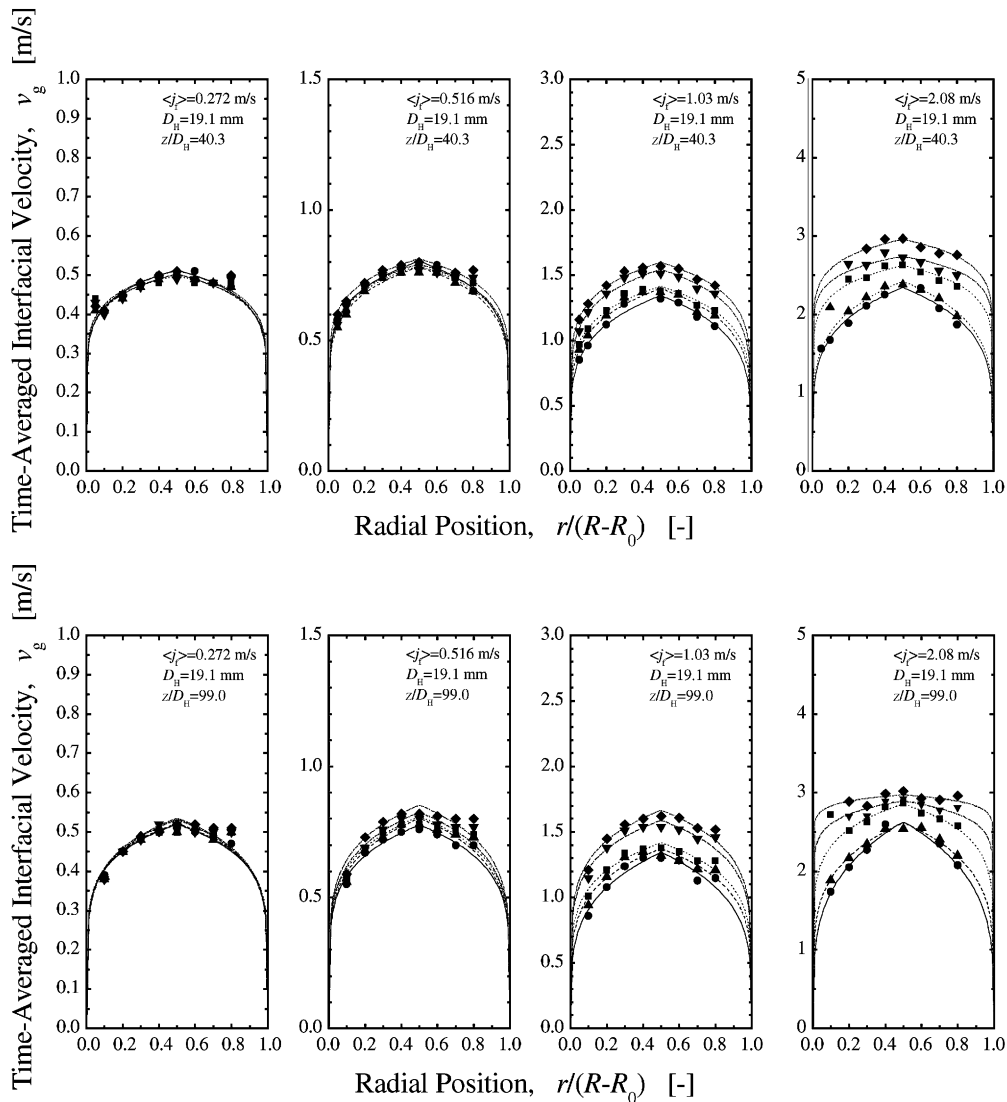


Fig. 9. Local interfacial velocity profiles at $z/D_H = 40.3$ and 99.9 .

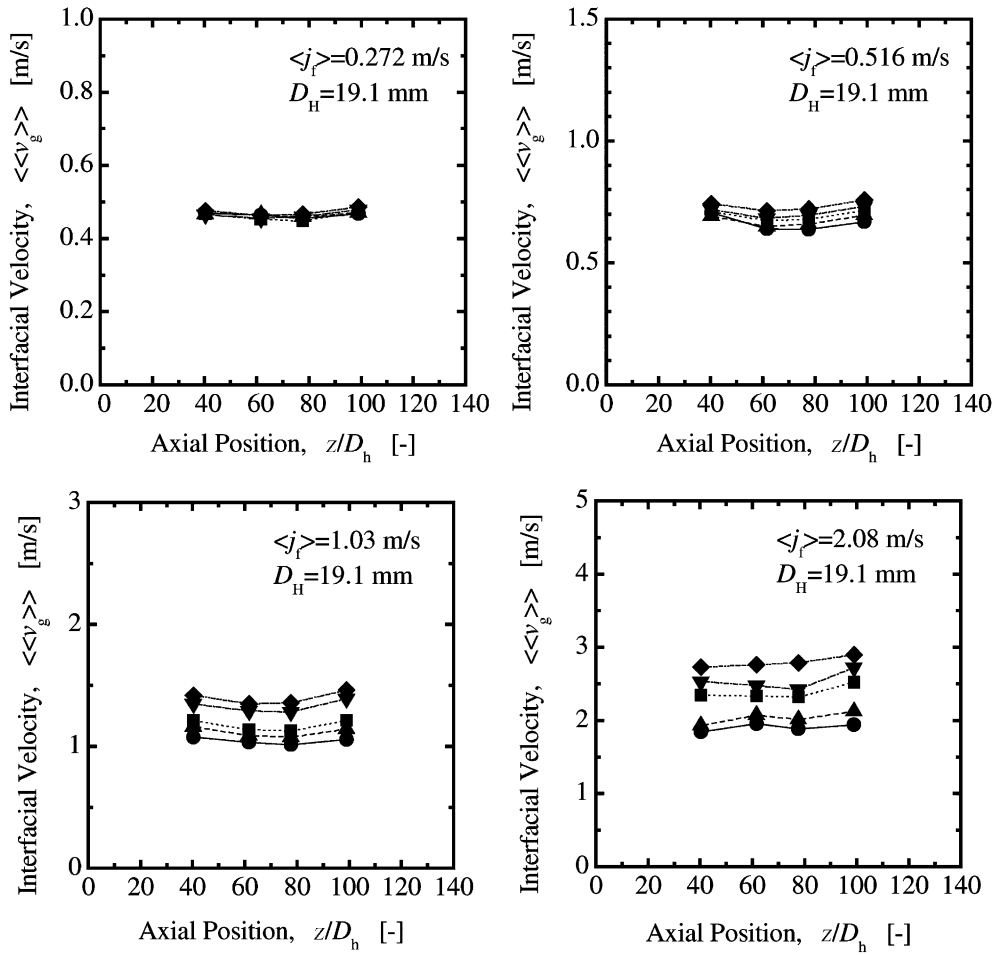


Fig. 10. Axial development of void-fraction-weighted mean interfacial velocity.

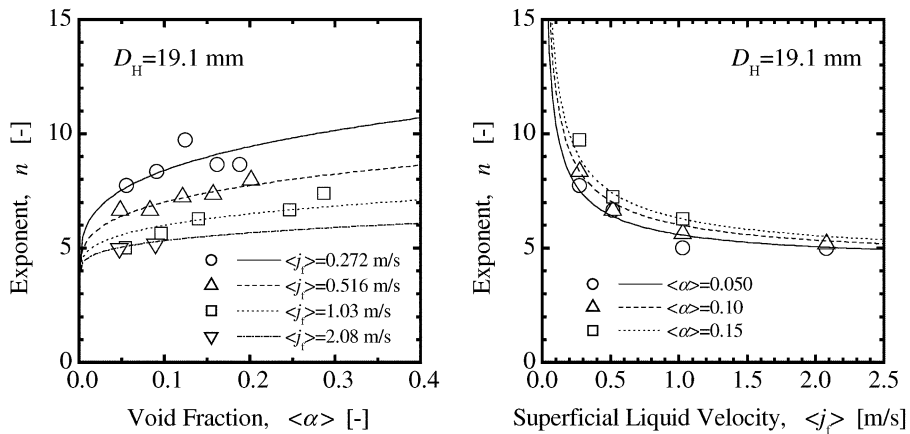


Fig. 11. Dependence of interfacial velocity profile on void fraction and superficial liquid velocity.

exponent decreased gradually and approached to the asymptotic value. Since the interfacial velocity would

have the same tendency of the respective liquid velocity profile [7], the interfacial velocity profile might be at-

tributed to the balance of the bubble-induced turbulence and shear-induced turbulence. It was observed in a round tube that for low liquid superficial velocities ($\langle j_l \rangle \leq 1$ m/s) the introduction of bubbles into the liquid flow flattened the liquid velocity profile and the liquid velocity profile approached to that of developed single-phase flow with the increase of void fraction [7]. It was also reported that the effect of the bubble introduction into the liquid on the liquid velocity profile was diminishing with increasing gas and liquid velocities and for high liquid velocities ($\langle j_l \rangle \geq 1$ m/s) the liquid velocity profile came to be the power law profile as the flow developed. Thus, for low or high liquid velocity, the bubble-induced or shear-induced turbulence would play an important role in determining the liquid velocity profile, respectively.

The dependence of the exponent on the void fraction and superficial liquid velocity might be captured by the following simple correlation.

$$n = n_0 \left(1 + 434 \langle \alpha \rangle^{0.272} Re_f^{-0.590} \right),$$

where $n_0 = 2.34 \times Re_f^{0.0425}$. (2)

In Eq. (2), n_0 and Re_f are the asymptotic exponent at $\langle \alpha \rangle = 0$ and the liquid Reynolds number defined by $\langle j_l \rangle D_H / \nu_f$ where ν_f is the kinetic viscosity of the liquid phase. Since sufficient data were not available, the asymptotic exponent, n_0 was obtained by assuming the same dependence of the exponent on the liquid Reynolds number as that for a liquid velocity profile in a round tube and by determining the coefficient from the data obtained by extrapolating the exponent for $\langle j_l \rangle = 2.08$ m/s at $\langle \alpha \rangle = 0$. It should be noted here that for $\langle j_l \rangle = 2.08$ m/s the bubble introduction might not affect the exponent significantly. The lines in Fig. 11 indicate the exponent calculated by Eq. (2), and Eq. (2) reproduced a proper trend of the dependence of the exponent on the flow parameters satisfactorily. The applicability of Eq. (2) to a flow condition over the present flow conditions should be examined by rigorous data set to be taken in a future study.

3.2. One-dimensional interfacial area transport

In order to develop the area-averaged or one-dimensional interfacial area transport equation, an accurate data set of the area-averaged flow parameters is indispensable. Area-averaged interfacial area concentration and Sauter mean diameter are plotted against z/D_H in Figs. 8 and 4, respectively. The meanings of the symbols in Figs. 8 and 4 are found in Table 1. Since the bubble expansion due to the pressure reduction can be thought of as the source term of the interfacial area transport, the axial change of the interfacial area concentration due to the bubble coalescence and breakup should be extracted from the total axial change of the

interfacial area concentration to understand the mechanism of the interfacial area transport due to the bubble coalescence and breakup as follows. Ishii et al. [12] derived the one-dimensional interfacial area transport equation for bubbly flow taking the gas expansion along the flow direction into account as:

$$\frac{\partial \langle a_i \rangle}{\partial t} + \frac{d}{dz} (\langle a_i \rangle \langle v_g \rangle_a) = \frac{1}{3\psi} \left(\frac{\langle \alpha \rangle}{\langle a_i \rangle} \right)^2 \left[\sum_j \langle S_j \rangle + \langle S_{ph} \rangle \right] + \left(\frac{2\langle a_i \rangle}{3\langle \alpha \rangle} \right) \left[\frac{\partial \langle \alpha \rangle}{\partial t} + \frac{d}{dz} (\langle \alpha \rangle \langle v_g \rangle) \right],$$

(3)

where ψ is the factor depending on the shape of a bubble ($1/36\pi$ for a spherical bubble), and S_j and S_{ph} denote the sink or source terms in the interfacial area concentration due to bubble coalescence or breakup, and the sink or source terms in the interfacial area concentration due to phase change, respectively. The brackets of $\langle \langle \rangle \rangle_a$ and $\langle \langle \rangle \rangle$ mean the interfacial area concentration weighted cross-sectional area-averaged quantity, and the void fraction weighted cross-sectional area-averaged quantity, respectively. Eq. (3) can be simplified as follows on the assumptions of (i) no phase change ($\langle S_{ph} \rangle = 0$), (ii) steady flow ($\partial \langle a_i \rangle / \partial t = 0$, $\partial \langle \alpha \rangle / \partial t = 0$), (iii) equilibrium of bubble coalescence and breakup rates ($\sum_j \langle S_j \rangle = 0$), and (iv) $\langle \langle v_g \rangle \rangle_a = \langle \langle v_g \rangle \rangle$. The assumption (iv) would be sound for almost spherical bubbles.

$$\langle a_{i,eq} \rangle = \left(\frac{P_0}{P} \right)^{2/3} \langle a_{i,0} \rangle,$$

(4)

where $a_{i,eq}$, $a_{i,0}$, P , and P_0 denote the local interfacial area concentration under the conditions of no phase change and equilibrium of bubble coalescence and breakup rates, the inlet interfacial area concentration, the local pressure, and the inlet pressure, respectively. The ratio of area-averaged interfacial area concentration, $\langle a_i \rangle$, to $\langle a_{i,eq} \rangle$, $\xi (\equiv \langle a_i \rangle / \langle a_{i,eq} \rangle)$ represents the net change in the interfacial area concentration due to the bubble coalescence and breakup. $\xi > 1$ or $\xi < 1$ implies that the bubble breakup or coalescence is dominant, respectively. It should be noted here that ξ becomes identical to a bubble number density ratio, if further assumptions such as (v) a spherical bubble and (vi) a uniform bubble distribution are made.

$$\frac{\langle a_i \rangle}{\langle a_{i,eq} \rangle} = \frac{\langle a_i \rangle}{\langle a_{i,eq} \rangle} \left(\frac{P_0}{P} \right)^{2/3} = \xi \left(\frac{P_0}{P} \right)^{2/3}, \quad \xi \equiv \frac{\langle a_i \rangle}{\langle a_{i,eq} \rangle}.$$

(5)

In a forced convective pipe flow or mechanically agitated systems, the initial bubble size may be too large or too small to be stable. In these cases, the bubble size is further determined by a coalescence and/or breakup mechanism. The changes in the interfacial area concentration due to the bubble coalescence and breakup, ξ , between $z/D_H = 40.3$ and 99.9 are plotted against the

void fraction, $\langle \alpha \rangle$, or the superficial liquid velocity, $\langle j_r \rangle$ in Fig. 12. The meanings of the symbols in Fig. 12 are found in Table 1. It should be noted in Fig. 12 that the interfacial area concentration and the pressure at $z/D_H = 40.3$ was taken as $\langle a_{i,0} \rangle$ and P_0 respectively, and measured P were used in the calculation of ξ . Fig. 13 shows the dependence of the Sauter mean diameter, $\langle D_{Sm} \rangle$, measured at $z/D_H = 40.3$ on the void fraction, $\langle \alpha \rangle$, or the superficial liquid velocity, $\langle j_r \rangle$. It can be found that in this experiment bubbles with the diameters of about 3 and 2 mm were generated at $z/D_H = 40.3$ for $\langle j_r \rangle \leq 1$ m/s and $\langle j_r \rangle = 2$ m/s, respectively. For $\langle j_r \rangle = 0.272$ m/s and $\langle \alpha \rangle \leq 0.10$, the bubble size at $z/D_H = 40.3$, which was formed in this experiment, would be smaller to be stable for the flow condition. In this case, the dominant mechanism on the interfacial area transport would be the bubble coalescence due to collision be-

tween bubbles induced by liquid turbulence. For $\langle j_r \rangle = 0.516$ and 1.03 m/s and $\langle \alpha \rangle = 0.05$, the bubble size at $z/D_H = 40.3$, which was formed in this experiment, would be larger to be stable for the flow conditions. In this case, the dominant mechanism on the interfacial area transport would be the bubble breakup due to collision between a bubble and a turbulence eddy. For $\langle j_r \rangle \leq 1.0$ m/s and $0.1 \leq \langle \alpha \rangle \leq 0.2$, the bubble size at $z/D_H = 40.3$ would be stable. In this case, insignificant interfacial area transport between $z/D_H = 40.3$ and 99.9, namely, $\xi \approx 1$, was observed. For $\langle j_r \rangle = 2.08$ m/s, the bubble size at $z/D_H = 40.3$, which was formed in this experiment, would be smaller to be stable for the flow condition. In this case, a strong liquid turbulence might promote the bubble coalescence rather than the bubble breakup. Thus, the bubble size as well as the void fraction and liquid turbulence would be a key factor to de-

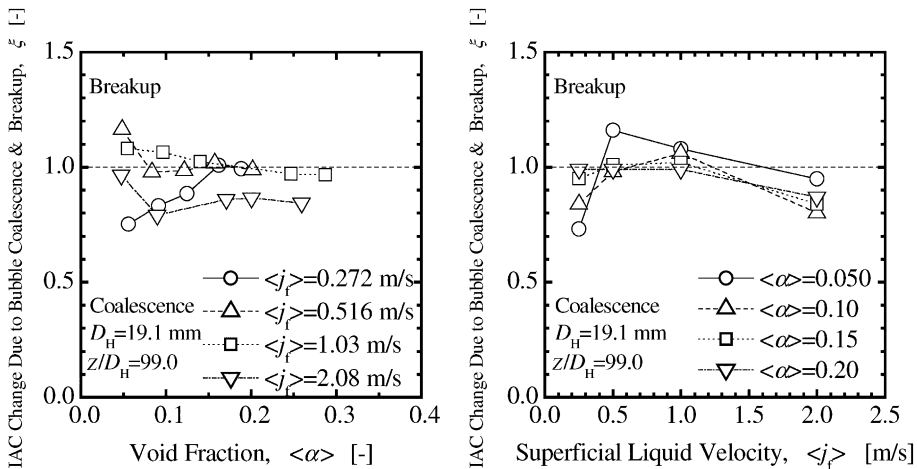


Fig. 12. Dependence of interfacial area transport due to bubble coalescence and breakup on void fraction and superficial liquid velocity.

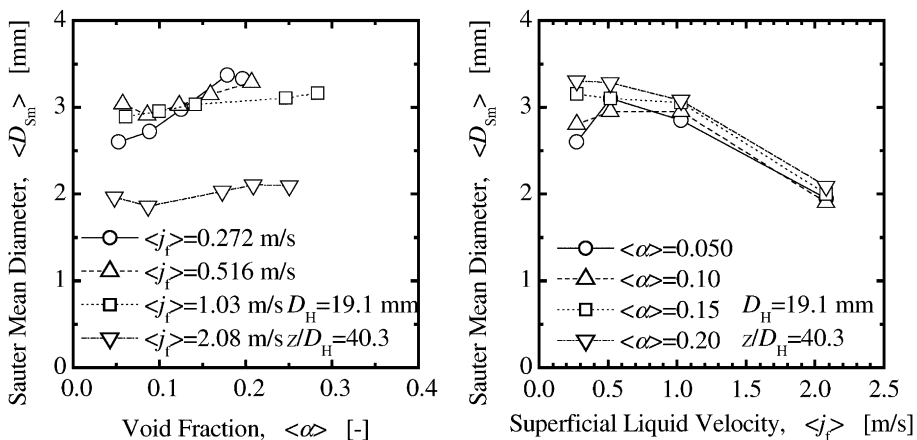


Fig. 13. Dependence of bubble size on void fraction and superficial liquid velocity.

termine the dominant factor of the interfacial area transport [2].

The data from the double-sensor conductivity probe give near complete information on the time-averaged local hydrodynamic parameters of bubbly flow to model and evaluate the sink and source terms of interfacial area concentration. For example, some attempts have been performed to model the sink and source terms in a round tube based on mechanisms of bubble coalescence due to bubble random collision and bubble breakup due to bubble–turbulent eddy random collision, respectively [2,12,13]. As a first step, the applicability of the modeled interfacial area transport equation in a round tube to a flow in an annulus will be tested by using the data taken in this study. Thus, the data set obtained in this study will eventually be used for the development of reliable constitutive relations, which reflect the true transfer mechanisms in bubbly flow systems.

4. Conclusions

As a first step of the development of the interfacial area transport equation in a subcooled boiling flow, hydrodynamic separate tests without phase change were performed to identify the effect of bubble coalescence and breakup on the interfacial area transport. Axial developments of local void fraction, interfacial area concentration, and interfacial velocity of vertical upward air–water bubbly flows in an annulus were measured by using the double-sensor conductivity probe method. The annulus channel consisted of an inner rod with a diameter of 19.1 mm and an outer round tube with an inner diameter of 38.1 mm, and the hydraulic equivalent diameter was 19.1 mm. A total of 20 data sets were acquired consisting of five void fractions, about 0.050, 0.10, 0.15, 0.20, and 0.25, and four superficial liquid velocities, 0.272, 0.516, 1.03, and 2.08 m/s. The measurements for each flow condition were performed at four axial locations: axial locations non-dimensionalized by the hydraulic equivalent diameter = 40.3, 61.7, 77.7, and 99.0. The mechanisms to form the radial profiles of local flow parameters and their axial developments were discussed in detail. The one-dimensional interfacial area transport due to the bubble coalescence and breakup was displayed against the void fraction and superficial liquid velocity. The bubble size as well as the void fraction and liquid turbulence was likely to be a key factor to determine the dominant factor of the interfacial area transport.

The data set obtained in this study are expected to be used for the development of reliable constitutive relations such as the interfacial area transport equation,

which reflect the true transfer mechanisms in subcooled boiling flow systems.

Acknowledgements

The research project was supported by the Tokyo Electric Power Company (TEPCO). The authors would like to express their sincere appreciation for the support and guidance from Dr. Mori of the TEPCO.

References

- [1] G. Kocamustafaogullari, M. Ishii, Foundation of the interfacial area transport equation and its closure relations, *Int. J. Heat Mass Transfer* 38 (1995) 481–493.
- [2] T. Hibiki, M. Ishii, Development of one-group interfacial area transport equation in bubbly flow systems, *Int. J. Heat Mass Transfer* 45 (2002) 2351–2372.
- [3] M.D. Bartel, M. Ishii, T. Masukawa, Y. Mi, R. Situ, Interfacial area measurements in subcooled flow boiling, *Nucl. Eng. Des.* 210 (2001) 135–155.
- [4] S. Kim, X.Y. Fu, X. Wang, M. Ishii, Development of the miniaturized four-sensor conductivity probe and the signal processing scheme, *Int. J. Heat Mass Transfer* 43 (2000) 4101–4118.
- [5] T. Hibiki, Y. Mi, R. Situ, M. Ishii, M. Mori, Interfacial area transport of vertical upward bubbly flow in an annulus, in: *Proceedings of International Congress on Advanced Nuclear Power Plants*, Hollywood, Florida, USA, 2002.
- [6] T. Hibiki, M. Ishii, Experimental study on interfacial area transport in bubbly two-phase flows, *Int. J. Heat Mass Transfer* 42 (1999) 3019–3035.
- [7] T. Hibiki, M. Ishii, Z. Xiao, Axial interfacial area transport of vertical bubbly flows, *Int. J. Heat Mass Transfer* 44 (2001) 1869–1888.
- [8] A. Serizawa, I. Kataoka, Phase distribution in two-phase flow, in: N.H. Afgan (Ed.), *Transient Phenomena in Multiphase Flow*, Hemisphere, Washington, DC, 1988, pp. 179–224.
- [9] K. Sekoguchi, T. Sato, T. Honda, Two-phase bubbly flow (first report), *Trans. JSME* 40 (1974) 1395–1403 (in Japanese).
- [10] I. Zun, Transition from wall void peaking to core void peaking in turbulent bubbly flow, in: N.H. Afgan (Ed.), *Transient Phenomena in Multiphase Flow*, Hemisphere, Washington, DC, 1988, pp. 225–245.
- [11] Y. Taitel, D. Bornea, E.A. Dukler, Modelling flow pattern transitions for steady upward gas–liquid flow in vertical tubes, *AIChE J.* 26 (1980) 345–354.
- [12] M. Ishii, Q. Wu, S. T. Revankar, T. Hibiki, W. H. Leung, S. Hogsett, A. Kashyap, Interfacial area transport in bubbly flow, in: *Proceedings of 15th Symposium on Energy Engineering Science*, Argonne, IL, USA, 1997.
- [13] Q. Wu, S. Kim, M. Ishii, S.G. Beus, One-group interfacial area transport in vertical bubbly flow, *Int. J. Heat Mass Transfer* 41 (1998) 1103–1112.