



ELSEVIER

Available online at www.sciencedirect.com

SCIENCE @ DIRECT®

International Journal of Multiphase Flow 30 (2004) 1421–1449

International Journal of
**Multiphase
Flow**

www.elsevier.com/locate/ijmulflow

Onset of flow instability in a heated capillary tube

G. Hetsroni *, L.P. Yarin, E. Pogrebnyak

Department of Mechanical Engineering, Technion-Israel Institute of Technology, 32000 Haifa, Israel

Received 20 May 2004; received in revised form 8 September 2004

Abstract

We study the stability of flow in a heated capillary tube with an evaporating meniscus. The behavior of the vapor/liquid system, which undergoes small perturbations, is analyzed by linear approximation, in the frame of a one-dimensional model of capillary flow, with a distinct interface. The effect of the physical properties of both phases, the wall heat flux and the capillary sizes, on the flow stability is studied. The velocity, pressure and temperature oscillations in a capillary tube with a constant wall heat flux or a constant wall temperature are determined. A scenario of a possible process at small and moderate Peclet numbers corresponding to the flow in capillaries is considered. The boundaries of stability, subdividing the domains of stable and unstable flows, are outlined, and the values of geometrical and operating parameters corresponding to the transition from stable to unstable flow are estimated. It is shown that the stable capillary flow occurs at relatively small wall heat fluxes, whereas at high ones, the flow is unstable, with continuously growing velocity, pressure and temperature oscillations.

© 2004 Elsevier Ltd. All rights reserved.

1. Introduction

We study the stability of capillary flow when a liquid is heated and evaporated at a meniscus. This problem is important in the context of cooling systems of electronic devices. A growing number of designs in MEMS with high power density require an insight into the mechanism of complex processes in heated micro-channels. The latter includes a number of problems related to

* Corresponding author. Tel.: +972 48 292058; fax: +972 48 238101.
E-mail address: hetsroni@techunix.technion.ac.il (G. Hetsroni).

hydrodynamics of laminar flow developed under conditions of inertia, friction, gravity and capillary forces interaction, heat transfer, as well as phase change. This stimulated numerous experimental and theoretical investigations in the field of micro-channel flows. The studies in the last decade concern a wide class of problems connected with single phase flows (Tuckerman and Pease, 1981; Tuckerman, 1984; Wiesberg et al., 1992; Wang and Peng, 1994; Wu and Little, 1984; Bailey et al., 1995; Peng et al., 1994; Peng and Peterson, 1995; Adams et al., 1998; Incropera, 1999), boiling nucleation and bubble growth in narrow pipes (Peng et al., 1998; Yuan et al., 1999; Ory et al., 2000; Peng et al., 2001), pressure drop and heat transfer in two-phase flows (Morijama and Inoue, 1992; Peng and Wang, 1993; Bowers and Mudawar, 1994; Sobhan and Garinella, 2001). At the same time, there is a paucity of theoretical studies dealing with a capillary flow with phase change at an evaporating meniscus. In spite of the fact that such flows are interesting in connection with their possible implementation in cooling systems of electronic devices.

The stationary regimes of capillary flows with a distinct meniscus separating the regions of liquid and vapor flows have been considered by Khrustalev and Faghri (1995) and Peles et al. (1998, 2000, 2001). Recently Yarin et al. (2002) investigated in detail the features of a two-phase laminar flow in a heated micro-channel and revealed the effect of inertia, pressure, gravity and friction forces on major flow characteristics. It was shown that, in the general case, the system of equations that describes the capillary flow has three solutions corresponding to stationary regimes of flow. The analysis of stationary states performed in the quasi-stationary approximation (an approach similar to Semenov's diagram method) showed that two of these states ("upper" and "lower" corresponding to high and low velocities, respectively) are stable, whereas the intermediate one is unstable. The stationary or quasi-stationary approximations should be considered as limiting for the solutions of the unsteady problems for infinite time intervals. However, approaches ignoring the dynamics of the transient processes leading to steady states, should be supplemented by stability consideration. Indeed, only stable steady states can become attractors of the transient processes. This makes stability studies of the limiting steady states extremely important.

The main goal of the present work is to study the stability of a flow in a heated capillary, with liquid evaporating at a meniscus. The study consists of the problem formulation, analysis of the influence of the physical properties of the liquid and its vapor, and wall heat flux, on velocity, pressure and temperature oscillations in capillary flows, as well as the stability of the flow at small and large Peclet numbers. Section 2 deals with the pattern of capillary flow in a heated micro-channel with a phase change at the meniscus. The perturbed equations and conditions on the interface are presented in Section 3. Section 4 contains the results of the investigation on the stability of capillary flow at a very small Peclet number. The effect of capillary pressure and heat flux oscillations on the stability of the flow is considered in Section 5. Section 6 deals with the study of capillary flow at a moderate Peclet number. The perturbed equations and conditions on the interface are derived in Appendix A. Approximate energy equations, corresponding to flow with very small and moderate Peclet numbers, are presented in Appendices B and C.

2. Capillary flow pattern

Here we deal with the stability of flow in a heated capillary tube when a liquid is evaporating at the meniscus. The capillary, as shown in Fig. 1, is a straight vertical pipe with diameter d and

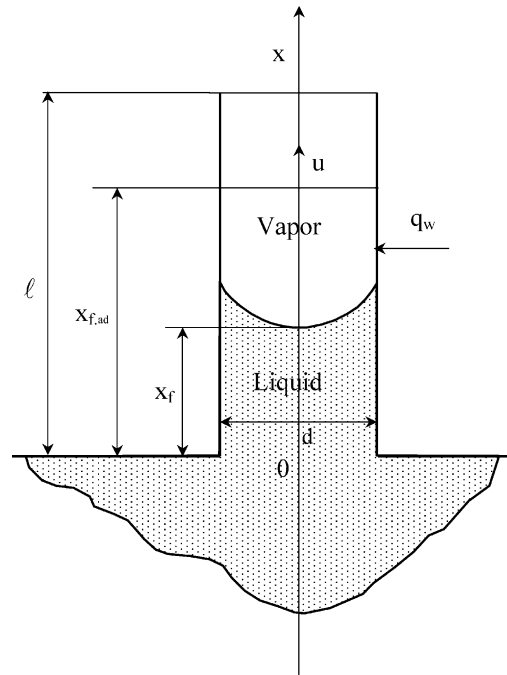


Fig. 1. Schematics of a heated micro-channel (arrows show flow and heat flux directions).

length ℓ . The wall heat flux is uniform: $q_w = \text{const}$. The thermal conditions on the capillary inlet and outlet are:

- (i) $\bar{T}_{L,\text{in}} = \text{const}$., the average liquid temperature \bar{T}_L at $x = 0$.
- (ii) $\left(\frac{d\bar{T}_G}{dx}\right)_{x=\ell} = 0$, the average vapor temperature gradient at $x = \ell$.

Here and hereinafter subscripts G and L denote vapor and liquid, respectively, ‘in’ and 0 the inlet and outlet of the capillary tube, respectively.

These conditions correspond to, certain design of the cooling system, namely, a micro-channel with a cooling inlet and adiabatic outlet (Yarin et al., 2002).

The wall heat flux is the cause for the liquid evaporation, and perturbation of equilibrium between the gravity and capillary forces. It leads to the offset of both phases (heated liquid and its vapor) and interface displacement towards the inlet. In this case the stationary state of the system corresponds to an equilibrium between gravity, viscous (liquid and vapor), and capillary forces. Under these conditions the stationary height of the liquid level is less than that in an adiabatic case

$$x_f < x_{f,\text{ad}} = \frac{2\sigma}{r\rho_L g} \cos \theta \tag{1}$$

where x_f and $x_{f,\text{ad}}$ are the height of the liquid level in a heated and adiabatic capillary tube, respectively, σ is the surface tension coefficient, r is the radius, ρ_L is the liquid density, g is the

acceleration due to gravity, and θ is the static contact angle as measured from the liquid side of the contact line.

Unlike at adiabatic conditions, the height of the liquid level in a heated capillary tube depends not only on σ , r , ρ_L and θ , but also on the viscosities and thermal conductivities of the two phases, the wall heat flux and the heat loss at the inlet. The latter affects the rate of liquid evaporation and hydraulic resistance of the capillary tube. The process becomes much more complicated when the flow undergoes small perturbations triggering an unsteady flow of both phases. The rising velocity, pressure and temperature fluctuations are the cause for oscillations of the position of the meniscus, its shape and, accordingly, the fluctuations of the capillary pressure. Under a constant wall temperature, the velocity and temperature fluctuations promote oscillations of the wall heat flux.

3. Perturbed equations

In this section, we present the system of quasi-one-dimensional equations, describing the unsteady flow in the heated capillary tube. They are valid for flows with a weakly curved meniscus when the ratio of its depth to curvature radius is small enough. The detailed description of a quasi-one-dimensional model of capillary flow with distinct meniscus, as well as the estimation conditions of its application for calculation thermohydrodynamic characteristics of two-phase flow in a heated capillary, are presented in the works by Peles et al. (2000, 2001) and Yarin et al. (2002). In this model the set of equations including the mass, momentum and energy balances is:

$$\frac{\partial \rho_i}{\partial t} + \frac{\partial \rho_i u_i}{\partial x} = 0 \quad (2)$$

$$\rho_i \frac{\partial u_i}{\partial t} + \rho_i u_i \frac{\partial u_i}{\partial x} = -\frac{\partial P_i}{\partial x} - \rho_i g - \frac{\partial F_i}{\partial x} \quad (3)$$

$$\rho_i \frac{\partial h_i}{\partial t} + \rho_i u_i \frac{\partial h_i}{\partial x} = \frac{\partial}{\partial x} \left(\lambda_i \frac{\partial T_i}{\partial x} \right) + q \quad (4)$$

where ρ , u , P , h and T are the density, velocity, pressure, enthalpy and temperature, respectively, q is the specific rate of volumetric heat absorption, F is the specific friction force, and the subscripts $i = G, L$ correspond to vapor and liquid, respectively.

The conditions on the interface express the continuity of the mass and heat fluxes and the equilibrium of all acting forces (Landau and Lifshitz, 1959). In the frame of reference associated with the interface they are

$$\rho_G \tilde{V}_G = \rho_L \tilde{V}_L \quad (5)$$

$$P_G + \rho_G \tilde{V}_G^2 = P_L + \rho_L \tilde{V}_L^2 + f_\sigma \quad (6)$$

$$\rho_G \tilde{V}_G h_G - \lambda_G \frac{\partial T_G}{\partial x} = \rho_L \tilde{V}_L h_L - \lambda_L \frac{\partial T_L}{\partial x} \tag{7}$$

where $V_f = \frac{dx_f}{dt}$ is the velocity of the interface, $\tilde{V}_i = u_i - V_f$ is the velocity relative to the interface, $f_\sigma = \frac{2\sigma}{R}$ is the capillary pressure, $R = \frac{r}{\cos\theta}$ is the radius of the interfacial curvature, and λ is the thermal conductivity.

In the disturbed case, the governing parameters are the sum of their basic values plus small perturbations

$$J = \bar{J} + J' \tag{8}$$

where \bar{J} is the basic value of the parameter corresponding to the stationary flow, J' is the small perturbation of the parameters, $|\frac{J'}{\bar{J}}| \ll 1$, $J = \rho, u, P, T, h, x_f, f_\sigma$ and q .

In capillary flow with a distinct meniscus separating the regions of pure liquid and pure vapor flows, it is possible to neglect the change in the densities of the phases and assume that ρ_L and ρ_G are constant.

In this case, the linearized equations for small perturbations of the velocity, pressure, temperature, enthalpy, capillary pressure, wall heat flux, as well as the interfacial position that are obtained from Eqs. (2)–(4) and conditions (5)–(7) are (see Appendix A)

$$\frac{\partial u'_i}{\partial x} = 0 \tag{9}$$

$$\frac{\partial u'_i}{\partial t} = -\frac{1}{\rho_i} \left(\frac{\partial P'_i}{\partial x} + \frac{\partial F'_i}{\partial x} \right) \tag{10}$$

$$\frac{\partial T'_i}{\partial t} + u'_i \frac{\partial \bar{T}_i}{\partial x} + \bar{u}_i \frac{\partial T'_i}{\partial x} = \frac{\partial}{\partial x} \left(\alpha_i \frac{\partial T'_i}{\partial x} \right) + \tilde{q}'_i \tag{11}$$

and

$$(\bar{\rho}_G u'_G - \bar{\rho}_L u'_L)_{x=x_f} = (\bar{\rho}_G - \bar{\rho}_L) \frac{dx'_f}{dt} \tag{12}$$

$$(P'_G - P'_L)_{x=x_f} = 2\bar{\rho}_L \bar{u}_L (u'_L - u'_G)_{x=x_f} + f'_\sigma \tag{13}$$

$$\begin{aligned} & \bar{\rho}_L \bar{u}_L (h'_G - h'_L)_{x=x_f} + (\bar{\rho}_G \bar{h}_G u'_G - \bar{\rho}_L \bar{h}_L u'_L)_{x=x_f} - (\bar{\rho}_G \bar{h}_G - \bar{\rho}_L \bar{h}_L)_{x=x_f} \frac{dx'_f}{dt} \\ & = \lambda_G \frac{\partial T'_G}{\partial x} \Big|_{x=x_f} - \lambda_L \frac{\partial T'_L}{\partial x} \Big|_{x=x_f} \end{aligned} \tag{14}$$

where α is the thermal diffusivity, $\tilde{q}'_i = \frac{q'}{c_p \rho_i}$, c_p is the specific heat, $q' = 0$ and $q' = q'(t)$, apply, respectively, to the situation of a constant wall heat flux and a constant wall temperature. The

terms \tilde{q}'_i and f'_σ account for the oscillations of the wall heat flux and capillary pressure due to the velocity fluctuations. The latter lead to the changing of the fluid temperature and heat transfer coefficient, as well as the contact angle that controls the radius of the meniscus curvature, which controls the pressure under the interface.

The solution of Eqs. (9)–(11), subject to the conditions (12)–(14), determines the displacement of the interface in time, as well as the evolution of the velocity, pressure and temperature oscillations.

4. Flow with small Pe

4.1. The velocity, pressure and temperature oscillations

The estimations (Appendix B) enable us to disregard the minor convective effects, and to consider the problem in the framework of pure conductive approximation. Neglecting, in Eq. (11), the term $u'_i \frac{\partial T'_i}{\partial x}$ and $\bar{u}_i \frac{\partial T'_i}{\partial x}$ we reduce the problem to

$$\frac{\partial T'_i}{\partial t} = \alpha_i \frac{\partial^2 T'_i}{\partial x^2} + \tilde{q}'_i \quad (15)$$

where α is the thermal diffusivity.

First we restricted ourselves to considering a particular case of flow in a capillary tube with $q_w = \text{const.}$ ($q' = 0$). We also neglected the change of the capillary pressure through the changes of the contact angle, due to the motion of the meniscus. Accordingly, we assume that $f'_\sigma = 0$ in condition (13).

To determine the velocity, pressure and temperature oscillations we use Eqs. (9), (10) and (15). From Eq. (9) it follows that:

$$u' = u'(t) \quad (16)$$

Thus, the velocity oscillations, in the flow of an incompressible fluid, depend only on time, i.e. the liquid and vapor columns move in the capillary tube, on the whole, similar to a solid body. Bearing this in mind, we present the solution of Eq. (9) as follows:

$$u'_i = A_i \exp(\Omega t) \quad (17)$$

where A is the amplitude of the velocity oscillations, $\Omega = \xi + i|\psi|$ is the complex frequency, ξ and ψ are the growth rate and frequency of the velocity oscillations.

The specific friction force F_i in laminar flow is expressed as (Yarin et al., 2002)

$$F_i = \frac{32}{d^2} \mu_i u_{i,x} \quad (18)$$

where d is the diameter of the tube, and μ is the viscosity.

In accordance with Eq. (18), the oscillations of F_i are

$$F'_i = \frac{32}{d^2} \mu_i u'_{i,x} \quad (19)$$

Taking into account Eqs. (17) and (19), we can present the pressure oscillations as follows:

$$P'_i = A_i \bar{\rho}_i f_i(x) \exp(\Omega t) + a_i \quad (20)$$

where $f_i(x)$ is some function of x , and the parameter $a_i = a_i(t)$.

From a dimensional consideration, it is necessary to assume that the derivative of the function $f(x)$ is constant: $f'_i(x) = k_i$. Substitution of expressions (19) and (20) in Eq. (10) gives

$$k_i = -\left(\frac{32}{d^2} \nu_i + \Omega\right) \quad (21)$$

where ν is the kinematic viscosity.

The parameter a_i is determined by using the conditions

$$x = 0, \quad P'_L = P'_{L.in} \quad (22)$$

$$x = \ell, \quad P'_G = P'_{G.0} \quad (23)$$

As a result we obtain

$$a_G = P'_{G.0} - \bar{\rho}_G A_G k_G \ell \exp(\Omega t) \quad (24)$$

$$a_L = P'_{L.in} \quad (25)$$

The oscillations of the phase temperatures can be presented in the following form:

$$T'_i = A_i \left(\frac{q_e}{c_{p_i} \bar{u}_L}\right) \varphi_i(x) \exp(\Omega t) \quad (26)$$

where q_e is the latent heat of the liquid vaporization, $\bar{u}_L = \bar{u}_{L.in}$ is the liquid velocity in the stationary flow regime, and $\varphi(x)$ is some function of x that satisfies the condition $\frac{\varphi''(x)}{\varphi(x)} = \text{const}$.

Assuming that $\varphi_i(x) = \exp(n_i x)$, we obtain

$$T'_i = A_i \left(\frac{q_e}{C_{p_i} \bar{u}_L}\right) \exp(n_i x^* + \Omega t) \quad (27)$$

where $x^* = x - \bar{x}_i$, $n = ik_x$, k_x is the longitudinal component of the wave vector k ($k_x \neq 0$, $k_y = k_z = 0$).

The substitution of expression (27) into Eq. (15) gives

$$n_i = \pm \left(\frac{\Omega}{\alpha_i}\right)^{1/2} \quad (28)$$

Assuming that the temperature oscillations that are due to the displacement of the interface decrease far from \bar{x}_i , the sign in front of Eq. (28) is positive for phase L and negative for phase G .

The oscillations of the meniscus position x'_i depend only on the time and are expressed as follows:

$$x'_i = C \exp(\Omega t) \quad (29)$$

where C is the amplitude.

4.2. Dispersion equation

We transform Eqs. (12)–(14), assuming that the difference between outlet and inlet pressure oscillations is $P'_{G,0} - P'_{L,in} = \bar{\rho}_G A_G k_G \ell \exp(\Omega t)$. As a result we obtain the dispersion equation in the following form (Appendix C):

$$y^3 + 3P_* y + 2q_* = 0 \quad (30)$$

where $y = \Omega^{1/2} + \frac{b_*}{3a_*}$, and

$$2q_* = \frac{2b_*^3}{27a_*^3} - \frac{b_* c_*}{3a_*^2} + \frac{d_*}{a_*} \quad (31)$$

$$3P_* = \frac{3a_* c_* - b_*^2}{3a_*^2} \quad (32)$$

The solution of Eq. (30) is given in Appendix D. The expressions for the growth rate and frequency of the oscillations have the following form:

$$\xi = \left(r_* \cosh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right)^2 - 3r_*^2 \sinh^2 \frac{\varphi}{3} \quad (33)$$

$$|\varphi| = \left| 4 \left(r_* \cosh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right) \sqrt{3} r_* \sinh \frac{\varphi}{3} \right| \quad (34)$$

for the case $q_*^2 + P_*^3 > 0$, $P_* < 0$ and

$$\xi = \left(r_* \sinh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right)^2 - 3r_*^2 \cosh^2 \frac{\varphi}{3} \quad (35)$$

$$|\varphi| = \left| 4 \left(r_* \sinh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right) \sqrt{3} r_* \cosh \frac{\varphi}{3} \right| \quad (36)$$

for the case $P_* > 0$.

4.3. Analysis of the solution

First we estimate the values of the coefficients a_* , b_* , c_* and d_* for realistic physical values of the characteristic parameters (Table 1).

Taking into account the data in Table 1 it is possible to simplify significantly the expressions for the coefficients a_* , b_* , c_* and d_*

$$a_* \simeq \alpha_G^{1/2} \alpha_L^{-1} \quad (37)$$

Table 1
Phase characteristics (saturated state $T = 100^\circ\text{C}$) (Vargaftic et al., 1996)

Phase parameter	ρ [kg/m ³]	μ [kg/m s]	λ [J/s m K]	c_p [J/kg K]	ν [m ² /s]	α [m ² /s]	Pr
Water	958.4	282.5×10^{-6}	0.679	4.2×10^3	0.295×10^{-6}	16.8×10^{-8}	1.75
Vapor	0.598	12.28×10^{-6}	2.5×10^{-2}	2.135×10^3	20.53×10^{-6}	19.58×10^{-6}	1.05

$$b_* \simeq \rho_{L,G} \frac{\bar{u}_L}{\alpha_L} \quad (38)$$

$$c_* \simeq - \left\{ -\frac{32}{d^2} \nu_G + 2\rho_{L,G} \alpha_{L,G} \frac{\bar{u}_L}{\bar{x}_f} \right\} \frac{1}{\sqrt{\alpha_L}} \quad (39)$$

$$d_* \simeq \frac{32}{d^2} \nu_L \frac{\bar{u}_L}{\alpha_L} \rho_{L,G} \quad (40)$$

For the study of flow stability in a heated capillary tube it is expedient to present the parameters P_* and q_* as a function of the Peclet number defined as $Pe = \frac{\bar{u}_L d}{\alpha_L}$. We notice that the Peclet number, in a capillary flow which results from liquid evaporation, is an unknown parameter, which is determined by solving the stationary problem (Yarin et al., 2002). Employing the Peclet number as generalized parameter of the problem allows one to estimate the effect of physical properties of phases, micro-channel geometry, as well as wall heat flux, on the characteristics of the flow, in particular, its stability.

Using Eqs. (37)–(40) and (31) and (32), we obtain

$$P_* = A_* Pe^2 + B_* Pe + C_* \quad (41)$$

$$q_* = A_{**} Pe^3 + B_{**} Pe^2 + C_{**} Pe \quad (42)$$

where

$$A_* = -\frac{1}{9} \rho_{L,G}^2 \frac{\alpha_L}{d^2} \alpha_{L,G}$$

$$B_* = -\frac{2}{3} \rho_{L,G} \alpha_{L,G}^{1/2} \frac{\alpha_L}{d^2} \frac{1}{\bar{x}_f}$$

$$C_* = \frac{1}{3} 32 \frac{\alpha_L}{d^2} \alpha_{G,L}^{1/2} Pr_G$$

$$A_{**} = \frac{1}{27} \frac{1}{d^3} \rho_{L,G}^3 \alpha_{L,G}^{3/2} \alpha_L^{3/2}$$

$$B_{**} = -\frac{1}{3} \rho_{L,G}^2 \alpha_{L,G} \alpha_L^{3/2} \frac{1}{d^3 \tilde{x}_f}$$

$$C_{**} = \frac{16}{d^3} \rho_{L,G} \alpha_{L,G}^2 \alpha_G^{3/2} Pr_G \left(1 - \frac{1}{3} v_{G,L} \alpha_{L,G}^{1/2} \right)$$

$$\tilde{x}_f = \frac{\bar{x}_f}{d}$$

The form of the solution of the dispersion equation (30) depends on the sign of the determinant $D = q_*^2 + P_*^3$, i.e. on the values of the characteristic parameters q_* and P_* . The latter are determined by the physical properties of the liquid and its vapor, as well as the values of the Peclet number. This allows us to use q_* and P_* as some general characteristics of the problem considered here.

The dependence of $P_*(Pe)$ and $q_*(Pe)$ is shown in Fig. 2. $P_*(Pe)$ is a parabola with an axis of symmetry line $Pe = 0$. Since the Peclet number is positive, for any value of the operating parameters, the physical meaning is that only for the right branch of this parabola, which intersects the axis of the abscisa at some critical value of the Peclet number: $Pe = Pe_{cr}$. The vertical line $Pe = Pe_{cr}$ subdivides the parametrical plane $P_* - Pe$ into two domains, corresponding to positive ($Pe < Pe_{cr}$) or negative ($Pe > Pe_{cr}$) values of the parameter P_* . The critical Peclet number is

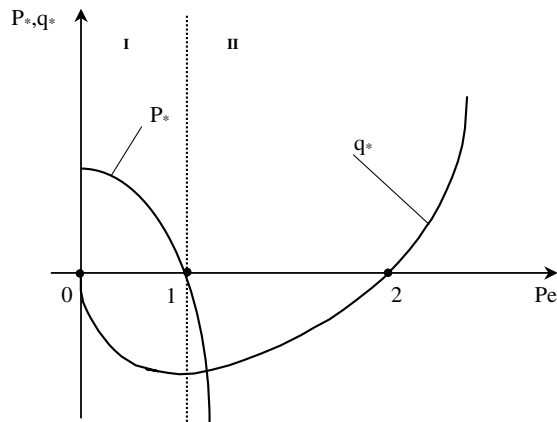


Fig. 2. The dependences of $P_*(Pe)$ and $q_*(Pe)$. (Dotted line) $Pe = Pe_{cr}$, I domain, $Pe < Pe_{cr}$; II domain, $Pe > Pe_{cr}$, 1 – critical point, 2 – $q_* = 0$.

$$Pe_{cr} = 3\alpha_{G,L}^{1/2} \left(-\frac{1}{\tilde{x}_f} \pm \sqrt{\left(\frac{1}{\tilde{x}_f}\right)^2 + \frac{32}{3}\alpha_{G,L}^{1/2} Pr_G} \right) \tag{43}$$

Taking into account that $Pe_{cr} > 0$, we should choose the positive value for the radical in Eq. (43). For very small and large \tilde{x}_f the following estimates for the critical Peclet number are valid: $Pe_{cr} \simeq 16 \frac{\alpha_{G,L}}{\rho_{L,G}} Pr_G \tilde{x}_f$, $\tilde{x}_f \leq 4 \times 10^{-3}$ and $Pe_{cr} = \frac{\sqrt{96}}{\rho_{G,L}} Pr_G^{1/2} \alpha_{G,L}^{3/4}$, $\tilde{x}_f \geq 4$ (\tilde{x}_f is the dimensionless liquid height in the stable state). In both cases the errors in the calculation Pe_{cr} do not exceed 5%. The dependence of the critical Peclet number on the dimensionless meniscus position \tilde{x}_f is plotted in Fig. 3. An increase of the wall heat flux, which is accompanied by a shift of the interface towards the capillary tube inlet, leads to decreasing Pe_{cr} . At small enough q_w (large \tilde{x}_f) Pe_{cr} approaches its asymptotic value $(Pe_{cr})_{lim} = \sqrt{96}\alpha_{G,L}^{3/4} Pr_G^{1/2}$.

The curve $q_*(Pe)$ is a cubic parabola, which passes through the point $O(0,0)$. Since the Peclet number is positive, the physical meaning has the falling and rising branches of $q_*(Pe)$, which are located on the right part of the parameter plane $q_* - Pe$.

Bearing in mind the characteristics of the dependences of $P_*(Pe)$ and $q_*(Pe)$, we estimate the growth rate of the oscillations in the vicinity of the two characteristic points: $Pe = 0$ and $Pe = Pe_{cr}$.

(a) $Pe = 0$. In the vicinity of this point P_* is close to $C_* > 0$ and q_* is close to zero. Then $\sinh \varphi = \frac{q_*}{|P_*|^{3/2}} \sim 0$, $\varphi \sim 0$, $\sinh \frac{\varphi}{3} \sim 0$, $\cosh \frac{\varphi}{3} \sim 1$. Since $\frac{b_*}{3a_*} = 0$, at $Pe = 0$, we obtain

$$\xi = -3P_* = -32 \frac{\alpha_L}{d^2} \alpha_{G,L}^{1/2} Pr_G \tag{44}$$

Thus, at small Pe , the growth rate of the oscillations is negative and the capillary flow is stable. The absolute value of ξ sharply increases with a decrease of the capillary tube diameter. It also depends on the thermal diffusivity of the liquid and the vapor, as well as on the value of the Prandtl number.

(b) $Pe = Pe_{cr}$. In the vicinity of this point, the parameters P_* and q_* are $P_* \sim 0$, $q_* \neq 0$. Bearing in mind that the sign of the parameter q_* is the same as that of the parameter r_* , we find that ratio $\frac{q_*}{r_*^3} \gg 1$ and $\varphi \gg 1$ in the vicinity of the point $Pe = Pe_{cr}$. In accordance with that, at large φ

$$\sinh \frac{\varphi}{3} = \cosh \frac{\varphi}{3} = \frac{1}{2^{2/3}} (\sinh \varphi)^{1/3} = \frac{1}{2^{2/3}} \left(\frac{q_*}{r_*^3} \right)^{1/3} \tag{45}$$

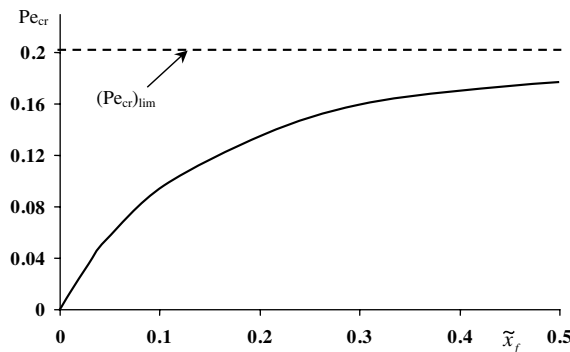


Fig. 3. The dependence of $Pe_{cr}(\tilde{x}_f)$.

Substitution of (45) in Eq. (35) leads to the following expression for the growth rate of the oscillations:

$$\zeta = \frac{q_*^{2/3}}{2^{4/3}} \left[\left(1 - \frac{b_*}{3a_*} \frac{2^{2/3}}{q_*^{1/3}} \right)^2 - 3 \right] \tag{46}$$

Since $q_*^{2/3} > 0$, the sign of the growth rate is determined by the difference of the terms in the bracket of Eq. (46): (i) $(1 - N)^2 > 3$, $\zeta > 0$, (ii) $(1 - N)^2 = 3$, $\zeta = 0$, (iii) $(1 - N)^2 < 3$, $\zeta < 0$, where $N = \frac{b_*}{3a_*} \frac{2^{2/3}}{q_*^{1/3}}$.

The behavior of the growth rate and the frequency of oscillations of flow parameters in the vicinity of the critical point is illustrated by Fig. 4, where the dependencies $\xi \left(\frac{2}{q_*} \right)^{2/3} = f(\tilde{x}_f)$ and $\frac{1}{2} \frac{|\psi|}{q_*^{2/3}} = \varphi(\tilde{x}_f)$ are plotted. It is seen that there are three ranges of changing meniscus position, which correspond to stable and unstable regimes of the flow. At small enough wall heat fluxes, when $\tilde{x}_f > \tilde{x}_f^{(1)}$, the growth rate is negative and the flow in the capillary is stable. An increase of the wall heat flux is accompanied by a displacement of the meniscus towards the inlet ($\tilde{x}_f \sim 1/q_w$), and a decrease of the absolute value of ζ . In the vicinity of the point $\tilde{x}_f^{(1)}$, sharp growth of ζ is observed. The latter leads to a change of the sign of the growth rate and to the transition from stable to unstable regime. At large heat fluxes when the meniscus reaches the inlet, the growth rate sharply decreases and becomes negative. The flow stabilization at $\tilde{x}_f < \tilde{x}_f^{(2)}$ is due to intense heat transfer to the cooling inlet, when the meniscus position and rate of evaporation weakly depend on q_w (Yarin et al., 2002).

It will be noted that applying the present approximation for the analysis of the stability of capillary flow at high heat fluxes corresponding to domain $0 < \tilde{x}_f < \tilde{x}_f^{(2)}$ is purely symbolic, since the general assumption that $Pe \ll 1$ is not valid at large q_w . Thus, in the case considered here, only stable stationary ($\tilde{x}_f > \tilde{x}_f^{(1)}$) or unsteady ($\tilde{x}_f < \tilde{x}_f^{(1)}$) flow occurs in the capillary tube. The above is also related to the frequency of oscillations. At physically realistic $\tilde{x}_f (\tilde{x}_f > 1)$ only low-frequency

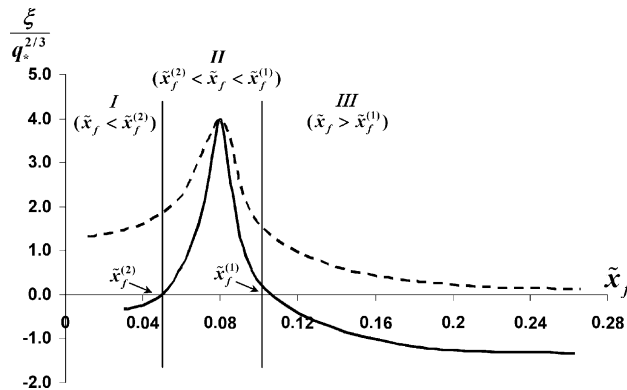


Fig. 4. The dependences of the increment (solid line) and frequencies (dotted line) of oscillations on \tilde{x}_f in the vicinity of the critical point.

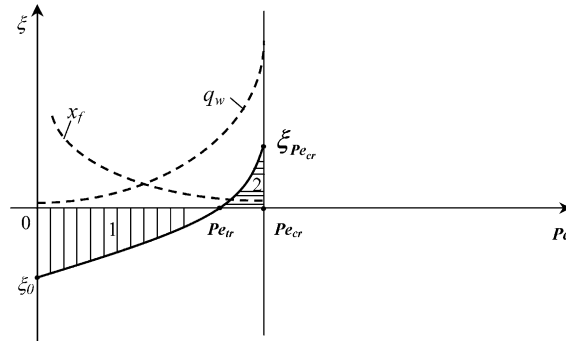


Fig. 5. The dependence $\xi(Pe)$: (1) domain of stationary steady regimes of flow; (2) domain of unsteady states $Pe = Pe_{tr}$ point of transition stable to unstable flow regime.

oscillations occur (as estimations show the order of these oscillations does not exceed 10 Gz). The dependence of the growth rate on the Peclet number (moderate q_w) is shown in Fig. 5. It is seen that at small Pe (small enough q_w), the flow is stable. An increase of the wall heat flux leads to an increase of the rate of evaporation, growth of the Peclet number, development of flow instability and transition (at $Pe = Pe_{tr}$) from stable to unstable flow.

5. Effect of capillary pressure and heat flux oscillations

In this section, we analyze the influence of the pressure in the capillary and the heat flux fluctuations on the stability of laminar flow in a heated capillary tube. All the estimations performed in the framework of the general approach and developed in the previous section are also kept in the present cases. Below we will assume that the single cause for capillary pressure oscillations is fluctuations of the contact angle due to motion of the meniscus, whereas heat flux oscillations are the result of fluid temperature fluctuations only.

5.1. Capillary pressure oscillations

The present analysis is based on the assumption that the interfacial temperature T_s is constant and the capillary pressure is determined by the following expression:

$$f_\sigma = \frac{2\sigma}{r} \cos \theta_d \tag{47}$$

where θ_d is the dynamic contact angle.

Assuming that the dynamic contact angle θ_d is a sum of its basic value corresponding to stationary flow θ_{st} and small perturbation θ' we arrive at the following relation for the fluctuation of capillary pressure:

$$f'_\sigma = \frac{2\sigma}{r} (\cos \theta_{st} \cos \theta' - \sin \theta_{st} \sin \theta') \tag{48}$$

For a system in which the contact angle is close to 90° (for example, the water–steel system: $70^\circ < \theta_{st} < 90^\circ$, (Grigoriev and Zorin, 1982)) it is possible to assume that $\cos \theta_{st} \sim 0$, $\sin \theta_{st} \sim 1$ and $\sin \theta' \sim \theta'$. Then Eq. (48) takes the following form:

$$f'_\sigma = -\frac{2\sigma}{r}\theta' \quad (49)$$

There are a number of theoretical and experimental relations determining the dependence of the dynamic contact angle on flow velocity (Dussan, 1979; Ngan and Dussan, 1982; Cox, 1986; Blake, 1993; Kistler, 1993). Hoffman (1975) expressed the dynamic contact angle as a function solely of dimensionless parameters: capillary number Ca

$$\theta_d = f(Ca) \quad (50)$$

where $Ca = \frac{\mu u}{\sigma}$.

We estimate the effect of the velocity fluctuations on the capillary pressure, using the Hoffman–Voinov–Tanner law which is valid at $\theta_d \leq 135$ and $Ca \leq 0$ (0.1)

$$\theta_d^3 = C_T - Ca \quad (51)$$

where $C_T \cong 93$, θ_d is in radians.

From Eq. (51), we obtain

$$\theta' = -\frac{1}{3} \frac{\mu_L u'_L}{\sigma} \left(C_T - \frac{\mu_L u_L}{\sigma} \right)^{-2/3} \quad (52)$$

Taking into account that $u_L = \bar{u}_L + u'_L$ and $u'_L \ll \bar{u}_L$, we arrive at the following relation for capillary pressure oscillations:

$$f'_\sigma = \frac{2}{3} \frac{\mu u'_L}{r} \left(C_T - \frac{\mu_L \bar{u}_L}{\sigma} \right)^{-2/3} \quad (53)$$

From (17), (20) and (51) we transform Eq. (13) to the following form:

$$A_G \tilde{\alpha}_{21} + A_L \alpha_{22}^* = 0 \quad (54)$$

where $\tilde{\alpha}_{22}^* = -(k_L \bar{\rho}_L \bar{x}_f + 2\bar{\rho}_L \bar{u}_L + \varepsilon)$, $\varepsilon = \frac{2}{3} \frac{\mu_L}{r} \left(C_T - \frac{\mu_L \bar{u}_L}{\sigma} \right)^{-2/3}$, $\tilde{\alpha}_{21}$ is the same as $\tilde{\alpha}_{21}$ in Eq. (30).

Then the dispersion equation for the problem considered here takes the following form:

$$\tilde{\alpha}_{21} \tilde{\alpha}_{32} - \tilde{\alpha}_{22}^* \tilde{\alpha}_{21} = 0 \quad (55)$$

The equation can be presented as follows:

$$a_* \Omega^{3/2} + b_* \Omega + \tilde{c}_* \Omega^{1/2} + \tilde{d}_* = 0 \quad (56)$$

where the coefficients a_* and b_* are the same as in Eq. (C.5) (Appendix C) and the coefficients \tilde{c}_* and \tilde{d}_* are

$$\tilde{c}_* = - \left\{ -\frac{32}{d^2} v_G (1 - v_{L,G} \alpha_{G,L}^{1/2}) + 2\rho_{L,G} \frac{\bar{u}_L}{\bar{x}_f} \left(1 - \rho_{G,L} \alpha_{L,G}^{1/2} - \varepsilon \frac{\rho_{G,L} \alpha_{G,L}^{1/2}}{2\bar{\rho}_L \bar{u}_L} \right) \right\} \frac{1}{\sqrt{\alpha_L}} \quad (57)$$

$$\tilde{d}_* = - \left\{ -\frac{32}{d^2} v_G \frac{\bar{u}_L}{\alpha_L} (1 - v_{L,G}) - \rho_{L,G} \frac{\bar{u}_L^2}{\alpha_L} \frac{\varepsilon}{\bar{\rho}_L \bar{u}_L} \frac{1}{\bar{x}_f} \right\} \quad (58)$$

Approximate expressions for the parameters \tilde{c}_* and \tilde{d}_* corresponding to realistic values of operating parameters are

$$\tilde{c}_* \simeq - \left\{ -\frac{32}{d^2} v_G + 2\rho_{L,G} \frac{\bar{u}_L}{\bar{x}_f} \left(1 - \varepsilon \frac{\rho_{G,L} \alpha_{G,L}^{1/2}}{2\bar{\rho}_L \bar{u}_L} \right) \right\} \frac{1}{\sqrt{\alpha_L}} \quad (59)$$

$$\tilde{d}_* \simeq \frac{32}{d^2} v_L \frac{\bar{u}_L}{\alpha_L} \rho_{L,G} - \rho_{L,G} \frac{\bar{u}_L^2}{\alpha_L} \frac{\varepsilon}{\bar{\rho}_L \bar{u}_L} \frac{1}{\bar{x}_f} \quad (60)$$

Using Eqs. (31) and (32) as well as expressions (37), (38), (59) and (60) it is possible to transform the dependencies $P_*(Pe)$ and $q_*(Pe)$ to the canonical form similar to Eqs. (41) and (42) with coefficients A_* , B_* , C_* and A_{**} , B_{**} , C_{**} .

$$A_* = -\frac{1}{9} \rho_{L,G}^2 \alpha_{L,G}, \quad B_* = -\frac{2}{3} \rho_{L,G} \alpha_{L,G}^2 \frac{1}{\bar{x}_f} \left(1 - \varepsilon \frac{\rho_{G,L} \alpha_{G,L}^{1/2}}{\bar{\rho}_L \bar{u}_L} \right), \quad C_* = \frac{32}{3} \frac{\alpha_L}{d^2} \alpha_{G,L}^{1/2} \rho_{L,G}$$

$$A_{**} = \frac{1}{27} \frac{1}{d^3} \rho_{L,G}^3 \alpha_{L,G}^{3/2} \alpha_L^{3/2}, \quad B_{**} = 3\rho_{G,L} \frac{1}{d^3 \bar{x}_f} \alpha_{L,G} \alpha_L^{3/2} \left(\rho_{L,G} - \frac{5}{2} \alpha_{G,L}^{1/2} \frac{\varepsilon}{\bar{\rho}_L \bar{u}_L} \right)$$

$$C_{**} = \frac{32}{d^3} \rho_{L,G} Pr_L \alpha_{L,G}^{1/2} \alpha_L^{3/2} \left(1 - \frac{1}{3} Pr_{G,L} \alpha_{L,G}^{1/2} \right)$$

In the domain of a very small Peclet number the growth rate of flow oscillations is negative at any values of flow parameters. In the vicinity of the critical point ($Pe = Pe_{cr}$, $P_* \simeq 0$) the sign ξ is determined by Eq. (46). An increase in ε (at other fixed parameters) leads to an increase if the critical value of the Peclet number and expansion of the domain of stable flows.

5.2. Heat flux oscillations

There are two causes for oscillations of the heat flux, with $T_w = \text{const}$. (i) fluctuations of the heat transfer coefficient due to velocity fluctuations and (ii) fluctuations of the fluid temperature. At small enough Reynolds numbers the heat transfer coefficient is constant (Bejan, 1993), whereas at moderate Re ($Re \sim 10^2$) it is a weak function of velocity (Peng and Peterson, 1996; Incropera, 1999; Sobhan and Garinella, 2001). Bearing this in mind, it is possible to neglect the influence of velocity fluctuations on the heat transfer coefficient and assume that heat flux fluctuations are expressed as follows:

$$q'_{w_i} = -h_i T'_i \quad (61)$$

where h_i is the heat transfer coefficient for stationary flow of the i th phase.

Using Eq. (15), as well as Eqs. (23) and (61) we obtain

$$n_i = \sqrt{\frac{\Omega + \Omega_{oi}}{\alpha_i}} \quad (62)$$

where $\Omega_{oi} = \frac{4h_i}{\rho_i c_{pi} d}$.

Using expressions (21) and (62) we transform Eq. (C.4) (Appendix C). Bearing in mind that $h_i = \lambda_i \frac{Nu}{d}$ and $\frac{\Omega_{oi}}{\alpha_i} = 4 \frac{Nu}{d^2}$ we arrive at the equation

$$\begin{aligned} & - \left(\frac{32}{d^2} v_G + \Omega \right) \sqrt{\frac{\Omega}{\alpha_L} + 4 \frac{Nu}{d^2}} \cdot N_1 + \sqrt{\frac{\Omega}{\alpha_L} + 4 \frac{Nu}{d^2}} \cdot N_2 - \left(\frac{32}{d^2} v_G + \Omega \right) \cdot N_3 + N_4 \\ & = + \left(\frac{32}{d^2} v_L + \Omega \right) \sqrt{\frac{\Omega}{\alpha_G} + 4 \frac{Nu}{d^2}} \cdot M_1 + \sqrt{\frac{\Omega}{\alpha_G} + 4 \frac{Nu}{d^2}} \cdot M_2 - \left(\frac{32}{d^2} v_L + \Omega \right) \cdot M_3 + M_4 \end{aligned} \quad (63)$$

where

$$\begin{aligned} N_1 &= \bar{\rho}_G \bar{x}_f \alpha_L, & N_2 &= 2\bar{\rho}_L \bar{u}_L \alpha_L, & N_3 &= -\bar{\rho}_G \bar{x}_f \bar{u}_L, & N_4 &= -2\bar{\rho}_L \bar{u}_L^2, & M_1 &= \bar{\rho}_L \bar{x}_f \alpha_G \rho_{G,L}, \\ M_2 &= 2\bar{\rho}_L \bar{u}_L \alpha_G \rho_{G,L}, & M_3 &= -\bar{\rho}_L \bar{x}_f \bar{u}_L, & M_4 &= -2\bar{\rho}_L \bar{u}_L^2 \end{aligned}$$

Eq. (63) shows that the effect of heat flux oscillations is not significant in micro-channels with a large diameter when the term $4 \frac{Nu}{d^2}$ is small enough.

Presenting the complex frequency as

$$\Omega = \zeta + i |\psi| \quad (64)$$

we arrive at two equations that determine the increment and the frequency of oscillations

$$\begin{aligned} & -f_1 F_2 N_1 + |\psi| \phi_2 N_1 + F_2 N_2 - f_1 N_3 + N_4 - f_2 F_1 M_1 \\ & + |\psi| \phi_1 M_1 - F_1 M_2 + f_2 M_3 - M_4 = 0 \end{aligned} \quad (65)$$

$$\begin{aligned} & -|\psi| F_2 N_1 - f_1 \phi_2 N_1 + \phi_2 N_2 - |\psi| N_3 + N_4 - |\psi| F_1 M_1 \\ & - f_2 \phi_1 M_1 - \phi_1 M_2 - |\psi| M_3 - M_4 = 0 \end{aligned} \quad (66)$$

where

$$F_i = \frac{1}{\sqrt{2}} \sqrt{\sqrt{a_i^2 + b_i^2} + a_i},$$

$$\phi_i = \frac{1}{\sqrt{2}} \sqrt{\sqrt{a_i^2 + b_i^2} - a_i},$$

$$f_i = \frac{32}{d^2} v_i + \xi,$$

$$a_i = \frac{\xi}{\alpha_i} + 4 \frac{Nu}{d^2},$$

$$b_i = \frac{|\psi|}{\alpha_i}$$

Consider the particular case corresponding to low frequency. Assuming $b \sim 0$, $\phi \sim 0$ and $F_i \sim a_i^{1/2}$ we arrive at the following equation for growth rate of oscillations at $\psi \rightarrow 0$:

$$-f_G a_L^{1/2} N_1 + a_L^{1/2} N_2 - f_G N_3 + N_4 - f_L a_L^{1/2} M_1 - a_L^{1/2} M_2 + f_L M_3 - M_4 = 0 \tag{67}$$

Transforming Eq. (67) we obtain

$$\xi = -\frac{v_L}{d^2 Nu^{1/2} (1 + \alpha_{G,L})} \left\{ 32 Nu^{1/2} (v_{G,L} + \alpha_{G,L}) - Pe \left[\frac{Nu^{1/2} \alpha_{L,G} (\rho_{L,G} - 2)}{\tilde{x}_f Pr_L} + 32 Pr_L (v_{G,L} - 1) \right] \right\} \tag{68}$$

At small Pe ($Pe \rightarrow 0$), the growth rate is negative and the flow is stable whereas at relatively large Pe the flow is unstable: $\xi > 0$. Assuming in Eq. (68) $\xi = 0$ and taking into account that $\rho_{L,G} \ll 1$, $v_{L,G} \gg 1$ we find the value of the Peclet number corresponding to transition from stable to unstable flow

$$Pe_{tr} \cong \frac{Nu^{1/2} Pr_L (v_{G,L} + \alpha_{G,L})}{\frac{Nu^{1/2}}{\tilde{x}_f} \alpha_{L,G} \rho_{L,G} + v_{G,L} Pr_L} \tag{69}$$

It is seen that the Peclet number corresponding to transition from stable to unstable flow decreases with an increase in the wall heat flux (decreasing \tilde{x}_f). The increase of the Nusselt number leads to an increase in Pe_{tr} .

6. Moderate Peclet number

The perturbed energy equation for a moderate Peclet number has (at $q' = 0$) the following form (Appendix E):

$$\frac{\partial T'_i}{\partial t} + \bar{u}_i \frac{\partial T'_i}{\partial x} = \frac{\partial}{\partial x} \left(\alpha_i \frac{\partial T'_i}{\partial x} \right) \tag{70}$$

Assuming, as earlier, that u' , P' and T' are determined by Eqs. (17), (20) and (22) we find k_i and n_i

$$k_i = -\left(\frac{32}{d^2} v_i + \Omega \right) \tag{71}$$

$$n_i = \frac{1}{2} \left(\frac{\bar{u}_i}{\alpha_i} \pm \sqrt{\left(\frac{\bar{u}_i}{\alpha_i} \right)^2 + 4 \frac{\Omega}{\alpha_i}} \right) \quad (72)$$

Substitution of expressions (80), (81) in Eq. (C.4) (Appendix C) leads to the dispersion equation

$$\begin{aligned} & - \left(\frac{32}{d^2} v_G + \Omega \right) \frac{1}{2} \left(\frac{\bar{u}_L}{\alpha_L} + \sqrt{\left(\frac{\bar{u}_L}{\alpha_L} \right)^2 + 4 \frac{\Omega}{\alpha_L}} \right) N_1 + \frac{1}{2} \left(\frac{\bar{u}_L}{\alpha_L} + \sqrt{\left(\frac{\bar{u}_L}{\alpha_L} \right)^2 + 4 \frac{\Omega}{\alpha_L}} \right) N_2 \\ & - \left(\frac{32}{d^2} v_G + \Omega \right) N_3 + N_4 = \\ & = - \left(\frac{32}{d^2} v_L + \Omega \right) \frac{1}{2} \left(\frac{\bar{u}_G}{\alpha_G} - \sqrt{\left(\frac{\bar{u}_G}{\alpha_G} \right)^2 + 4 \frac{\Omega}{\alpha_G}} \right) M_1 + \frac{1}{2} \left(\frac{\bar{u}_G}{\alpha_G} - \sqrt{\left(\frac{\bar{u}_G}{\alpha_G} \right)^2 + 4 \frac{\Omega}{\alpha_G}} \right) M_2 \\ & - \left(\frac{32}{d^2} v_L + \Omega \right) M_3 + M_4 \end{aligned} \quad (73)$$

By transforming this equation, we obtain

$$A^\circ + B^\circ \Omega^\circ + C^\circ F_G(\Omega^\circ) + D^\circ F_L(\Omega^\circ) + E^\circ \Omega^\circ [F_L(\Omega^\circ) + \rho_{L,G} F_G(\Omega^\circ)] = 0 \quad (74)$$

where

$$A^\circ = (1 - \mu_{L,G}) Pe + 2 \frac{N_3}{N_1} \alpha (1 - \rho_{L,G} v_{L,G})$$

$$B^\circ = Pe(1 - \rho_{L,G})$$

$$C^\circ = -v_{G,L} \rho_{L,G} Pe \left(1 + \frac{d^2}{32 v_G} \frac{N_2}{N_1} \right)$$

$$D^\circ = -Pe \left(1 + \frac{d^2}{32 v_G} \frac{N_2}{N_1} \right)$$

$$E^\circ = Pe$$

$$F_G(\Omega^\circ) = \sqrt{1 + \beta_1 \Omega^\circ}$$

$$F_L(\Omega^\circ) = \sqrt{1 + \beta_2 \Omega^\circ}$$

$$\beta_1 = 128 \frac{Pr_G}{Pe^2} \alpha_{G,L}^2 \rho_{G,L}; \quad \beta_2 = 128 \alpha_{G,L} \frac{Pr_G}{Pe^2}$$

Assuming $\Omega^\circ = \xi^\circ + i|\psi^\circ|$, where $\xi^\circ = \xi \frac{d^2}{32\nu_G}$, $\psi^\circ = \psi \frac{d^2}{32\nu_G}$ we obtain from Eq. (74) two equations for dimensionless frequency and increment of oscillations

$$\begin{aligned}
 & A^\circ + B^\circ \xi^\circ + \frac{C^\circ}{\sqrt{2}} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} + a_1^\circ} + \frac{D^\circ}{\sqrt{2}} \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} - a_1^\circ} \\
 & + \frac{E^\circ \xi^\circ}{\sqrt{2}} \left\{ \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} + a_2^\circ} + \rho_{L,G} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} - a_1^\circ} \right\} \\
 & - \frac{E^\circ |\psi^\circ|}{\sqrt{2}} \left\{ \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} - a_2^\circ} - \rho_{L,G} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} - a_1^\circ} \right\} = 0
 \end{aligned} \tag{75}$$

and

$$\begin{aligned}
 & B^\circ |\psi^\circ| + \frac{C^\circ}{\sqrt{2}} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} - a_1^\circ} + \frac{D^\circ}{\sqrt{2}} \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} - a_1^\circ} \\
 & + \frac{E^\circ |\psi^\circ|}{\sqrt{2}} \left\{ \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} - a_2^\circ} + \rho_{L,G} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} - a_1^\circ} \right\} \\
 & + \frac{E^\circ |\psi^\circ|}{\sqrt{2}} \left\{ \sqrt{\sqrt{a_2^{\circ 2} + b_2^{\circ 2}} + a_2^\circ} + \rho_{L,G} \sqrt{\sqrt{a_1^{\circ 2} + b_1^{\circ 2}} + a_1^\circ} \right\} = 0
 \end{aligned} \tag{76}$$

where $a_1^\circ = 1 + \beta_1 \xi^\circ$, $a_2^\circ = 1 + \beta_2 \xi^\circ$, $b_1^\circ = \beta_1 |\psi^\circ|$, $b_2^\circ = \beta_2 |\psi^\circ|$.

Using Eq. (75) we estimate the increment of oscillations for low frequencies ($|\psi^\circ| \rightarrow 0$). Assuming in Eq. (75) $b_1 \rightarrow 0$ we arrive at the equation

$$A^\circ + B^\circ \xi^\circ + C^\circ a_1^{\circ 1/2} + B^\circ \xi^\circ (a_1^{\circ 1/2} + \rho_{L,G} a_1^{\circ 1/2}) = 0 \tag{77}$$

To find the solution of Eq. (77), we use an approximate expressions for the coefficients A° , B° , C° and E° . The characteristic values of the operating parameters are

$$\begin{aligned}
 & A^\circ \cong \mu_{L,G} Pe > 0, \quad B^\circ \cong -\rho_{L,G} Pe < 0, \quad C^\circ \cong -\nu_{G,L} \rho_{L,G} Pe \left(1 + \rho_{L,G} \alpha_{L,G} \frac{Pe}{Pr_G} \frac{1}{\tilde{x}_f} \right) < 0, \\
 & E^\circ = Pe > 0
 \end{aligned}$$

Consider three particular cases corresponding to very small and large values of ξ° : (i) $\xi^\circ \leq 10^{-6}$, (ii) $\xi^\circ \leq 10^{-5}$, (iii) $\xi^\circ \geq 10^2$. In the first case $a_1^{\circ 1/2} \sim 1$, $a_2^{\circ 1/2} \sim 1$ and the solution of Eq. (77) is

$$\xi^\circ = - \frac{A^\circ + C^\circ}{B^\circ + E^\circ (1 + \rho_{L,G})} \tag{78}$$

Since $\nu_{G,L} \rho_{L,G} > \mu_{L,G}$ and $(1 + \rho_{L,G} \alpha_{L,G} \frac{Pe}{Pr_G} \frac{1}{\tilde{x}_f}) > 1$ the sum $A^\circ + C^\circ < 0$. The sum $B^\circ + E^\circ (1 + \rho_{L,G}) = E^\circ > 0$. Accordingly, the ratio $\frac{A^\circ + C^\circ}{B^\circ + E^\circ (1 + \rho_{L,G})}$ is negative and the growth rate is positive

$\xi^\circ > 0$. Thus, in this case the flow in a heated micro-channel is unstable at any value of the Peclet number.

In the second case, the growth rate is expressed as

$$\xi^\circ = \frac{1}{2} \left\{ \beta_2^{-1} + \sqrt{\beta_2^{-2} - 8\beta_2^{-1}(A^\circ + C^\circ)} \right\} \quad (79)$$

Since $\beta_2 > 0$ and $A^\circ + C^\circ < 0$, the growth rate is positive and the flow is also unstable.

In the third case, Eq. (77) is transformed to a form similar to Eq. (C.5) (Appendix C)

$$a\xi^{\circ 3/2} + b\xi^\circ + c\xi^{\circ 1/2} + d = 0 \quad (80)$$

with the coefficients a , b , c and d expressed as $a = E^\circ(\beta_2^{1/2} + \rho_{L,G}\beta_1^{1/2})$, $b = B^\circ$, $c = \beta_1^{1/2}C^\circ$, $d = A^\circ$. Estimations show that the determinant

$$D = q_*^2 + P_*^3 \quad (81)$$

that is defined by correlations (31) and (32) and coefficients a , b , c and d are negative. This means that Eq. (80) has three real roots, which are

$$\begin{aligned} \xi_I^{\circ 1/2} &= -2r_* \cos \frac{4}{3} - \frac{b}{3a} \\ \xi_{II}^{\circ 1/2} &= 2r_* \cos \left(60 - \frac{4}{3} \right) - \frac{b}{3a} \\ \xi_{III}^{\circ 1/2} &= -2r_* \cos \left(60 + \frac{4}{3} \right) - \frac{b}{3a} \end{aligned} \quad (82)$$

where $\cos \varphi = \frac{q}{r_*}$; $r_* = \sqrt{|P_*|}$, sign r_* is the same as sign q_* .

At realistic flow conditions $\cos \varphi \sim 0$ and φ is close to $\pi/2$. Under these conditions, in any case, one of the roots of (82) is positive. This shows that the capillary flow in a capillary tube is unstable at large ξ° .

The above consideration shows that flow instability in a heated capillary tube develops under conditions of high wall heat fluxes, which are the main factor determining the flow regimes. The evolution of the capillary flow is due to changes of heat flux on the wall that may be presented as follows. At relatively small q_w , when the rate of liquid evaporation is small and the height of the rising liquid is close to the adiabatic one, a stable laminar flow takes place. In this case, the equilibrium of the two-phase system is determined by the equality of gravity and capillary forces, whereas the influence of the friction forces and heat losses to cooling inlet is negligible. On the contrary, at high wall heat fluxes, the dominant role is played by the friction and capillary forces, as well as loss to inlet. Under these conditions, a small deviation from equilibrium leads to progressive (exponential) growth of disturbances i.e. development of flow instability. The latter is displayed in oscillations of the velocity and temperature of both phases, as well as oscillations of the position of the meniscus.

7. Conclusion

We have used the quasi-one-dimensional model describing the dynamics of flow in a heated capillary tube, with a distinct interface, to study flow instability at small and moderate Peclet numbers. The effect of heat flux and capillary pressure oscillations on the stability of laminar flow has been estimated. It has been shown that the stability of the flow, with evaporating meniscus, depends (other conditions being equal) on the wall heat flux. The latter determines the rate of liquid evaporation, equilibrium acting forces, meniscus position, as well as the heat losses to the cooling inlet. The stable stationary flow with fixed meniscus position corresponds to low wall heat fluxes ($Pe \ll 1$). In contrast, at high wall heat fluxes ($Pe \gg 1$) an exponential increase of small disturbances takes place. This leads to a transition from stable stationary to unstable flow with oscillating meniscus.

Acknowledgment

E. Pogrebnyak was supported by a grant from the Center for Absorption in Science of the Ministry of Immigrants Absorption State of Israel. L.P. Yarin is supported by the Israel Council for Higher Education.

Appendix A. Perturbed equations

In the case when capillary flow undergoes small perturbations, the governing parameters J_j can be presented as a sum of their basic values, corresponding to the stationary flow \bar{J}_j , plus small perturbations J'_j

$$J_j = \bar{J}_j + J'_j \quad (\text{A.1})$$

where $J_j = u, P, T, h, \rho$ and q .

For flow of incompressible fluid ($\rho_i = \text{const.}$, $\rho'_j = 0$, $\frac{\partial \bar{u}_i}{\partial x} = 0$, $\frac{\partial u'_j}{\partial x} = 0$) the substitution of (A.1) in Eqs. (1)–(3) leads, in a linear approximation, to the following system of equations:

$$\begin{aligned} \bar{\rho}_i \frac{\partial(\bar{u}_i + u'_i)}{\partial x} &= 0 \\ \bar{\rho}_i \frac{\partial u'_i}{\partial t} &= -\frac{\partial(\bar{P}_i + P'_i)}{\partial x} - \bar{\rho}_i g - \frac{\partial(\bar{F}_i + F'_i)}{\partial x} \\ \bar{\rho}_i \frac{\partial h'_i}{\partial t} + \bar{\rho}_i \bar{u}_i \frac{\partial \bar{h}_i}{\partial x} + \bar{\rho}_i u'_i \frac{\partial \bar{h}_i}{\partial x} + \bar{\rho}_i \bar{u}_i \frac{\partial h'_i}{\partial x} &= \frac{\partial}{\partial x} \left(\lambda_i \frac{\partial(\bar{T}_i + T'_i)}{\partial x} \right) + \bar{q} + q' \end{aligned} \quad (\text{A.2})$$

where subscript $i = G, L$ corresponds to vapor and liquid, k , respectively.

The equations for stationary flow

$$\begin{aligned}\frac{d\bar{u}_i}{dx} &= 0 \\ \frac{d\bar{P}_i}{dx} + \bar{\rho}_i g + \frac{d\bar{F}_i}{dx} &= 0 \\ \bar{\rho}_i \bar{u}_i C p_i \frac{d\bar{T}_i}{dx} &= \frac{d}{dx} \left(\lambda_i \frac{d\bar{T}_i}{dx} \right) + \bar{q}\end{aligned}\quad (\text{A.3})$$

we obtain from (A.2) the equations for small perturbations of velocity, pressure, temperature and enthalpy, as well as the specific volumetric rate of heat absorption. Assuming that $h_i = c_{p_i} T_i$ we arrive at

$$\begin{aligned}\frac{\partial u'_i}{\partial x} &= 0 \\ \frac{\partial u'_i}{\partial t} &= -\frac{1}{\bar{\rho}_i} \left(\frac{\partial P'_i}{\partial x} + \frac{\partial F'_i}{\partial x} \right) \\ \frac{\partial T'_i}{\partial t} + u'_i \frac{\partial \bar{T}_i}{\partial x} + \bar{u}_i \frac{\partial T'_i}{\partial x} &= \frac{\partial}{\partial x} \left(\alpha_i \frac{\partial T'_i}{\partial x} \right) + \tilde{q}'_i\end{aligned}\quad (\text{A.4})$$

where $\alpha_i = \frac{\lambda_i}{\bar{\rho}_i c_{p_i}}$ is the thermal diffusivity, $\tilde{q}'_i = \frac{q'}{\bar{\rho}_i c_{p_i}}$. Substitution of (A.1) in conditions (5)–(7) leads (in linear approximations) to the following system of equations:

$$\begin{aligned}\bar{\rho}_G \left(\bar{u}_G + u'_G - \frac{dx'_f}{dt} \right) &= \bar{\rho}_L \left(\bar{u}_L + u'_L - \frac{dx'_f}{dt} \right) \\ \bar{P}_G + P'_G + \bar{\rho}_G (\bar{u}_G^2 + 2\bar{u}_G u'_G) &= \bar{P}_L + P'_L + \bar{\rho}_L (\bar{u}_L^2 + 2\bar{u}_L u'_L) + \bar{f}_\sigma + f'_\sigma \\ \bar{\rho}_G \left(\bar{u}_G \bar{h}_G + u'_G \bar{h}_G + \bar{u}_G h'_G - \bar{h}_G \frac{dx'_f}{dt} \right) &- \lambda_G \frac{\partial \bar{T}_G}{\partial x} - \lambda_G \frac{\partial T'_G}{\partial x} = \\ \bar{\rho}_L \left(\bar{u}_L \bar{h}_L + u'_L \bar{h}_L + \bar{u}_L h'_L - \bar{h}_L \frac{dx'_f}{dt} \right) &- \lambda_L \frac{\partial \bar{T}_L}{\partial x} - \lambda_L \frac{\partial T'_L}{\partial x}\end{aligned}\quad (\text{A.5})$$

Here $x_f = \bar{x}_f + x'_f$, x_f is the liquid height in the capillary.

For stationary flow

$$\begin{aligned}\bar{\rho}_G \bar{u}_G &= \bar{\rho}_L \bar{u}_L \\ \bar{P}_G + \bar{\rho}_G \bar{u}_G^2 &= \bar{P}_L + \bar{\rho}_L \bar{u}_L^2 + \bar{f}_\sigma \\ \bar{\rho}_G \bar{u}_G \bar{h}_G - \lambda_G \frac{\partial \bar{T}_G}{\partial x} &= \bar{\rho}_L \bar{u}_L \bar{h}_L - \lambda_L \frac{\partial \bar{T}_L}{\partial x}\end{aligned}\quad (\text{A.6})$$

we obtain from (A.5) equations for the oscillations at the meniscus surface

$$\begin{aligned}
 (\bar{\rho}_G \bar{u}'_G - \bar{\rho}_L \bar{u}'_L) &= (\bar{\rho}_G - \bar{\rho}_L) \frac{dx'_f}{dt} \\
 (P'_G - P'_L) &= 2\bar{\rho}_L \bar{u}_L (u'_L - u'_G) + f'_\sigma \\
 \bar{\rho}_L \bar{u}_L (h'_G - h'_L) + (\bar{\rho}_G \bar{h}_G u'_G - \bar{\rho}_L \bar{h}_L u'_L) - (\bar{\rho}_G \bar{h}_G - \bar{\rho}_L \bar{h}_L) \frac{dx'_f}{dt} &= \lambda_G \frac{\partial T'_G}{\partial t} - \lambda_L \frac{\partial T'_L}{\partial t}
 \end{aligned}
 \tag{A.7}$$

where $h = c_p T$, $h_{x=x_f} = c_p T_s$, T_s is the temperature of the interface that is assumed to be constant and equal to the saturation temperature. The small perturbations of pressure practically do not influence T_s because of weak dependence $T_s(P_s)$ (Reid et al., 1987).

Appendix B. Perturbed energy equation for small Peclet number

The dimensionless form of Eq. (11) is

$$St \frac{\partial \tilde{T}'_i}{\partial \tilde{t}} + \tilde{u}'_i \frac{\partial \tilde{T}'_i}{\partial \tilde{x}} + \tilde{u} \frac{\partial \tilde{T}'_i}{\partial \tilde{x}} = Pe^{*-1} \frac{\partial^2 \tilde{T}'_i}{\partial \tilde{x}^2} + \vartheta'_i
 \tag{B.1}$$

where $St = \frac{\ell_* \psi_*}{\bar{u}_*}$ and $Pe^* = \frac{u_* \ell_*}{\alpha_i}$ are the Strouhal and Peclet numbers, respectively, $\vartheta'_i = \frac{q' \ell_*}{\rho_i u_* c_{pi} T_*}$, $\tilde{u}_i = \frac{\bar{u}_i}{\bar{u}_*}$, $\tilde{u}'_i = \frac{\bar{u}'_i}{\bar{u}_*}$, $\tilde{T}_i = \frac{\bar{T}_i}{T_*}$, $\tilde{T}'_i = \frac{\bar{T}'_i}{T_*}$, $\tilde{x} = \frac{x}{\ell_*}$ and $\tilde{t} = t \psi_*$, ℓ_* , \bar{u}_* , T_* and ψ_* are characteristic scales of the length, velocity, temperature and time.

The first terms on the left- and right-hand sides of Eq. (B.1) are on the order of St and Pe^{-1} , respectively, whereas the second and third terms on the left-hand side of Eq. (B.1) have the order of one. When $Pe \ll 1$ and $St \ll 1$ it is possible to omit the terms accounting convective heat transfer that is due to oscillations and present Eq. (10) as follows:

$$\frac{\partial T'_i}{\partial t} = \alpha_i \frac{\partial^2 T'_i}{\partial x^2} + \tilde{q}'_i
 \tag{B.2}$$

Appendix C. Dispersion equation

Using expressions (17), (20), (26) and (29) for the velocity, pressure, temperature and meniscus position oscillations, as well as Eqs. (21) and (29) for k_i and n_i , we arrive at the system of algebraical equations for unknown amplitudes A_G , A_L and C .

$$\begin{aligned}
 A_G \tilde{\alpha}_{11} + A_L \tilde{\alpha}_{1,2} + C \tilde{\alpha}_{13} &= 0 \\
 A_G \tilde{\alpha}_{21} + A_L \tilde{\alpha}_{22} &= 0 \\
 A_G \tilde{\alpha}_{31} + A_L \tilde{\alpha}_{32} + C \tilde{\alpha}_{33} &= 0
 \end{aligned}
 \tag{C.1}$$

where

$$\tilde{\alpha}_{11} = \bar{\rho}_G, \quad \tilde{\alpha}_{12} = -\bar{\rho}_L, \quad \tilde{\alpha}_{13} = -\Omega(\bar{\rho}_G - \bar{\rho}_L)$$

$$\begin{aligned} \tilde{\alpha}_{21} &= (k_G \bar{\rho}_G \bar{x}_f + 2\bar{\rho}_L \bar{u}_L), & \tilde{\alpha}_{22} &= -(k_L \bar{\rho}_L \bar{x}_f + 2\bar{\rho}_L \bar{u}_L) \\ \tilde{\alpha}_{31} &= \left(\bar{u}_L + \rho_{G,L} \frac{\bar{h}_G}{q_e} - \alpha_G \rho_{G,L} n_G \right), & \tilde{\alpha}_{32} &= \left(\bar{u}_L + \frac{\bar{h}_L}{q_e} - \alpha_L n_L \right) \\ \tilde{\alpha}_{33} &= \Omega \bar{u}_L \left(\rho_{G,L} \frac{\bar{h}_G}{q_e} - \frac{\bar{h}_L}{q_e} \right), & \rho_{G,L} &= \rho_G / \rho_L \end{aligned}$$

Note that the system (C.1) is valid for small deviations of the interface from \bar{x}_f when $n_i x'_f \ll 1$ and $\exp(n_i x'_f) \simeq 1$. Estimations show that the term $C\tilde{\alpha}_{33}$ in the thermal balance equation on the interface is small in comparison with the term $A_G\tilde{\alpha}_{31}$ and $A_L\tilde{\alpha}_{32}$. Besides, since $\rho_{G,L} \frac{\bar{h}_G}{q_e} \ll 1$ and $\frac{\bar{h}_L}{q_e} \ll 1$, it is possible to neglect the second term in the expressions for coefficients $\tilde{\alpha}_{31}$ and $\tilde{\alpha}_{32}$ and assume that $\tilde{\alpha}_{31} = (\bar{u}_L - \alpha_G \rho_{G,L} n_G)$, $\tilde{\alpha}_{32} = (\bar{u}_L - \alpha_L n_L)$. Then the nontrivial solution of Eqs. (C.1) corresponds to the following condition:

$$\begin{vmatrix} \tilde{\alpha}_{11} & \tilde{\alpha}_{12} & \tilde{\alpha}_{13} \\ \tilde{\alpha}_{21} & \tilde{\alpha}_{22} & 0 \\ \tilde{\alpha}_{31} & \tilde{\alpha}_{32} & 0 \end{vmatrix} = 0 \tag{C.2}$$

From (C.2), it follows:

$$\tilde{\alpha}_{13}(\tilde{\alpha}_{21}\tilde{\alpha}_{32} - \tilde{\alpha}_{22}\tilde{\alpha}_{31}) = 0 \tag{C.3}$$

The case $\tilde{\alpha}_{13} = 0$ corresponds to condition $\Omega = 0$ (stationary regime), we obtain the following dispersion equation for $\Omega \neq 0$:

$$\tilde{\alpha}_{21}\tilde{\alpha}_{32} - \tilde{\alpha}_{22}\tilde{\alpha}_{31} = 0 \tag{C.4}$$

The specific form of the dependence of the complex frequency Ω on parameters of the problem found by Eq. (C.4) is presented as follows:

$$a_* \Omega^{3/2} + b_* \Omega + c_* \Omega^{1/2} + d_* = 0 \tag{C.5}$$

where

$$a_* = (1 + \alpha_{G,L}^{1/2} \rho_{L,G}) \alpha_L^{-1/2},$$

$$b_* = -\frac{\bar{u}_L}{\alpha_L} (1 - \rho_{L,G}),$$

$$c_* = -\left\{ -\frac{32}{d^2} v_G (1 - v_{L,G} \alpha_{G,L}^{1/2}) + 2\rho_{L,G} \frac{\bar{u}_L}{\bar{x}_f} (1 - \rho_{G,L} \alpha_{L,G}^{1/2}) \right\} \frac{1}{\sqrt{\alpha_L}},$$

$$d_* = -\frac{32}{d^2} v_G \frac{\bar{u}_L}{\alpha_L} (1 - v_{L,G} \rho_{L,G})$$

and the ratio of characteristic parameters, corresponding to liquid and gaseous phases, is expressed as $\alpha_{j,i} = \frac{\alpha_j}{\alpha_i}$, $\rho_{j,i} = \frac{\rho_j}{\rho_i}$, $v_{j,i} = \frac{v_j}{v_i}$.

Introducing a new variable

$$y = \Omega^{1/2} + \frac{b_*}{3a_*} \quad (\text{C.6})$$

we reduce Eq. (C.5) to the form

$$y^3 + 3P_*y + 2q_* = 0 \quad (\text{C.7})$$

where

$$2q_* = \frac{2b_*^3}{27a_*^3} - \frac{b_*c_*}{3a_*^2} + \frac{d_*}{a_*}, \quad (\text{C.8})$$

$$3P_* = \frac{3a_*c_* - b_*^2}{3a_*^2}$$

Appendix D. Solution of the dispersion equation

Eq. (30) has three roots: three real or one real and two complex, depending on the value of determinant $D = q_*^2 + P_*^3$ (Korn and Korn, 1968). Since our aim is to determine the complex frequency Ω , we will consider the complex solution of Eq. (30) only.

In the case when $q_*^2 + P_*^3 > 0$ and $P_* < 0$, the complex roots of Eq. (30) are

$$\Omega_{\text{I}}^{1/2} = \left(r_* \cosh \frac{\varphi}{3} + i\sqrt{3}r_* \sinh \frac{\varphi}{3} \right) - \frac{b_*}{3a_*} \quad (\text{D.1})$$

$$\Omega_{\text{II}}^{1/2} = \left(r_* \cosh \frac{\varphi}{3} - i\sqrt{3}r_* \sinh \frac{\varphi}{3} \right) - \frac{b_*}{3a_*} \quad (\text{D.2})$$

where $\cosh \varphi = \frac{q_*}{r_*^3}$, $r_* = \pm \sqrt{|P_*|}$, the sign of r_* is the same as sign of q_* .

In the case when $P_* > 0$ the complex roots of Eq. (30) are

$$\Omega_{\text{I}}^{1/2} = \left(r_* \sinh \frac{\varphi}{3} + i\sqrt{3}r_* \cosh \frac{\varphi}{3} \right) - \frac{b_*}{3a_*} \quad (\text{D.3})$$

$$\Omega_{\text{II}}^{1/2} = \left(r_* \sinh \frac{\varphi}{3} - i\sqrt{3}r_* \cosh \frac{\varphi}{3} \right) - \frac{b_*}{3a_*} \quad (\text{D.4})$$

where $\sinh \varphi = \frac{q_*}{r_*^3}$.

Since $\Omega = \xi + i|\psi|$ and

$$\Omega^{1/2} = \left\{ \sqrt{\sqrt{\xi^2 + |\psi|^2} + \xi} + i \sqrt{\sqrt{\xi^2 + |\psi|^2} - \xi} \right\} \quad (\text{D.5})$$

we split Eqs. (D.1), (D.2) and (D.3), (D.4) into real and imaginary parts. As a result we obtain expressions for the growth rate and frequency of oscillations

$$\xi = \left(r_* \cosh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right)^2 - 3r_*^2 \sinh^2 \frac{\varphi}{3} \quad (\text{D.6})$$

$$|\varphi| = \left| 4 \left(r_* \cosh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right) \sqrt{3} r_* \sinh \frac{\varphi}{3} \right| \quad (\text{D.7})$$

for the case $q_*^2 + P_*^3 > 0, P_* < 0$ and

$$\xi = \left(r_* \sinh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right)^2 - 3r_*^2 \cosh^2 \frac{\varphi}{3} \quad (\text{D.8})$$

$$|\varphi| = \left| 4 \left(r_* \sinh \frac{\varphi}{3} - \frac{b_*}{3a_*} \right) \sqrt{3} r_* \cosh \frac{\varphi}{3} \right| \quad (\text{D.9})$$

for the case $P_* > 0$.

Appendix E. Perturbed energy equation for moderate Peclet number

When the temperature T_s of the interface is constant, and wall heat flux is also constant, temperature oscillations are the result of the meniscus displacement along micro-channel axis. They are expressed as

$$T'_i = x' \frac{dT_i}{dx} = x' \frac{d\bar{T}_i}{dx} + x' \frac{dT'_i}{dx} \quad (\text{E.1})$$

Neglecting the term containing the product of oscillations, we obtain

$$T'_i = x' \frac{d\bar{T}_i}{dx}, \frac{dT'_i}{dx} = x' \frac{d^2\bar{T}_i}{dx^2} \quad (\text{E.2})$$

The oscillations of the meniscus position x' can be estimated as follows:

$$x' = u'_* \psi_* \quad (\text{E.3})$$

where u'_* is the characteristic oscillation velocity (order of liquid oscillation velocity).

Convective heat transfer that is due to oscillations determines the second and the third terms on the left-hand side of Eq. (10). From Eqs. (E.2) and (E.3), we estimate the values of these terms. For this, we consider the ratio of the third term to the second one

$$\left| \frac{\bar{u}_i \frac{\partial T'_i}{\partial x}}{u'_i \frac{\partial T_i}{\partial x}} \right| = \frac{1}{St_*} \frac{\bar{u}_i \left| \left(\frac{\partial^2 \tilde{T}_i}{\partial \tilde{x}_i^2} \right) \right|}{\left| \left(\frac{\partial \tilde{T}_i}{\partial \tilde{x}_i} \right) \right|} \tag{E.4}$$

where $St_* = \frac{\ell_* \psi_*}{u'_*}$.

The temperature distribution in a heated micro-channel is described by the following correlation (Peles et al., 2001):

$$\tilde{T} = C_1^{(i)} + \vartheta_i(\tilde{x}^* + Pe_i^{*-1}) + C_2^{(i)} \exp(Pe_i^* \tilde{x}^*) \tag{E.5}$$

where the constants $C_1^{(i)}$ and $C_2^{(i)}$ are expressed as

$$\begin{aligned} C_1^{(L)} &= (1 - C_2^{(L)}) - \vartheta_L/Pe_L^* \\ C_2^{(L)} &= [(\tilde{T}_s - 1) - \vartheta_L \tilde{x}_f^*] / [\exp(Pe_L^* \tilde{x}_f^*) - 1] \\ C_1^{(G)} &= \tilde{T}_s - \vartheta_G(\tilde{x}_f^* + Pe_G^{*-1}) - C_2^{(G)} \exp(Pe_L^* \tilde{x}_f^*) \\ C_2^{(G)} &= -\vartheta_G / [Pe_G \exp(Pe_G^*)] \end{aligned} \tag{E.6}$$

Here superscripts G and L correspond to vapor and liquid, respectively; characteristic length $\ell_* = \ell$ is the length of the capillary tube, $T_* = T_{L.in}$ is the inlet liquid temperature.

The temperature distribution in a heated micro-channel is not uniform (Fig. 6, Peles et al., 2000). The liquid entering the channel absorbs heat from the walls and its temperature increases. As the liquid flows toward the evaporating front, it reaches a maximum temperature and then the temperature begins to decrease up to a saturated temperature. Within the vapor domain, the temperature increases monotonically from saturation temperature T_s up to outlet temperature $T_{G.o}$.

The module of ratio of the second order derivative $\frac{\partial^2 T_i}{\partial x^2}$ to the first-order one $\frac{\partial T_i}{\partial x}$ is

$$\left| \frac{\left(\frac{\partial^2 \tilde{T}_i}{\partial \tilde{x}_i^2} \right)}{\left(\frac{\partial \tilde{T}_i}{\partial \tilde{x}_i} \right)} \right| = \frac{C_2^{(i)} Pe_i^{*2} \exp(Pe_i^* \tilde{x}^*)}{1 - C_2^{(i)} Pe_i^* \exp(Pe_i^* \tilde{x}^*)} \tag{E.7}$$

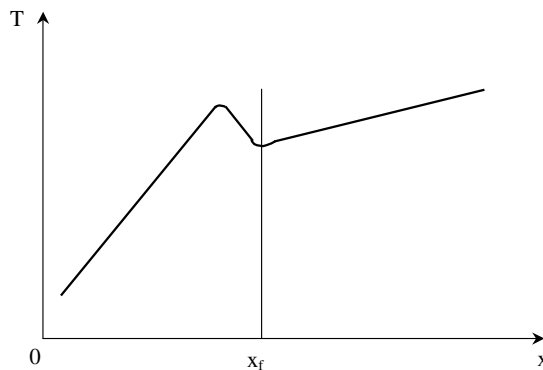


Fig. 6. Temperature oscillation along a heated micro-channel.

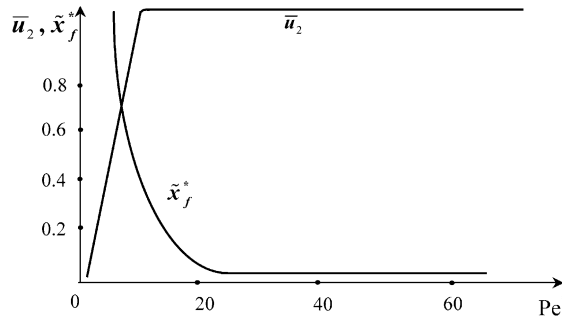


Fig. 7. The dependences $\bar{u}_L(Pe^*)$ and $\tilde{x}_f(Pe^*)$.

The value of the ratio $\varepsilon = \frac{(\frac{\partial^2 \tilde{T}_i}{\partial \tilde{x}^{*2}})/(\frac{\partial \tilde{T}_i}{\partial \tilde{x}^*})}{(\frac{\partial T'_i}{\partial x})}$ depends on the Peclet number, as well as on the meniscus position in stable state \tilde{x}_f . The dependence of the lowest meniscus position $\tilde{x}_{\text{flow}}^*$ on Pe_* for $\varepsilon = 1$ is shown in Fig. 7. It is seen that in the range $0.1 < Pe_* < 1$ and $\tilde{x}_f^* > \tilde{x}_{\text{flow}}^*$, $\varepsilon \geq 1$. Thus, the value of the r.h.s of Eq. (E.4) determines the multiplier $\frac{\bar{u}_i}{u'_i} \frac{1}{St_*}$. When $St_* \sim 1$, $\frac{\bar{u}_i}{u'_i} \frac{1}{St_*} \gg 1$. Since $\bar{u}_i \gg u'_i$. In this case it is possible to omit the second term in the l.h.s of Eq. (10) and it takes the following form:

$$\frac{\partial T'_i}{\partial t} + \bar{u}_i \frac{\partial T'_i}{\partial x} = \frac{\partial}{\partial x} \left(\alpha_i \frac{\partial T'_i}{\partial x} \right) \quad (\text{E.8})$$

References

- Adams, T.M., Abdel-Khalik, S.I., Jeter, S.M., Qureshi, Z.H., 1998. An experimental investigation of single-phase forced convection in micro-channels. *Int. J. Heat Mass Transfer* 41, 851–857.
- Bailey, D.K., Ameel, T.A., Warrington, R.O., Savoie, T.I., 1995. Single-phase forced convection heat transfer in microgeometries: a review. IECEC paper ES-396, ASME, pp. 301–310.
- Bejan, A., 1993. *Heat transfer*. John Wiley & Sons Inc., New York.
- Blake, T.D., 1993. Dynamic contact angles and wetting kinetics. In: Berg, J.C. (Ed.), *Wettability*. Marcel-Dekker Inc., New York, pp. 251–309.
- Bowers, M.B., Mudawar, I., 1994. High flux boiling in low flow rate, low pressure drop mini-channel and micro-channel heat sinks. *Int. J. Heat Mass Transfer* 37, 321–332.
- Cox, R.G., 1986. The dynamics of the spreading of liquids on a solid surface. Part 1. Viscous flows. *J. Fluid Mech.* 168, 169–194.
- Dussan, E.B.V., 1979. On the spreading of liquids on solid surfaces: static and dynamic contact lines. *Ann. Rev. Fluid Mech.* 11, 371–400.
- Grigoriev, V.A., Zorin, V.M. (Eds), 1982. *Heat Mass Transfer. Thermal Experiment. Reference Book*. Energoizdat, Moscow (in Russian).
- Hoffman, R., 1975. A study of the advancing interface, Interface shape in liquid gas system. *J. Colloid Interface Sci.* 50, 228–241.
- Incropera, F.P., 1999. *Liquid cooling of electronic devices by single-phase convection*. John Wiley and Sons Inc., New York.
- Kistler, S.F., 1993. Hydrodynamics of Wetting. In: Berg, J.C. (Ed.), *Wettability*. Marcel-Dekker Inc., New York, pp. 311–429.
- Khrustalev, D., Faghri, D., 1995. Fluid flow effect in evaporation from liquid–vapor meniscus. *J. Heat Transfer* 118, 725–730.

- Korn, G.A., Korn, T.M., 1968. *Mathematical Handbook*. McGraw-Hill Company, New York.
- Landau, L.D., Lifshitz, E.M., 1959. *Fluid Mechanics*, Second Ed. Pergamon, London.
- Morijama, K., Inoue, A., 1992. The thermodynamic characteristics of two-phase flow in extremely narrow channels (the frictional pressure drop and heat transfer of boiling two-phase flow, analytical model). *Heat Transfer Jpn. Res.* 21, 838–856.
- Ngan, C.D., Dussan, E.B.V., 1982. On the nature of the dynamic contact angle: an experimental study. *J. Fluid Mech.* 118, 27–40.
- Ory, E., Yuan, H., Prosperetti, A., 2000. Growth and collapse of vapor bubble in narrow tube. *Phys. Fluid* 12, 1268–1277.
- Peles, Y.P., Yarin, L.P., Hetsroni, G., 1998. Heat transfer of two-phase flow in heated capillary. *Heat Transfer 1998*. In: *Proceedings of the 11th International Heat Transfer Conference*, vol. 2, Kyongju, Korea, pp. 193–198.
- Peles, Y.P., Yarin, L.P., Hetsroni, G., 2000. Thermodynamic characteristics of two-phase flow in a heated capillary. *Int. J. Multiphase Flow* 26, 1063–1093.
- Peles, Y.P., Yarin, L.P., Hetsroni, G., 2001. Steady and unsteady flow in a heated micro-channels. *Int. J. Multiphase Flow* 28, 1589–1616.
- Peng, X.F., Wang, B.X., 1993. Forced convection and flow boiling heat transfer for liquid flowing through micro-channels. *Int. J. Heat Mass Transfer* 14, 3421–3427.
- Peng, X.F., Peterson, G.P., 1995. The effect of thermofluid and geometrical parameters on convection of liquid through rectangular micro-channels. *Int. J. Heat Mass Transfer* 38, 755–758.
- Peng, X.F., Peterson, G.P., 1996. Convective heat transfer and flow friction for water flow in micro-channel structure. *Int. J. Heat Mass Transfer* 39, 2599–2608.
- Peng, X.F., Peterson, G.P., Wang, B.X., 1994. Heat transfer characteristics of water flowing through micro-channels. *Exp. Heat Transfer* 7, 249–264.
- Peng, X.F., Hu, H.Y., Wang, B.X., 1998. Boiling nucleation during liquid flow in micro-channels. *Int. J. Heat Mass Transfer* 41, 101–106.
- Peng, X.F., Tien, Y., Lee, D.J., 2001. Bubble nucleation in micro-channels: statistical mechanics approach. *Int. J. Multiphase Flow* 44, 2953–2964.
- Reid, R.C., Prausnitz, J.M., Poling, B.E., 1987. *The properties of gases and liquids*. McGraw-Hill, New York.
- Sobhan, C.B., Garinella, S.V., 2001. A comparative analysis of studies on heat transfer and fluid flow in micro-channels. *Microscale Thermophys. Eng.* 5, 293–311.
- Tuckerman, D., 1984. *Heat transfer microstructure for integrated circuits*. Ph.D. thesis. Stanford University, Stanford, CA.
- Tuckerman, D., Pease, R.F.W., 1981. High-performance heat sinking for VLSI. *IEEE Electron. Device Lett.* EDL-2, 126–129.
- Vargaftic, N.B., Vinogradov, Y.K., Yargin, V.S., 1996. *Handbook of Physical Properties of Liquids and Gases*. Pure Substance and Mixtures, third augmented and revised ed. Begel House, New York.
- Wang, B.X., Peng, X.F., 1994. Experimental investigation of liquid forced convection heat transfer through micro-channels. *Int. J. Heat Mass Transfer* 37, 73–82.
- Wiesberg, A., Ban, H.H., Zemel, J.N., 1992. Analysis of micro-channels for integrated cooling. *Int. J. Heat Mass Transfer* 35, 2465–2472.
- Wu, P.Y., Little, W.A., 1984. Measurement of the heat transfer characteristics of gas flow a fine channels heat exchangers used for microminiature refrigerators. *Cryogenics* 24, 415–420.
- Yarin, L.P., Ekelchik, L.A., Hetsroni, G., 2002. Two-phase laminar flow in a heated micro-channels. *Int. J. Multiphase Flow* 28, 1589–1616.
- Yuan, H., Qguz, H.N., Prosperetti, A., 1999. Growth and collapse of a vapor bubble in a small tube. *Int. J. Heat Mass Transfer* 42, 3643–3657.