

# Influence of Ductile Damage Evolution on the Collapse Load of Frames

Edwin L. Chica<sup>1</sup>

Department of Mechanical Engineering,  
University of Antioquia,  
C/67 No. 53-108,  
AA 1226 Medellín, Colombia  
e-mail: echica@udea.edu.co

Antolín L. Ibán

e-mail: ali@eis.uva.es

José M. G. Terán

e-mail: teran@uva.es

Solid Mechanics and Structures Group,  
E.T.S.I.I. (Industrial Engineering),  
University of Valladolid,  
C/Paseo del Cauce, 59,  
CP 47011 Valladolid, Spain

Pablo M. López-Reyes

Structural Design Area,  
CARTIF,  
Technological Park of Boecillo,  
CP 47151 Valladolid, Spain  
e-mail: pablop@cartif.es

*In this note we analyze the influence of four damage models on the collapse load of a structure. The models considered here have been developed using the hypothesis based on the concept of effective stress and the principle of strain equivalence and they were proposed by Lemaitre and Chaboche (1990, *Mechanics of Solid Materials*), Wang (1992, "Unified CDM Model and Local Criterion for Ductile Fracture—I. Unified CDM Model for Ductile Fracture," *Eng. Fract. Mech.*, **42**, pp. 177–183), Chandrakanth and Pandey (1995, "An Isotropic Damage Model for Ductile Material," *Eng. Fract. Mech.*, **50**, pp. 457–465), and Bonora (1997, "A Nonlinear CDM Model for Ductile Failure," *Eng. Fract. Mech.*, **58**, pp. 11–28). The differences between them consist mainly in the form of the dissipative potential from which the kinetic law of damage is derived and also in the assumptions made about some parameters of the material.*

[DOI: 10.1115/1.4000427]

## 1 Introduction

The continuum damage mechanics (CDM) is a new approach through which the material degradation can be quantified as a measurable parameter called the *damage variable*. It is considered as an internal variable in the framework of thermodynamics and it is a measure of the degradation of the material. The constitutive model of a postulated damage parameter should be a function of

the local stress, strain, strain rate, etc. Integrating over the loading history, the damage law will predict the material failure dynamically [1,2]. The dissipation potential function ( $\phi$ ) is a scalar function of all the *observable variables* (elastic strain tensor  $\varepsilon_{ij}$  and temperature  $T$ ; their associated variables are the stress tensor  $\sigma_{ij}$  and the entropy  $s$ ) and the *internal variables* (accumulated plastic strain  $p$  and damage variable  $D$ ; their associated variables are the increment of yield surface  $R$  and the damage strain energy release rate  $Y$ ) as parameters [2–4]. The differences between many ductile models are mainly based on the form of this potential.

## 2 Materials and Methods

The analysis of frames considering damaged material can be done using the same concepts of equivalence of stress and strain as in continuum mechanics. Therefore, if we consider a 2D beam element of a frame between nodes 1 and 2 (Fig. 1), generalized damage, stresses, and displacements can be defined, respectively, at the beam-ends as

$$\{D\} = \{D_1, D_2\} \quad (1)$$

$$\{dF\} = \{dN_{x1}, dV_{y1}, dM_{z1}, dN_{x2}, dV_{y2}, dM_{z2}\} \quad (2)$$

$$\{du^{ep}\} = \{u_{x1}^{ep}, v_{y1}^{ep}, \theta_1^{ep}, u_{x2}^{ep}, v_{y2}^{ep}, \theta_2^{ep}\} \quad (3)$$

A constitutive model for the 2D beam element can be defined as the set of equations that relates the generalized stress with the history of generalized displacements. For the elastic case considering that the variation in the elastoplastic displacement  $du^{ep}$  at the beam-ends can be split into its elastic ( $du^e$ ) and its plastic ( $du^p$ ) components, in a vectorial form  $\{du^{ep}\} = \{du^e\} + \{du^p\}$

$$\{dF\} = [K]\{du^e\} = [K](\{du^{ep}\} - \{du^p\}) \quad (4)$$

where  $[K]$  is the elastic stiffness matrix for the 2D beam element.

The variation in plastic displacement  $\{du^p\}$ , taking into account the laws in the case of associated flow, can be expressed through

$$\{du^p\} = \{d\lambda\} \left\{ \frac{dZ}{dF} \right\} \quad (5)$$

where  $Z$  is the yield function for the beam element and  $\{d\lambda\}$  is a  $2 \times 1$  column vector of so-called plastic multipliers  $d\lambda_1$ ,  $d\lambda_2$  that measure the total plastic flow of the beam-ends.

The classic CDM formulation from Chaboche and Lemaitre [5], in the form specifically related to damage evolution, can be generically expressed as

$$\{dD\} = \{d\lambda\} \left\{ \frac{-\partial\phi^*}{\partial Y} \right\} \quad \text{and} \quad \dot{p} = \frac{\dot{\lambda}}{(1-D)} \quad (6)$$

Equation (6), the kinetic law of damage evolution, shows the coupling between the damage rate and the effective accumulated plastic strain rate  $\dot{p}$  by means of the plastic multiplier.  $\phi^*$  is the damage dissipation potential.

From the plastic consistency condition, we can write

$$\dot{Z} = \left\{ \frac{\partial Z}{\partial F} \right\} \{dF\} + \left\{ \frac{\partial Z}{\partial D} \right\} \{dD\} = 0 \quad (7)$$

By substituting Eqs. (4)–(6) into Eq. (7), isolating  $\{d\lambda\}$  and substituting it in Eqs. (6) and (4) yields

$$\begin{aligned} \{dF\} &= [K] \left[ 1 - \frac{[K] \left\{ \frac{\partial Z}{\partial F} \right\} \left\{ \frac{\partial Z}{\partial F} \right\}}{\left\{ \frac{\partial Z}{\partial F} \right\} [K] \left\{ \frac{\partial Z}{\partial F} \right\} + \left\{ \frac{\partial Z}{\partial D} \right\} \left\{ \frac{\partial \phi^*}{\partial Y} \right\}} \right] \{du^{ep}\} \\ &= [K^{ep}] \{du^{ep}\} \end{aligned} \quad (8)$$

where  $[K^{ep}]$  is the elastoplastic degradation stiffness matrix for the 2D beam element.

<sup>1</sup>Corresponding author.

Contributed by the Applied Mechanics Division of ASME for publication in the JOURNAL OF APPLIED MECHANICS. Manuscript received February 10, 2009; final manuscript received July 17, 2009; published online February 4, 2010. Assoc. Editor: Yonggang Huang.

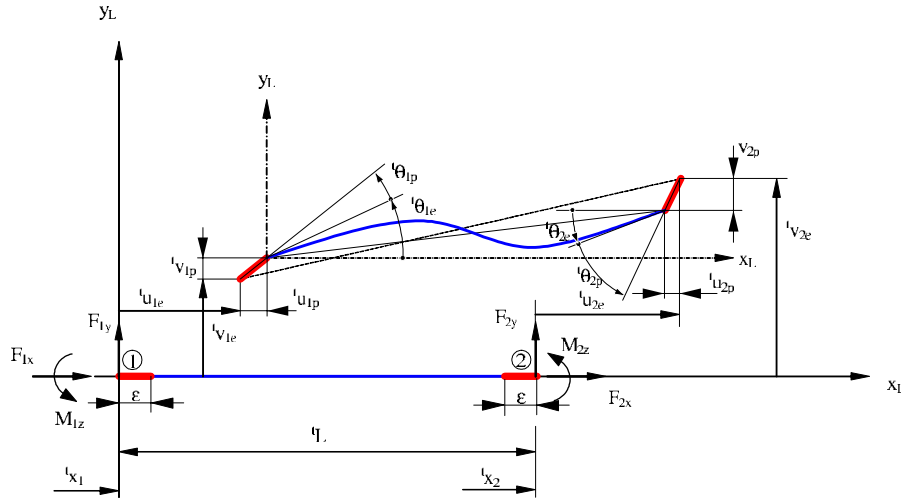


Fig. 1 Beam element with plasticity and damage at its ends

To determine the elastoplastic degradation stiffness matrix, it is necessary to evaluate the potential derivative with respect to the damage strain energy  $Y$ .

$$Y = -\frac{\sigma_{eq}^2}{2E(1-D)^2} f\left(\frac{\sigma_m}{\sigma_{eq}}\right) \quad \text{where} \quad f\left(\frac{\sigma_m}{\sigma_{eq}}\right) = \left[ \frac{2}{3}(1+\nu) + 3(1-2\nu)\left(\frac{\sigma_m}{\sigma_{eq}}\right)^2 \right] \quad (9)$$

where  $\sigma_m$  is the hydrostatic stress,  $\sigma_{eq}$  is the von Mises equivalent stress,  $\nu$  is the Poisson's ratio, and  $E$  is the Young's modulus.

The next step consists of deriving the damage dissipation potential (Table 1) with respect to  $Y$  for obtaining the damage evolution law. Now we describe the procedure for Lemaitre's model [6].

For a ductile material, the effective equivalent von Mises stress can be written as a function of the accumulated plastic strain, using the Ramberg–Osgood power law, as follows:

$$\frac{\sigma_{eq}}{1-D} = \kappa p^n, \quad p^n = \frac{\sigma_{eq}}{\kappa(1-D)} \quad \text{or} \quad \sigma_{eq} = \kappa p^n (1-D) \quad (10)$$

where  $\kappa$  is a material constant. Then, by substituting Eqs. (9) and (10) into Lemaitre's damage evolution law (Table 1), we get

$$\frac{\partial \phi^*}{\partial Y} = -\left[ \frac{\kappa^2}{2ES_L} f\left(\frac{\sigma_m}{\sigma_{eq}}\right) \right] \frac{p^{2n}}{1-D} = -[B_0] \frac{p^{2n}}{1-D} \quad (11)$$

In the case of proportional loading, the ratio  $\sigma_m/\sigma_{eq}$  can be considered as a constant with respect to time so, for simplicity, the term  $[(\kappa^2/2ES_L)f(\sigma_m/\sigma_{eq})]$  is renamed as  $[B_0]$ .

By substituting Eq. (11) in the damage evolution law given in Eq. (6), we obtain

$$\dot{D} = [B_0] p^{2n} \dot{p} \quad \text{or} \quad \frac{dD}{dp} = [B_0] p^{2n} \quad (12)$$

Then, we integrate Eq. (12) between the initial condition  $D = D_o$  and  $D = D_{cr}$ . The damage process remains inactivated (i.e.,  $D = D_o$ ) until the effective accumulated plastic strain  $p$  reaches a threshold strain  $p_{th}$  (i.e.,  $dD = 0$  and  $D = 0$  or  $D = D_o$ ). When  $p = p_{th}$ , nucleation is the dominating void growth state [3]. When  $D = D_{cr}$ , coalescence dominates the void growth process and the effective accumulated plastic strain  $p$  reaches the critical value  $p_{cr}$  for which failure occurs.

$$D_{cr} - D_o = [B_0] \left( \frac{p_{cr}^{2n+1} - p_{th}^{2n+1}}{2n+1} \right) \quad \text{and} \quad D_{cr} - D = [B_0] \left( \frac{p_{cr}^{2n+1} - p^{2n+1}}{2n+1} \right) \quad (13)$$

By eliminating  $[B_0]$  in these equations, we obtain a general integrated evolution law for ductile plastic damage

$$p^{2n+1} = p_{cr}^{2n+1} - \left( \frac{D_{cr} - D}{D_{cr} - D_o} \right) (p_{cr}^{2n+1} - p_{th}^{2n+1}) \quad (14)$$

By substituting the same term into Eq. (11), we obtain the derivative of the dissipation potential with respect to  $Y$ .

$$\frac{\partial \phi^*}{\partial Y} = -\frac{p^{2n}}{1-D} \left( \frac{D_{cr} - D_o}{p_{cr}^{2n+1} - p_{th}^{2n+1}} \right) (2n+1) \quad (15)$$

Similar procedures are used for obtaining the expressions for other models (Table 2). Figure 2 shows the evolution law for ductile plastic damage of the models considered. The material coefficients are taken from Ref. [3].

The next step is to determine  $\{\partial Z/\partial F\}$  and  $\{\partial Z/\partial D\}$ . It is necessary to define the yield function  $Z$  for the beam element in function of the stress and the damage of the material. For the following assumptions (material nonlinearity simulated by the formation of plastic zones of zero length at the beam-ends, effect of strain hardening not considered, and rectangular cross sections  $b \times h$ ) [7], we get

Table 1 Damage evolution law for different approaches

Bonora [3]	$\phi^* = \left[ \frac{1}{2} \left( -\frac{Y}{S_o} \right)^2 \frac{S_o}{1-D} \right] \frac{(D_{cr} - D)^{\alpha_B - 1/\alpha_B}}{p^{(2+n)/n}}$
Lemaitre [5]	$\phi^* = \left[ \frac{1}{2} \left( -\frac{Y}{S_L} \right)^2 \frac{S_L}{1-D} \right]$
Wang [1]	$\phi^* = \left[ \frac{1}{2} \left( -\frac{Y}{S_W} \right)^2 \frac{S_W}{1-D} \right] \frac{(p_{cr} - p)^{\alpha_W - 1}}{p^{2n}}$
Chandranth [2]	$\phi^* = \left[ \frac{1}{2} \left( -\frac{Y}{S_C} \right)^2 \frac{S_C}{1-D} \right] \frac{1}{D^{\alpha_C/n} \cdot p^{2n}}$

$D_{cr}$  and  $p_{cr}$  are the damage and deformation at failure initiation, respectively. The terms  $S_o$ ,  $S_L$ ,  $S_W$ ,  $S_C$ ,  $\alpha_B$ ,  $\alpha_W$ , and  $\alpha_C$  are the material constants and  $n$  is the hardening constant of the material.

**Table 2**  $\{\partial\phi^*/\partial Y\}$  and ductile plastic damage evolution law for different models


Bonora ( $PA_{MNVDB}$ )	$\frac{\partial\phi^*}{\partial Y} = -\alpha \left( \frac{(D_{cr}-D_o)^{1/\alpha}}{\ln(p_{cr}/p_{th})} \right) \frac{(D_{cr}-D)^{\alpha-1/\alpha}}{(1-D)p}$ $D = D_o + (D_{cr}-D_o) \left[ 1 - \left( 1 - \frac{\ln(p/p_{th})}{\ln(p_{cr}/p_{th})} \right)^\alpha \right]$ $p = e^A, \text{ where } e \text{ is the base of the Neperian logarithm}$ $A = \ln(p_{cr}) - \ln(p_{cr}/p_{th}) \left( \frac{D_{cr}-D}{D_{cr}-D_o} \right)^{1/\alpha}$
Lemaitre ( $PA_{MNVDL}$ )	$\frac{\partial\phi^*}{\partial Y} = -\frac{p^{2n}}{1-D} \left( \frac{D_{cr}-D_o}{p_{cr}^{2n+1}-p_{th}^{2n+1}} \right) (2n+1)$ $D = D_{cr} - (D_{cr}-D_o) \left( \frac{p_{cr}^{2n+1}-p^{2n+1}}{p_{cr}^{2n+1}-p_{th}^{2n+1}} \right)$ $p^{2n+1} = p_{cr}^{2n+1} - \left( \frac{D_{cr}-D}{D_{cr}-D_o} \right) (p_{cr}^{2n+1}-p_{th}^{2n+1})$
Wang ( $PA_{MNVDC}$ )	$\frac{\partial\phi^*}{\partial Y} = -\alpha \left( \frac{D_{cr}-D_o}{(p_{cr}-p_{th})^\alpha} \right) \frac{(p_{cr}-p)^{\alpha-1}}{1-D}$ $D = D_{cr} - (D_{cr}-D_o) \left( \frac{p_{cr}-p}{p_{cr}-p_{th}} \right)^\alpha$ $p = p_{cr} - (p_{cr}-p_{th}) \left( \frac{D_{cr}-D}{D_{cr}-D_o} \right)^{1/\alpha}$
Chandrasekhar ( $PA_{MNVDC}$ )	$\frac{\partial\phi^*}{\partial Y} = -\frac{1}{\alpha_n} \left( \frac{D_{cr}-D_o}{p_{cr}-p_{th}} \right) \frac{1}{D^{\alpha_n/(1-D)}}$ $D = \left[ D_o^{\alpha_n} + (D_{cr}^{\alpha_n} - D_o^{\alpha_n}) \left( \frac{p-p_{th}}{p_{cr}-p_{th}} \right) \right]^{1/\alpha_n}$ $p = p_{th} + (p_{cr}-p_{th}) \left( \frac{D^{\alpha_n} - D_o^{\alpha_n}}{D_{cr}^{\alpha_n} - D_o^{\alpha_n}} \right)$ $\alpha_n = \frac{\alpha}{n} + 1$

$$Z = \frac{|M_z|}{M_p} + \left( \frac{N_x}{N_p} \right)^2 \frac{1}{1-D} + \frac{1}{3} \left( \frac{V_y}{V_p} \right)^2 \frac{1}{(1-D)^3} - (1-D) = 0$$

(16)

$M_z$ ,  $N_x$ , and  $V_y$  are the stresses on the cross section of the beam and  $M_p$ ,  $N_p$ , and  $V_p$  are the plastic bending moment, plastic axial force, and plastic shear force, respectively, that cause the full yielding of the cross section of the beam.

Considering the yielding function of Eq. (16), we get

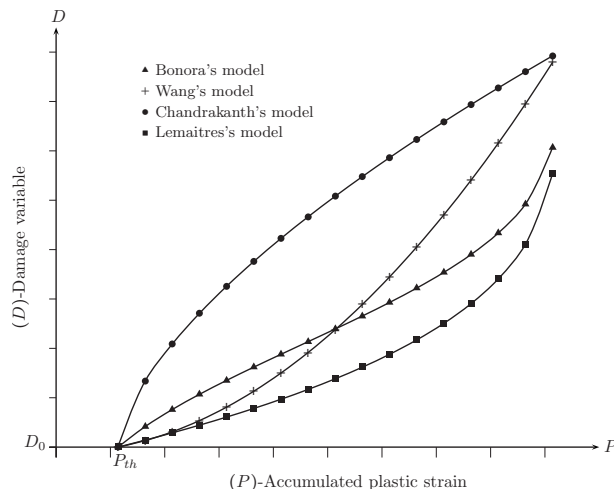

**Fig. 2** Damage ( $D$ ) versus accumulated plastic strain ( $p$ )

$$\left\{ \frac{\partial Z}{\partial F} \right\} = \begin{bmatrix} A_1 & B_1 & \frac{1}{M_p} & 0 & 0 & 0 \\ 0 & 0 & 0 & A_2 & B_2 & \frac{1}{M_p} \end{bmatrix}^T \quad \text{where}$$

$$A_i = \frac{2N_{xi}}{N_p^2(1-D_i)}; \quad B_i = \frac{2}{3} \frac{V_{yi}}{V_p^2(1-D_i)^3} \quad (17)$$

$$\left\{ \frac{\partial Z}{\partial D} \right\} = \begin{bmatrix} C_1 & 0 \\ 0 & C_2 \end{bmatrix} \quad \text{where}$$

$$C_i = \left( \frac{N_{xi}}{N_p} \right)^2 \frac{1}{(1-D_i)^2} + \left( \frac{V_{yi}}{V_p} \right)^2 \frac{1}{(1-D_i)^4} + 1 \quad (18)$$

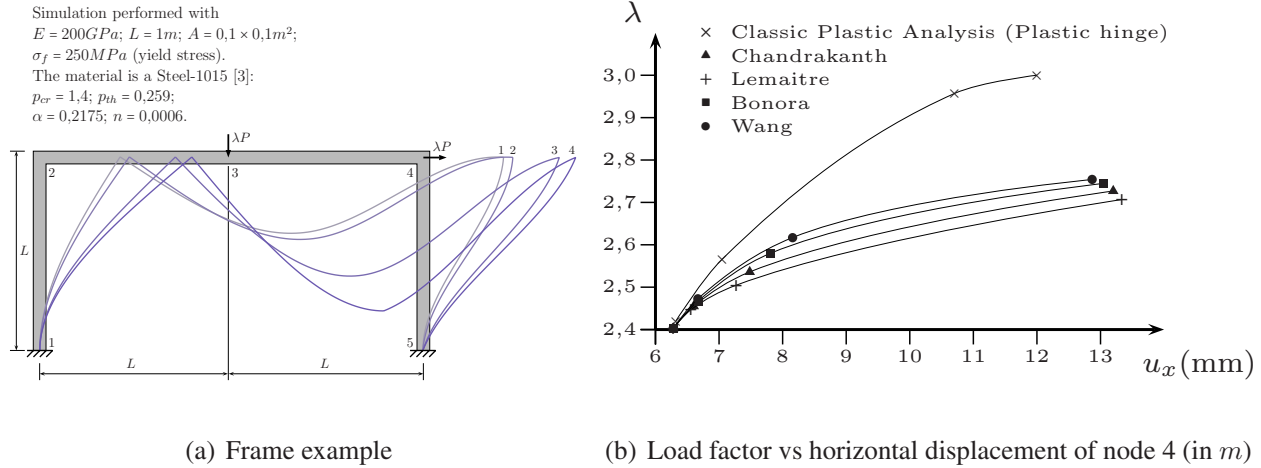


Fig. 3 Test on a 2D frame

### 3 Results and Result Analysis

The accuracy of the model is verified by simulating one experiment for which the data were available in literature [8]. We can conclude that the model is simple but it still represents accurately the behavior of the structure.

After this validation, we apply the method to compare the collapse load of the 2D frame shown in Fig. 3(a). We consider yielding by bending moment and axial and shear forces. The loads are proportionally increased from zero to their collapse values using an incremental and iterative procedure. Within each load increment, the equilibrium equations are solved by Newton–Raphson methods. Figure 3(a) shows the accumulated deformed shape of the frame for different load factors ( $\lambda$ ) for the model  $(PA_{MNVD})B$ . In all the models, the sequence of the cross section yielding is 5, 4, 3, and 1 and the collapse load is  $P = \lambda \cdot M_p$ .

The response curves for the classic plastic analysis and the elastoplastic degradation analysis are shown in Fig. 3(b). They were obtained considering the material nonlinear effect and the elastoplastic damage model proposed, using the hypothesis of strain equivalence and dissipative potential from which the kinetic law of damage is derived. The curves of damage models are below the curve of the plastic analysis model due to the loss of stiffness of some sections: The load factor is lower and the displacements are higher. The effective accumulated plastic strain plays an important role on the damage evolution law. The evolution of the damage variable is much greater with Wang's model than with the other models. Therefore, the progressive reduction in material ductility is much higher.

### 4 Conclusions

The damage model shows a nonlinear variation with respect to plastic strain and it can be identified with a quantitative evaluation of the parameters  $D_{cr}$ ,  $D_o$ ,  $p_{th}$ ,  $p_{cr}$  and also the hardening param-

eter, which defines the real stress-strain curve. The effects of axial and shear forces and bending moment have been taken into account for determining the yielding of the cross section of the beam.

The results lead to a more accurate prediction of the load that causes the yielding of the sections of the beam until the mechanism of collapse is formed. We can observe that the transmission of the load state among all the beams of a system is affected by the behavior of the plastic material and the accumulation of plastic strain, which leads to damage in the section and to the subsequent decreasing in the load-bearing capacity of the structure.

### Acknowledgment

This work is partially supported by the PSE-HABITAT\_2030 and funded by the M.E.C. (Spanish Government).

### References

- [1] Wang, T., 1992, "Unified CDM Model and Local Criterion for Ductile Fracture—I. Unified CDM Model for Ductile Fracture," *Eng. Fract. Mech.*, **42**, pp. 177–183.
- [2] Chandrakanth, S., and Pandey, P., 1995, "An Isotropic Damage Model for Ductile Material," *Eng. Fract. Mech.*, **50**, pp. 457–465.
- [3] Bonora, N., 1997, "A Nonlinear CDM Model for Ductile Failure," *Eng. Fract. Mech.*, **58**, pp. 11–28.
- [4] Le Roy, G., Embury, J., Edwards, G., and Ashby, M., 1981, "A Model of Ductile Fracture Based on the Nucleation and Growth of Void," *Acta Metall.*, **29**, pp. 1509–1522.
- [5] Lemaitre, J., 1992, *A Course on Damage Mechanics*, Springer-Verlag, Berlin, Germany.
- [6] Lemaitre, J., and Chaboche, J. L., 1990, *Mechanics of Solid Materials*, Cambridge University Press, Cambridge.
- [7] Chica, E., Terán, J., and Ibán, A., 2008, "Yield Surface for Elastoplastic 2D Beam Element Considering Damaged Material," Eighth World Congress on Computational Mechanics (WCCM8), Venice, Italy, Jun. 30–Jul. 4.
- [8] Inglessis, P., Gómez, G., Quintero, G., and Flórez, J., 1999, "Model of Damage for Steel Frame Members," *Eng. Struct.*, **21**, pp. 954–964.