

**ERRATA****High-Shear Capillary Viscosity Studies on Concentrated Copolymer Solutions**

*(J. Appl. Polymer Sci., 7, 909-922, 1963)*

By SURESH N. CHINAI and WILLIAM C. SCHNEIDER

*American Cyanamid Company, Stamford Research Laboratories, Stamford, Connecticut*

On page 910, eq. (1) should read as follows:

$$\tau_w = \Delta P r / 2l$$

**High Gloss of Extruded High Impact Polystyrene Sheet. A Microscopical Study of Sheet Morphology**

*(J. Appl. Polymer Sci., 7, 1731-1741 1963)*

By RUTH GIUFFRIA, R. O. CARHART, and D. A. DAVIS

*Major Appliance Laboratory, General Electric Company, Louisville, Kentucky*

The first 5 figures on pages 1732, 1733, 1734, and 1735 were incorrect and had no bearing with the subject matter of this paper. The correct figures and captions appear on the following 3 pages.

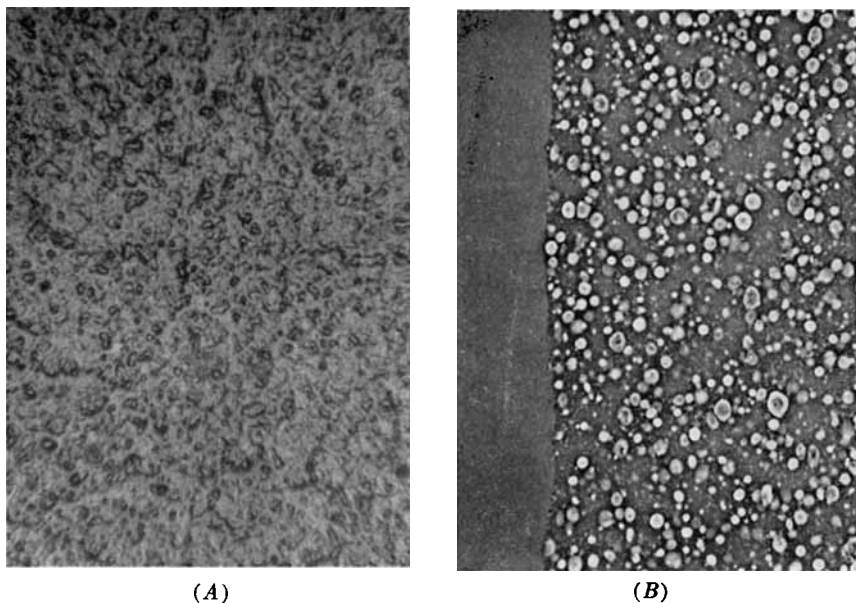


Fig. 1. Natural high impact polystyrene normally extruded, gloss 40: (A) surface, 33 $\times$ ; (B) microtome cross section, 280 $\times$ .

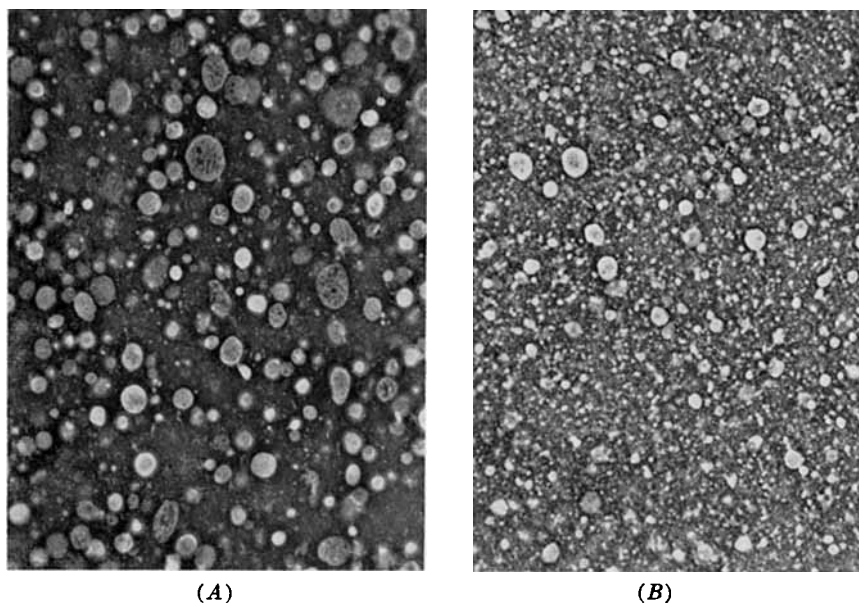


Fig. 2. Cross sections of normally extruded high impact polystyrene sheet, different lots of same polymer: (A) gloss 15; (B) gloss 60. 490 $\times$ .

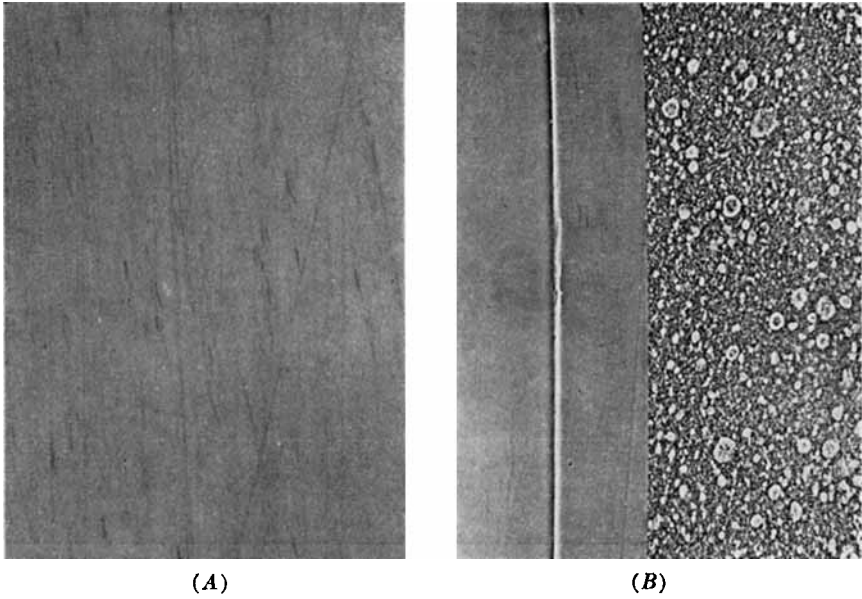


Fig. 3. General-purpose polystyrene laminate (2 mil) on high impact polystyrene sheet: (A) surface, 33X; (B) microtome cross section, 190X.



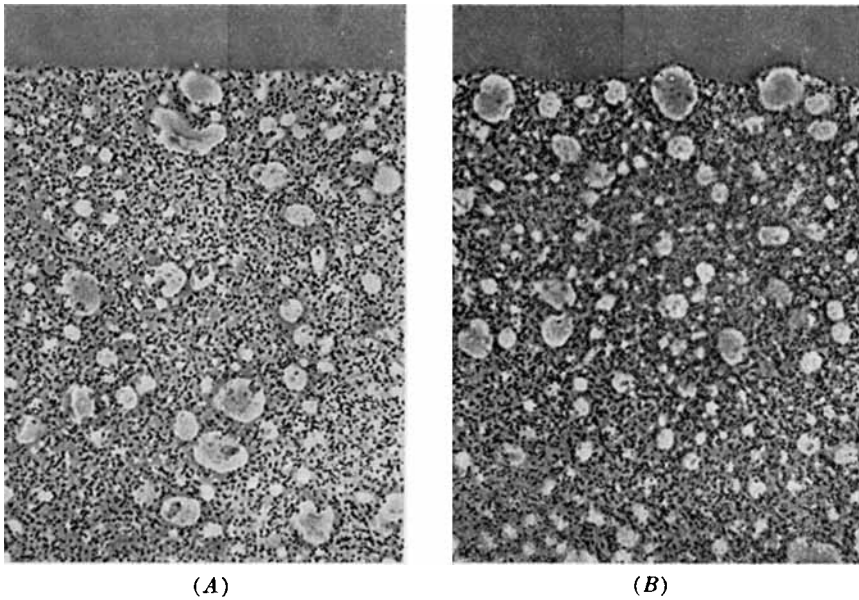



Fig. 4. Cross sections of gloss transfer sheet: (A) before heating; (B) after heating. 490X.

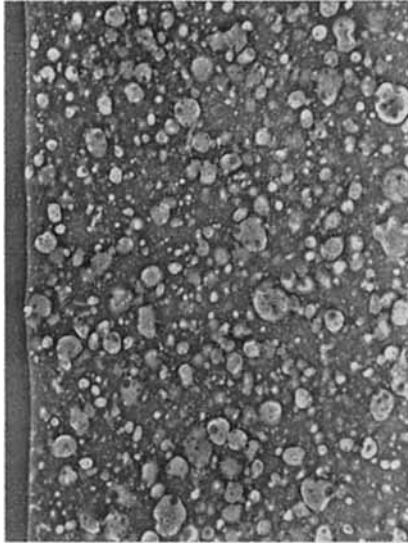

(A)

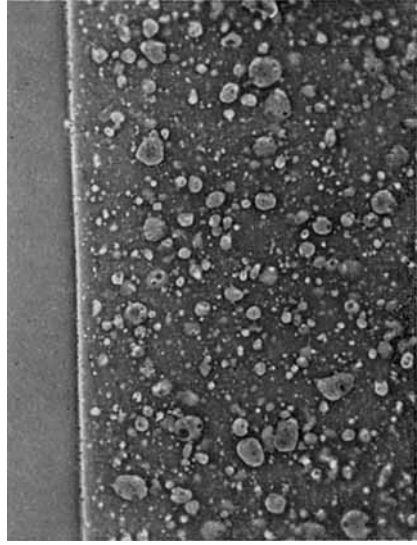

(B)

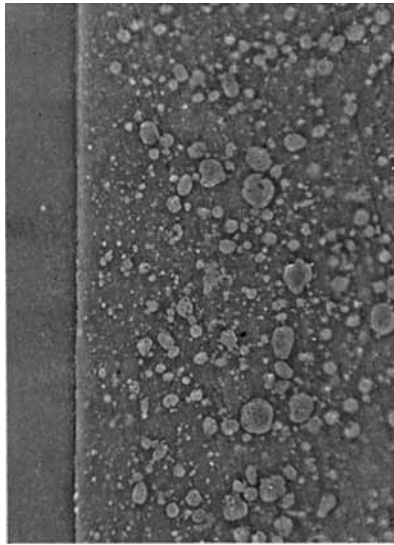

(C)

Fig. 5. Cross sections of extruded high impact polystyrene sheet, high shear technique: (A) normal extrusion, gloss 45; (B) high shear extrusion, gloss 84; (C) high shear extrusion, gloss 98. 325 $\times$ .