

Fatigue induced effects on bipolar strain loops in PZN–PT piezoelectric single crystals

Metin Ozgul · Susan Trolier-Mckinstry ·
Clive A. Randall

Published online: 7 July 2007
© Springer Science + Business Media, LLC 2007

Due to a processing error, the published article contains Figs. 5 and 7 uncorrected by the publisher at proof. The corrected figures are given below.

The online version of the original article can be found at <http://dx.doi.org/10.1007/s10832-007-9120-8>.

M. Ozgul (✉)
Department of Ceramic Engineering, Afyon Kocatepe University,
03200 Afyonkarahisar, Turkey
e-mail: metinozgul@aku.edu.tr

S. Trolier-Mckinstry · C. A. Randall
Materials Research Institute, Pennsylvania State University,
University Park, PA 16802, USA

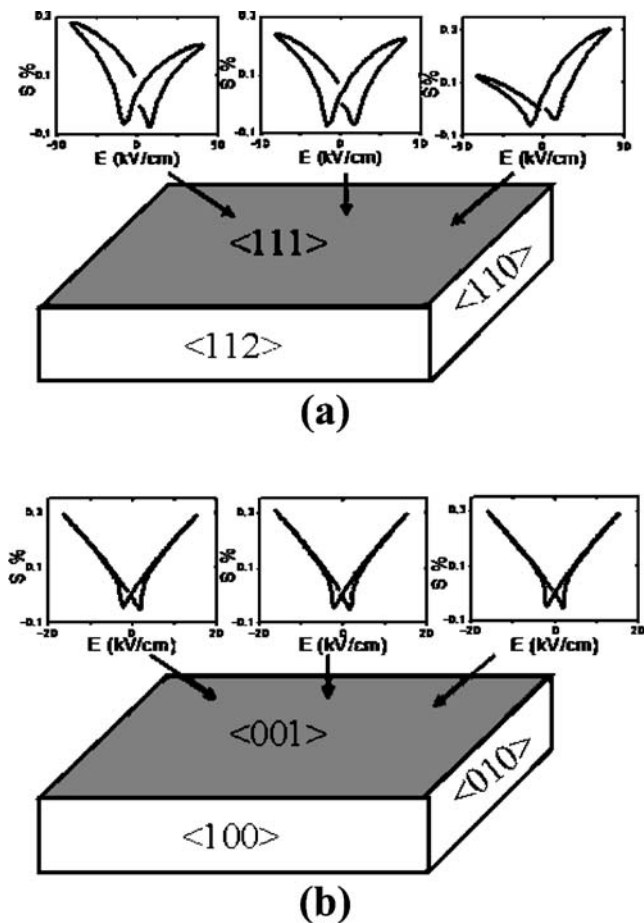


Fig. 5 Bipolar strain behavior of <111>- and <001>-oriented PZN-4.5PT single crystals after 10^5 cycles on different spots of their respective surfaces

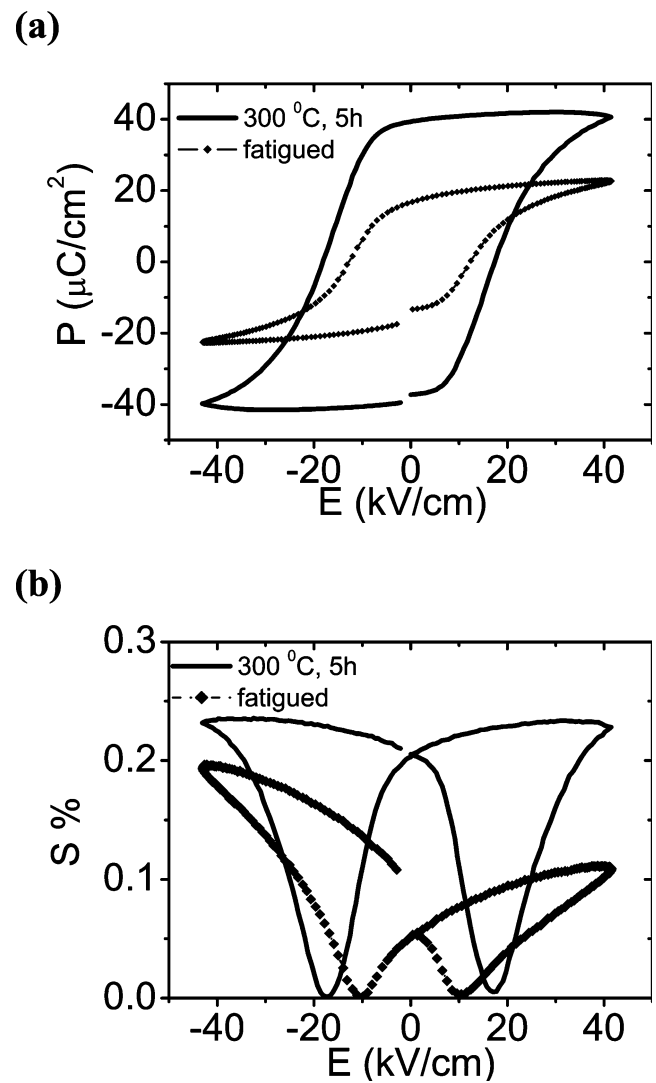


Fig. 7 Thermal rejuvenation of (a) polarization (P), and (b) strain (S) in fatigued crystals. (fatigued samples were held at 300 °C for 5 h.)