

Erratum

Erratum to “Unsteady flow around impacting bluff bodies”
[J. Fluids Struct. 24 (2008) 1194–1203]

T. Leweke^{a,*}, L. Schouveiler^a, M.C. Thompson^b, K. Hourigan^{b,c}

^a*Institut de Recherche sur les Phénomènes Hors Équilibre—CNRS, École Centrale, Aix-Marseille Université,
49 rue Frédéric Joliot-Curie, B.P. 146, F-13384 Marseille Cedex 13, France*

^b*Fluids Laboratory for Aeronautical and Industrial Research, Department of Mechanical and Aerospace Engineering,
Monash University, Victoria 3800, Australia*

^c*Division of Biological Engineering, Monash University, Victoria 3800, Australia*

Available online 5 March 2009

The publisher regrets that Fig. 2 of this article was printed with errors. The correct figure is below:
We apologize most sincerely for this error.

DOI of original article: [10.1016/j.jfluidstructs.2008.08.003](https://doi.org/10.1016/j.jfluidstructs.2008.08.003)

*Corresponding author. Tel.: +33 4 9613 9761; fax: +33 4 9613 9709.

E-mail address: Thomas.Leweke@irphe.univ-mrs.fr (T. Leweke).

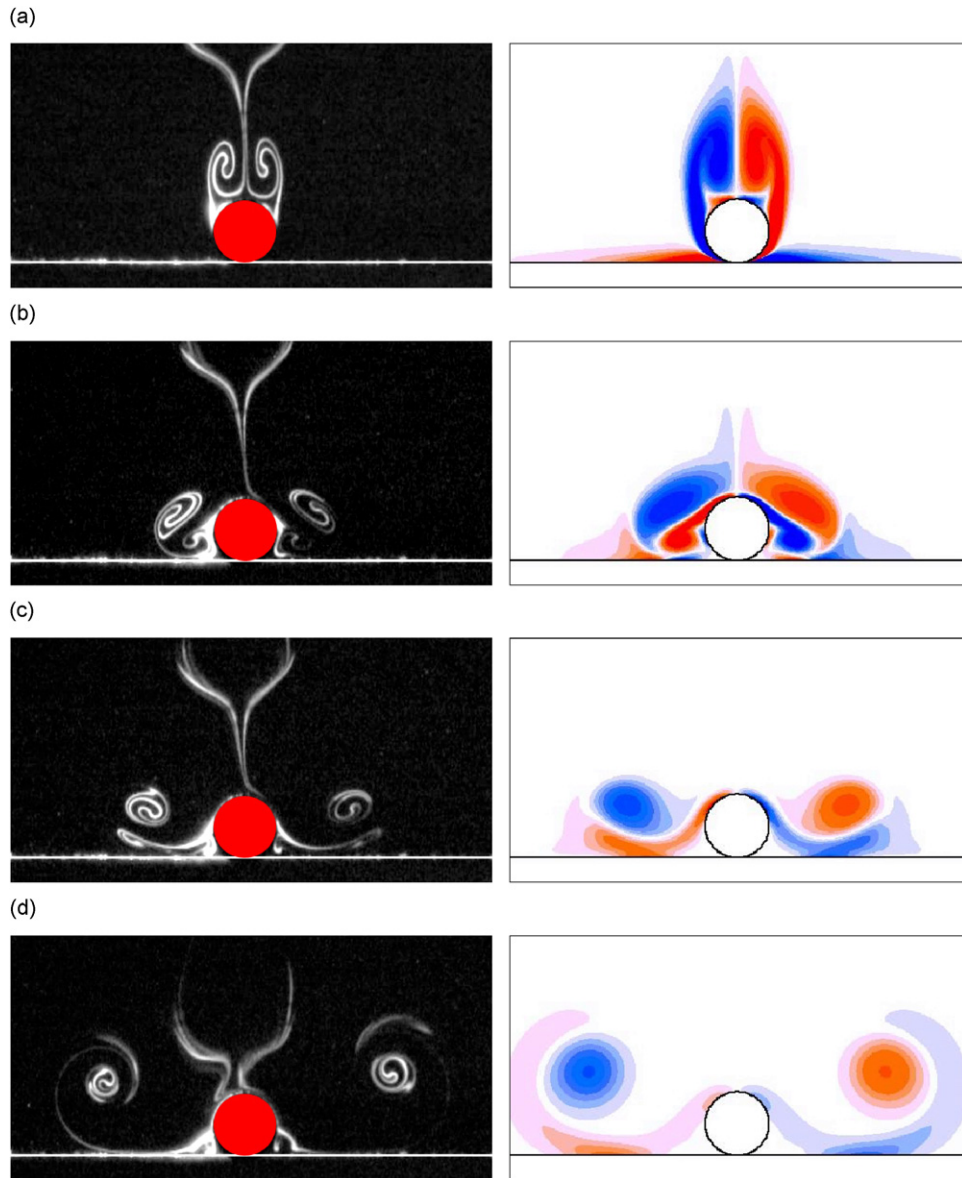


Fig. 2. Experimental dye visualizations (left) and vorticity field from numerical simulations (right) after the normal impact ($\alpha = 0$) of a cylinder with a wall for $Re = 200$ and running distance $L/D = 4$: (a) $\tau = 0$, (b) $\tau = 2.1$, (c) $\tau = 4.9$, and (d) $\tau = 15.1$.