

# Functional and physicochemical properties of whole egg powder: effect of spray drying conditions

Mehmet Koç · Banu Koç · Gonca Susyal ·  
Melike Sakin Yilmazer · Figen Kaymak Ertekin ·  
Neriman Bağdathoğlu

Revised: 4 October 2010 / Accepted: 19 October 2010 / Published online: 9 November 2010  
© Association of Food Scientists & Technologists (India) 2010

**Abstract** Pasteurized liquid whole egg was subjected to spray drying to determine the effect of spray drying conditions on moisture content, water activity, peroxide value, emulsion stability, gel texture, foaming stability and colour change of the powder product. Drying process was carried out in a pilot scale spray dryer (Mobile Minor Niro-Atomizer, Denmark). The inlet (165–195 °C) and outlet air temperatures (60–80 °C) and the atomization pressure (196–392 kPa) were investigated as spray drying process variables. Perturbation and 3-D graphs revealed that outlet air temperature and atomization pressure had more effect than inlet air temperature, on the properties of whole egg powder. Optimum spray drying conditions of whole egg powder were determined according to the specific end-product requirements (bakery foods, omelette and mayonnaise and salad dressing) targeting to obtain the desired value of functional properties, i.e.; emulsion stability, gel texture, foaming stability and colour change.

**Keywords** Whole egg powder · Spray drying · Optimization · Functional properties · Physical properties

## Introduction

The main roles of functional properties of whole egg are stabilization of emulsion, foamability and build up firm gels. Whole egg is also used as colorants (Stadelman and Cotterill 1995). These natural properties of whole egg are useful in bakery foods, bakery mixes, mayonnaise and salad dressings, confections, ice cream, pastas and many convenience foods (Stadelman and Cotterill 1995; Forsythe 1963). Recently, the use of shell egg in food production, as the raw material has reduced with the technological developments around the world food industry, and egg products such as frozen egg, pasteurized liquid egg and dried egg products have gained popularity. Prasad et al. (2004) suggested that biscuits enriched with spray-dried egg powder can form a good substitute instead of shell eggs for armed personnel stationed in remote areas. Further, the product may find use as protein-rich biscuits for infants and children. Furthermore, spray dried egg powder has great importance for food industry with respect to handling and hygienic aspects. Spray drying allows preparation of stable and functional powder products (Koç et al. 2010; Liu and Liu 2009; Re 2006; Sagar and Suresh Kumar 2010) and can be implemented for large scale throughputs (Chávez and Ledebøer 2007; Youssefi et al. 2009). The properties of eggs are very delicate, and the final quality of the dried product can be significantly affected by drying conditions (Bergquist 1980). For egg powder production, most of the researches in the literature were related with the method of spray drying and process conditions (Caboni et al. 2005; Franke and Kießling 2002; Guardiola et al. 1995; Guardiola et al. 1997; Hammershøj et al. 2004; Lechevalier et al. 2007; Morgan and Armstrong 1992). Franke and Kießling (2002) studied the effect of inlet air temperature and nozzle pressure of spray dryer on functional properties of egg

M. Koç · B. Koç · M. Sakin Yilmazer · F. Kaymak Ertekin (✉)  
Faculty of Engineering, Department of Food Engineering,  
Ege University,  
35100 Bornova,  
Izmir, Turkey  
e-mail: figen.ertekin@ege.edu.tr

G. Susyal · N. Bağdathoğlu  
Faculty of Engineering, Food Engineering Department,  
Celal Bayar University,  
Manisa, Turkey

powder and found that protein solubility and foaming power decreased as the inlet air temperature increased. Ayadi et al. (2008) studied the effect of moderate spray drying conditions on the functionality of dried white and whole egg powders. The researchers obtained that spray drying under moderate scale led to egg products with specific foaming, gelling and emulsifying properties, depending on the liquid flow rate and inlet air temperature. Since the drying process causes change in functional properties of whole egg powder after reconstitution, the influence of spray drying conditions, especially on functional properties of whole egg must be defined. A detailed search of the literature showed that no research has been conducted on the optimization of the spray drying conditions to obtain the maximum quality powder of whole egg. Optimization of drying conditions still needs improvement and in particular, their impact on storage stability of dried powder needs further investigation.

The present study was undertaken to optimize the spray drying process in terms of inlet and outlet air temperatures and the atomization pressure to have an optimum quality whole egg powder with a maximum gel texture and emulsion stability, and acceptable foaming capacity and change in colour.

## Material and methods

### Materials

Pasteurized liquid whole egg containing 24 ( $\pm 1$ ) % (wb, w/w) total solid, which was used as the test material was supplied from the Mix Food Company, Izmir, Turkey. Pasteurized liquid whole egg samples were kept at +4 °C until used.

### Spray drying

Experiments were conducted in a pilot scale spray dryer (Mobile Minor Niro-Atomizer, Denmark). Pasteurized liquid whole egg was atomized from a rotary atomizer into vertical, co-current drying chamber, 0.87 m diameter and 1.2 m height, under various operating conditions. Feed temperature was below 10 °C and hot air flow rate of 1.54 m<sup>3</sup>/min was fixed for all experiments. Inlet air temperature, outlet air temperature and atomization pressure, which were in the range of 165–195 °C, 60–80 °C and 196–392 kPa, respectively, were adjusted according to the Box-Behnken experimental design and outlet air temperature was controlled by regulating the feeding velocity (Table 1). The inlet and outlet temperature measurement errors were  $\pm 1$  °C. The dried powder was collected in a single cyclone separator and then packaged in ALPE packaging material until used for analysis.

## Analysis

### Moisture content

The moisture content of egg powders were measured with a halogen moisture analyser (Ohaus MB45, Switzerland) which was correlated well with the vacuum oven method, drying at 70 °C for 2 h (AOAC 2000).

### Water activity

The water activity ( $a_w$ ) values of egg powders were measured with a water activity measurement device (Testo AG 400, Germany), with a  $\pm 0.001$  sensitivity.

### Oil extraction and peroxide value analysis

The method of Folch et al. (1957) method was used to extract lipids from egg powder for peroxide value determination. The method used for peroxide value determined all substances, in terms of milliequivalents peroxide per 1000 g of sample, which oxidize KI under conditions of test (AOAC 2000).

### Functional properties

The functional properties except colour of the dried whole egg powder were analyzed after reconstitution according to the methods described below.

### Emulsion Stability (ES)

The dried whole egg was reconstituted in 0.5 M NaCl solution to dry matter content of 1% (w/w) and a pH value of 7.0. A 50 ml aliquot of this suspension was mixed with 30 ml of corn oil. Subsequently, the mixture was homogenized for 60 s at 22000 rpm in a homogenizer (IKA T25 Ultra turrex, Germany). To estimate the emulsion stability at 20 °C, the electrical conductivity of the emulsion near the bottom of the glass jar was monitored at the end of 1 h. The higher the amount of creamed oil phase at the surface, the higher the conductivity of the emulsion at the bottom owing to the increased water concentration (Franke and Kießling 2002; Anton and Gandemer 1997). The proportion of creamed oil phase,  $f$ , can be calculated from the Eq. 1 (Anton and Gandemer 1997):

$$f = 1 - (m_w/m_o)(1 - c_e/c_o) \quad (1)$$

$$ES = 1 - f$$

where  $m_w$  (g) is the mass of the water phase,  $m_o$  (g) is the mass of the oil phase,  $c_e$  ( $\mu\text{S}/\text{cm}$ ) is the conductivity after 1 h and  $c_o$  ( $\mu\text{S}/\text{cm}$ ) is the conductivity of pure water.

**Table 1** Physicochemical and functional properties of whole egg powder at 17 different experimental spray drying conditions

| Inlet air temperature (°C), X <sub>1</sub> | Outlet air temperature (°C), X <sub>2</sub> | Atomization Pressure (kPa), X <sub>3</sub> | Flow rate* 10 <sup>-6</sup> (m <sup>3</sup> /s) | ES (%) | GT (N) | FS (%) | ΔE   | MC (%wb) | a <sub>w</sub> | Peroxide Value |
|--------------------------------------------|---------------------------------------------|--------------------------------------------|-------------------------------------------------|--------|--------|--------|------|----------|----------------|----------------|
| 165                                        | 60                                          | 294                                        | 1,1                                             | 88.3   | 7.1    | 57.9   | 25.1 | 2.6      | 0.093          | 0.480          |
| 195                                        | 60                                          | 294                                        | 1,4                                             | 88.0   | 7.2    | 69.1   | 22.3 | 3.0      | 0.141          | 0.400          |
| 165                                        | 80                                          | 294                                        | 0,67                                            | 91.4   | 8.2    | 63.0   | 25.3 | 2.0      | 0.066          | 0.519          |
| 195                                        | 80                                          | 294                                        | 0,99                                            | 90.1   | 8.3    | 60.0   | 26.8 | 1.7      | 0.074          | 0.799          |
| 165                                        | 70                                          | 196                                        | 0,90                                            | 89.1   | 7.7    | 50.8   | 23.4 | 2.5      | 0.096          | 0.360          |
| 195                                        | 70                                          | 196                                        | 1,3                                             | 90.6   | 7.7    | 47.4   | 22.3 | 2.3      | 0.081          | 0.400          |
| 165                                        | 70                                          | 392                                        | 0,83                                            | 92.8   | 8.3    | 40.3   | 27.5 | 2.4      | 0.133          | 0.520          |
| 195                                        | 70                                          | 392                                        | 1,2                                             | 90.7   | 8.8    | 38.7   | 26.1 | 1.8      | 0.064          | 0.400          |
| 180                                        | 60                                          | 196                                        | 1,3                                             | 87.6   | 6.7    | 73.0   | 20.7 | 2.6      | 0.104          | 0.600          |
| 180                                        | 80                                          | 196                                        | 0,96                                            | 89.8   | 8.4    | 49.7   | 25.9 | 2.2      | 0.107          | 0.480          |
| 180                                        | 60                                          | 392                                        | 1,2                                             | 89.1   | 8.6    | 46.7   | 26.5 | 2.3      | 0.096          | 0.320          |
| 180                                        | 80                                          | 392                                        | 0,86                                            | 91.6   | 8.2    | 67.5   | 26.2 | 1.8      | 0.052          | 0.639          |
| 180                                        | 70                                          | 294                                        | 1,0                                             | 90.2   | 8.5    | 50.1   | 26.9 | 2.3      | 0.065          | 0.680          |
| 180                                        | 70                                          | 294                                        | 1,0                                             | 90.9   | 8.6    | 43.0   | 26.4 | 1.8      | 0.053          | 0.420          |
| 180                                        | 70                                          | 294                                        | 1,0                                             | 90.0   | 8.6    | 45.0   | 26.0 | 1.7      | 0.055          | 0.440          |
| 180                                        | 70                                          | 294                                        | 1,0                                             | 90.2   | 8.6    | 42.8   | 26.3 | 2.5      | 0.125          | 0.599          |
| 180                                        | 70                                          | 294                                        | 1,0                                             | 90.5   | 8.5    | 44.4   | 26.9 | 2.5      | 0.124          | 0.480          |

ES Emulsion stability, GT Gel texture, FS Foaming stability, ΔE Colour change, MC Moisture content, a<sub>w</sub> Water activity

Gelling Textural analysis (GT)

The gelling properties were measured according to the method of Franke and Kießling (2002) with some modifications. The powder of whole egg was reconstituted in 0.5 M NaCl solution to achieve dry matter content of 20% (w/w) and pH value of 7.0. A metal container consist of 12 cells (71 mm in diameter, 33 mm in depth) was used and each cell was filled with 50 ml of egg suspension, then container was covered with an aluminium foil and tempered in water bath for 15 min at 90 °C. Subsequently, sample container were cooled down at room temperature and stored at 4 °C overnight. To achieve the desired temperature (8 °C), samples were kept at ambient temperature just before the measurement. A small cylinder sampler (15 mm in both height and diameter) was used for sampling from the whole egg gel. Sample was deformed (compressed) by using a 7.5 cm diameter plate probe integrated with texture analyzer TA-XT Plus (Stable Micro Systems, England) with a plate velocity of 1 mms<sup>-1</sup>. The maximum force obtained during compression was used as the parameter for gelling property.

Foaming Stability (FS)

The powder of whole egg was reconstituted in distilled water up to a dry matter content of 20% and was foamed

using a mixer (Sinbo, SMX-2128, Turkey) at speed 1 during 5 min. Calculation of the foam stability (FS) was calculated as given in Eq. 2 (Hammershøj et al. 2006):

$$FS = \frac{V_{Liquid\ before\ foaming} - V_{Drained\ liquid\ t=90\ min}}{V_{Liquid\ before\ foaming} - V_{liquid\ at\ time\ t=1\ min}} [L/L] \quad (2)$$

where V<sub>liquid before foaming</sub>=0.1 L, V<sub>drained liquid at time t=90min</sub>= volume of liquid drained from foam at time t=90 min after foaming (L) and V<sub>liquid at time t=1min</sub>=volume of liquid not incorporated in the foam at time t=1 min after foaming (L).

Colour Change (ΔE)

The colour of pasteurized liquid egg and dried whole egg samples (L, a and b-value) was measured with a colorimeter (Colorflex, CFLX 45-2 Model Colorimeter, HunterLab, Reston, VA) and results were expressed in accordance with the CIE Lab. system. The total colour change (ΔE) of whole egg powder with respect to pasteurized liquid egg was calculated by Eq. 3.

$$\begin{aligned} \Delta E &= \sqrt{\Delta L^2 + \Delta a^2 + \Delta b^2} \\ \Delta L &= L_{Pasteurized\ liquid\ whole\ egg} - L_{whole\ egg\ powder} \\ \Delta a &= a_{Pasteurized\ liquid\ whole\ egg} - a_{whole\ egg\ powder} \\ \Delta b &= b_{Pasteurized\ liquid\ whole\ egg} - b_{whole\ egg\ powder} \end{aligned} \quad (3)$$

Particle morphology

The morphological properties of egg powders (the appearance and the particle shape) were investigated by taking images via a scanning electron microscope (SEM, JSM–6060 JEOL).

Experimental design and statistical analysis

The effects of spray drying conditions on the functional properties; emulsion stability (ES), gel texture (GT), foaming stability (FS) and colour change ( $\Delta E$ ) during the production of whole egg powder production by spray drying were defined. A Box-Behnken design was used to arrange the experimental data. Box-Behnken design has been extensively applied for different process in foods (Raghavan et al. 1996; Kumar and Rao 2004) The inlet air temperature (165–195 °C) (X1), outlet air temperature (60–80 °C) (X2) and atomization pressure (196–392 °C) (X3) were selected as independent variables depending on the literature survey and preliminary experiments, which also enabled the explored experimental domain is to be fixed by taking into account industrial practice. Optimum spray drying conditions, targeting the maximum or minimum or acceptable values of the functional properties (the emulsion stability (ES), the gel texture (GT), the foaming stability (FS) and the colour change ( $\Delta E$ )), were selected, setting the value of each functional property according to the area of use of egg powder (bakery foods, omelette and mayonnaise and salad dressing) by using Design Expert–version 7.0 software (Statease Inc., MI, USA). The influence of spray drying conditions on the moisture content, water activity and peroxide value was analyzed using SPSS version 13.0 Windows program (SPSS Inc., Chicago, IL). The analysis of variance (ANOVA) at a confidence level of 95% was performed.

Optimization

The desirability function method was used for simultaneous optimization of the multiple responses. The desirability function method finds the desired goals for each variable and response. All the independent variables were kept within range while the responses were either maximized or minimized. The numerical optimization finds a point that maximizes the desirability function. In the present study, the desirability functions were developed for each area of use of egg powder, according to the desired value of functional properties; emulsion stability, gel texture, foaming stability and colour change.

Results and discussion

The spray drying process caused substantial functional, physical and chemical changes in the powder of whole egg.

Table 2 ANOVA results of physicochemical and functional properties of whole egg powder

| Source                        | DF | GT             |         | FS             |         | $\Delta E$     |         | ES             |         | MC             |         | $a_w$          |         | Peroxide value |         |
|-------------------------------|----|----------------|---------|----------------|---------|----------------|---------|----------------|---------|----------------|---------|----------------|---------|----------------|---------|
|                               |    | Sum of Squares | p-Value | Sum of Squares | p-Value | Sum of Squares | p-Value | Sum of Squares | p-Value | Sum of Squares | p-Value | Sum of Squares | p-Value | Sum of Squares | p-Value |
| Model                         | 6  | 4.2            | 0.032   | 0.180          | 0.000   | 56.5           | 0.0001  | 2.85E-003      | <0.0001 | 4.4            | 0.000   | 0.023          | 0.000   | 0.606          | 0.000   |
| x <sub>1</sub>                | 1  | 0.052          | 0.606   | 1.31E-004      | 0.729   | 1.2            | 0.0600  | 6.58E-005      | 0.042   | 0.130          | 0.165   | 0.000          | 0.517   | 0.005          | 0.352   |
| x <sub>2</sub>                | 1  | 1.4            | 0.019   | 5.15E-004      | 0.499   | 10.0           | 0.0003  | 1.26E-003      | <0.0001 | 2.2            | 0.000   | 0.006          | 0.001   | 0.152          | 0.000   |
| x <sub>3</sub>                | 1  | 1.5            | 0.017   | 9.73E-003      | 0.017   | 24.8           | <0.0001 | 6.30E-004      | 0.0001  | 0.500          | 0.008   | 0.000          | 0.232   | 0.000          | 0.755   |
| x <sub>1</sub> x <sub>2</sub> | 1  | 7.98E-005      | 0.983   | 5.02E-003      | 0.061   | 3.4            | 0.0070  | 2.42E-005      | 0.1764  | 0.480          | 0.009   | 0.001          | 0.155   | 0.097          | 0.000   |
| x <sub>1</sub> x <sub>3</sub> | 1  | 0.044          | 0.637   | 7.83E-005      | 0.789   | 0.013          | 0.8190  | 3.23E-004      | 0.0009  | 0.120          | 0.178   | 0.001          | 0.072   | 0.019          | 0.084   |
| x <sub>2</sub> x <sub>3</sub> | 1  | 1.1            | 0.033   | 0.049          | 0.000   | 7.8            | 0.0007  | 2.28E-006      | 0.6581  | 0.014          | 0.648   | 0.001          | 0.055   | 0.144          | 0.000   |
| Error                         | 10 | 1.9            |         | 7.10E-003      |         | 1.7            |         | 7.50E-005      |         | 2.4            |         | 0.018          |         | 0.235          |         |
| Total                         | 16 | 6.0            |         | 0.180          |         | 58.1           |         | 2.93E-003      |         | 261.0          |         | 0.485          |         | 13.4           |         |


ES Emulsion stability, GT Gel texture, FS Foaming stability,  $\Delta E$  Colour change, MC Moisture content,  $a_w$  Water activity

The moisture content (% wb), water activity and peroxide values of whole egg powder with respect to the inlet and outlet air temperatures of spray drying and the atomization pressure were given in Table 1. Maximum moisture content (3.0%, wb) and water activity values were recorded at the same spray drying conditions; outlet air temperature of 60 °C, inlet air temperature of 195 °C and atomization pressure 294 kPa, while maximum value of peroxide (0.799) was recorded at the outlet air temperature of 80 °C. Moisture content and water activity of the egg powder increased with a decrease in the outlet air temperature since the feed flow rate to atomizer and also spray dryer is high to achieve lower outlet air temperatures, in which case the moisture removal rate gets lower. It is generally accepted that water activity of whole egg powder should be below 0.40 (Beuchat 1981) and thus moisture content below 5% (Stadelman and Cotterill 1995) in order to ensure stability. ANOVA results showed that the outlet air temperature had a significant

effect on moisture content, water activity and peroxide value of whole egg powder (Table 2). In addition the moisture content was affected by the atomization pressure (Table 2).

Egg powders can be added to the various food products to fortify them and provide functionality such as foaming, emulsifying, gelling and colouring (Stadelman and Cotterill 1995). The proteins and colour pigments of whole egg during drying are subjected to the structural changes. Anandharamakrishnan et al. (2007) also reported that the protein denaturation was highly related with spray drying conditions. The functional properties of whole egg powder, emulsion stability, gel texture, foaming stability and colour change during spray drying at different combinations of inlet and outlet air temperatures and atomization pressure were presented in Table 1. The minimum emulsion stability value of whole egg powder was observed to be 0.876 at outlet air temperature of 60 °C, inlet air temperature of 180 °C and atomization pressure 196 kPa, whereas the


**Fig. 1** Perturbation plots. (X1) Inlet air temperature, (X2) Outlet air temperature, (X3) Atomization pressure

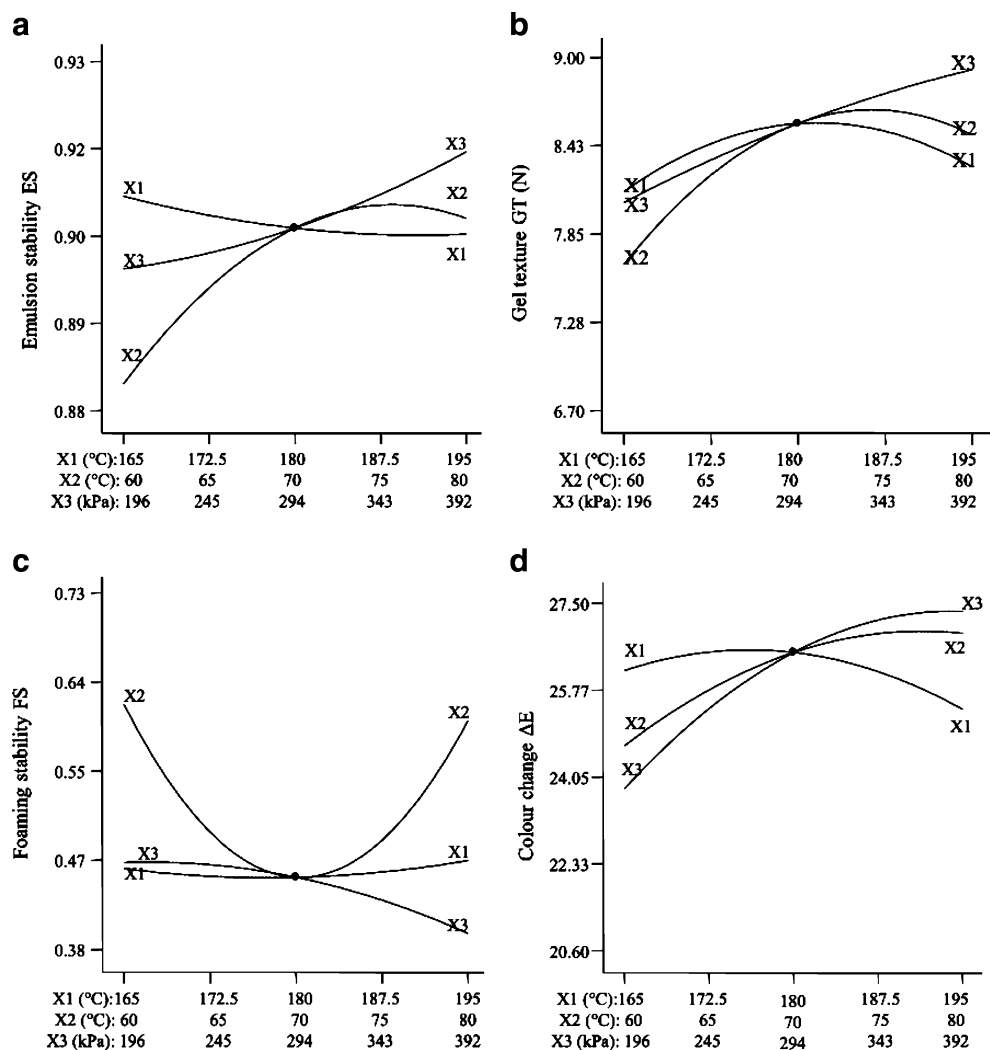

maximum emulsion stability value was observed to be 0.928 at outlet air temperature of 70 °C, inlet air temperature of 165 °C and atomization pressure 392 kPa (Table 1). Perturbation plots (Fig. 1a) showed that the emulsion stability of the egg powder increased with the increase in outlet air temperature and atomization pressure whereas, a little change in emulsion stability was observed with the inlet air temperature. The effect of outlet air temperature and atomization pressure on the emulsion stability further revealed by 3-D graph (Fig. 2a) from which it is clear that increase in outlet air temperature and atomization pressure led to an increase in an emulsion stability of egg powder. Drying process has improved the emulsion properties of whole egg as reported also by Chapin (1951). The better stabilisation effects of powders

dried at higher temperatures may be attributed to the changes in protein conformation which contribute to the stability of boundary surfaces, as also reported earlier by Franke and Kießling (2002) and Kato et al. (1990). The ANOVA results showed that (Table 2) that the outlet air temperature, atomization pressure and inlet air temperature were the significant parameters affecting the emulsion stability ( $p < 0.05$ ).

Spray drying process and conditions have also the influence on the gel texture of whole egg powder. The gel texture strongly depends on protein denaturation (Franke and Kießling 2002; Campbell et al. 2003). The maximum force obtained during compression was used as the quality parameter for gelling property. The highest gel texture value, 8.8 N was observed at the outlet air temperature of

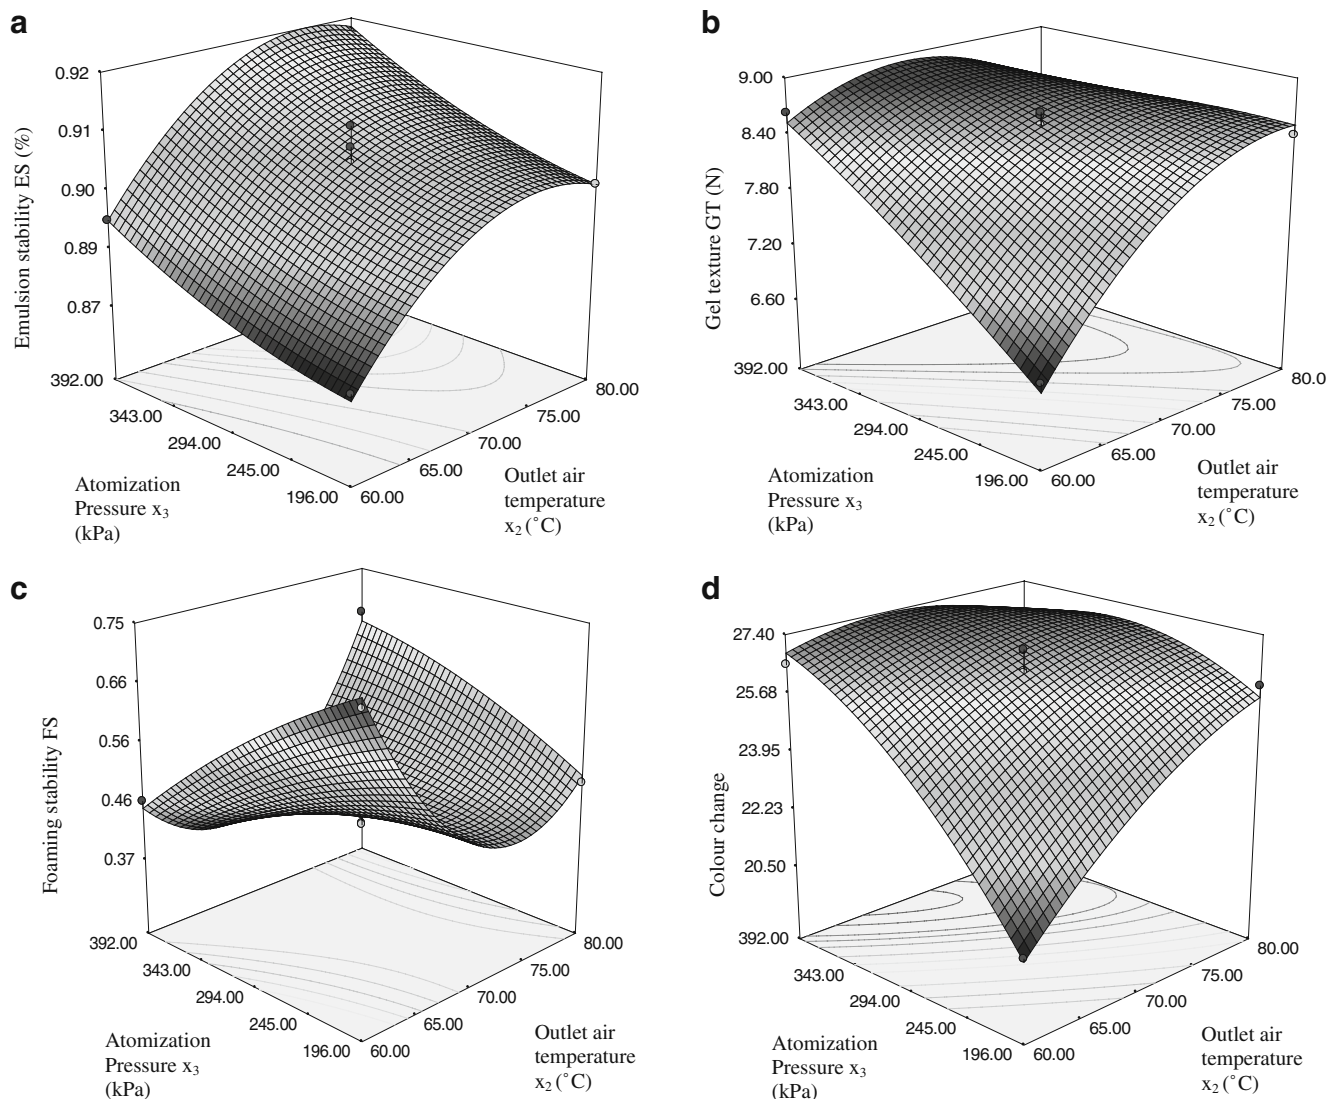

**Fig. 2** Calculated effect of outlet air temperature (°C) and atomization pressure (kPa) on functional properties; **a** Emulsion stability, **b** Gel texture, **c** Foaming stability, **d** Colour change of spray dried whole egg

**Table 3** Optimum spray drying conditions according to usage of the whole egg powder


| Type of product              | Process Variables                   |                                      |                                     | Responses  |        |            |            |
|------------------------------|-------------------------------------|--------------------------------------|-------------------------------------|------------|--------|------------|------------|
|                              | Inlet air temperature<br>$X_1$ (°C) | Outlet air temperature<br>$X_2$ (°C) | Atomization Pressure<br>$X_3$ (kPa) | ES (%)     | GT (N) | FS (%)     | $\Delta E$ |
| Bakery foods                 | 171.9                               | 72.5                                 | 392.0                               | Max        | Max    | Acceptable | Acceptable |
| Mayonnaise or salad dressing | 195.0                               | 64.5                                 | 196.0                               | Max        | Min    | Min        | Acceptable |
| Omelet                       | 195.0                               | 66.4                                 | 196.0                               | Acceptable | Min    | Min        | Min        |

70 °C, inlet air temperature of 195 °C and atomization pressure of 392 kPa, while the lowest value, 6.7 N was monitored at the outlet air temperature of 60 °C, inlet air temperature of 180 °C and atomization pressure of 196 kPa during spray drying (Table 1). As seen from Fig. 1b, higher atomization pressure and outlet air temperature provide to a certain improvement in gelling properties. In general, surface hydrophobicity increases during drying of egg and has a beneficial effect on the gel texture (Kato et al. 1990; Handa et al. 2001; Baron et al. 2003). It was found that the gel texture was not affected significantly by the air inlet temperature (Table 2). The results of Franke and Kießling (2002), Hammershøj et al. (2006) and Ayadi et al. (2008) were in similar manner. Figure 2b shows the interaction effects of outlet air temperature ( $x_2$ ) and atomization pressure ( $x_3$ ) on the gel texture values. It can be inferred from Fig. 2b decreasing in outlet air temperature and atomization pressure caused reducing the applicable compression force on gel which obtained from whole egg powder.

When whole egg is beaten, air bubbles are trapped in the liquid albumen, and the foam is formed. The foam is defined as a colloidal dispersion in which a gaseous phase is dispersed in liquid or solid phase. Stadelman and Cotterill (1995) reported that the foaming stability of egg is affected by drying process and conditions. It was found that the foaming stability of whole egg powders altered between 38.7% and 73.0%, and it was influenced by the outlet air temperature and atomization pressure that can be seen in Fig. 1c. The foaming stability decreased with increasing atomization pressure, fundamentally due to physical denaturation of proteins. As seen in Fig. 2c a saddle system was found out because of the interaction of outlet air temperature and atomization pressure. This was explained by the foaming stability which was the highest value at maximum and minimum levels of the outlet air temperature. These findings were inconsistent with the results of the ANOVA (Table 2).

The visual impression of egg colour determines the acceptability of products containing egg powder. It is well known that high temperature and long drying time caused a significant decrease in the quality of dried materials; e.g.,

by change of colour. The net change in colour ( $\Delta E$ ) was calculated as the change in L, a, b values between the whole egg powder and pasteurized liquid egg. As seen in Figs. 1d and 2d a decrease in outlet air temperature and atomization pressure caused a decrease in the colour change. The minimum change in colour, ( $\Delta E$ ) (20.7), was recorded at the lowest outlet air temperature and atomization pressure, whereas the maximum change in colour, ( $\Delta E$ ) (27.5), was recorded at the outlet air temperature of

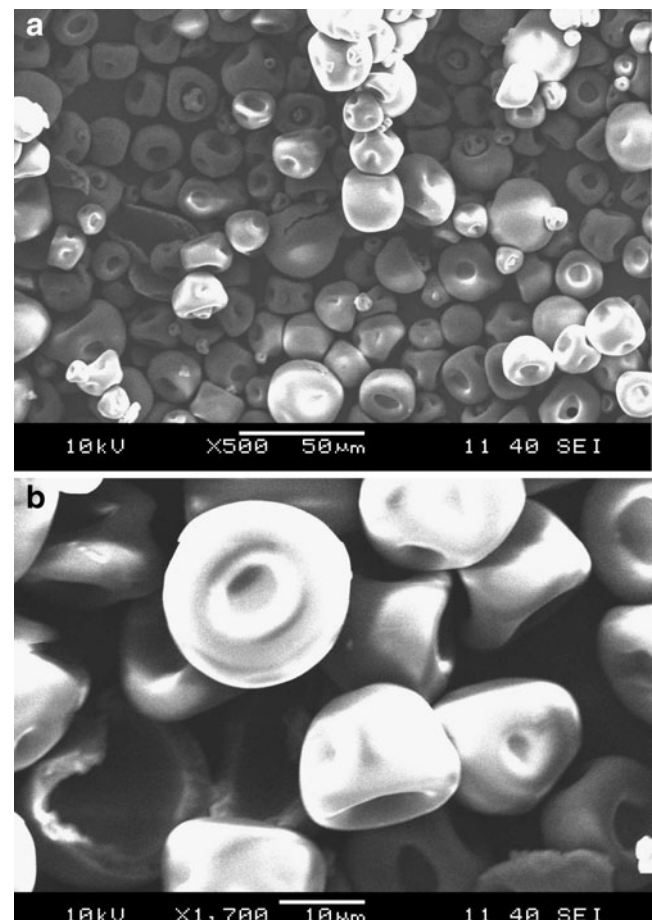**Fig. 3** Scanning electron microscopy images of whole egg powder, produced at  $X_1$ :172.9 °C;  $X_2$ :72.5 °C;  $X_3$ :392 kPa

70 °C and atomization pressure of 392 kPa. In spray drying process, higher temperature and atomization pressure applications which lead to oxidation of colour pigments (xanthophylls, lutein and zeaxanthin) and formation of smaller particles after atomization caused a bleaching of colour of whole egg powder (Stadelman and Cotterill 1995). It was observed that Hunter L value, as lightness index, increased during the drying process. On the other hand, the low  $a_w$  value of the egg powder prevented the formation of excessive Maillard reaction, also preventing the increase in Hunter b value, since the optimal range of  $a_w$  is known as 0.520–0.750 for that reaction (O'Brien and Morissey 1989).

### Optimization

Spray dried whole egg powder with desired functional properties are used by many segments of the food industry especially for bakery foods, fast food (omelette), mayonnaise and salad dressing. For these products, optimum spray drying conditions were determined for targeting to obtain the desired value of functional properties, i.e.; emulsion stability, gel texture, foaming stability and colour change, separately, for the area of use or specific end-product requirement. While maximum emulsion stability and gel texture and acceptable foaming stability and colour change were objected for bakery foods, for the fast food (omelette) minimum gel texture, foaming stability and colour change and acceptable emulsion stability were the selected goals. For mayonnaise and salad dressing type products maximum emulsion stability, minimum gel texture and colour change and acceptable foaming stability were targeted. At the optimization stage, the air inlet temperature (165–195 °C), air outlet temperature (60–80 °C) and atomization pressure (196–392 kPa) were selected as independent factors. Numerical optimization was performed for the process parameters of spray drying to obtain the optimum quality whole egg powder for bakery foods, fast food and mayonnaise and salad dressing. To perform this operation, Design Expert–version 7.0 software (Statease Inc., MI, USA) was utilized for simultaneous optimization of the multiple responses.

The desired goals for each variable and response were chosen and different weights were assigned to each goal to adjust the shape of its particular desirability function. Table 3 shows software generated optimum conditions of independent variables for each area of use of the egg powder with the maximum desirability (>0.70). Outlet air temperature and atomization pressure were observed to get high values for producing whole egg powder which would be used in bakery foods were higher than other type of products' (mayonnaise and salad dressing; omelette).

Nearly the same spray drying conditions of whole egg powder production were defined for mayonnaise and salad dressing, and omelette.

In the following stage of the study, which was given elsewhere (Koç 2009), the sensorial analysis was conducted for testing the use of egg powder in a cake formulation. The sensorial test results (in terms of appearance, taste and texture) showed that the egg powder produced at the selected optimum condition was satisfactorily used instead of liquid egg. Parihar et al. (2001) also reported that the overall acceptability of the omelette made from the egg powder was the second best in their samples.

### Particle morphology (SEM analysis)

Figure 3a and b show scanning electron micrographs of the spray dried whole egg powder at optimum conditions. Through the scanning electron microscopy, the whole egg powder particles were observed as amorphous and shrivelled appearance. If the skin remains moist and supple for longer than the hollow particles can deflate and shrivel as they cool (Birchal et al. 2005). Fast formation and expansion of the crust or skin can also damage the particle surface.

### Conclusion

Spray drying conditions (outlet air temperature; atomization pressure) in the transformation of pasteurized liquid whole egg into whole egg powder have effect on functional, physical and chemical properties of the powder. The outlet air temperature has the most pronounced effect on all analysed properties except the foaming stability, whereas only the emulsion stability was influenced by the inlet air temperature. Furthermore, no significant impact of atomization pressure was found on the water activity and peroxide value. In the optimization study, optimum spray dryer conditions were determined as the inlet air temperature of 171.9 °C, outlet air temperature of 72.5 °C and atomization pressure of 392 kPa, for whole egg powder as to be used as an ingredient in bakery foods. Similar spray drying conditions were obtained for whole egg powder which would be used in mayonnaise and salad dressing, and omelette products. This study can be used as a reference for further studies planned to develop dried egg products with the desired levels of functional properties.

**Acknowledgements** The authors acknowledge the financial support of TUBITAK-TOVAG (Project Number: 108 O 541), Ege University, Council of Scientific Research Projects (Project Number: BAP 2008/Muh/012 and EBİLTEM 09/BİL/014) and also Mix Food Company, Izmir, Turkey.



## References

- Anandharamakrishnan C, Rielly CD, Stapley AGF (2007) Effects of process variables on the denaturation of whey proteins during spray drying. *Dry Technol* 25:799–807
- Anton M, Gandemer G (1997) Composition, solubility and emulsifying properties of granules and plasma of egg yolk. *J Food Sci* 62:484–487
- AOAC (2000) Association of Official Analytical Chemists. Official Methods of Analysis of the Association of Official Analytical Chemists, 17th edn. Washington, D.C
- Ayadi MA, Khemakhem M, Belgith H, Attia H (2008) Effect of moderate spray drying conditions on functionality of dried egg white and whole egg. *J Food Sci* 73:E281–E287
- Baron F, Nau F, Guerin-Dubiard C, Gonnet F, Dubois JJ, Gautier M (2003) Effect of dry heating on the microbiological quality, functional properties, and natural bacteriostatic ability of egg white after reconstitution. *J Food Prot* 66:825–832
- Bergquist DH (1980) Measurable difference in quality of egg products. *Proc Eur Poult Conf World Poult Sci Assoc* 1:232–243
- Beuchat LR (1981) Microbial stability as affected by water activity. *Cereal Food World* 26:345–349
- Birchal VS, Passos ML, Wildhagen GRS, Mujumdar AS (2005) Effect of spray-dryer operating variables on the whole milk powder quality. *Dry Technol* 23:611–636
- Caboni MF, Boselli E, Messia MC, Velazco V, Fratianni A, Panfilì G, Marconi E (2005) Effect of processing and storage on the chemical quality markers of spray-dried whole egg. *Food Chem* 92:293–303
- Campbell L, Raikos V, Euston SR (2003) Modification of functional properties of egg white proteins. *Nahrung* 47:369–376
- Chapin RB (1951). Some factors affecting the emulsifying properties of hen's egg. PhD Dissertation, Iowa State University, Ames, Iowa
- Chávez BE, Ledebøer AM (2007) Drying of probiotics: optimization of formulation and process to enhance storage survival. *Dry Technol* 25:1193–1201
- Folch J, Lees M, Sloane-Stanley GH (1957) A simple method for the isolation and purification of total lipids from animal tissues. *J Biol Chem* 226:497–509
- Forsythe RH (1963) Chemical and physical properties of eggs and egg products. *Cereal Sci Today* 8:309–310, 312, 328
- Franke K, Kießling M (2002) Influence of spray drying conditions on functionality of dried whole egg. *J Sci Food Agr* 82:1837–1841
- Guardiola F, Codony R, Miskin D, Rafecas M, Boatella J (1995) Oxysterol formation in egg powder and relationship with other quality parameters. *J Agr Food Chem* 43:1903–1907
- Guardiola F, Codony R, Rafecas M, Grau A, Jorda'n A, Boatella J (1997) Oxysterol formation in spray-dried egg processed and stored under various conditions: Prevention and Relationship with Other Quality Parameters. *J Agr Food Chem* 45:2229–2243
- Hammershøj M, Nording JA, Rasmussen HC, Carstens JH, Pedersen H (2006) Dry pasteurization of egg albumen powder in a fluidized bed. I. Effect on microbiology, physical and chemical parameters. *Int J Food Sci Tech* 41:249–261
- Hammershøj M, Peters LV, Andersen HJ (2004) The significance of critical processing steps in the production of dried egg albumen powder on gel textural and foaming properties. *J Sci Food Agr* 84:1039–1048
- Handa A, Hayashi K, Shidara H, Kuroda N (2001) Correlation of the protein structure and gelling properties in dried egg white products. *J Agric Food Chem* 49:3957–3964
- Kato A, Ibrahim HR, Watanabe H, Honma K, Kobayashi K (1990) Enthalpy of denaturation and surface functional properties of heated egg white proteins in the dry state. *J Food Sci* 55:1280–1283
- Koç B, Sakin Yılmaz M, Balkir P, Kaymak-Ertekin F (2010) Spray drying of yoghurt: Optimization of process conditions for improving viability and other quality attributes. *Dry Technol* 28:495–507
- Koç M (2009) Determination of optimum drying conditions of pasteurised liquid egg with spray drying method and microencapsulation. Thesis (MSc), Ege University
- Kumar GV, Rao MN (2004) Enzymatic synthesis of butyl butyrate using response surface methodology. *J Food Sci Technol* 41:560–562
- Lechevalier V, Jeantet R, Arhaliass A, Legrand J, Nau F (2007) Egg white drying: Influence of industrial processing steps on protein structure and functionalities. *J Food Eng* 83:404–413
- Liu CP, Liu SD (2009) Low-temperature spray drying for the microencapsulation of the fungus *Beauveria bassiana*. *Dry Technol* 27:747–753
- Morgan JN, Armstrong DJ (1992) Quantification of cholesterol oxidation products in egg yolk powder spray-dried with direct heating. *J Food Sci* 57:43–45
- O'Brien JM, Morissey PA (1989) The Maillard reaction in milk products. *IDF Bulletin* 238:53–61
- Re MI (2006) Formulating drug delivery systems by spray drying. *Dry Technol* 24:433–446
- Parihar P, Mandhyan BL, Agrawal R (2001) Development of a cottage industry for dehydrating whole egg. *J Food Sci Technol* 38:158–160
- Prasad NN, Swamy MSL, Viswanathan KR, Santhanam K (2004) Nutritional quality of egg-fortified biscuits. *J Food Sci Technol* 41:534–536
- Raghavan CV, Babu RS, Chand N, Rao PNS (1996) Response surface analysis of power consumption of dough sheeting as a function of gap, reduction ratio, water, salt and fat. *J Food Sci Technol* 33:313–321
- Sagar VR, Suresh Kumar P (2010) Recent advances in drying and dehydration of fruits and vegetables: a review. *J Food Sci Technol* 47:15–26
- Stadelman WJ, Cotterill OJ (1995) *Egg Science and Technology*. Food Products Press, Binghamton, NY
- Youssefi Sh, Emam-Djomeh Z, Mousavi SM (2009) Comparison of artificial neural network (ANN) and response surface methodology (RSM) in the prediction of quality parameters of spray-dried pomegranate juice. *Dry Technol* 27:910–917